




# THE DATASHEET OF 5GSH935



# Multimec™ 5G

High performance tactile switches • MIL-PRF-28855H • excellent illumination



## DISTINCTIVE FEATURES

- Large range of accessories
- Momentary switches with NO or NC/NO function
- Sealed to IP67
- Single or bi-color illumination option
- Illumination with integrated chip-LEDs



## ENVIRONMENTAL SPECIFICATIONS

- Sealing : IP67 according to IEC 60529
- Working and storage temperature :
  - non-illuminated: -40 °C/+160 °C (-40 °F to +320 °F)
  - illuminated: -30 °C/+85 °C (-22 °F to +185 °F)
- Soldering :
  - through-hole : IEC 60068-2-20 8
  - surface mount : JEDEC J-STD-020E



## ELECTRICAL SPECIFICATIONS


- Recommended load :
  - Gold contacts : 0.5µ-50 mA 24 VDC
  - Silver contacts : 0.5-50 mA 24 VDC
- Contact resistance : <30 mΩ - typically 10 mΩ
- Insulation resistance : >10 MΩ
- Contact bounce : <2 mS - typically 0.5 mS



## MECHANICAL SPECIFICATIONS

- Standard actuation force :
  - momentary NO : 2.0 N, 3.5 N, 6.5 N
  - quiet version : 2.0 N
  - NC/NO function : 3.5 N
- Max. actuation force :
  - momentary : 115 N for 60 sec (according to MIL-PRF-22885H)
  - NC/NO : 100 N for 10 sec
- Travel : 1 mm
- Lifetime :
  - NO : >10,000,000 cycles
  - NC/NO : >1,000,000 cycles

The company reserves the right to change specifications without notice.

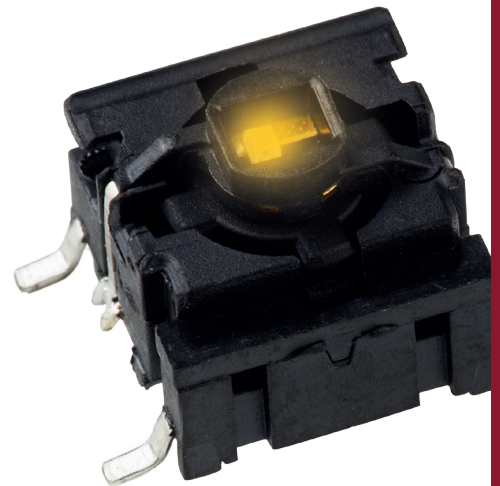

## MATERIALS


- Housing : PPS UL94V0
- Actuator : PPS UL94V0
- Sealing : Silicone rubber
- Contacts spring : Stainless steel
  - Silver : +3 µAg
  - Gold : +1 µAu
- Fixed contacts :
  - Silver : SnCu + 2 µNi + 3 µAg
  - Gold : SnCu + 2 µNi + 1 µAu
- Terminals : SnCu + 2 µNi + 3 µSn100

All tolerance if not otherwise specified ±0.2 mm.

# Multimec™ 5G


High performance tactile switches • MIL-PRF-28855H • excellent illumination

## 5G NON-ILLUMINATED




- SMD, TH or right angle TH
- NO or NC/NO

## 5G ILLUMINATED




- SMD or TH
- NO
- single or bi-color LEDs

All tolerances unless otherwise noted : ±0.2 mm

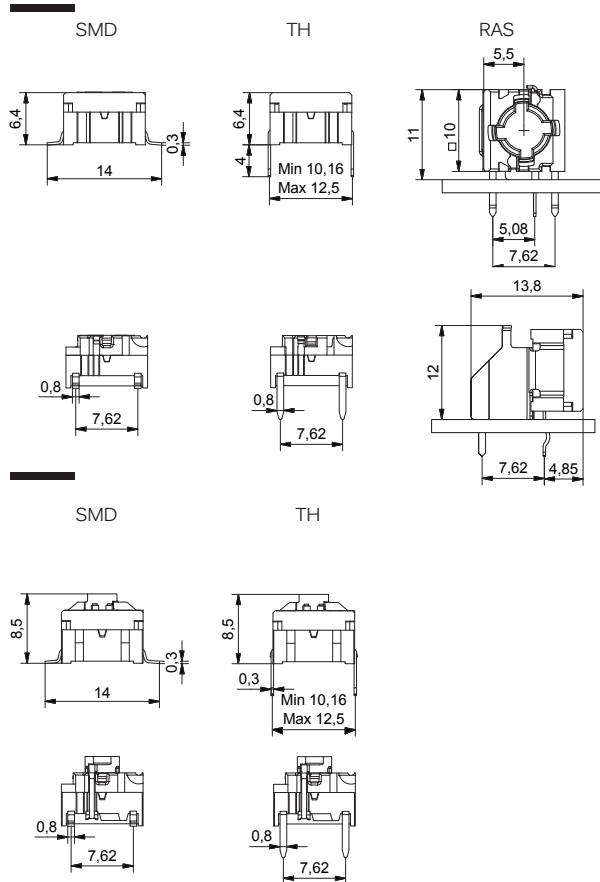


## PCB LAYOUT & CIRCUIT DIAGRAM


Non-illuminated




Single LED







Bicolor - 2 LEDs



RAS



NC/NO function  
\*not for sale in Japan



# Multimec™ 5G

High performance tactile switches • MIL-PRF-28855H • excellent illumination



## BUILD YOUR PART NUMBER

**ILLUMINATED**

|             |  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
|-------------|--|-----------------|--------------|------------|---------------|---|-----------|-------|-----------|-------|-----------|-------|--|-----------|------|-----------|-------|-----------|----------------------|-----------|--------|-----------|-------|-----------|-----|-------------|--------------|-------------|-----------|-------------|------------|--|----------|---------------------------------|----------|-----------------------------|----------|---------------|
| 5G          | —  | —               | —            | —          |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| SERIES      | MOUNTING   | ACTUATION FORCE | LED          | OPTIONAL   |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
|             | <table border="0"> <tr><td><b>TH9</b></td><td>Through-hole</td></tr> <tr><td><b>SH9</b></td><td>Surface mount</td></tr> </table> | <b>TH9</b>      | Through-hole | <b>SH9</b> | Surface mount | <table border="0"> <tr><td><b>20</b></td><td>2.0 N</td></tr> <tr><td><b>35</b></td><td>3.5 N</td></tr> <tr><td><b>65</b></td><td>6.5 N</td></tr> </table> | <b>20</b> | 2.0 N | <b>35</b> | 3.5 N | <b>65</b> | 6.5 N | <table border="0"> <tr><td><b>02</b></td><td>Blue</td></tr> <tr><td><b>22</b></td><td>Green</td></tr> <tr><td><b>29</b></td><td>High intensity Green</td></tr> <tr><td><b>42</b></td><td>Yellow</td></tr> <tr><td><b>61</b></td><td>White</td></tr> <tr><td><b>82</b></td><td>Red</td></tr> <tr><td><b>2242</b></td><td>Green/yellow</td></tr> <tr><td><b>8222</b></td><td>Red/green</td></tr> <tr><td><b>8242</b></td><td>Red/yellow</td></tr> </table> | <b>02</b> | Blue | <b>22</b> | Green | <b>29</b> | High intensity Green | <b>42</b> | Yellow | <b>61</b> | White | <b>82</b> | Red | <b>2242</b> | Green/yellow | <b>8222</b> | Red/green | <b>8242</b> | Red/yellow | <table border="0"> <tr><td><b>Q</b></td><td>Quiet contact (with 2.0 N only)</td></tr> <tr><td><b>R</b></td><td>Tape &amp; reel (with SMD only)</td></tr> <tr><td><b>G</b></td><td>Gold contacts</td></tr> </table> | <b>Q</b> | Quiet contact (with 2.0 N only) | <b>R</b> | Tape & reel (with SMD only) | <b>G</b> | Gold contacts |
| <b>TH9</b>  | Through-hole   |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>SH9</b>  | Surface mount  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>20</b>   | 2.0 N  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>35</b>   | 3.5 N  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>65</b>   | 6.5 N  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>02</b>   | Blue   |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>22</b>   | Green  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>29</b>   | High intensity Green   |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>42</b>   | Yellow   |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>61</b>   | White  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>82</b>   | Red  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>2242</b> | Green/yellow   |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>8222</b> | Red/green  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>8242</b> | Red/yellow   |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>Q</b>    | Quiet contact (with 2.0 N only)  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>R</b>    | Tape & reel (with SMD only)  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |
| <b>G</b>    | Gold contacts  |                 |              |            |               |   |           |       |           |       |           |       |  |           |      |           |       |           |                      |           |        |           |       |           |     |             |              |             |           |             |            |  |          |                                 |          |                             |          |               |

**NON-ILLUMINATED**

|             |  |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
|-------------|--|-----------------|--------------|------------|---------------|---|-----------|-------|-----------|-------|-----------|-------|--|----------|---------------------------------|------------|----------------------------|-------------|---|----------|-----------------------------|----------|---------------|
| 5G          | —  | —               | —            |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
| SERIES      | MOUNTING   | ACTUATION FORCE | OPTIONAL     |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
|             | <table border="0"> <tr><td><b>TH9</b></td><td>Through-hole</td></tr> <tr><td><b>SH9</b></td><td>Surface mount</td></tr> </table> | <b>TH9</b>      | Through-hole | <b>SH9</b> | Surface mount | <table border="0"> <tr><td><b>20</b></td><td>2.0 N</td></tr> <tr><td><b>35</b></td><td>3.5 N</td></tr> <tr><td><b>65</b></td><td>6.5 N</td></tr> </table> | <b>20</b> | 2.0 N | <b>35</b> | 3.5 N | <b>65</b> | 6.5 N | <table border="0"> <tr><td><b>Q</b></td><td>Quiet contact (with 2.0 N only)</td></tr> <tr><td><b>RAS</b></td><td>Right angle (with TH only)</td></tr> <tr><td><b>NCNO</b></td><td>Normally closed/ normally open function (with 3.5 N only)</td></tr> <tr><td><b>R</b></td><td>Tape &amp; reel (with SMD only)</td></tr> <tr><td><b>G</b></td><td>Gold contacts</td></tr> </table> | <b>Q</b> | Quiet contact (with 2.0 N only) | <b>RAS</b> | Right angle (with TH only) | <b>NCNO</b> | Normally closed/ normally open function (with 3.5 N only) | <b>R</b> | Tape & reel (with SMD only) | <b>G</b> | Gold contacts |
| <b>TH9</b>  | Through-hole   |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
| <b>SH9</b>  | Surface mount  |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
| <b>20</b>   | 2.0 N  |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
| <b>35</b>   | 3.5 N  |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
| <b>65</b>   | 6.5 N  |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
| <b>Q</b>    | Quiet contact (with 2.0 N only)  |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
| <b>RAS</b>  | Right angle (with TH only)   |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
| <b>NCNO</b> | Normally closed/ normally open function (with 3.5 N only)  |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
| <b>R</b>    | Tape & reel (with SMD only)  |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |
| <b>G</b>    | Gold contacts  |                 |              |            |               |   |           |       |           |       |           |       |  |          |                                 |            |                            |             |   |          |                             |          |               |



## ABOUT THIS SERIES

- Laser marking on the switch for identification : WWYS, WW=week, Y=year, S=suffix for the type of switch, e.g. P=2.0 N and silver contacts, S=3.5 N and silver contacts, E6.5 N and silver contacts
- Caps and accessories : for the full range of accessories for Multimec™ 5G please see the website.

# Multimec™ 5G


High performance tactile switches •  
MIL-PRF-28855H • excellent illumination



## TAPE & REEL

Tape and reel is available for the parts listed and has the following specifications

- Reel diameter: Ø330 mm
- Tape width: 24 mm
- Pitch: see list
- Tape and reel material: antistatic or better
- Quantity per reel: see list

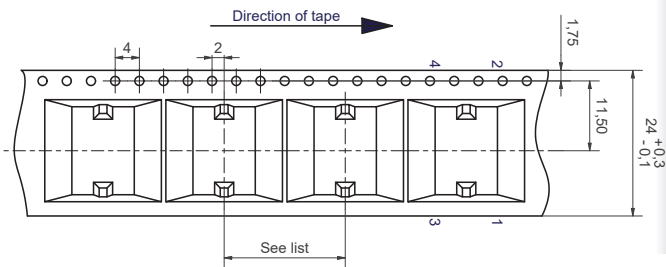


| PART NO.          | ORDERING CODE      | PITCH | QUANTITY PER REEL |
|-------------------|--------------------|-------|-------------------|
| 5GSH9XX           | 5GSH9XXR           | 16    | 500               |
| 5GSH9XX1SSXX-08.0 | 5GSH9XXR1SSXX-08.0 | 20    | 250               |
| 5GSH9XX1SSXX-09.5 | 5GSH9XXR1SSXX-09.5 | 20    | 250               |
| 5GSH9XX1SSXX-10.4 | 5GSH9XXR1SSXX-10.4 | 20    | 250               |
| 5GSH9XX1SSXX-11.0 | 5GSH9XXR1SSXX-11.0 | 20    | 250               |
| 5GSH9XX1SSXX-12.0 | 5GSH9XXR1SSXX-12.0 | 20    | 250               |
| 5GSH9XX02         | 5GSH9XX02R         | 20    | 250               |
| 5GSH9XX22         | 5GSH9XX22R         | 20    | 250               |
| 5GSH9XX29         | 5GSH9XX29R         | 20    | 250               |
| 5GSH9XX42         | 5GSH9XX42R         | 20    | 250               |
| 5GSH9XX61         | 5GSH9XX61R         | 20    | 250               |
| 5GSH9XX82         | 5GSH9XX82R         | 20    | 250               |
| 5GSH9XX2242       | 5GSH9XX2242R       | 20    | 250               |
| 5GSH9XX8222       | 5GSH9XX8222R       | 20    | 250               |
| 5GSH9XX8242       | 5GSH9XX8242R       | 20    | 250               |




## OPERATING FORCE


2.0 N

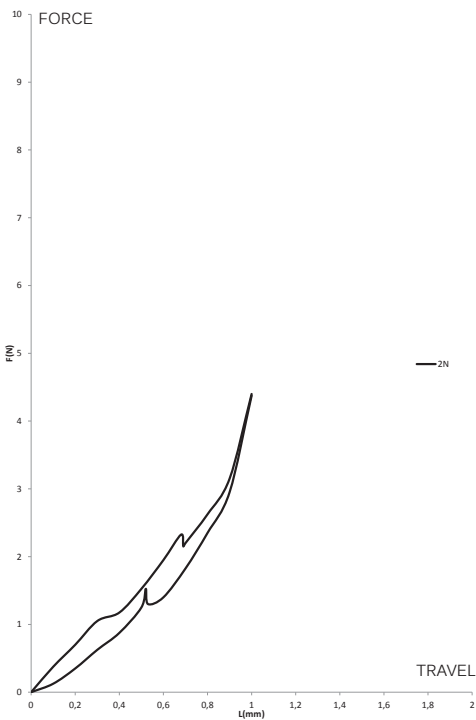

3.5 N

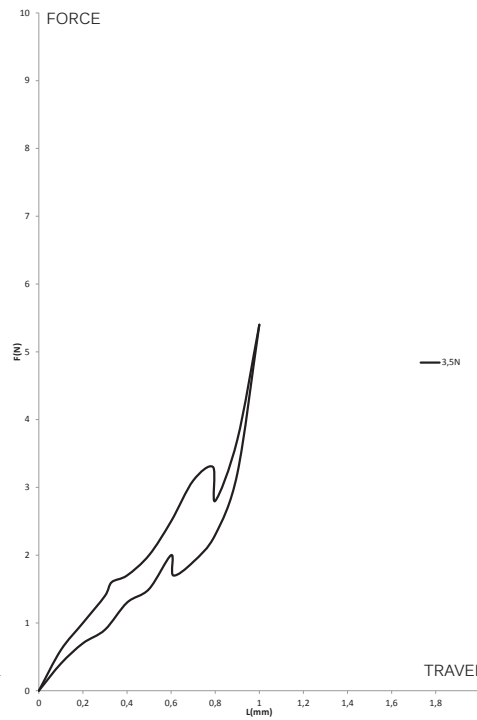

6.5 N

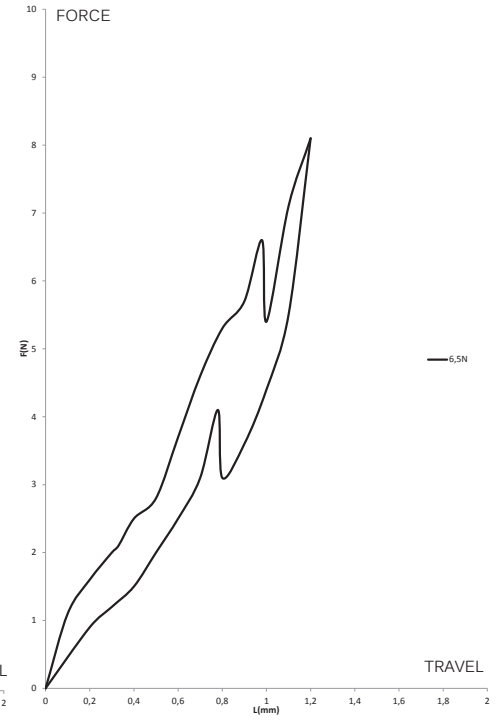


# Multimec™ 5G

High performance tactile switches • MIL-PRF-28855H • excellent illumination




## MOUNTING


### MOUNTING TOOLS FOR MULTIMEC™ THROUGH-HOLE SWITCHES

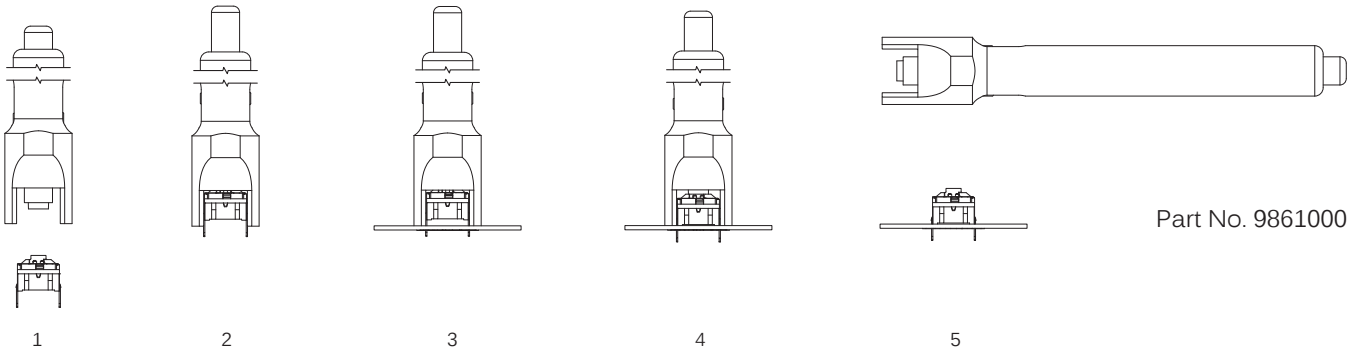

### SPACE REQUIREMENT - MATRIX MOUNTING




Through-hole (TH)




Surface mount (SMD)


### MULTIMEC™ SPACING EXAMPLES




5GT+1B+2C/D




5GS+1B+2C/D



5GT+1M



5GT+1A/H



1VS+1TS+1VS


# Multimec™ 5G

High performance tactile switches •  
MIL-PRF-28855H • excellent illumination




## MOUNTING (CONTINUED)


SPACE REQUIREMENT - SWITCH/CAP



Switch spacing



Cap dimensions



Panel cut-out

| CAP SERIES    | RECOMMENDED<br>MIN. SWITCH SPACING AxB | NOMINAL CAP DIMENSION<br>WxH | RECOMMENDED<br>MIN. PANEL CUT-CUT |
|---------------|--|------------------------------|-----------------------------------|
| 1A/1H         | 12.7x10.3                              | 12.6x10.1                    | 13.0x10.5                         |
| 1B+2C/2D      | 15.4x15.4                              | 15.1x15.1                    | 15.5x15.5                         |
| 1DS/1ES/1FS   | 12.7x11.3                              | Ø9.6                         | Ø10.0                             |
| 1GAS          | 12.7x11.3                              | Ø11.0                        | Ø11.4                             |
| 1GCS          | 15.3x15.3                              | Ø15.0                        | Ø15.4                             |
| 1JS           | 12.7x10.3                              | Ø10.0                        | Ø10.4                             |
| 1KS/1KBS/1KCS | 14.6x14.6                              | 14.3x14.3                    | 14.7x14.7                         |
| 1M            | 25.3x10.3                              | 25x10                        | 25.7x10.5                         |
| 1NS           | 13.6x11.3                              | Ø9.8/ □4.9                   | Ø10.2/□5.1                        |
| 1PS/ 1QS/1RS  | 12.8x10.3                              | 6.5x12.5                     | 7x13, R max. 1.0                  |
| 1SS/1IS/1LS   | 12.7x10.3                              | Ø6.5                         | Ø7.0                              |
| 1TS           | 12.7x12.3                              | 10.6x10.6                    | 11.0x11.0                         |
| 1US           | 12.7x12.3                              | Ø10.6                        | Ø11.0                             |
| 1VS           | 15.95x12.1                             | 10.6x13.25                   | 11.0x13.65                        |
| 1WAS/1WPS     | 14.2x10.3                              | 12.5x6.5                     | 12.9x6.9                          |
| 1WDS          | 16.9x10.3                              | 15.2x8.0                     | 15.6x8.4                          |
| 1XS           | 12.7x10.3                              | 9.4x7.4                      | 9.8x7.9                           |
| 1ZA           | 19.0x10.3                              | 18.7x10.1                    | 19.4x10.5                         |
| 1ZB           | 24.34x12.1                             | R1=7.4; R2=17.5 90°          | R1=7.1; R2=17.5-17.75 90°         |
| 1ZCS          | 14.6x14.6                              | Ø14.3                        | Ø14.7                             |
| 1Z/1ZW        | 35.5x35.5; 41.6x41.6                   | Ø29.5                        | Ø30.3                             |
| 10C           | 22.3x22.3                              | Ø19.2                        | Ø19.8                             |
| 10R/10RF/10RM | 37.3x37.3                              | Ø30.0                        | Ø30.6                             |
| 10Q/10QM      | 29.3x29.3                              | 22x22                        | 22.5x22.5                         |



## LED COMPONENT SPECIFICATIONS

| LED COMPONENT SPECIFICATIONS                  |          |                    |         |         |          |          |                      |
|---|----------|--------------------|---------|---------|----------|----------|----------------------|
| Color   |          | Blue               | Green   | Yellow  | White    | Red      | High Intensity Green |
| Color Codes                                   |          | 02                 | 22      | 42      | 61       | 82       | 29                   |
| ABSOLUTE MAXIMUM RATINGS (Ta= 25°C)           |          |                    |         |         |          |          |                      |
| Power   | mW       | 75                 | 75      | 60      | 46.5     | 65       | 102.5                |
| Current forward                               | mA       | 20                 | 30      | 25      | 15       | 25       | 25                   |
| Forward peak current                          | mA       | 100                | 80      | 60      | 100      | 100      | 150                  |
| Voltage reverse                               | V        | 5                  | 5       | 5       | 5        | 12       | 5                    |
| Operating temperature                         | °C       | -40/+85            | -55/+85 | -40/+85 | -40/+85  | -30/+85  | -40/+85              |
| Storage temperature                           | °C       | -40/+90            | -55/+85 | -40/+90 | -40/+85  | -40/+85  | -40/+85              |
| Soldering temperature                         | °C       | 245 for max 10 sec |         |         |          |          |                      |
| ELECTRICAL-OPTICAL CHARACTERISTICS (Ta=25 °C) |          |                    |         |         |          |          |                      |
| Voltage forward                               | Typ. V   | 2.7                | 2       | 1.75**  | 2.85     | 2        | 3.3                  |
|   | Max. V   | 3.7                | 2.4     | 2.35    | 3.1      | 2.5      | 4.1                  |
| Current reverse (VR=5V)                       | Max. µA  | 50                 | 100     | 10      | 10       | 100      | 50                   |
| Wave length                                   | nm       | 468                | 571     | 591     | NA       | 633      | 525                  |
| Spread  | Δnm      | 25                 | NA      | 15      | NA       | 16       | 30                   |
| Spread angle                                  | degree   | 120                | 130     | 120     | 150      | 160      | 60                   |
| Luminous Intensity                            | Min. mcd | 45                 | 18      | 28.5    | 56       | 28       | 500                  |
|   | Typ. mcd | 112*               | 35      | 72*     | max 450* | max 180* | 1000                 |
| Optical intensity                             | Lm/w     | NA                 | NA      | NA      | 36       | 7        | NA                   |

\*I<sub>F</sub>=20 mA, \*\*Pulse width 1ms Duty cycle 1:5, \*\*\*I<sub>F</sub>=50 mA, \*\*\*\*Luminous Flux mlm

# Multimec™ 5G

High performance tactile switches • MIL-PRF-28855H • excellent illumination



## USAGE GUIDELINES

### HOW TO GET THE BEST RESULTS WITH MEC SWITCHES ?

These guidelines are offered to users of MEC Switches as an aid to ensure successful and reliable switch operation. Please see the technical specifications for details on operating and storage temperatures and soldering guidelines to make sure you select the best switch for your application. When reflow soldering is taking place, MEC strongly recommend that the temperature profile is analyzed and compared with the temperature rating of the switch. It is also important to monitor the accumulated heat buildup from both the pre-heat zones and the solder zone.

Most standard accessories for multimec™ 5 series switches are made from ABS plastic with a maximum operating temperature of 65 °C. It is strongly recommended that accessories are mounted after soldering of the switch. If this is not possible care must be taken not to overheat the accessories during the soldering process. The 1SS and 1GAS/1GCS caps are, however, made of high temperature materials and will meet the same temperature specifications as the switches. For accessories made from other plastic materials please see multimec™ 5 series cap & bezel technical specifications.

LEDs have their own temperature specifications. When fitted in a switch the LED will determine the max. operating temperature, i.e. 5GTH93522 has an upper temperature limit of 85 °C!

### MOUNTING AND DISMOUNTING

If switches are to be mounted in rows it is essential that the recommendations regarding spacing are followed. PC board thickness should be 1.4 ±0.2 mm and terminal hole diameter should be 0.9 mm.

All multimec™ 5 series caps and bezels are easily snapped onto the switch modules and can be changed at a later time.

A mounting tool is available for through hole multimec™ 5 series switches.

### SOLDERING AND CLEANING MULTIMEC™ SERIES

Multimec™ 5 series switches are fully sealed to IP67 specifications to minimize solder flux and aqueous based cleaning solutions from entering the switch and contaminating the contacts. The switches can be placed on the PC board with other components and reflow soldered. Multimec™ 5 series offers a high level of sealing, however, with aqueous solvent solutions care must be taken to avoid the worst

case situation with water jets, complete immersion into a liquid with a temperature below the board or surface tension reducing additives.

Recommended cleaning methods are demineralized water. Any surface tension reducing agents, such as soap, must not be used as they risk causing a potential leakage of the switch.

### SOLDERING - THROUGH HOLE VERSIONS

**Hand soldering:** max. 350 °C for max. 3 sec

**Wave soldering:** heat built up in the switch during pre-heating and soldering must not exceed the maximum operating temperature of the switch. Peak temperature must not exceed 260 °C, and soldering time is max 10 sec. (IEC 60068-2-20 8)

### SOLDERING - SURFACE MOUNT VERSIONS

For all methods - infrared, convection and vapor phase. The upper limit 240 °C/40 sec must be observed. The soldering temperature profile must have moderate temperature gradients. (JEDEC J-STD-020E)

### ROHS COMPLIANCE

As of 1 July 2006 MEC has completed the conversion to RoHS compliance. For more info please see our homepage [www.apem.com](http://www.apem.com)

### TEMPERATURE LIMITS:

|             |              |
|-------------|--------------|
| Switch      | 160 °C       |
| LEDs        | 85/90 °C     |
| Accessories | 65/85/160 °C |

### PACKAGING



Multimec™ 5 series switches are packed in rigid tubes of 50 pieces each. A box contains 1.000 pcs.

The surface mount versions of multimec™ 5 series switches with a height up to 12.5 mm can also be delivered on tape/reel. Each reel contains 250/500 pcs.

Right angle switches are packed into trays. Each tray contains 100 pcs.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 5GSH935 on WIN SOURCE](#)
-  [MEC Switches](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management