




THE DATASHEET OF
750510231





CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

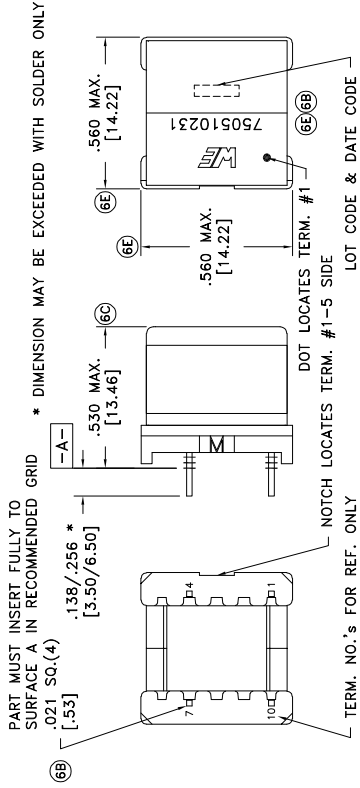

ELECTRICAL SPECIFICATIONS @ 25°C unless

PARAMETER	TEST CONDITION
D.C. RESISTANCE	1-4 @20°C
D.C. RESISTANCE	10-7 @20°C
INDUCTANCE	1-4 100kHz, 1.0VAC, 0/15m
LEAKAGE INDUCTANCE	1-4 tie(7+10), 75kHz 100mVAC, Ls
INTERWINDING CAPACITANCE	1-10 tie(1+4, 7+10), 75V 1.0VAC, Cs
DIELECTRIC	1-10 2000VAC, 1 second
URNS RATIO	(1-4):(10-7)



RECOMMENDED
P.C. PATTERN, COMPONENT SIDE

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -20°C to +80°C

6B Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified:
6E	8/22	Method: Tray	Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [.13]
6D	1/19	PKG-1292 www.we-online.com/midcom	Fractions: $\pm 1/64$ Footprint: $\pm .001$ [.03]
6C	6/17	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.
6B	9/11	SEE REVISION SHEET FOR REVISION LEVEL	

DRAWING TITLE

TRANSFORMER

eISos p/n: 750510231

PART



75



SPECI

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 750510231 on WIN SOURCE](#)
-  [Wurth Electronics Inc Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management