


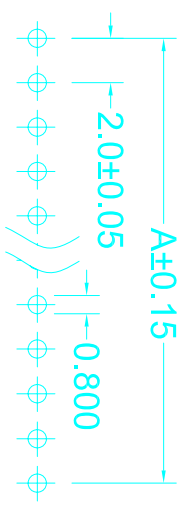


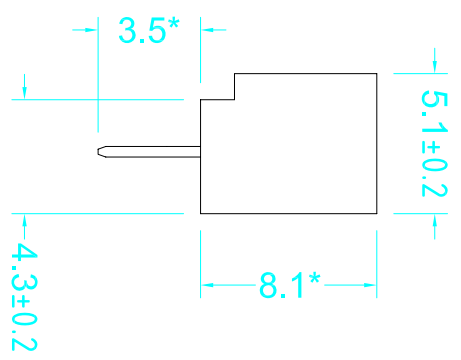

**THE DATASHEET OF
110990030**

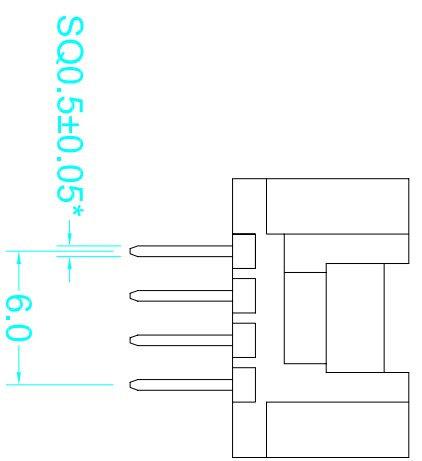


标记	版本	文件编号	变更前	变更后	日期	变更人
	A		/	新版图	2013.07.25	wzw



PCB LAYOUT

- Performance characteristics:
1. The dimensions with "*" are key control size
 2. Main body part material
Insulator: NYLON UL94V-0
Contact: Brass
 3. Plating
Contact: Tin-plated according to customer needs
 4. Electrical requirements:
Current rating: 2 A
Voltage rating: 250V
Contact resistance: ≤10 mΩ
Insulation resistance: ≥1000 MΩ
Withstanding voltage: 800 V AC, 60s
 5. Environment specification
Working temperature: -25℃~85℃
Method of packing: 1000 pcs per bag

DRAWN	DATE	 SHENZHEN NS-TECH CO.,LTD.
wzw	2013.07.25	
CHECKED	DATE	TITLE: 1125S-4P SPEC: 不打K 环保
APPROVED	DATE	
未注公差表		PART NO.
.X ±0.5	X. ±5°	CLIENT P/N
.XX ±0.3	.X ±3°	UNIT: mm
.XXX ±0.1	.XX ±1°	SCALE: free
		FILE NO.:NS-1125-W00008
		REV A
		HC

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View 110990030 on WIN SOURCE](#)
- [Seed Technology Co., Ltd Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management