



**THE DATASHEET OF
DCW-11-722+**



Ceramic Directional Coupler

DCW-11-722+

50Ω 11 dB Coupling 2400 to 7200 MHz



Generic photo used for illustration purposes only
CASE STYLE: JC0603C

Maximum Ratings


Operating Temperature	-55°C to 105°C
Storage Temperature	-55°C to 105°C
Input Power ¹	1W

Permanent damage may occur if any of these limits are exceeded.
1. Derate linearly 0.5W at 0.5°C

Pad Connections

INPUT	1
OUTPUT	4
COUPLED	6
TERMINATION	3
GROUND	2,5

Outline Drawing

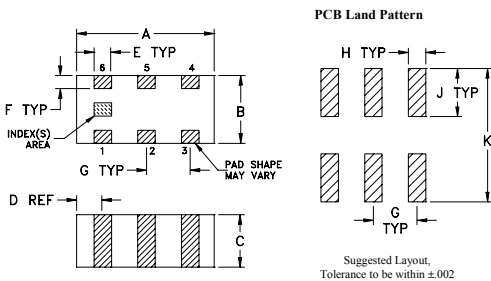


Outline Dimensions (inch/mm)

A	B	C	D	E	F
.063	.031	.024	.012	.008	.006
1.60	0.79	0.61	0.30	0.20	0.15

G	H	J	K	wt
.020	.010	.022	.053	grams
0.51	0.25	0.56	1.35	0.005

Demo Board MCL P/N: TB-DCW-11-722+ Suggested PCB Layout (PL-572)

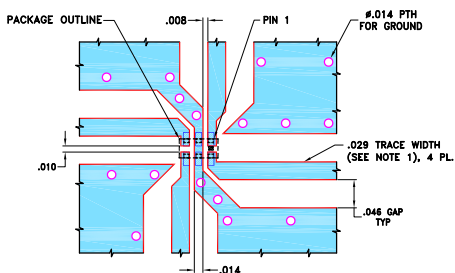

- NOTES:
- TRACE WIDTH & GAP ARE SHOWN FOR FR4, GRADE IT-180TC (ITEQ CORP.) WITH DIELECTRIC THICKNESS .016±.0015. COPPER: 1/2 OZ EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - REFER TO MODEL DATASHEET FOR PIN OUTS.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Features

- Wideband, 2400-7200 MHz
- Excellent return loss for input/output ports ideal for signal-tap
- Ultra small size, 0603 (1.6 x 0.8 mm)
- Temperature stable
- LTCC construction

Applications




- ISM
- UMTS
- WiMAX
- PCS
- Wi-Fi
- LTE

Electrical Specifications at 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		2400		7200	MHz
Mainline Loss	2400-7200	—	0.7	2.2	dB
Midband Coupling	2400-7200	—	11	—	dB
Coupling Flatness(±)	2400-7200	—	2.5	—	dB
Directivity	2400-7200	—	12	—	dB
Return Loss (Input)	2400-7200	9.5	17	—	dB
Return Loss (Output)	2400-7200	9.5	17	—	dB

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		Cpl
				In	Out	
2400	0.36	13.93	13.69	34.89	31.26	23.33
2800	0.42	12.93	13.86	31.59	27.87	22.12
3400	0.50	11.84	13.86	25.48	23.92	21.83
4000	0.58	11.11	13.54	22.22	21.59	21.39
4600	0.64	10.69	13.39	20.58	20.63	20.42
5000	0.66	10.58	13.77	19.80	20.51	20.09
5600	0.67	10.66	14.81	19.22	19.79	19.16
6200	0.66	11.12	17.41	18.42	18.10	16.77
6800	0.66	12.07	21.40	16.78	15.58	13.28
7200	0.67	12.92	16.67	15.83	13.96	11.49

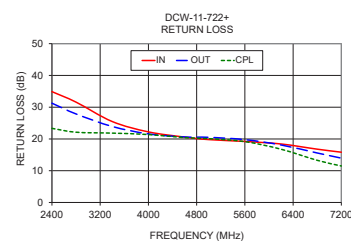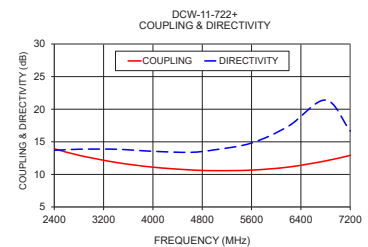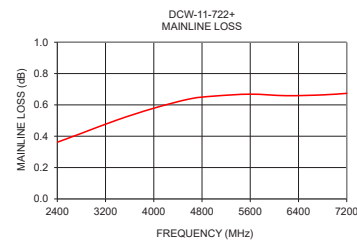

Electrical Schematic



* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLERS REQUIRING EXTERNAL TERMINATION THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS.

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp





www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
ECO-007432
DCW-11-722+
AVB/CP/AM
210423
Page 1 of 1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View DCW-11-722+ on WIN SOURCE](#)
-  [Mini-Circuits Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management