




**THE DATASHEET OF**  
**597-3222-407F**



**Surface Mount LED  
0603 Type Package**

597-5004-4xx  
597-5x12-4xx  
597-52x3-4xx

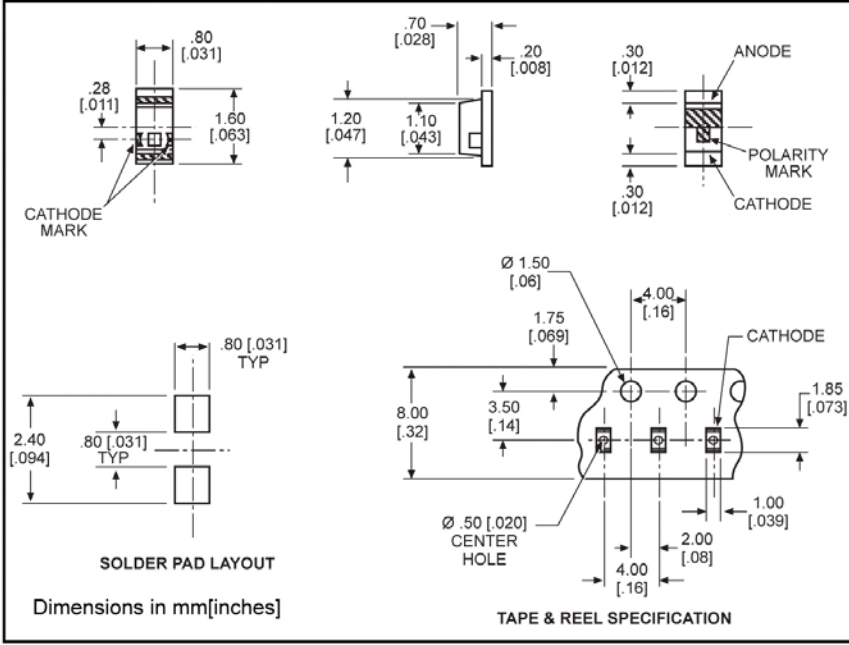

**PART NO.\***

- 597-5004-4xx
- 597-5112-4xx
- 597-5203-4xx
- 597-5213-4xx
- 597-5223-4xx
- 597-5312-4xx
- 597-5412-4xx

**COLOR**

- AllnGaP Red
- Red
- Orange
- AllnGaP Orange
- AllnGaP Yellow
- Green
- Yellow Green

**Benefits**

- Compatible with automatic placement equipment
- Compatible with infrared reflow processes
- Packaged on 12mm tape, 7" reels (meets EIA-481-1 standard)
- Helps to eliminate mixed technology PC board processing

**\*ORDERING INFORMATION**

**597-5xxx-4xx**

packaging option  $\nearrow$

02	20 pieces on tape
07	7" reel, 4000 pcs/reel

	AllnGaP Red	Red	Orange	AllnGaP Orange	AllnGaP Yellow	Green	Yellow Green
<b>ABSOLUTE MAXIMUM RATINGS</b> ( $T_A=25^\circ\text{C}$ )	<b>-5004</b>	<b>-5112</b>	<b>-5203</b>	<b>-5213</b>	<b>-5223</b>	<b>-5312</b>	<b>-5412</b>
Power Dissipation (mW)	81	57.5	70	81	81	70	70
Forward Current (mA)	30	25	25	30	30	25	25
Peak Current (mA)	100	60	60	100	100	60	60
<i>Pulse width = 10 <math>\mu\text{s}</math></i>							
Operating Temperature ( $^\circ\text{C}$ )	-40/+85	-30/+85	-30/+85	-40/+85	-40/+85	-30/+85	-30/+85
Storage Temperature ( $^\circ\text{C}$ )	-40/+100	-40/+100	-40/+100	-40/+100	-40/+100	-40/+100	-40/+100
Soldering Temperature	240 $^\circ\text{C}$ , 5 sec. max						

*Solder Adherence per MIL-STD-202E, Method 208C*

		AllnGaP Red	Red	Orange	AllnGaP Orange	AllnGaP Yellow	Green	Yellow Green
<b>OPERATING CHARACTERISTICS</b> ( $T_A=25^\circ\text{C}$ )		<b>-5004</b>	<b>-5112</b>	<b>-5203</b>	<b>-5213</b>	<b>-5223</b>	<b>-5312</b>	<b>-5412</b>
Luminous Intensity (mcd)	Min.	16	7	2	16	16	3.8	7
	Typical	50	11.7	3.4	65	65	6.4	11.7
	$I_F=20\text{mA}$							
Peak Wavelength (nm)	Typical	630	660	605	609	592	560	570
	$\lambda_{\text{Peak}}$							
Viewing Angle ( $2\Theta_{1/2}$ )	Typical	152 $^\circ$	152 $^\circ$	152 $^\circ$	152 $^\circ$	152 $^\circ$	152 $^\circ$	152 $^\circ$
Forward Voltage (V)	Typical	1.9	1.7	2.2	1.9	1.9	2.1	2.1
	Max.	2.4	2.3	2.8	2.4	2.4	2.8	2.8
	$I_F=20\text{mA}$							
Reverse Current ( $\mu\text{A}$ )	Max	100	100*	100*	100	100	100*	100*
	$(V_R = 5\text{V}) \quad * (V_R = 4\text{V})$							

$\Theta_{1/2}$  is the off axis angle at which the luminous intensity is half the axial luminous intensity

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 597-3222-407F on WIN SOURCE](#)

 [Dialight Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management