




**THE DATASHEET OF  
1824740000**



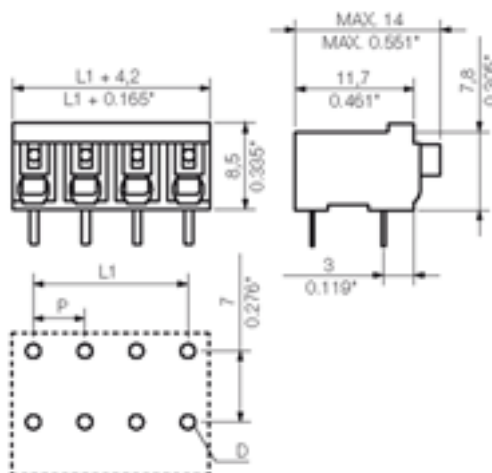

#### General ordering data

Order No.	1824740000
Part designation	LSF-SMT5.00/2/90 3.5 SW
Version	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 2, 90°, Tube
EAN	4032248327294
Qty.	60 pc(s).

#### System parameters

Product family	System LS
Conductor connection system	Push In
Fitted to PCB	Reflow solder connection
Outgoing direction of conductor	90°
Pitch	5 mm
Pitch in inch	0.197 inch
No. of poles	2
Fitted by customer	yes
No. of rows	1
Solder pin length	3.5 mm
Dia. of fitting hole	1.1 mm
Fitting hole tolerance	+ 0.1 mm
No. of solder pins per pole	2
Stripping length	8 mm

#### System parameters

L1 in mm	5 mm
L1 in inch	0.197 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

#### Material data

Insulating material	LCP GF
Colour	black
colour chart	Similar to RAL 9011
Insulating material group	IIIa
Flammability class UL 94	V-0
CTI	>= 175
Contact base material	Copper alloy
Contact surface	tinned
Storage temperature, min.	-25 °C
Storage temperature, max.	55 °C

#### Connectable conductors

Clamping range, min.	0.13 mm <sup>2</sup>
Clamping range, max.	1.5 mm <sup>2</sup>
AWG, min.	24
AWG, max.	16
O.D. of conductor insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.2 mm <sup>2</sup>
Solid, max. H05(07) V-U	1.5 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.2 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, min.	0.25 mm <sup>2</sup>
With wire end ferrule, acc. to DIN 46 228/1, max.	1.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.25 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, max.	0.75 mm <sup>2</sup>

#### DIN IEC rating data

Rated current, min. No. pins (Tu=20°C)	17.5 A
Rated current, max. No. pins (Tu=20°C)	17.5 A
Rated current, min. No. pins (Tu=40°C)	17.5 A
Rated current, max. No. pins (Tu=40°C)	15 A
Rated voltage for overvoltage class/pollution severity II/2	500 V
Rated voltage for overvoltage class/pollution severity III/2	320 V
Rated voltage for overvoltage class/pollution severity III/3	250 V
Rated impulse withstand voltage for overvoltage class/pollution severity II/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	4 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	4 kV
Short-time withstand current resistance	3 x 1s with 80 A

#### CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	24
AWG conductor (field wiring), max.	16

#### UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	24
AWG conductor, max.	16

#### Approvals

Approvals institutes



#### Classifications

eClass 4.1	NK
eClass 5.0	NK
eClass 5.1	NK

#### Similar products

Order No.	Part designation	Version
1876430000	LSF-SMT5.00/2/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 2, 90°, Tape
1869600000	LSF-SMT 5.00/2/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 2, 90°, Tube
1876240000	LSF-SMT5.00/2/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 2, 90°, Tape
1824750000	LSF-SMT5.00/3/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 3, 90°, Tube
1876510000	LSF-SMT5.00/3/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 3, 90°, Tape
1869610000	LSF-SMT 5.00/3/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 3, 90°, Tube
1876260000	LSF-SMT5.00/3/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 3, 90°, Tape
1824760000	LSF-SMT5.00/4/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 4, 90°, Tube
1876530000	LSF-SMT5.00/4/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 4, 90°, Tape

1869620000	LSF-SMT 5.00/4/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 4, 90°, Tube
1876270000	LSF-SMT5.00/4/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 4, 90°, Tape
1824770000	LSF-SMT5.00/5/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 5, 90°, Tube
1876550000	LSF-SMT5.00/5/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 5, 90°, Tape
1869630000	LSF-SMT 5.00/5/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 5, 90°, Tube
1876280000	LSF-SMT5.00/5/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 5, 90°, Tape
1824780000	LSF-SMT5.00/6/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 6, 90°, Tube
1876560000	LSF-SMT5.00/6/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 6, 90°, Tape
1869640000	LSF-SMT 5.00/6/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 6, 90°, Tube
1876300000	LSF-SMT5.00/6/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 6, 90°, Tape
1824790000	LSF-SMT5.00/7/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 7, 90°, Tube
1876540000	LSF-SMT5.00/7/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 7, 90°, Tape
1869650000	LSF-SMT 5.00/7/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 7, 90°, Tube
1876330000	LSF-SMT5.00/7/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 7, 90°, Tape
1824800000	LSF-SMT5.00/8/90 3.5 SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 8, 90°, Tube
1876520000	LSF-SMT5.00/8/90 3.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 8, 90°, Tape
1869660000	LSF-SMT 5.00/8/90 1.5SW	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 8, 90°, Tube
1876350000	LSF-SMT5.00/8/90 1.5R	PCB terminal, Push In, Reflow solder connection, Clamping range, max.: 1.5 mm <sup>2</sup> , Pitch: 5.00 mm, No. of poles: 8, 90°, Tape

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1824740000 on WIN SOURCE](#)

 [Weidmuller Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management