




THE DATASHEET OF
MS1V-T1K-32.768KHZ-12.5PF-20PPM-TA-QC




MS1V-T1K

Tuning Fork Crystal 30 kHz – 200 kHz

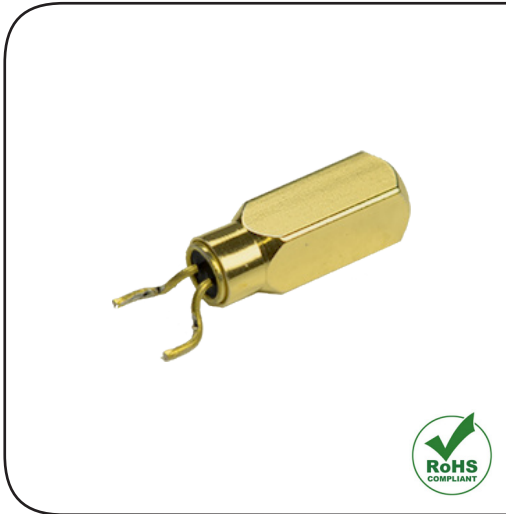

DIMENSIONS

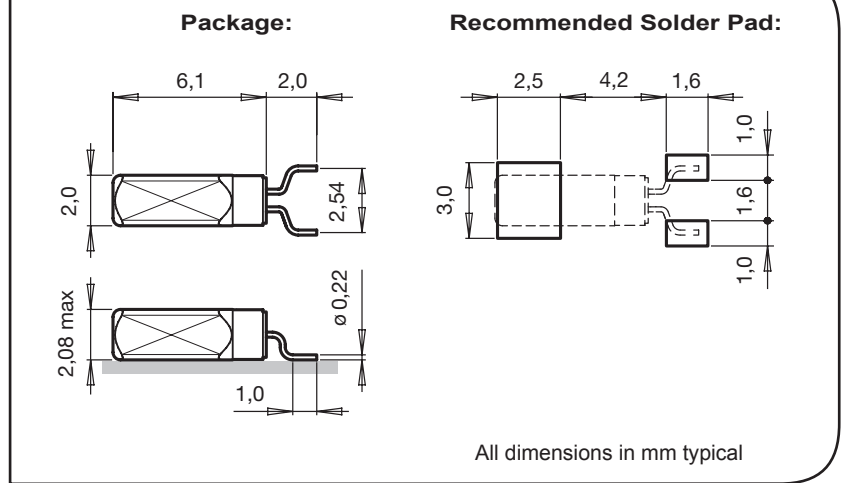

APPLICATIONS

IoT
Metering
Wearables
Health Care
Consumer Electronics

DESCRIPTION

The MS1V-T1K is a low frequency surface mount technology Quartz Crystal Unit that incorporates a tuning fork Quartz Crystal Resonator. It operates under vacuum in a hermetically sealed square-bodied metal can package.

FEATURES

High stability is guaranteed by hermetic sealing.
High shock and vibration resistant.
Proven surface mount technology package for reflow soldering.
Excellent lead coplanarity for surface mounting.
RoHS-compliant.

ELECTRICAL CHARACTERISTICS AT 25°C

Standard Frequency	¹⁾ F_L	32.768	kHz
Load capacitance	²⁾ C_L	6.0 / 7.0 / 9.0 / 12.5	pF
Frequency tolerance	³⁾ $\Delta F/F$	±20	ppm
	$\Delta F/F$	±100	ppm
Series resistance typ./max.	R_S	45 / 60	kΩ
Motional capacitance typ.	C_1	2.25	fF
Static capacitance typ.	C_0	0.9	pF
Drive level max.	P	1.0	μW
Insulation resistance min.	R_i	500	MΩ
Aging first year max.	$\Delta F/F$	±3	ppm
Turnover temperature	T_0	25 ±5	°C
Frequency vs. temperature	$\Delta F/F_0$	$-0.035 \text{ ppm}/^\circ\text{C}^2 (T - T_0)^2 \pm 10\%$	ppm

- 1) Other frequencies on request.
2) Other load capacitances on request.
3) Tighter and wider frequency tolerances on request.

STANDARD FREQUENCIES

Frequencies		
32.768 kHz	60.000 kHz	76.800 kHz
Other frequencies on request		

ENVIRONMENTAL CHARACTERISTICS

		Conditions	Max. Dev.
Storage temperature range		-55 to +85°C	
TA Operating temperature range		-40 to +85°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	±5 ppm
Vibration resistance	ΔF/F	20 g / 10–2000 Hz	±5 ppm

TERMINATIONS AND PROCESSING

Type	Termination	Processing
MS1V-T1K	Can: Au flashed Leads: Formed leads Au flashed	For surface mounting IPC/JEDEC J-STD-020C 260°C / 20 - 40 s
MS1V-T1N	Can: Au flashed Leads: Straight leads Au flashed	For through-hole mounting IPC/JEDEC J-STD-020C 260°C / 20 - 40 s

ORDERING INFORMATION

MS1V - T1K 32.768 kHz 12.5 pF ±20 ppm TA QC

Square metal package
MS1V = 2.0 x 2.0 x 6.1 mm

SMT Package

Au flashed leads

Package lead form
K = SMD spacing 2.54 mm
N = Straight leads

Frequency F_L
32.768 kHz

Load capacitance C_L
6.0 pF
7.0 pF
9.0 pF
12.5 pF
Other C_L on request

Frequency tolerance
±20 ppm
±100 ppm
Tighter and wider freq. tolerances on request

Temperature range
TA = -40 to +85°C

Qualification
QC = Commercial Grade

A unique part number will be generated for each product specification, i.e:		
20xxx-ML02	2'000 pcs (in 16 mm tape on 7" reel)	MS1V-T1K
20xxx-PL08	8'000 pcs (in 16 mm tape on 13" reel)	MS1V-T1K
20xxx-BA01	1'000 pcs (in plastic bag)	MS1V-T1N

All specifications subject to change without notice.



Micro Crystal AG
Muehlestrasse 14
CH-2540 Grenchen
Switzerland

Phone +41 32 655 82 82
sales@microcrystal.com
www.microcrystal.com

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MS1V-T1K-32.768KHZ-12.5PF-20PPM-TA-QC on WIN SOURCE](#)
- ⊖ [Abracon LLC Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management