





**THE DATASHEET OF
1633860000**

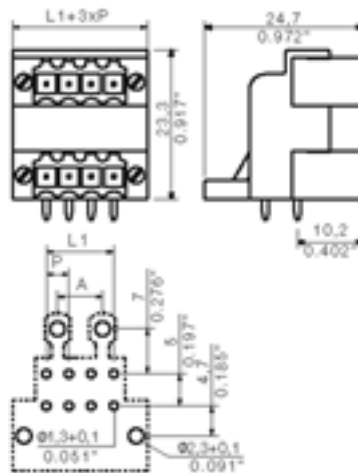

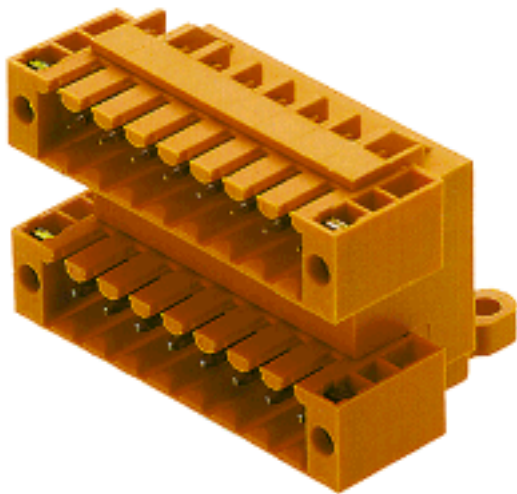

General ordering data

| | |
|------------------|---|
| Order No. | 1633860000 |
| Part designation | SLD 3.5/14/90F3.2SN OR |
| Version | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 14, 90°, Box |
| EAN | 4008190258313 |
| Qty. | 20 pc(s). |

System parameters

| | |
|---|------------------------------|
| Fitted to PCB | Soldered connection |
| Outgoing elbow | 90° |
| Pitch | 3.5 mm |
| Pitch in inch | 0.138 inch |
| No. of poles | 14 |
| Solder pin length | 3.2 mm |
| Can be coded | Yes |
| No. of rows | 2 |
| No. of solder pins per pole | 1 |
| Dia. of fitting hole | 1.3 mm |
| Fitting hole tolerance | + 0.1 mm |
| L1 in mm | 21 mm |
| L1 in inch | 0.827 inch |
| Insulation resistance | 1 MΩ |
| Electric shock protection to DIN VDE 0470 | IP 10 |
| Electric shock protection to DIN VDE 0470 | Safe from back-of-hand touch |

Material data

| | |
|---------------------------|---------------------|
| Insulating material | PBT |
| Colour | orange |
| colour chart | Similar to RAL 2000 |
| Insulating material group | IIIa |
| Flammability class UL 94 | V-0 |
| CTI | >= 200 |
| Contact base material | CuSn |

Material data

| | |
|---------------------------------------|--------|
| Contact surface | tinned |
| Constant operating temp., min. | -25 °C |
| Constant operating temp., max. | 100 |
| Storage temperature, min. | -25 °C |
| Storage temperature, max. | 55 °C |
| Max. relative humidity during storage | 80 % |

DIN IEC rating data

| | |
|--|------------------|
| Rated current, min. No. pins (Tu=20°C) | 10.5 A |
| Rated current, max. No. pins (Tu=20°C) | 8 A |
| Rated current, min. No. pins (Tu=40°C) | 9 A |
| Rated current, max. No. pins (Tu=40°C) | 7 A |
| Rated voltage for overvoltage class/pollution severity III/3 | 125 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/3 | 2.5 kV |
| Rated voltage for overvoltage class/pollution severity III/2 | 160 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity III/2 | 2.5 kV |
| Rated voltage for overvoltage class/pollution severity II/2 | 200 V |
| Rated impulse withstand voltage for overvoltage class/pollution severity II/2 | 2.5 kV |
| Short-time withstand current resistance | 3 x 1s with 80 A |

CSA rating data

| | |
|-----------------------------|-------|
| Rated voltage (Use group D) | 300 V |
| Rated current (Use group D) | 8 A |

UL 1059 rating data

| | |
|-----------------------------|-------|
| Rated voltage (Use group D) | 300 V |
| Rated current (Use group D) | 8 A |

Approvals

Approvals institutes



Downloads

| | |
|---------------------------------------|---------|
| CAD Library (P-CAD Format - Standard) | SLD.LIB |
|---------------------------------------|---------|

Classifications

| | |
|------------|-------------|
| ETIM 2.0 | NK |
| ETIM 3.0 | EC001284 |
| eClass 4.1 | 27-26-07-01 |
| eClass 5.0 | 27-26-07-01 |
| eClass 5.1 | 27-26-07-04 |

Similar products

| Order No. | Part designation | Version |
|------------|------------------------|---|
| 1633810000 | SLD 3.5/4/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 4, 90°, Box |
| 1633820000 | SLD 3.5/6/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 6, 90°, Box |
| 1633830000 | SLD 3.5/8/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 8, 90°, Box |
| 1633840000 | SLD 3.5/10/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 10, 90°, Box |
| 1633850000 | SLD 3.5/12/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 12, 90°, Box |
| 1633870000 | SLD 3.5/16/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 16, 90°, Box |
| 1633880000 | SLD 3.5/18/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 18, 90°, Box |
| 1633890000 | SLD 3.5/20/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 20, 90°, Box |
| 1633900000 | SLD 3.5/22/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 22, 90°, Box |
| 1633910000 | SLD 3.5/24/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 24, 90°, Box |
| 1633920000 | SLD 3.5/26/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 26, 90°, Box |
| 1633930000 | SLD 3.5/28/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 28, 90°, Box |
| 1633940000 | SLD 3.5/30/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 30, 90°, Box |
| 1633950000 | SLD 3.5/32/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 32, 90°, Box |
| 1633960000 | SLD 3.5/34/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 34, 90°, Box |
| 1633970000 | SLD 3.5/36/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 36, 90°, Box |
| 1633980000 | SLD 3.5/38/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 38, 90°, Box |
| 1633990000 | SLD 3.5/40/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 40, 90°, Box |

| | | |
|------------|------------------------|---|
| 1634000000 | SLD 3.5/42/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 42, 90°, Box |
| 1634010000 | SLD 3.5/44/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 44, 90°, Box |
| 1634020000 | SLD 3.5/46/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 46, 90°, Box |
| 1634030000 | SLD 3.5/48/90F3.2SN OR | PCB plug-in connector, Male connectors, Soldered connection, Pitch: 3.50 mm, No. of poles: 48, 90°, Box |

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1633860000 on WIN SOURCE](#)

 [Weidmuller Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management