





**THE DATASHEET OF
1690030000**

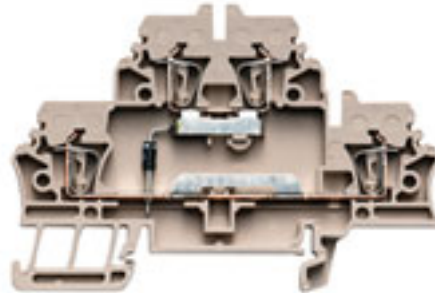

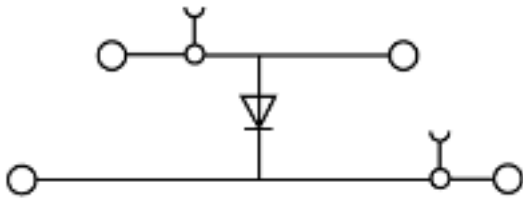

General ordering data

Order No.	1690030000
Part designation	ZDK 2.5/D/2
Version	Component terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
EAN	4008190877903
Qty.	50 pc(s).

Product notes

Note, ordering data	Soldered diode: Type 1N 4007, reverse voltage 1000V, current 1 A; current of continuous busbar = 10 A
Note, technical data	2.5 mm ² flexible conductors with wire end ferrules are crimped with the Weidmüller PZ 6/5 crimping tool.
Product description	Z-series standard ranges provide solutions for conductor cross-sections from 0.05 to 35 mm ² .

Additional technical data

Colour of insulating material	dark beige
Connection direction	top
Electronic component	Diode
End plate required	Yes
Explosion-tested version "Ex e"	Yes
Installation advice	TS 35
Insulating material	Wemid
Levels cross-connected internally	No
No. of levels	2
No. of terminal strips per level	2
Open sides	right
Operating temperature range	- 50 °C, + 120 °C
Product family	Z-series
Type of connection	Plugged
Type of mounting	Snap-on
UL 94 flammability rating of insulation material	V-0

Additional technical data

Version Feed-through terminal with electronic components

CSA rating data

Voltage (CSA) 300 V
 CSA current 10 A
 Min. cross-section (CSA) AWG 26
 Max. cross-section (CSA) AWG 12

Conductors for clamping (additional connection)

Type of connection Tension clamp connection
 Flexible with ferrule, min. (DIN 46228 pt 1) 0.5 mm²
 Flexible with ferrule, max. (DIN 46228 pt 1) 2.5 mm²

Conductors for clamping (rated connection)

Clamping range, min. 0.05 mm²
 Clamping range, max. 2.5 mm²
 Type of connection Tension clamp connection
 2nd type of connection clamped
 Connection direction top
 No. of connections 4
 Stripping length 10 mm
 Blade size 0.6 x 3.5 mm
 Gauge to IEC 60947-1 A2
 Solid, min. 0.5 mm²
 Solid, max. 2.5 mm²
 Flexible, min. 0.5 mm²
 Flexible, max. 2.5 mm²
 Flexible with ferrule, min. (DIN 46228/1) 0.5 mm²
 Flexible with ferrule, max. (DIN 46228/1) 1.5 mm²
 Flexible, min., ferrule with plastic collar (DIN 46228 pt 4) 0.5 mm²
 Flexible, max., ferrule with plastic collar (DIN 46228 pt 4) 1.5 mm²
 Twin wire-end ferrule, min. 0.14 mm²
 Twin wire end ferrule, max. 0.34 mm²
 AWG conductor size, min. AWG 30
 AWG conductor size, min. 0.13 mm²
 AWG conductor size, max. 2.5 mm²

Dimensions

Width 5.1 mm
 Height of lowest version 54 mm
 Length 79.1 mm
 TS 35 offset 39 mm

Rating data

Rated cross-section 2.5 mm²
 Rated voltage 500 V
 Rated impulse voltage 6 kV
 Rated current 10 A

Rating data

Standards	IEC 60947-7-1
Pollution severity	3

UL rating data

Voltage (UL)	300 V
Current (UL)	10 A
Min. cross-section (UL)	AWG 30
Max. cross-section (UL)	AWG 14

Approvals

Approvals institutes



Downloads

STEP	1690030000_24218_ZDK_2.5-1.5-D-2_STP.stp
------	--

Classifications


eClass 4.1	27-14-11-27
eClass 5.0	27-14-11-27
eClass 5.1	27-14-11-27

Similar products

Order No.	Part designation	Version
1690020000	ZDK 2.5/D/1	Component terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
1690040000	ZDK 2.5/D/4	Component terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
1690050000	ZDK 2.5/D/5	Component terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35
1690060000	ZDK 2.5/D/6	Component terminal, 2.5 mm ² , Tension clamp connection, Wemid, dark beige, TS 35

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 1690030000 on WIN SOURCE](#)
-  [Weidmuller Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management