




**THE DATASHEET OF  
1703700000**



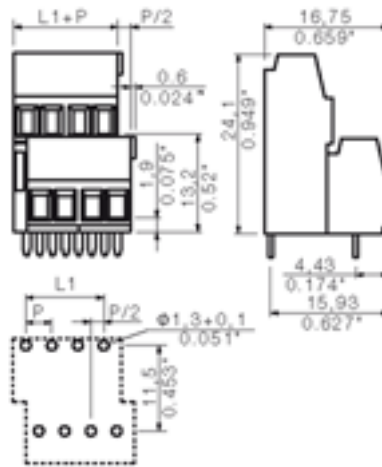

#### General ordering data

Order No.	1703700000
Part designation	LM2N 3.5/4 3.2 OR
Version	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 4, 90°, Box
EAN	4008190910778
Qty.	100 pc(s).

#### System parameters

Product family	System LM
Conductor connection system	Clamping yoke connection
Fitted to PCB	Soldered connection
Outgoing direction of conductor	90°
Pitch	3.5 mm
Pitch in inch	0.138 inch
No. of poles	4
Fitted by customer	yes
Max. adjacent poles per row	24
No. of rows	2
Solder pin length	3.2 mm
Dia. of fitting hole	1.3 mm
Fitting hole tolerance	+ 0.1 mm
No. of solder pins per pole	1

**System parameters**

Screwdriver blade	0.4 x 2.5
Screwdriver blade standard	DIN 5264
Tightening torque, min.	0.2
Tightening torque, max.	0.2 Nm
Clamping screw	M 2
Stripping length	5 mm
L1 in mm	3.5 mm
L1 in inch	0.138 inch
Electric shock protection to DIN VDE 0470	IP 20
Electric shock protection to DIN VDE 0470	Safe from finger touch

**Material data**

Insulating material	PA
Colour	orange
colour chart	Similar to RAL 2000
Insulating material group	I
Flammability class UL 94	V-2
CTI	>= 600
Temperature of glow-wire test	750 °C
Duration of glow-wire test	30 S
Contact base material	Copper alloy
Contact surface	tinned
Storage temperature, min.	-20 °C
Storage temperature, max.	55 °C

**Connectable conductors**

Clamping range, min.	0.08 mm <sup>2</sup>
Clamping range, max.	2.08 mm <sup>2</sup>
AWG, min.	28
AWG, max.	14
O.D. of conductor insulation, max.	2.9 mm
Solid, min. H05(07) V-U	0.5 mm <sup>2</sup>
Solid, max. H05(07) V-U	1.5 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.5 mm <sup>2</sup>
Flexible, max. H05(07) V-K	1.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, max.	0.75 mm <sup>2</sup>
Gauge to EN 60999 a x b; ø	2.4 mm x 1.5 mm;

**DIN IEC rating data**

Rated current, min. No. pins (Tu=20°C)	13 A
Rated current, max. No. pins (Tu=20°C)	12 A
Rated current, min. No. pins (Tu=40°C)	11 A
Rated current, max. No. pins (Tu=40°C)	10 A
Rated voltage for overvoltage class/pollution severity II/2	320 V
Rated voltage for overvoltage class/pollution severity III/2	160 V
Rated voltage for overvoltage class/pollution severity III/3	160 V

#### DIN IEC rating data

Rated impulse withstand voltage for overvoltage class/pollution severity II/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/2	2.5 kV
Rated impulse withstand voltage for overvoltage class/pollution severity III/3	2.5 kV
Short-time withstand current resistance	3 x 1s with 72 A

#### CSA rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor (field wiring), min.	28
AWG conductor (field wiring), max.	14

#### UL 1059 rating data

Rated voltage (Use group D)	300 V
Rated current (Use group D)	10 A
AWG conductor, min.	28
AWG conductor, max.	14

#### Approvals

Approvals institutes



#### Classifications

eClass 4.1	NK
eClass 5.0	NK
eClass 5.1	NK

#### Similar products

Order No.	Part designation	Version
1703710000	LM2N 3.5/6 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 6, 90°, Box
1703720000	LM2N 3.5/8 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 8, 90°, Box
1703730000	LM2N 3.5/10 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 10, 90°, Box
1703740000	LM2N 3.5/12 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 12, 90°, Box

1703750000	LM2N 3.5/14 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 14, 90°, Box
1703760000	LM2N 3.5/16 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 16, 90°, Box
1703770000	LM2N 3.5/18 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 18, 90°, Box
1703780000	LM2N 3.5/20 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 20, 90°, Box
1703790000	LM2N 3.5/22 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 22, 90°, Box
1703800000	LM2N 3.5/24 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 24, 90°, Box
1703810000	LM2N 3.5/26 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 26, 90°, Box
1703820000	LM2N 3.5/28 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 28, 90°, Box
1703830000	LM2N 3.5/30 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 30, 90°, Box
1703840000	LM2N 3.5/32 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 32, 90°, Box
1703850000	LM2N 3.5/34 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 34, 90°, Box
1703860000	LM2N 3.5/36 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 36, 90°, Box
1703870000	LM2N 3.5/38 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 38, 90°, Box
1703880000	LM2N 3.5/40 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 40, 90°, Box
1703890000	LM2N 3.5/42 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 42, 90°, Box
1703900000	LM2N 3.5/44 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 44, 90°, Box
1703910000	LM2N 3.5/46 3.2 OR	PCB terminal, Clamping yoke connection, Soldered connection, Clamping range, max.: 2.08 mm <sup>2</sup> , Pitch: 3.50 mm, No. of poles: 46, 90°, Box

1703920000 LM2N 3.5/48 3.2 OR

PCB terminal, Clamping yoke connection, Soldered connection,  
Clamping range, max.: 2.08 mm<sup>2</sup>, Pitch: 3.50 mm, No. of poles: 48,  
90°, Box

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1703700000 on WIN SOURCE](#)

 [Weidmuller Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management