



**THE DATASHEET OF
2494000000**




A2C 16**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

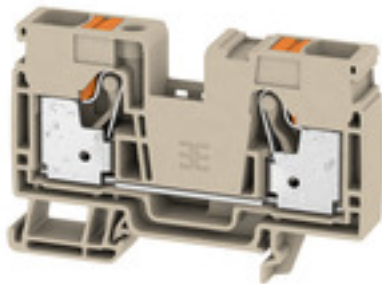Product image

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

General ordering data

| | |
|------------|---|
| Version | Feed-through terminal, PUSH IN, 16 mm ² , 1000 V, 76 A, dark beige |
| Order No. | 2494000000 |
| Type | A2C 16 |
| GTIN (EAN) | 4050118504019 |
| Qty. | 20 pc(s). |

A2C 16**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

| | | | |
|--------------------------|------------|----------------|------------|
| Depth | 51.5 mm | Depth (inches) | 2.028 inch |
| Depth including DIN rail | 52.5 mm | Height | 80.5 mm |
| Height (inches) | 3.169 inch | Width | 12 mm |
| Width (inches) | 0.472 inch | Net weight | 35.955 g |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature | -25 °C...55 °C | Continuous operating temp., min. | -60 °C |
| Continuous operating temp., max. | 130 °C | | |

Material data

| | | | |
|--------------------------------|--------|---------------------------|------------|
| Material | Wemid | Colour | dark beige |
| Colour of operational elements | orange | UL 94 flammability rating | V-0 |

Rating data IECEx/ATEX

| | | | |
|--------------------------------|--------------------|---------------------------------|--------------------|
| Certificate No. (ATEX) | TUEV16ATEX7909U | Certificate No. (IECEX) | IECEXTUR16.0036U |
| Max. voltage (ATEX) | 550 V | Current (ATEX) | 64 A |
| Wire cross section max. (ATEX) | 16 mm ² | Max. voltage (IECEX) | 550 V |
| Current (IECEX) | 64 A | Wire cross section max. (IECEX) | 16 mm ² |

System specifications

| | | | |
|-------------------------------|-------|-------------------------------------|----|
| End cover plate required | Yes | Number of potentials | 1 |
| Number of levels | 1 | Number of clamping points per level | 2 |
| Number of potentials per tier | 1 | Levels cross-connected internally | No |
| Rail | TS 35 | | |

Additional technical data

| | | | |
|--------------------------|---------|---------------------|-------|
| Explosion-tested version | Yes | Installation advice | Rail |
| Open sides | right | Snap-on | No |
| Type of fixing | Snap-on | Type of mounting | TS 35 |
| With snap-in pegs | No | | |

CSA rating data

| | | | |
|-------------------------------|-----------------|-------------------------------|-------|
| Certificate No. (CSA) | 200039-70089609 | Current size B (CSA) | 62 A |
| Current size C (CSA) | 62 A | Current size D (CSA) | 5 A |
| Voltage size B (CSA) | 600 V | Voltage size C (CSA) | 600 V |
| Voltage size D (CSA) | 600 V | Wire cross section max. (CSA) | 6 AWG |
| Wire cross section min. (CSA) | 18 AWG | | |

Conductors for clamping (additional connection)

Connection type, additional connection PUSH IN

A2C 16

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

| | | | |
|---|----------------------|---|---------------------|
| Blade size | 1.0 x 5.5 mm | Clamping range, max. | 25 mm ² |
| Clamping range, min. | 0.5 mm ² | Connection cross-section, stranded, max. | 25 mm ² |
| Connection cross-section, stranded, min. | 10 mm ² | Connection direction | top |
| Gauge to IEC 60947-1 | A6 | Number of connections | 2 |
| Stripping length | 18 mm | Twin wire-end ferrules, max. | 6 mm ² |
| Twin wire-end ferrules, min. | 0.75 mm ² | Type of connection | PUSH IN |
| Wire connection cross section AWG, max. | AWG 4 | Wire connection cross section AWG, min. | AWG 18 |
| Wire connection cross section, finely stranded, max. | 25 mm ² | Wire connection cross section, finely stranded, min. | 0.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 16 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 16 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm ² |
| Wire connection cross-section, solid core, max. | 16 mm ² | Wire connection cross-section, solid core, min. | 0.5 mm ² |

General

| | | | |
|---|---------------|---|-------|
| Installation advice | Rail | Rail | TS 35 |
| Standards | IEC 60947-7-1 | Wire connection cross section AWG, max. | AWG 4 |
| Wire connection cross section AWG, min. | AWG 18 | | |

Rating data

| | | | |
|--|--------------------|---------------------------------|---------------|
| Rated cross-section | 16 mm ² | Rated voltage | 1,000 V |
| Rated DC voltage | 1,000 V | Rated current | 76 A |
| Current at maximum wires | 76 A | Standards | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 0.42 mΩ | Rated impulse withstand voltage | 8 kV |
| Power loss in accordance with IEC 60947-7-x | 2.43 W | Pollution severity | 3 |
| Surge voltage category | III | | |

UL rating data

| | | | |
|--|--------|--|-------|
| Certificate No. (cURus) | E60693 | Conductor size Factory wiring max. (cURus) | 6 AWG |
| Conductor size Factory wiring min. (cURus) | 18 AWG | Conductor size Field wiring max. (cURus) | 6 AWG |
| Conductor size Field wiring min. (cURus) | 18 AWG | Current size B (cURus) | 62 A |
| Current size C (cURus) | 62 A | Current size D (cURus) | 5 A |
| Voltage size B (cURus) | 600 V | Voltage size C (cURus) | 600 V |
| Voltage size D (cURus) | 600 V | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000897 | ETIM 7.0 | EC000897 |
| ETIM 8.0 | EC000897 | ETIM 9.0 | EC000897 |
| ECLASS 9.0 | 27-14-11-20 | ECLASS 9.1 | 27-14-11-20 |
| ECLASS 10.0 | 27-14-11-20 | ECLASS 11.0 | 27-14-11-20 |
| ECLASS 12.0 | 27-14-11-20 | ECLASS 13.0 | 27-25-01-01 |

Creation date July 24, 2024 6:58:09 PM CEST

Catalogue status 13.07.2024 / We reserve the right to make technical changes.

3

A2C 16

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| REACH SVHC | / |
| RoHS Compliance Status | Compliant without exemption |

Approvals

Approvals



| | |
|---------------------------|------------|
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate No. (cURus) | E60693 |
| Certificate No. (cURusEX) | E184763 |

Downloads

| | |
|---|---|
| Approval/Certificate/Document of Conformity | DE PT0101 20180316 001 ISSUE01.pdf Attestation of Conformity UKCA Ex Attestation of Conformity IECEX Certificate ATEX Certificate DNVGL certificate CCC Ex Certificate UKCA Ex Certificate 20-AV4BO-0269U UKCA declaration of conformity Confirmation of Standards EN 45545-2_2020-10 |
| Engineering Data | CAD data – STEP |
| Tender specification | Klippon® Connect 2494000000 DE Klippon® Connect 2494000000 EN |
| User Documentation | StorageConditionsTerminalBlocks NTI A2C 16 User Manual AXC 1.5-16 |
| Catalogues | Catalogues in PDF-format |


Data sheet

A2C 16

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 2494000000 on WIN SOURCE](#)

 [Weidmuller Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management