




**THE DATASHEET OF  
TST-108-05-S-D-RA**



## SHROUDED .025" SQ POST IDC HEADERS

(2.54 mm) .100" PITCH • TST/HTST/ZST SERIES

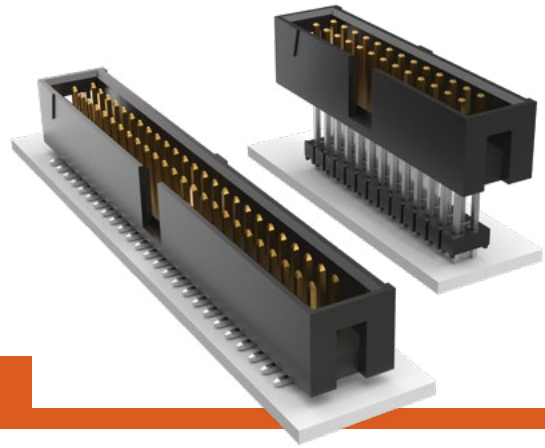

### TST/HTST/ZST

Mates:  
IDSD, HCSD

#### SPECIFICATIONS

##### Insulator Material:

TST, ZST=Black Glass Filled Polyester  
HTST=Natural LCP

##### Insulation Resistance:

5000 MΩ min

##### Terminal Material:

Phosphor Bronze

##### Plating:

Au or Sn over  
50 μ" (1.27 μm) Ni

##### Operating Temp Range:

-55 °C to +125 °C with Gold

-55 °C to +105 °C with Tin

##### Voltage Rating:

425 VAC/600 VDC

#### PROCESSING

##### Lead-Free Solderable:

HTST=Yes

TST, ZST= No, Lead Wave only

##### SMT Lead Coplanarity:

(0.10 mm) .004" max (05-15)

(0.15 mm) .006" max (17-36)\*

\*(.004" stencil solution

may be available; contact

ipg@samtec.com)

SERIES	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OTHER OPTION
--------	---	------------------	------------	----------------	------------	--------------

**TST**  
= Cable Strip

**HTST**  
= High Temp Cable Strip

**05, 07, 08, 10,  
12, 13, 15, 17,  
20, 25, 32, 36**  
(Standard sizes)

Specify  
**LEAD  
STYLE**  
from  
chart

**-F**  
= Gold flash on post,  
Matte Tin on tail  
(Not available on -DV)

**-L**  
= 10 μ" (0.25 μm)  
Gold on post,  
Matte Tin on tail

**-T**  
= Matte Tin

**-D**  
= Double Row Through-hole  
(lead style -01, -02 & -03 only)

**-DV**  
= Double Row Surface Mount  
(lead style -01 only)  
(HTST only)

**-D-RA**  
= Double Row Right-angle  
(lead style -04 & -05 only)


Surface Mount  
(lead style -01 only)  
(HTST only)

**-P**  
= Pick & Place Pad




**-TR**  
= Tape & Reel

**-FR**  
= Full Reel Tape & Reel  
(must order max. quantity per reel; contact Samtec for quantity breaks)


LEAD STYLE	THROUGH-HOLE (A)
-01	(2.92) .115
-02	(4.19) .165
-03	(14.35) .565

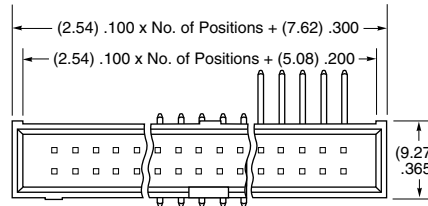

-D -DV -D-RA

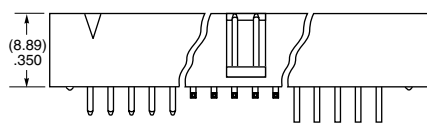

-DV (HTST ONLY)



LEAD STYLE	RIGHT-ANGLE (B)
-04	(3.30) .130
-05	(5.84) .230

#### ALSO AVAILABLE MOQ Required

Other platings & sizes

Alignment Pins

Single Row

Locking Leads

Polarized

ZST	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	D	BODY HEIGHT
-----	---	------------------	------------	----------------	---	-------------

**05, 07, 08, 10,  
12, 13, 15, 17,  
20, 25, 32, 36**  
(Standard sizes)




Specify  
**LEAD  
STYLE**  
from  
chart

**-F**  
= Gold flash on post,  
Matte Tin on tail

**-L**  
= 10 μ" (0.25 μm)  
Gold on post,  
Matte Tin on tail

**-T**  
= Matte Tin

**-"XXXX"**  
= Body Height

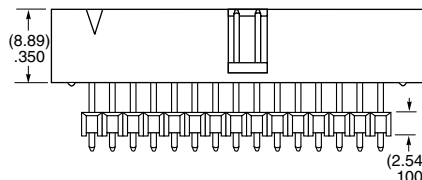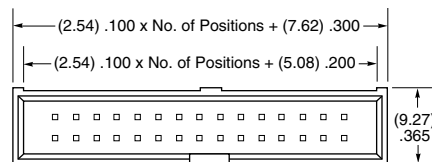

LEAD STYLE	C (OAL)	MAX BODY HEIGHT
-01	(16.00) .630	(13.72) .540
-02	(18.54) .730	(16.26) .640
-03	(21.08) .830	(18.80) .740
-04	(23.62) .930	(21.34) .840
-05	(26.16) 1.030	(23.88) .940
-06	(28.70) 1.130	(26.42) 1.040
-07	(31.24) 1.230	(28.96) 1.140
-08	(33.78) 1.330	(31.50) 1.240
-09	(36.32) 1.430	34.04) 1.340

##### Note:

For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact ipg@samtec.com for more information.

**Note:**  
Some lengths, styles and options are non-standard, non-returnable. ZST is non-standard, non-returnable.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Samtec:

[HTST-110-01-T-DV](#) [HTST-105-01-T-DV-P-TR](#) [HTST-113-01-L-DV-P-TR](#) [ZST-110-06-G-D-1040](#) [HTST-110-01-S-DV](#)  
[HTST-105-01-S-D](#) [HTST-107-01-S-DV](#) [HTST-107-01-L-DV-P](#) [HTST-113-04-L-D-RA](#) [HTST-105-01-S-DV](#) [HTST-](#)  
[107-01-L-DV](#) [ZST-105-02-L-D-640](#) [ZST-105-03-G-D-740](#) [ZST-110-09-G-D-1290](#) [ZST-113-01-G-D-515](#) [ZST-108-01-L-](#)  
[D-540](#) [ZST-110-02-L-D-640](#) [ZST-108-05-L-D-940-LL](#) [ZST-120-01-L-D-450](#) [ZST-108-01-G-D-515](#) [TST-108-02-G-D](#)  
[TST-113-04-T-D-RA](#) [TST-120-01-T-D](#) [TST-117-02-T-D](#) [TST-107-01-G-D-13](#) [TST-115-01-G-D](#) [TST-113-04-G-D-RA](#)  
[TST-113-04-S-D-LA](#) [HTST-108-04-L-D-RA](#) [HTST-113-01-SM-DV](#) [HTST-108-01-L-DV](#) [HTST-110-01-L-DV-A](#) [HTST-](#)  
[105-02-T-D](#) [HTST-115-01-S-DV-P](#) [HTST-120-01-L-DV](#) [HTST-107-01-L-D](#) [HTST-117-01-S-D](#) [HTST-105-02-G-D](#)  
[HTST-120-01-T-DV](#) [HTST-110-01-T-DV-P](#) [ZST-110-01-L-D-450](#) [ZST-106-04-L-D-750](#) [TST-110-04-T-D-RA](#) [TST-108-](#)  
[02-G-D-14](#) [TST-107-01-T-D-LL](#) [TST-113-01-S-D](#) [TST-117-04-G-D-RA](#) [HTST-105-01-L-DV-P-TR](#) [HTST-117-02-L-D](#)  
[HTST-108-01-L-D](#) [HTST-108-01-T-DV-P-TR](#) [HTST-107-01-S-D](#) [HTST-132-01-L-DV](#) [ZST-107-02-G-D-640](#) [ZST-110-](#)  
[04-L-D-840](#) [ZST-105-06-S-D-770](#) [ZST-107-04-L-D-840](#) [TST-107-04-S-D-RA-06](#) [TST-108-03-L-D](#) [TST-115-01-L-D](#)  
[TST-120-01-G-D](#) [HTST-108-01-L-DV-P-TR](#) [HTST-113-01-S-DV-P](#) [HTST-113-01-F-D-LL](#) [HTST-113-01-L-DV-P](#)  
[HTST-107-02-S-D](#) [ZST-107-06-G-D-1040](#) [ZST-117-02-G-D-640](#) [ZST-110-03-L-D-740](#) [ZST-108-03-F-D-740](#) [ZST-113-](#)  
[06-G-D-1000](#) [TST-108-04-L-D-RA](#) [TST-120-03-L-D](#) [TST-113-03-S-D](#) [TST-112-04-L-D-RA-01](#) [TST-107-01-S-D-03](#)  
[ZST-107-04-L-D-785](#) [ZST-132-01-F-D-500](#) [ZST-117-01-G-D-480](#) [TST-105-01-T-D-09](#) [TST-105-01-T-D-LL](#) [TST-112-](#)  
[04-T-D-RA](#) [TST-107-01-L-D-LL](#) [TST-107-02-L-D](#) [TST-136-04-L-D-RA](#) [HTST-110-01-L-DV-P-TR](#) [HTST-105-01-S-DV-](#)  
[P-TR](#) [HTST-105-04-L-D-RA](#) [HTST-112-01-T-DV](#) [HTST-105-01-L-D](#) [HTST-108-01-G-D](#) [HTST-105-01-S-DV-P](#) [HTST-](#)  
[117-01-L-D](#) [HTST-110-01-TM-DV](#) [HTST-120-01-G-D](#) [HTST-117-01-S-DV](#) [HTST-105-01-T-DV](#) [HTST-107-01-F-DV-P-](#)  
[TR](#) [HTST-113-01-S-D](#) [TST-105-02-F-D](#)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View TST-108-05-S-D-RA on WIN SOURCE](#)

 [Samtec Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management