




**THE DATASHEET OF
ESQT-110-02-L-T-666**



FLEXIBLE ELEVATED & SELF-NESTING SOCKETS

(2.00 mm) .0787" PITCH • ESQT/ESQT (-368)/PTHF SERIES

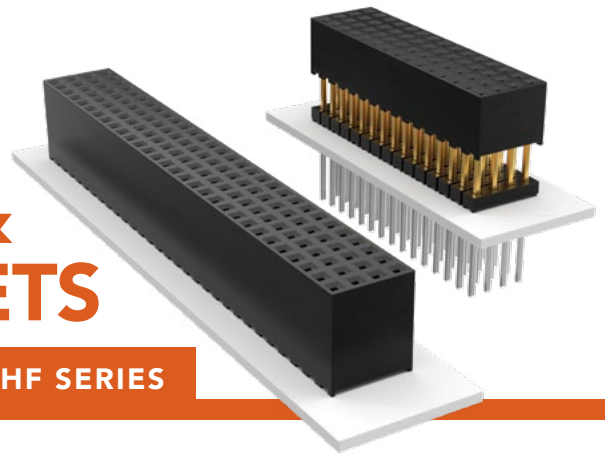

ESQT

Board Mates:
TMMH, TMM, MTMM,
MMT, TW, LTMM, ZLTMM,
ESQT, PTT, TSH, TMMS

Cable Mates:
TCMD

SPECIFICATIONS

Insulator Material:
Black Liquid Crystal Polymer
Contact Material:
Phosphor Bronze
Plating:
Sn or Au over
50 μ" (1.27 μm) Ni
Current Rating (ESQT/TMMH):
4.5 A per pin
(2 pins powered)
Operating Temp Range:
-55 °C to +125 °C
Insertion Depth:
(2.62 mm) .103" to
(5.03 mm) .198" with
(0.38 mm) .015" wipe
Max Cycles:
100 with 10 μ" (0.25 μm) Au
Lead-Free Solderable:
Yes, for -S, -D & -Q
(Wave only for -T, -5 & -6)

ESQT	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	BODY HEIGHT	OTHER OPTION
		02 thru 50	Specify LEAD STYLE from chart	-F = Gold flash on contact, Matte Tin on tail -L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail -M = 20 μ" (0.51 μm) Gold on contact, Matte Tin on tail -GF = 15 μ" (0.38 μm) Gold on contact, Gold flash on tail (Recommended for self-nesting) (-02 lead style only)	-S = Single Row -D = Double Row -T = Triple Row -Q = Quad Row -5 = Five Row -6 = Six Row	"XXX" = Body Height (in inches) (7.87 mm) .310" minimum for -S, -D, -Q (9.53 mm) .375" minimum for -T, -5, -6	"XXX" = Polarized Position (Indicate position number)

LEAD STYLE	A	MAX TAIL	MAX BODY HEIGHT
-02	(21.59) .850	(13.72) .540	(20.32) .800
-03	(11.63) .458	(3.76) .148	(10.36) .408

ESQT (-368)/PTHF

Mates:
ESQT, PTHF

SPECIFICATIONS

Insulator Material:
Black Liquid Crystal Polymer (ESQT-368)
Black High Temp Nylon (PTHF)
Contact Material:
Phosphor Bronze
Plating:
Au or Sn over
50 μ" (1.27 μm) Ni
Operating Temp Range:
-55 °C to +125 °C
Normal Force:
60 grams (0.59 N) average
Max Cycles:
100 with 10 μ" (0.25 μm) Au
Lead-Free Solderable:
Yes (ESQT-368)

SERIES	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	Q	368
		30	Specify LEAD STYLE from chart	-GF = 15 μ" (0.38 μm) Gold on contact, Gold flash on tail (-02 Lead Style only) -M = 20 μ" (0.51 μm) Gold on contact, Matte Tin on tail (-03 Lead Style only)		

LEAD STYLE	ESQT		PTHF	
	A	B	A	B
-02	(21.59) .850	(12.24) .482	(21.59) .850	(12.24) .482
-03	(11.63) .458	(2.29) .090	(12.34) .486	(3.00) .118

ESQT (-368) SERIES

PTHF SERIES

TOOLING

Press-Fit
CAT-PT-130-A-4
For more information, visit
www.samtec.com/tooling

Note:
This Series is non-standard,
non-returnable.

Mouser Electronics

Authorized Distributor



Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[ESQT-120-02-F-Q-755](#) [ESQT-120-02-F-S-413](#) [ESQT-120-02-G-D-532](#) [ESQT-120-02-GF-D-368](#) [ESQT-120-02-GF-D-625](#) [ESQT-120-02-GF-D-700](#) [ESQT-120-02-GF-D-725](#) [ESQT-120-02-H-Q-730-070](#) [ESQT-120-02-L-D-310-017](#) [ESQT-120-02-L-D-320-020](#) [ESQT-120-02-L-D-375](#) [ESQT-120-02-L-D-408](#) [ESQT-120-02-L-D-510](#) [ESQT-120-02-L-D-565](#) [ESQT-120-02-L-Q-445](#) [ESQT-120-02-L-Q-540](#) [ESQT-120-02-M-5-730](#) [ESQT-120-02-M-Q-416](#) [ESQT-120-02-S-5-650](#) [ESQT-120-02-S-6-660](#) [ESQT-120-02-S-6-765](#) [ESQT-120-02-S-Q-405](#) [ESQT-120-02-S-Q-589](#) [ESQT-120-03-L-D-312](#) [ESQT-120-03-L-D-325](#) [ESQT-120-03-L-D-334](#) [ESQT-120-03-L-D-356](#) [ESQT-120-03-L-D-405](#) [ESQT-120-03-L-Q-328](#) [ESQT-120-03-L-Q-340](#) [ESQT-121-02-F-D-500](#) [ESQT-121-02-F-D-540](#) [ESQT-121-02-L-D-490](#) [ESQT-121-02-L-D-725](#) [ESQT-121-03-F-D-310](#) [ESQT-121-03-L-D-335](#) [ESQT-121-03-L-D-343](#) [ESQT-121-03-L-Q-339](#) [ESQT-121-03-L-S-335](#) [ESQT-121-03-M-Q-400](#) [ESQT-122-02-F-D-408](#) [ESQT-122-02-F-D-433](#) [ESQT-122-02-F-D-670](#) [ESQT-122-02-F-Q-732](#) [ESQT-122-02-F-Q-745](#) [ESQT-122-02-GF-D-651](#) [ESQT-122-02-G-T-750](#) [ESQT-122-02-L-D-532](#) [ESQT-122-02-L-D-665](#) [ESQT-122-02-L-Q-750](#) [ESQT-122-02-M-D-677](#) [ESQT-122-02-M-D-723](#) [ESQT-122-03-M-S-340-021](#) [ESQT-123-03-F-D-338](#) [ESQT-123-03-F-S-400](#) [ESQT-123-03-G-D-313](#) [ESQT-124-03-L-D-330](#) [ESQT-125-02-F-D-640](#) [ESQT-125-02-F-D-695](#) [ESQT-125-02-F-T-731](#) [ESQT-125-02-G-D-677](#) [ESQT-125-02-G-D-735](#) [ESQT-125-02-GF-D-368](#) [ESQT-125-02-GF-D-575](#) [ESQT-125-02-L-D-685](#) [ESQT-125-02-L-D-775](#) [ESQT-125-02-L-Q-435](#) [ESQT-125-02-L-Q-600](#) [ESQT-125-02-M-Q-655](#) [ESQT-125-02-M-T-551](#) [ESQT-125-03-G-D-380](#) [ESQT-126-02-F-T-590](#) [ESQT-126-02-L-D-665](#) [ESQT-126-02-L-Q-620](#) [ESQT-126-02-L-Q-740](#) [ESQT-126-03-F-D-313](#) [ESQT-127-02-L-D-485](#) [ESQT-128-02-G-D-708](#) [ESQT-128-02-L-5-720](#) [ESQT-128-02-L-D-420](#) [ESQT-128-02-L-Q-420](#) [ESQT-128-02-S-D-450](#) [ESQT-128-03-F-D-380](#) [ESQT-128-03-F-D-387](#) [ESQT-128-03-F-Q-315](#) [ESQT-130-02-F-D-690](#) [ESQT-130-02-F-Q-765](#) [ESQT-130-02-G-D-540](#) [ESQT-130-02-GF-D-310](#) [ESQT-130-02-GF-D-410](#) [ESQT-130-02-GF-Q-575](#) [ESQT-130-02-GF-S-310](#) [ESQT-130-02-GF-S-410](#) [ESQT-130-02-GF-S-480](#) [ESQT-130-02-GF-S-510](#) [ESQT-130-02-G-Q-720](#) [ESQT-130-02-L-Q-445](#) [ESQT-130-02-L-Q-515](#) [ESQT-130-02-L-Q-690-047](#) [ESQT-130-02-L-Q-690-055](#)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ESQT-110-02-L-T-666 on WIN SOURCE](#)
-  [Samtec Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management