


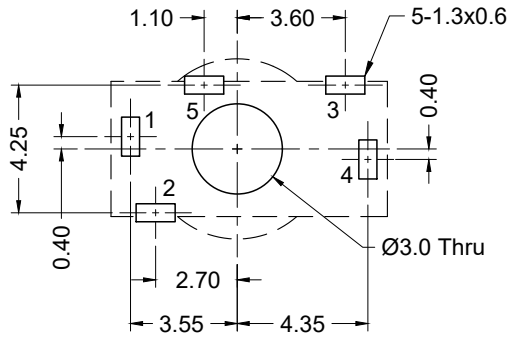




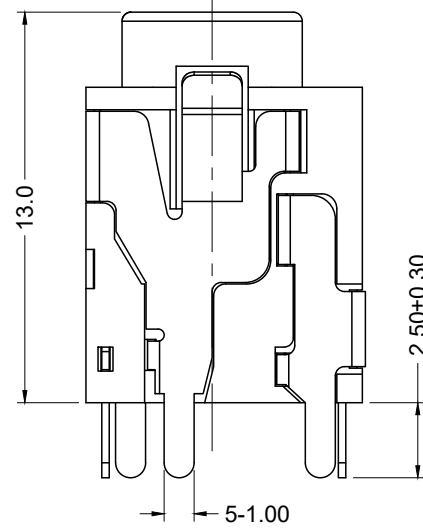


**THE DATASHEET OF
STX-3790-5N**

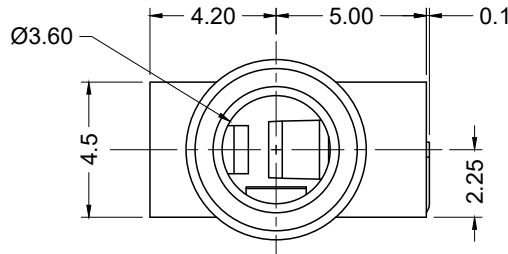

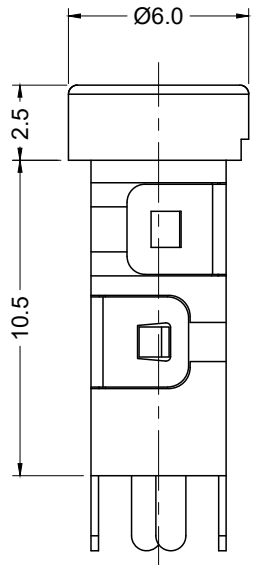

RECOMMENDED PCB LAYOUT (BOTTOM VIEW)

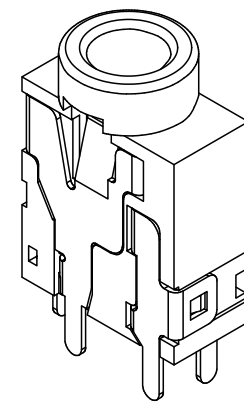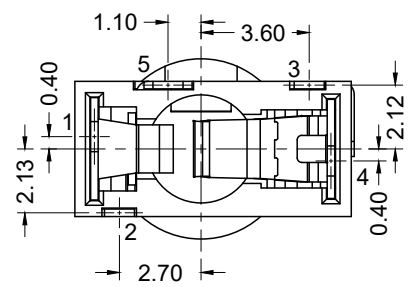

Materials and Finish

Housing Material:
Thermoplastic, UL 94V-0 Rated,
Color: Black
Contact Material:
Copper Alloy,
Tin Plated

Electrical Characteristics

Contact Resistance:
Before Test: 50 milliohms Max.
After Durability Test:
100 milliohms Max.
Rated Voltage: 16V DC
Rated Current: 0.3A
Insulation Resistance:
100 Megohms Min.
at 500V DC
Dielectric Strength:
500V AC RMS for 1 Munit
Operating Temp:
-25°C to +85°C

PART NO:	COLOR	
STX-3790-5N	BLACK	
STX-3790-5N-577C	PANTONE 577C (GREEN)	Discontinued
STX-3790-5N-284C	PANTONE 284C (BLUE)	Discontinued
STX-3790-5N-157C	PANTONE 157C (ORANGE)	Discontinued
STX-3790-5N-701C	PANTONE 701C (PINK)	Discontinued

Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated
Otherwise



REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A3	11/18/08	Correct Part Number	S. Vien	H. MA	WILL H.	10/31/07
A4	09/14/09	ECO #09-070	S. Vien	H. MA		
A5	10/28/13	ECO #13-085	D. Gih	H. MA		
A6	08/14/18	Update Address	D. Shehan	N/A		
A7	10/12/22	Add Clearance Hole	C. Kelleher	Carl Furumasa		
A8	08/23/23	ECO #23-008	C. Kelleher	Carl Furumasa		

STX-3790-5N

3.5mm Vertical Mount, 5 pin

RoHS Compliant



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View STX-3790-5N on WIN SOURCE](#)

 [Kycon, Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management