





**THE DATASHEET OF
BHSD-1225-SM**



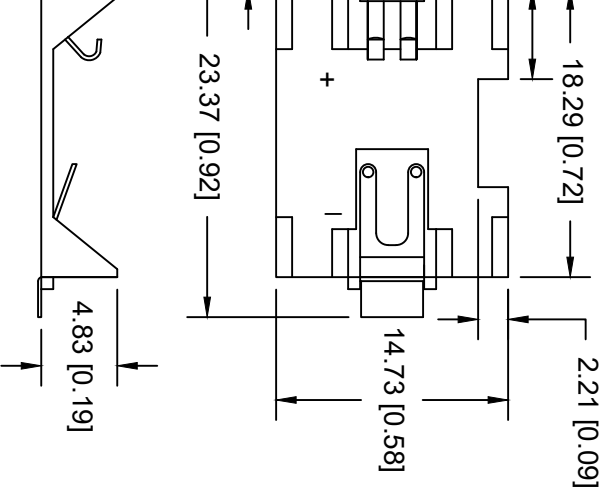

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
01/27/17	E	Updated UL File number	T.B.	B.S.	
10/31/19	F	Added weight of the part	T.B.	B.S.	

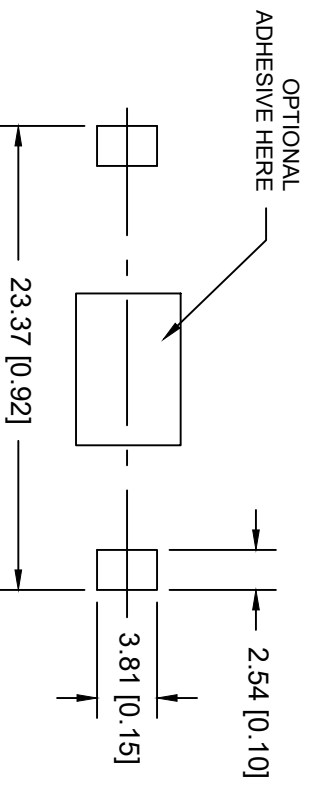


PCB LAYOUT

, Color off white, UL File No. E344082
 C5191, Gold Flash, 1u - 3u thickness



±280°C
 swept in 60 seconds
 on: 1 hour each direction
 the cell or damage
 r 10 milliseconds
 acceleration 150G, 6 milliseconds
 each direction per axis, total of 18 pulses
 ical damage
 dgment of cell

PATENT:9,192,059

Tolerance (Inches)		 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	
Decimal	±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional	±.8 (.030)	Title	BASE, SURFACE MOUNT, CR1225 BATTERY
Angular	± 3°	Date	10/31/19
		Drawing Number	BHSD-1225-SM

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BHSD-1225-SM on WIN SOURCE](#)
-  [MPD \(Memory Protection Devices\) Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management