



**THE DATASHEET OF  
BFCV-2895+**



Ceramic

# LTCC Bandpass Filter

BFCV-2895+

50Ω

2220 to 3570 MHz



Generic photo used for illustration purposes only  
CASE STYLE: JV1210C

## The Big Deal

- Small size 3.2mm x 2.5mm
- Wide passband (2220-3570 MHz)
- Low Insertion Loss (1.8 dB typical)
- Wide stopband rejection up to 7 GHz

## Product Overview

The BFCV-2895+ LTCC Band Pass Filter is constructed with multiple layers in order to achieve a miniature size and high repeatability of performance. Wrap-around terminations minimize variations in performance due to parasitics. These units offer low insertion loss and very good wide band rejection.

## Key Features

Feature	Advantages
Small Size (3.20mm x2.5 mm)	Allows for high layout density of circuit boards, while minimizing the effects of parasitics.
Wrap around termination	Provides excellent solderability and easy visual inspection capability.
Wide bandwidth	Enables high data rate in communication systems.
LTCC construction	Provides a rugged package that is well suited for tough environments including high humidity and high temperature extremes.

### Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Ceramic Bandpass Filter

## BFCV-2895+

50Ω 2220 to 3570 MHz



Generic photo used for illustration purposes only  
CASE STYLE: JV1210C

### Features

- Small size
- Temperature stable
- Hermetically sealed
- LTCC construction

### Applications

- Software defined radio
- WLAN
- Cellular network
- Satellite television broadcast

### Electrical Specifications<sup>1,2</sup> at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	2895	—	MHz
	Insertion Loss	F3-F5	2220-3570	—	1.8	dB
	VSWR	F3-F5	2220-3570	—	2.3	:1
Stop Band, Lower	Insertion Loss	DC-F1	DC-1680	15	17	dB
	VSWR	F2	1785	—	17	dB
Stop Band, Upper	Insertion Loss	F6	4440	—	16	dB
	VSWR	F7-F8	5000-7000	14	20	dB

1. Measured on Mini-Circuits Characterization Test Board TB-946+

2. This filter is not intended for use as a DC Blocking circuit element. In Application where DC voltage is present at either input or output ports, blocking capacitors are required at the corresponding RF port.


### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	5 W max @ +25°C


\*Passband rating, derate linearly to 0.25W at 100°C ambient

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

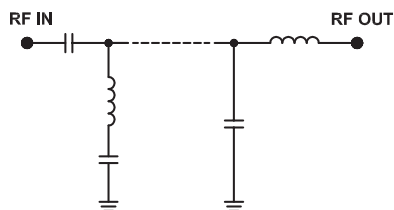

### Typical Frequency Response




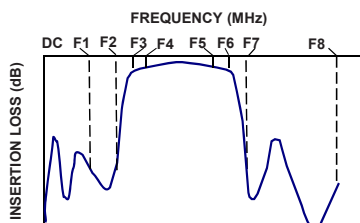


### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
10	50.41	339.97	2220	0.91
1680	31.42	12.98	2240	0.89
1785	20.03	12.48	2300	0.81
1850	15.66	11.40	2400	0.66
2000	8.04	6.68	2500	0.57
2150	2.98	2.48	2600	0.52
2220	1.83	1.54	2700	0.50
2450	1.38	1.66	2800	0.50
2895	1.38	1.86	2895	0.50
3570	1.72	1.64	2900	0.50
3600	1.71	1.49	3000	0.50
3800	3.08	1.98	3050	0.49
4000	9.16	7.93	3100	0.49
4100	13.19	13.36	3150	0.48
4280	20.80	24.88	3200	0.48
4440	29.62	34.62	3250	0.48
4600	42.43	42.30	3300	0.48
5000	29.26	52.61	3400	0.49
6000	27.59	43.06	3500	0.54
7000	29.35	32.15	3570	0.60

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




## Pad Connections

RF IN	1
RF OUT	3
GROUND	2,4



Product Marking: HL

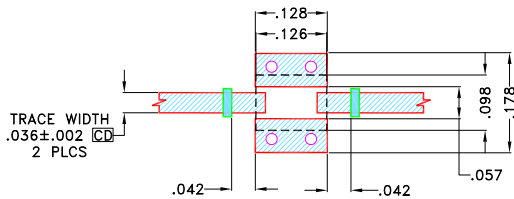Demo Board MCL P/N: TB-946+  
Suggested PCB Layout (PL-502)




### NOTES:

- TRACE WIDTH & SPACE WIDTH IS SHOWN FOR ROGERS (R04350B) WITH DIELECTRIC THICKNESS  $.0166 \pm .0015$ ". COPPER 1/2 OZ. EACH SIDE FOR OTHER MATERIALS TRACE WIDTH & SPACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
-  DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

## Outline Drawing

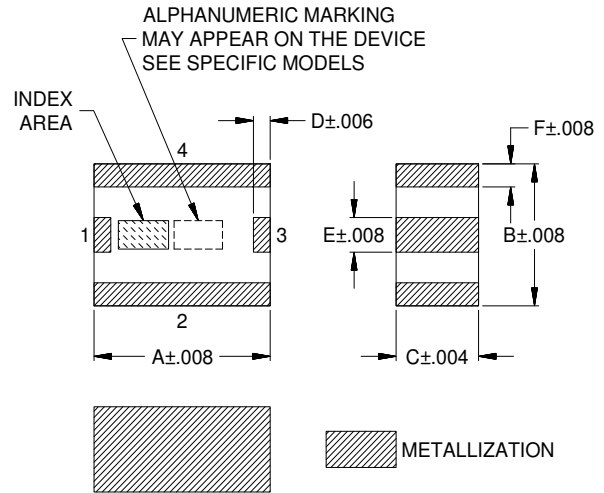

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	Wt.
.126	.098	.059	.012	.024	.016	grams
3.2	2.5	1.5	.3	.6	.4	.03

Note: Please refer to case style drawing for details

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View BFCV-2895+ on WIN SOURCE](#)

 [Mini-Circuits Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management