



**THE DATASHEET OF
DF272-400-22_D47MM**





TET ESTEL AS
ESTONIA

May
2015

Series
DF272-400
DF272-400X

Fast Recovery Stud-Mounted
Diodes
Type DF272-400,
DF272-400X

For use as high-power inverters,
fly-wheel diodes in DC choppers,
power supplies as high frequency rectifier

| | | | | | | | |
|---|------------|------|------|------|------|-------------------------|--|
| Maximum mean forward current | I_{FAV} | | | | | 400 A | |
| Maximum repetitive peak reverse voltage | U_{RRM} | | | | | 1400 ÷ 2200 V | |
| Reverse recovery time | trr | | | | | 3,2; 4,0; 5,0 μs | |
| U_{RRM}, V | 1400 | 1500 | 1600 | 1800 | 2000 | 2200 | |
| Voltage code | 14 | 15 | 16 | 18 | 20 | 22 | |
| $T_{vj}, °C$ | - 60 ÷ 125 | | | | | | |

MAXIMUM ALLOWABLE RATINGS

| Symbols and parameters | | Units | DF272-400 DF272-400X | Conditions |
|------------------------|-------------------------------------|---------|-------------------------|---|
| I_{FAV} | Mean forward current | A | 400 324 | $T_c=80 °C,$ $T_c=92 °C,$ 180° half-sine wave, 50 Hz |
| I_{FRMS} | RMS forward current | A | 628 | $T_c=80 °C$ |
| I_{FSM} | Surge forward current | kA | 8,0 8,8 | $T_{vj}=125 °C$ $T_{vj}= 25 °C$ tp=10 ms |
| I^2t | Limiting load integral | kA^2s | 320 387 | $T_{vj}=125 °C$ $T_{vj}= 25 °C$ $U_R=0$ |
| U_{RRM} | Repetitive peak reverse voltage | V | 1400÷2200 | $T_j \min \leq T_{vj} \leq T_{jM}$ 180° half-sine wave, 50 Hz |
| U_{RSM} | Non-repetitive peak reverse voltage | V | 1500÷2300 | $T_j \min \leq T_{vj} \leq T_{jM}$ 180° half-sine wave tp=10 ms, Single pulse |
| T_{stg} | Storage temperature | °C | -60÷80 | |
| T_{vj} | Junction temperature | °C | -60÷125 | |

CHARACTERISTICS

| | | | | |
|-------------|---------------------------------|----|------|--|
| U_{FM} | Peak forward voltage | V | 1,85 | $T_{vj}=25 °C, I_{FM}=3,14 I_{FAV}$ |
| $U_{F(TO)}$ | Threshold voltage | V | 1,05 | $T_{vj}=125 °C$ 1,57 $I_{FAV} < I_F < 4,71 I_{FAV}$ |
| R_T | Forward slope resistance | mΩ | 0,5 | |
| I_{RRM} | Repetitive peak reverse current | mA | 50 | $T_{vj}=125 °C,$ $U_R = U_{RRM}$ |


CHARACTERISTICS

| Symbols and parameters | | Units | DF272-400 DF272-400X | Conditions |
|------------------------|-------------------------------------|-------|-------------------------------------|---|
| trr | Reverse recovery time | μs | 3,2 ÷ 5,0 2,5 ÷ 4,0 2,0 ÷ 3,2 | T _{vj} =125°C, I _F =400A, U _R =100V di _R / dt = 50A/μs di _R / dt = 100A/μs di _R / dt = 200A/μs |
| Q _{rr} | Recovered charge | μC | 140 ÷ 230 190 ÷ 300 250 ÷ 380 | T _{vj} =125°C, I _F =400A, U _R =100V di _R / dt = 50A/μs di _R / dt = 100A/μs di _R / dt = 200A/μs |
| R _{thjc} | Thermal resistance junction to case | °C/W | 0,07 | Direct current |

ORDERING

| | DF | 272 | 400 | X | 18 | 2 |
|--|----|-----|-----|---|----|---|
| | 1 | 2 | 3 | 4 | 5 | 6 |

1. Fast recovery diode.
2. Design version.
3. Mean forward current, A .
4. Reverse polarity (cathode stud mounted), without X-normal polarity.
5. Voltage code (18 = 1800 V).
6. Group of reverse recovery time (1 ≤ 5,0μs; 2 ≤ 4,0 μs; 3 ≤ 3,2 μs).

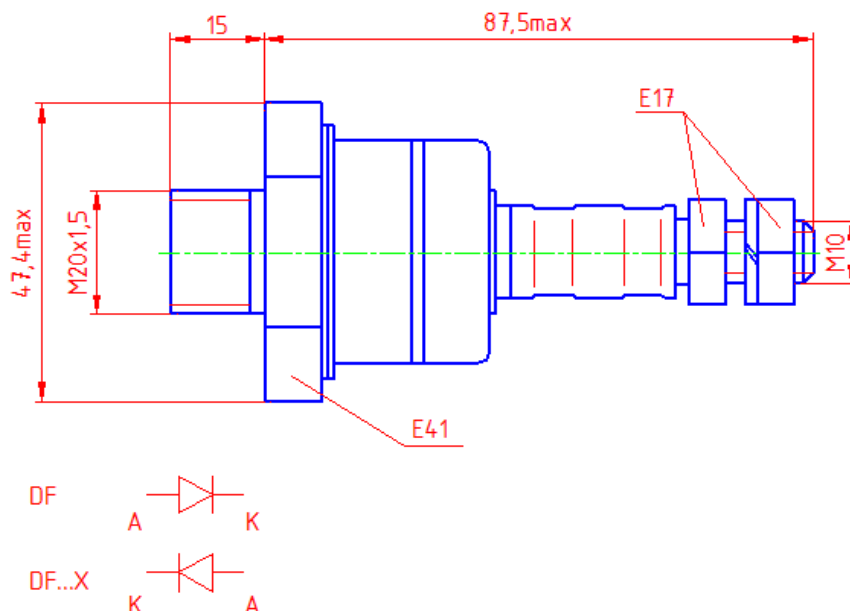

Mounting of diodes with a rigid cathode gate should be carried through a flexible conductor.

Tightening torque: 32 ÷ 48 Nm (thread M20x1,5)

Tightening torque: 8 ÷ 12 Nm (thread M10)

Weight : 370 grams

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View DF272-400-22_D47mm on WIN SOURCE](#)
- ⊖ [TET Estel Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management