




THE DATASHEET OF
750311088




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

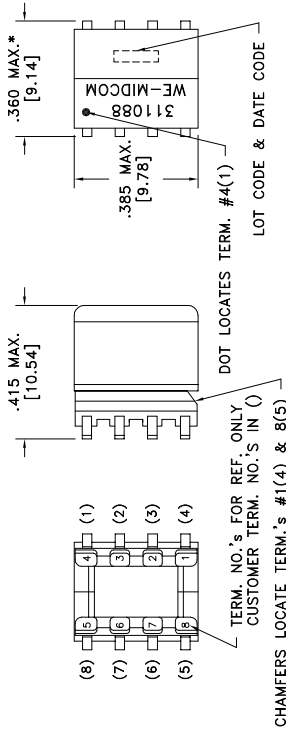

TERM. NO.'s FOR REF. ONLY
CUSTOMER TERM. NO.'s IN ()

CHAMFERS LOCATE TERM.'s #1(4) & 8(5)

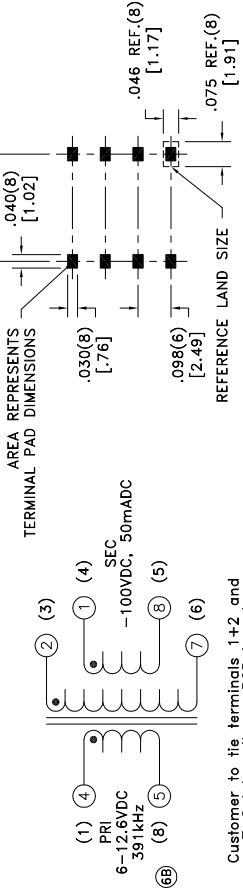

Customer to tie terminals 1+2 and 7+8 internally on PCB board.

CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless

PARAMETER	TEST CONDITION
D.C. RESISTANCE	4-5 @20°C
D.C. RESISTANCE	1-8 tie(1+2, 7+8), @20°C
INDUCTANCE	4-5 100kHz, 100mVAC,
SATURATION CURRENT	20% rolloff from in
DIELECTRIC	4-1 tie(1+2, 7+8), 625VAC, 1 second
TURNS RATIO	(1-8):(4-5), tie(1+2,
TURNS RATIO	(1-8):(2-7)

6C

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C

6C Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 Fractions: ±1/64	Dimensions in millimeters.
6C	10/13	Method: Tape & Reel PKG-0410 www.we-online.com/midcom	Decimals: ±.005 Footprint: ±.005	
6B	5/11	CONVENTION PLACEMENT	This drawing is dual dimensioned. in brackets are in millimeters.	
6A	7/09	SEE REVISION SHEET FOR REVISION LEVEL		


DRAWING TITLE

TRANSFORMER

eISos p/n: 750311088

PART

75



SPECI

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 750311088 on WIN SOURCE](#)

 [Wurth Electronics Inc Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management