



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes


* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY
 DOT LOCATES TERM. #4(1)

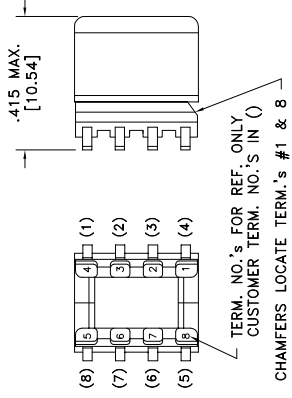

TERM. NO.'s FOR REF. ONLY
 CUSTOMER TERM. NO.'s IN ()
 CHAMFERS LOCATE TERM.'s #1 & 8

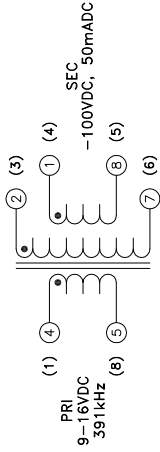

Customer to tie terminals 1+2
 and 7+8 internally on PC Board.

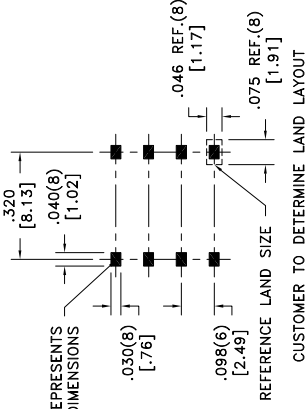

REFERENCE LAND SIZE
 CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless

PARAMETER	TEST CONDITION
D.C. RESISTANCE	4-5 @20°C
D.C. RESISTANCE	1-8 tie(1+2, 7+8), @20°C
INDUCTANCE	4-5 100kHz, 100mVAC, tie(1+2, 7+8)
DIELECTRIC	4-1 625VAC, 1 second
URNS RATIO	(1-8):(4-5), tie(1+2, 7+8)
URNS RATIO	(1-8):(2-7)

GENERAL SPECIFICATIONS:
 OPERATING TEMPERATURE RANGE: -40°C to +125°C

Ⓢ Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64	DRAWING TITLE	PART
6B	4/17	Method: Tape & Reel PKG-1074 www.we-online.com/midcom	Decimals: ±.005 Footprint: ±.005	TRANSFORMER	75
6A	8/09	SEE REVISION SHEET FOR REVISION LEVEL	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		
				eISos p/n: 750311268	compliant RoHS
					SPECI

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 750311268 on WIN SOURCE](#)

 [Wurth Electronics Inc](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management