





THE DATASHEET OF
750315125




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes




TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1



LOT CODE & DATE CODE

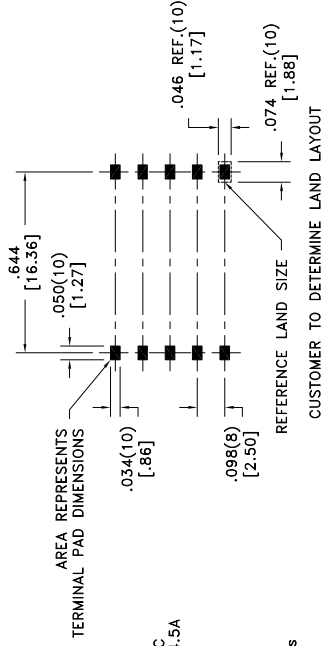


AREA REPRESENTS TERMINAL PAD DIMENSIONS

(6B)

Application of the transformer requires the leadwires between terminals 6&7 and 9&10 be internally connected on the PCB.

Application of the transformer allows for the leadwires between terminals 6&7 and 9&10 to solder bridge.



GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C

ELECTRICAL SPECIFICATIONS @ 25°C unless

PARAMETER	TEST CONDITION
D.C. RESISTANCE	3-5 @20°C
D.C. RESISTANCE	6-10 @20°C
D.C. RESISTANCE	7-9 @20°C
INDUCTANCE	3-5 10kHz, 100mVAC,
SATURATION CURRENT	20% rolloff from in
LEAKAGE INDUCTANCE	tie(6+7+9+10), 100mVAC, 1s
DIELECTRIC	3-6 tie(9+10), 1875VAC, 1
TURNS RATIO	(3-5):(6-10)
TURNS RATIO	(3-5):(7-9)

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 Fractions: ±1/64	DRAWING TITLE	PART
6B	3/16	Method: Tape & Reel PKG-0499 www.we-online.com/midcom	Dimensions in brackets are in millimeters.	TRANSFORMER	75
6A	6/15	SEE REVISION SHEET FOR REVISION LEVEL			



eISos p/n: 750315125

SPECI

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 750315125 on WIN SOURCE](#)

 [Wurth Electronics Inc Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management