




THE DATASHEET OF
750343810



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

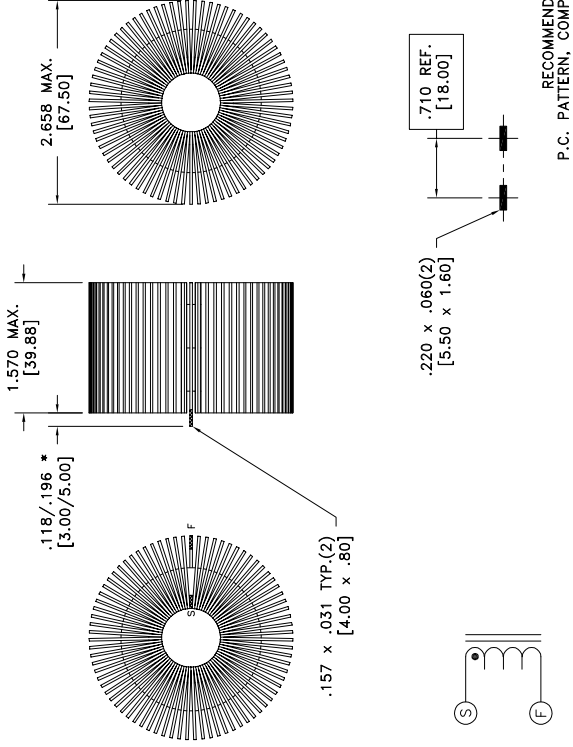

ELECTRICAL SPECIFICATIONS @ 25°C unless

PARAMETER	TEST CONDITION
D.C. RESISTANCE	S-F @20°C
INDUCTANCE	S-F 10kHz, 100mVAC,

GENERAL SPECIFICATIONS:
 OPERATING TEMPERATURE RANGE: -40°C to +125°C
 CURRENT RATING: 15A
 SATURATION CURRENT: 24A

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 Fractions: ±1/64	DRAWING TITLE	PART
		Method: Tray PKG-1185 www.we-online.com/midcom		Dimensions in brackets are in millimeters.	INDUCTOR	75
6B	3/20	SEE REVISION SHEET FOR REVISION LEVEL				
6A	10/18					eiSos p/n: 750343810

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 750343810 on WIN SOURCE](#)

 [Wurth Electronics Inc Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management