




**THE DATASHEET OF**  
**750313417**



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

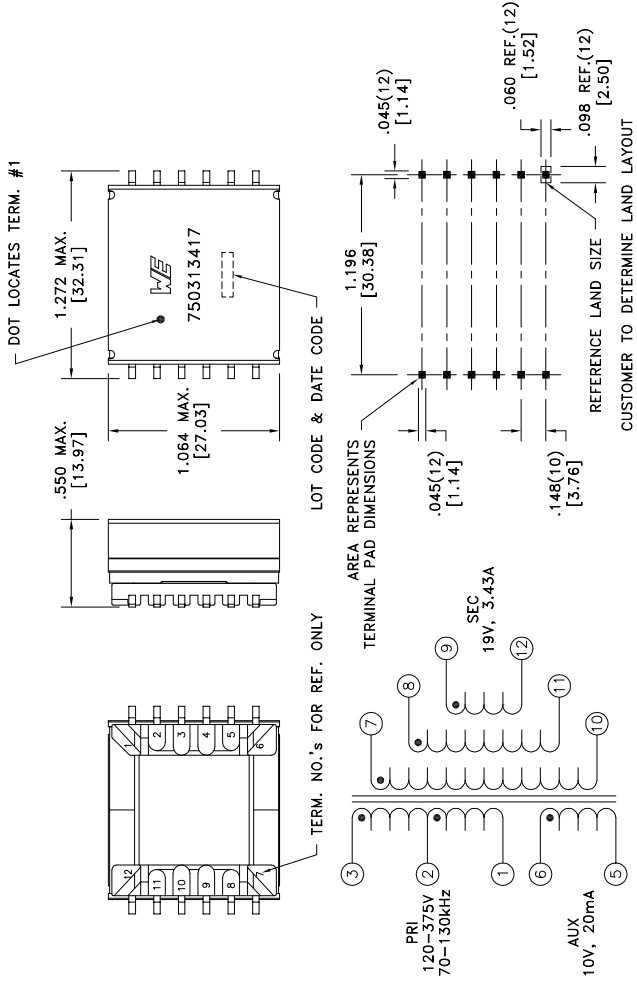

ELECTRICAL SPECIFICATIONS @ 25°C unless

PARAMETER		TEST CONDITION
D.C. RESISTANCE	1-3	@20°C
D.C. RESISTANCE	5-6	@20°C
D.C. RESISTANCE	7-10	tie(7+8+9, 10+11+12),
INDUCTANCE	1-3	10kHz, 100mVAC,
SATURATION CURRENT		20% rolloff from in
LEAKAGE INDUCTANCE	1-3	tie(5+6, 7+8+9+10+11-100kHz, 100mVAC,
DIELECTRIC	1-12	tie(3+5, 7+8+9) 1875VAC, 1 second
DIELECTRIC	1-6	625VAC, 1 second
URNS RATIO		(3-2):(2-1)
URNS RATIO		(3-1):(6-5)
URNS RATIO		(3-1):(7-10), tie(7+10+11+12)

GENERAL SPECIFICATIONS:  
OPERATING TEMPERATURE RANGE: -40°C to +125°C

Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0605 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 Footprint: ±.005	DRAWING TITLE <b>TRANSFORMER</b>	PART <b>750313417</b>
6B	10/14		CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		
6A	1/14	SEE REVISION SHEET FOR REVISION LEVEL				



eISos p/n: 750313417

SPECI

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 750313417 on WIN SOURCE](#)

 [Wurth Electronics Inc Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management