



THE DATASHEET OF
750312495




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes


⑥B * DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID .020 SQ.(10)

DOT LOCATES TERM. #1

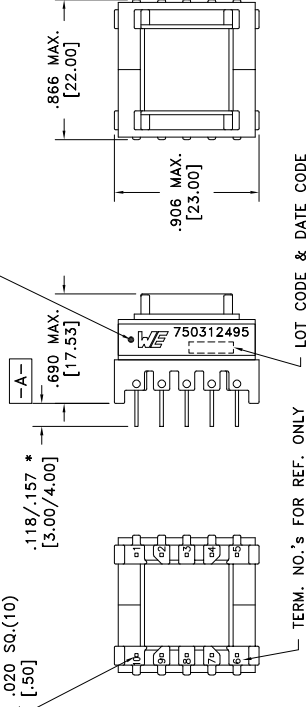

TERM. NO.'s FOR REF. ONLY

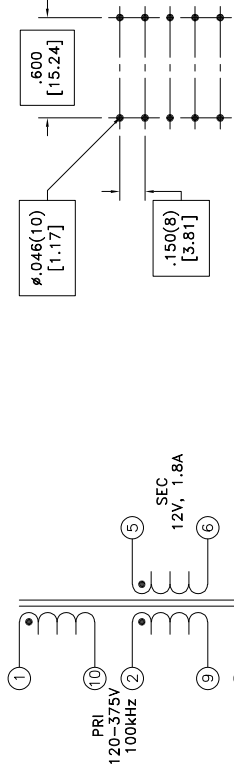

RECOMMENDED P.C. PATTERN, COMPONENT SIDE

Customer to tie terminals 2 & 10 internally on PC board.

ELECTRICAL SPECIFICATIONS @ 25°C unless

PARAMETER	TEST CONDITION
D.C. RESISTANCE	tie(2+10), @20°C
D.C. RESISTANCE	3-8 @20°C
D.C. RESISTANCE	5-6 @20°C
INDUCTANCE	tie(2+10), 10kHz, 100mVAC, 1s
SATURATION CURRENT	20% rolloff from in
LEAKAGE INDUCTANCE	tie(2+10, 3+8, 5+6), 100kHz, 100mVAC,
DIELECTRIC	1-5 tie(2+3+10), 3750VAC, 1 s
DIELECTRIC	1-8 tie(2+10), 625VAC, 1 s
TURNS RATIO	(1-10):(2-9)
TURNS RATIO	(1-9):(3-8)
TURNS RATIO	(1-9):(5-6)

GENERAL SPECIFICATIONS:
 OPERATING TEMPERATURE RANGE: -40°C to +125°C
 Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 Fractions: ±1/64	DRAWING TITLE	PART
		Method: Tray PKG-0736 www.we-online.com/midcom		Dimensions in brackets are in millimeters.	TRANSFORMER	75
6B	5/23					
6A	10/11	SEE REVISION SHEET FOR REVISION LEVEL			eISos p/n: 750312495	compliant RoHS

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 750312495 on WIN SOURCE](#)

 [Wurth Electronics Inc Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management