




THE DATASHEET OF
760390011




CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes




TERM. NO.'s FOR REF. ONLY

6F




DOT LOCATES TERM. #1



LOT CODE & DATE CODE

ELECTRICAL SPECIFICATIONS @ 25°C unless


PARAMETER	TEST CONDITION
D.C. RESISTANCE	1-3 @20°C
D.C. RESISTANCE	6-4 @20°C
INDUCTANCE	1-3 10kHz, 100mVAC
INTERWINDING CAPACITANCE	1-6 100kHz, 10mVAC
DIELECTRIC	1-6 1875VAC, 1 second
TURNS RATIO	(6-4):(1-3)

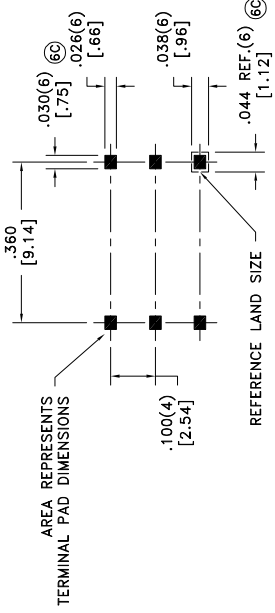

AREA REPRESENTS TERMINAL PAD DIMENSIONS

REFERENCE LAND SIZE

CUSTOMER TO DETERMINE LAND LAYOUT



GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C

CURRENT RATING: 100mAAC

VOLTAGE-TIME: 7VuS

Qualified to AEC-Q200.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64	DRAWING TITLE	PART
6G	4/21	Method: Tape & Reel		Decimals: ±.005 [0.13] Footprint: ±.005 [0.13]	TRANSFORMER	76
6F	12/20	PKG-0895 www.we-online.com/midcom		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		
6E	7/16					
6D	3/16	SEE REVISION SHEET FOR REVISION LEVEL				
					eISos p/n: 760390011	SPECI

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 760390011 on WIN SOURCE](#)

 [Wurth Electronics Inc Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management