



**THE DATASHEET OF
ECS-TX032-S3-33-100-BN-TR**



ECS-TXO32-S3 Stratum 3, Clipped Sine Wave SMD TCXO / VCTCXO. The 3.2 x 2.5 x 0.9 mm ceramic package S3 TCXO ideal for Femtocell, Nanocell and Instrumentation applications.

Request a Sample

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS



ECS-TXO32-S3

- Clipped Sine Wave Output
- Stratum 3
- TCXO / VCTCXO
- 280ppb Stability
- 3.2 x 2.5 mm Footprint
- PbFree/RoHS Compliant
- MSL 1
- Lead Finish Au

Notes:

1. Over temp (-40 ~ +85°C) varied less than 2°C per minute. Ref to $F_{ref} = (F_{max} + F_{min}) / 2$, $V_{cc} = 3.3V$, Load 10KΩ//10 pF.
2. Inclusive of initial tolerance at 25°C, temperature, supply voltage ±5%, load ±5%, reflow soldering and ageing 15 years

ECS-TXO32-S3					
Parameters	MIN	TYP	MAX	Units	Test Conditions
Frequency Range	9.600		50.000	MHz	
Frequency Tolerance			±1.0	ppm	Ref to freq @ +25°C ±2°C, $V_{cc} = 3.3V$, within 30 days ex-works
Frequency Stability	Temperature		±280	ppb	See Note 1
	Supply		±0.1	ppm	Vs. Supply Change (±5%), with 10KΩ//10 pF load
	Load		±0.1	ppm	Vs. Load Change (±5%), Ref +25°C, $V_{cc} = 3.3V$
	Aging/day		±0.02	ppm	Vs. Aging @ +25°C, $V_{cc} = 3.3V$, after 1hr of operation
	Aging/year		±1.0	ppm	
Overall Stability	-4.6		+4.6	ppm	See Note 2
Supply Voltage	+3.135	+3.3	+3.465	VDC	VDD (33 Option)
Current Consumption			3.0	mA	Ref 25°C, $V_{cc} = 3.3V$, $V_c = 1.5V$, $C_{load} = 10KΩ//10pF$.
Output Waveform	Clipped Sinewave				
Output Level	0.8			V p-p	Clipped Sine Wave
Output Load	10KΩ//10 pF				
Start-up Time			2	mS	
Phase Noise @ 10.000 MHz		-90	-85	dBc/Hz	@ 10 Hz Offset
		-120	-115	dBc/Hz	@ 100 Hz Offset
		-140	-135	dBc/Hz	@ 1 KHz Offset
		-145	-140	dBc/Hz	@ 10 KHz Offset
		-148	-143	dBc/Hz	@ 100 KHz Offset
VC-TXO32-S3	VC-TCXO Option				
Control Voltage Range	+0.5	+1.5	+2.5	V	Input Impedance 100kΩ Min.
Pullability	±10		±15	ppm	Positive Slope ≤10% Linearity
Operating Temperature	-40		+85	°C	* N Option
Storage Temperature	-55		+105	°C	Vs. Temp (-40 ~ +85°C) BN Option

Part Numbering Guide: Example ECS-TXO32-S3-33-200-BN-TR

ECS Packaging	Series	Voltage	Frequency Abbreviations	Stability	Temperature	
ECS	TXO32-S3 = Clipped Sine Wave TCXO VC-TXO32-S3 = Clipped Sine Wave VC-TCXO	33 = 3.3V ±5% 30 = 3.0V ±5%	200 = 20.000 MHz	B = ±280 ppb	M = -20 ~ +70°C Y = -30 ~ +85°C N = -40 ~ +85°C	TR = Tape & Reel

Package Dimensions (mm)

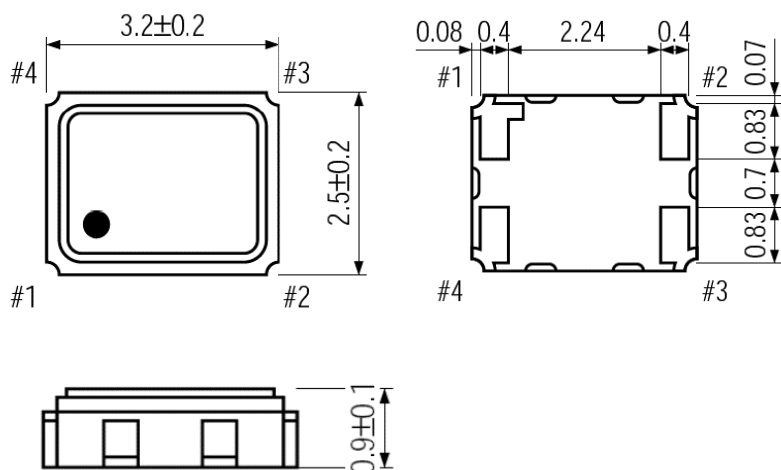


Figure 1) Top, Side, and Bottom views

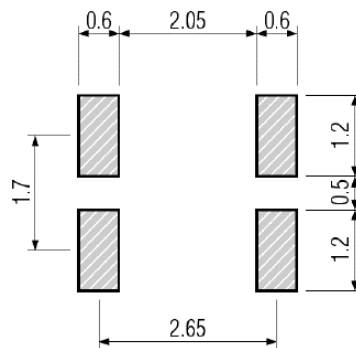


Figure 2) Land Pattern

ECS-TXO32-S3	
Pin Connections	
#1	N/C
#2	Ground
#3	Output
#4	VDD

ECS-VC-TXO32-S3	
Pin Connections	
#1	Voltage Control
#2	Ground
#3	Output
#4	VDD

Developed Frequencies	
* Abbreviation	Frequency (MHz)
100	10.000
128	12.800
192	19.200
200	20.000
400	40.000
500	50.000

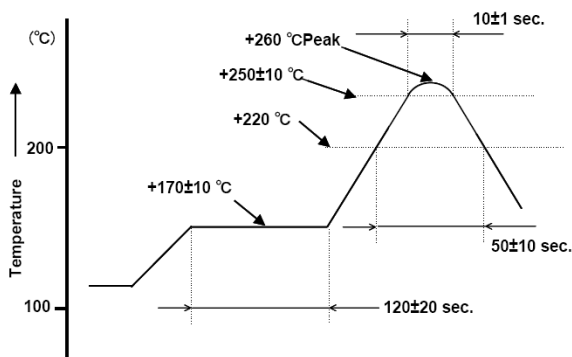


Figure 3) Suggested Reflow Profile

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ECS-TX032-S3-33-100-BN-TR on WIN SOURCE](#)

 [ECS Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management