



**THE DATASHEET OF  
RG1005P-2212-B-T5**





# Metal thin film chip resistors (the highest precision)

■ RG series

AEC-Q200 Compliant

## Features

- Long term stability with inorganic passivation
- Less than  $\pm 0.1\%$  drift after 10000 hours of reliability test
- High precision resistance tolerance:  $\pm 0.05\%$ , very small TCR:  $\pm 5\text{ppm}/^\circ\text{C}$
- Thin film structure enabling low noise and anti-sulfur

## Applications

- Automotive electronics
- Industrial measurement instrumentation, industrial machines
- Various sensors, medical electronics



## ◆ Part numbering system


**RG 1608 N - 102 - B - T5**

|             |  |                                       |   |   |
|-------------|--|---------------------------------------|---|---|
| Series code | Size: RG0603, RG1005, RG1608, RG2012, RG3216 | Temperature coefficient of resistance | Resistance tolerance  | Packaging quantity:<br>T5(5,000pcs), T10(10,000pcs) |
|             |  |                                       | Nominal resistance value<br>(E-24: 3 digit, E-96: 4 digit, RG3216: all 4 digit) |   |

## ◆ Electrical Specification

| Type   | Power ratings |         |      | Temperature coefficient of resistance<br>(ppm/ $^\circ\text{C}$ ) | Resistance range ( $\Omega$ ) Resistance tolerance (%) |                              |                  | Maximum voltage | Resistance value series                    | Operating temperature                      | Pakaging quantity |
|--------|---------------|---------|------|---|--|------------------------------|------------------|-----------------|--|--|-------------------|
|        | Low           | Regular | High |   | $\pm 0.05\%$ (W)                                       | $\pm 0.1\%$ (B)              | $\pm 0.5\%$ (D)  |                 |  |  |                   |
| RG0603 | 1/20W         | 1/16W   | —    | $\pm 10$ (N)  | —  | $100 \leq R \leq 22\text{k}$ |                  | 30V             | E-24, E-96                                 | $-55^\circ\text{C} \sim 155^\circ\text{C}$ | T10               |
|        |               |         |      | $\pm 25$ (P)  |  |                              |                  |                 |  |  |                   |
|        |               |         |      | $\pm 50$ (Q)  |  | —                            | $10 \leq R < 47$ |                 |  |  |                   |
|        |               |         |      | $\pm 100$ (R)   |  |                              |                  |                 |  |  |                   |
| RG1005 | 1/32W         | 1/16W   | 1/8W | $\pm 5$ (V)   | $100 \leq R < 3\text{k}$                               |                              | 75V              | E-24, E-96      | $-55^\circ\text{C} \sim 155^\circ\text{C}$ | T5<br>T10                                  |                   |
|        |               |         |      | $\pm 10$ (N)  | $47 \leq R \leq 100\text{k}$                           |                              |                  |                 |  |  |                   |
|        |               |         |      | $\pm 25$ (P)  | $47 \leq R \leq 150\text{k}$                           |                              |                  |                 |  |  |                   |
|        |               |         |      | $\pm 100$ (R)   | —  | —                            |                  |                 |  |  | $10 \leq R < 47$  |
| RG1608 | 1/16W         | 1/10W   | 1/6W | $\pm 5$ (V)   | $100 \leq R < 5.1\text{k}$                             |                              | 100V             | E-24, E-96      | $-55^\circ\text{C} \sim 155^\circ\text{C}$ | T5   |                   |
|        |               |         |      | $\pm 10$ (N)  | $47 \leq R \leq 274\text{k}$                           |                              |                  |                 |  |  |                   |
|        |               |         |      | $\pm 25$ (P)  | $47 \leq R \leq 274\text{k}$                           | $47 \leq R \leq 1\text{M}$   |                  |                 |  |  |                   |
|        |               |         |      | $\pm 50$ (Q)  | —  | —                            |                  |                 |  |  | $10 \leq R < 47$  |
| RG2012 | 1/10W         | 1/8W    | 1/4W | $\pm 5$ (V)   | $100 \leq R < 10.2\text{k}$                            |                              | 150V             | E-24, E-96      | $-55^\circ\text{C} \sim 155^\circ\text{C}$ | T5   |                   |
|        |               |         |      | $\pm 10$ (N)  | $47 \leq R \leq 475\text{k}$                           |                              |                  |                 |  |  |                   |
|        |               |         |      | $\pm 25$ (P)  | $47 \leq R \leq 475\text{k}$                           | $47 \leq R \leq 2.7\text{M}$ |                  |                 |  |  |                   |
|        |               |         |      | $\pm 50$ (Q)  | —  | —                            |                  |                 |  |  | $10 \leq R < 47$  |
| RG3216 | 1/8W          | 1/4W    | —    | $\pm 5$ (V)   | $100 \leq R \leq 33.2\text{k}$                         |                              | 200V             | E-24, E-96      | $-55^\circ\text{C} \sim 155^\circ\text{C}$ | T5   |                   |
|        |               |         |      | $\pm 10$ (N)  | $47 \leq R \leq 1\text{M}$                             |                              |                  |                 |  |  |                   |
|        |               |         |      | $\pm 25$ (P)  | $47 \leq R \leq 5.1\text{M}$                           |                              |                  |                 |  |  |                   |
|        |               |         |      | $\pm 50$ (Q)  | —  | —                            |                  |                 |  |  | $10 \leq R < 47$  |

## ◆ Dimensions



| Type   | Size (inch) | L               | W               | a               | b               | t               |
|--------|-------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| RG0603 | 0201        | $0.60 \pm 0.05$ | $0.30 \pm 0.05$ | $0.13 \pm 0.05$ | $0.15 \pm 0.05$ | $0.23 \pm 0.03$ |
| RG1005 | 0402        | $1.0 \pm 0.05$  | $0.50 \pm 0.05$ | $0.20 \pm 0.10$ | $0.25 \pm 0.05$ | $0.35 \pm 0.05$ |
| RG1608 | 0603        | $1.60 \pm 0.20$ | $0.80 \pm 0.20$ | $0.30 \pm 0.20$ | $0.30 \pm 0.20$ | $0.40 \pm 0.10$ |
| RG2012 | 0805        | $2.00 \pm 0.20$ | $1.25 \pm 0.20$ | $0.40 \pm 0.20$ | $0.40 \pm 0.20$ | $0.40 \pm 0.10$ |
| RG3216 | 1206        | $3.20 \pm 0.20$ | $1.60 \pm 0.20$ | $0.50 \pm 0.25$ | $0.50 \pm 0.20$ | $0.40 \pm 0.10$ |

(unit : mm)


## ◆ Reliability specification

| Test Items                     | Condition (test methods)  | Low            |                | Regular        |                | High |                | Typical  |
|--------------------------------|---|----------------|----------------|----------------|----------------|------|----------------|----------|
|                                |   | ≤47Ω           | ≥47Ω           | ≤47Ω           | ≥47Ω           | ≤47Ω | ≥47Ω           | Low      |
| Short time overload            | 2.5 x rated voltage,*1 5 seconds                                | ±(0.05%+0.01Ω) | ±(0.05%+0.01Ω) | ±(0.05%+0.01Ω) | ±(0.05%+0.01Ω) | —    | ±(0.05%+0.01Ω) | ±(0.01%) |
| Life (biased)                  | 85°C, rated voltage,*1 90min on 30min off, 1000hours            | ±(0.25%+0.05Ω) | ±(0.1%+0.01Ω)  | ±(0.5%+0.05Ω)  | ±(0.25%+0.05Ω) | —    | ±(0.5%+0.01Ω)  | ±(0.01%) |
| High temperature high humidity | 85°C, 85%RH, 1/10 of rated power, 90min on 30min off, 1000hours | ±(0.25%+0.05Ω) | ±(0.1%+0.01Ω)  | ±(0.5%+0.05Ω)  | ±(0.25%+0.05Ω) | —    | ±(0.5%+0.01Ω)  | ±(0.05%) |
| Temperature shock              | -55°C (30min) ~ 125°C (30min) 1000cycles                        | ±(0.25%+0.05Ω) | ±(0.1%+0.01Ω)  | ±(0.25%+0.05Ω) | ±(0.1%+0.01Ω)  | —    | ±(0.1%+0.01Ω)  | ±(0.01%) |
| High temperature exposure      | 155°C, no bias, 1000hours                                       | ±(0.25%+0.05Ω) | ±(0.1%+0.01Ω)  | ±(0.25%+0.05Ω) | ±(0.1%+0.01Ω)  | —    | ±(0.1%+0.01Ω)  | ±(0.01%) |
| Resistance to soldering heat   | 260±5°C, 10 seconds (reflow)                                    | ±(0.05%+0.01Ω) | ±(0.05%+0.01Ω) | ±(0.05%+0.01Ω) | ±(0.05%+0.01Ω) | —    | ±(0.05%+0.01Ω) | ±(0.01%) |


\*1 Rated voltage is given by  $E = \sqrt{R \times P}$  E= rated voltage (V), R=nominal resistance value(Ω), P=rated power(W)  
If rated voltage exceeds maximum voltage /element, maximum voltage/element is the rated voltage.

## ◆ 10000 hour reliability test data


### ○ Biased life test

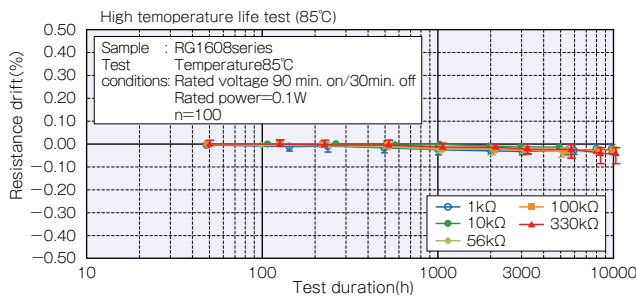


### ○ High temperature high humidity (biased)

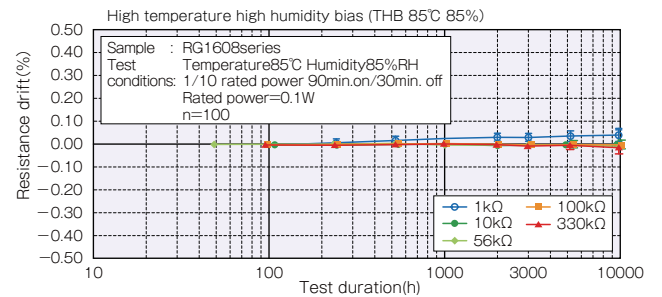


### ○ Temperature shock

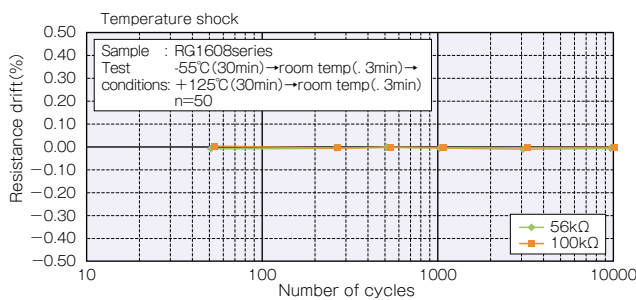


### ○ High temperature exposure

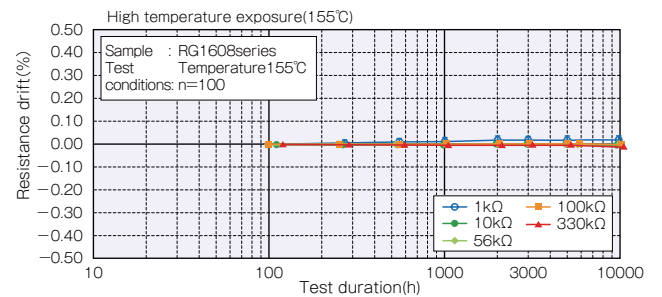

## ◆ Derating Curve

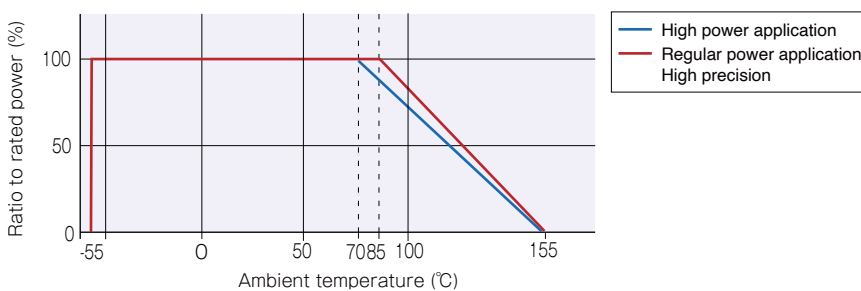

## ◆ Maximum pulse power limit

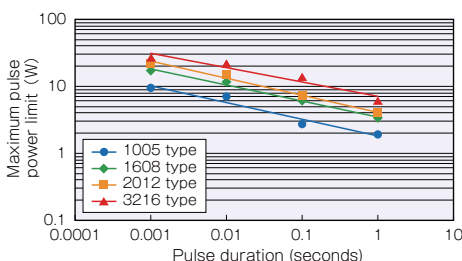



### Test procedure

Voltage pulse is applied to the test samples mounted on the test board.  
After each pulse, resistance drift is measured. Pulse voltage is increased until the drift exceeds +/-0.5%.  
The power at that voltage is defined as the maximum pulse power.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View RG1005P-2212-B-T5 on WIN SOURCE](#)
-  [Susumu Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management