



**THE DATASHEET OF  
DSSK70-008AR**





# Power Schottky Rectifier with common cathode

$$I_{FAV} = 2 \times 35 \text{ A}$$

$$V_{RRM} = 80 \text{ V}$$

$$V_F = 0.64 \text{ V}$$

$V_{RSM}$	$V_{RRM}$	Type
V	V	
80	80	DSSK 70-008AR

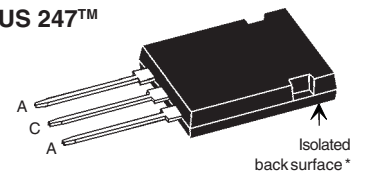
**ISOPLUS 247™**


C = Cathode, A = Anode

Symbol	Conditions	Maximum Ratings	
$I_{FRMS}$		70	A
$I_{FAV}$	$T_C = 150^\circ\text{C}$ ; rectangular, $d = 0.5$	35	A
$I_{FAV}$	$T_C = 150^\circ\text{C}$ ; rectangular, $d = 0.5$ ; per device	70	A
$I_{FSM}$	$T_{VJ} = 45^\circ\text{C}$ ; $t_p = 10 \text{ ms}$ (50 Hz), sine	600	A
$E_{AS}$	$I_{AS} = 35 \text{ A}$ ; $L = 100 \mu\text{H}$ ; $T_{VJ} = 25^\circ\text{C}$ ; non repetitive	61	mJ
$I_{AR}$	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$ ; repetitive	3.5	A
$(dv/dt)_{cr}$		tdb	V/ $\mu\text{s}$
$T_{VJ}$		-55...+175	$^\circ\text{C}$
$T_{VJM}$		175	$^\circ\text{C}$
$T_{stg}$		-55...+150	$^\circ\text{C}$
$P_{tot}$	$T_C = 25^\circ\text{C}$	190	W
$F_C$	mounting force with clip	20...120	N
$V_{ISOL}$	50/60 Hz, RMS; $t = 1 \text{ s}$	3000	V~
Weight	typical	6	g

## Features

- International standard package
- Very low  $V_F$
- Extremely low switching losses
- Low  $I_{RM}$ -values
- Isolated and UL registered E153432

## Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

## Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see Outlines.pdf

Symbol	Conditions	Characteristic Values	
		typ.	max.
$I_R$ ①	$V_R = V_{RRM}$ ; $T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$ ; $T_{VJ} = 125^\circ\text{C}$	4	mA
		10	mA
$V_F$	$I_F = 35 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$	0.64	V
	$I_F = 35 \text{ A}$ ; $T_{VJ} = 25^\circ\text{C}$	0.76	V
	$I_F = 70 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$	0.80	V
$R_{thJC}$		0.8	K/W
$R_{thCH}$	0.25		K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %  
Data according to IEC 60747 and per diode unless otherwise specified

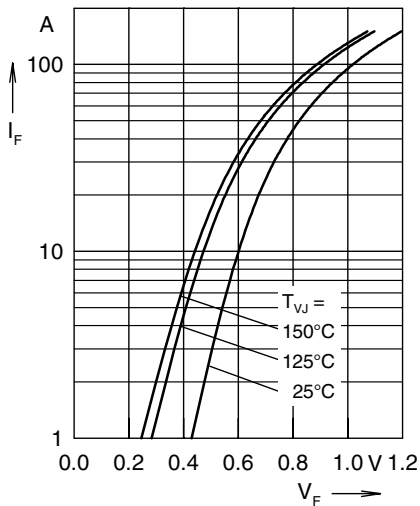


Fig. 1 Max. forward voltage drop characteristics

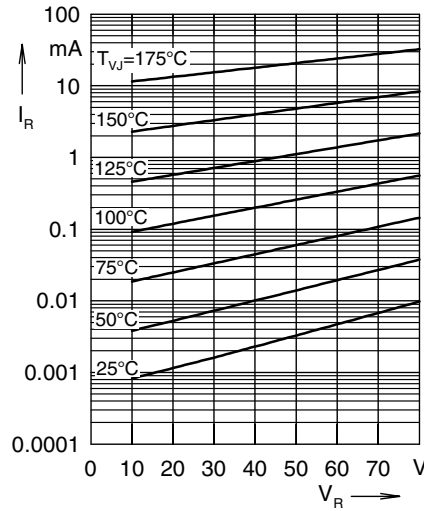


Fig. 2 Typ. reverse current  $I_R$  versus reverse voltage

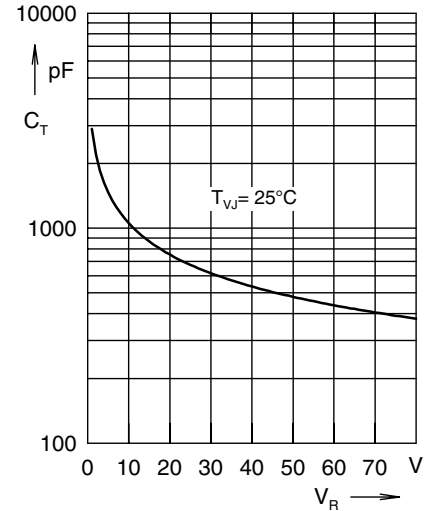


Fig. 3 Typ. junction capacitance  $C_T$  vs. reverse voltage  $V_R$

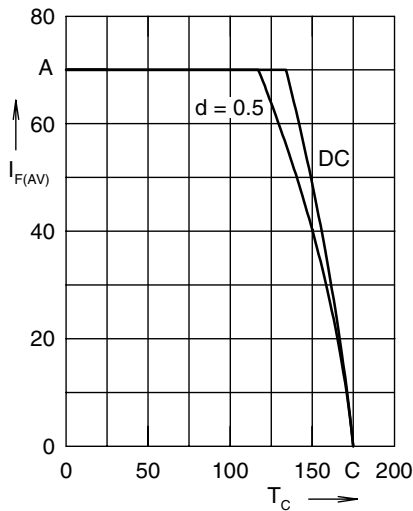


Fig. 4 Avg. forward current  $I_{F(AV)}$  vs. case temperature  $T_C$

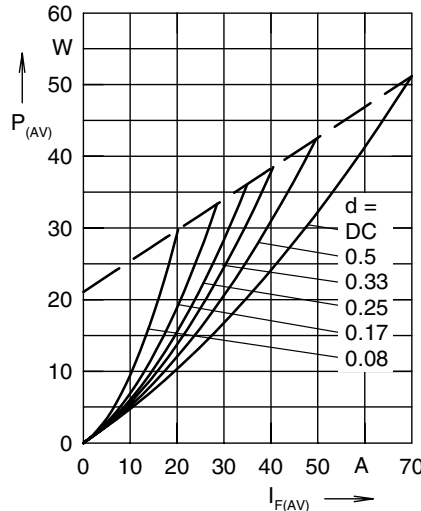


Fig. 5 Forward power loss characteristics

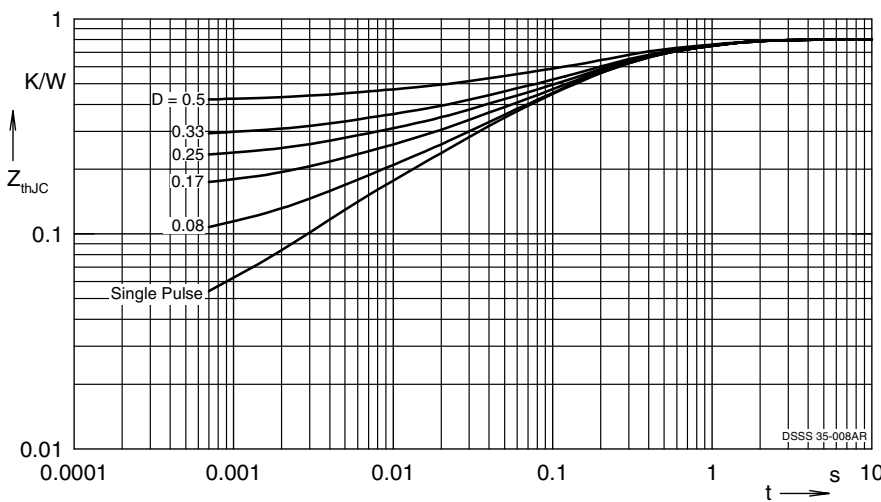




Fig. 6 Transient thermal impedance junction to case at various duty cycles







Note: All curves are per diode

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View DSSK70-008AR on WIN SOURCE](#)
-  [IXYS Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management