


Metallized Polyester Film Capacitor

Series : **ECQUL** [Class X2]
[Class Y2/X2]

In accordance with UL/CSA and European safety regulation class X2 or class Y2/X2

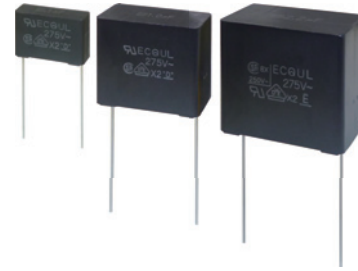


Features

- Compact
- Flame-retardant plastic case and non-combustible resin
- RoHS directive compliant

Recommended applications

- Interference suppressors

Explanation of part number

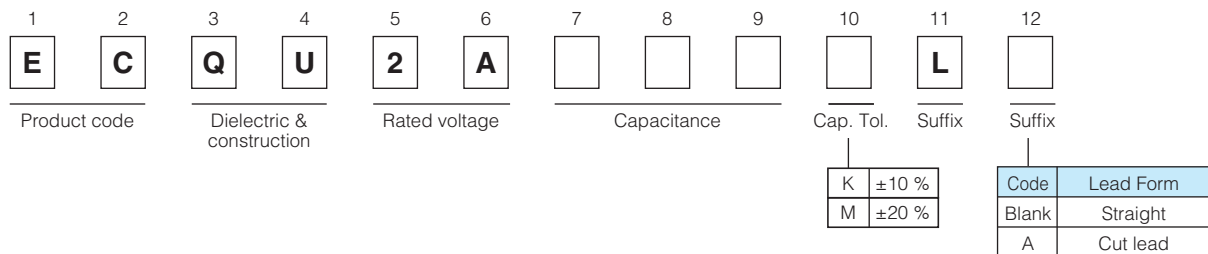

Applicable standard

* It is certified as type ECQUL in the following approval.

Approval		Class	Capacitance range	Certification organization
UL	UL60384-14	Class Y2/X2	(0.0010 μF to 0.0068 μF)	UL
		Class X2	(0.0082 μF to 2.2 μF)	
CSA	CAN/CSA E60384-14 CSA C22.2 No.8-M1986	Class Y2/X2	(0.0010 μF to 0.0068 μF)	CSA
		Class X2	(0.0082 μF to 2.2 μF)	
Europe	EN60384-14	Class Y2/X2	(0.0010 μF to 0.0068 μF)	VDE
		Class X2	(0.0082 μF to 2.2 μF)	
International	IEC60384-14	Class Y2/X2	(0.0010 μF to 0.0068 μF)	VDE
		Class X2	(0.0082 μF to 2.2 μF)	

* When applying this capacitor to European and American safety standards, please use type designation and rating such as ECQUL, 0.1 μF.

* Approval number (File No.) of safety regulations are subject to revision without notice. Ask factory for a copy of the latest file No.

* This capacitor is recognized for European standards by VDE only. But, there are no problems using this capacitor in a device which will get approvals from certification bodies in Europe, SEMKO, DEMKO, NEMKO, FIMKO and SEV etc.

Specifications

Category temperature range	-40 °C to +100 °C (85 °C max. on CSA C22.2 No.8 spec.)
Rated voltage	275 V.AC (250 V.AC on CSA C22.2 No.8 spec.)
Rated capacitance	0.0010 μF to 2.2 μF
Capacitance tolerance	±10 % (K), ±20 % (M)
Dissipation factor (tan δ)	tan δ ≤ 1.0 % (20 °C, 1 kHz)
Withstand voltage	Between terminals : 575 V.AC, 1768 V.DC, 60 s (0.0082 μF to 2.2 μF) Between terminals : 1500 V.AC, 2121 V.DC, 60 s (0.0010 μF to 0.0068 μF) Between terminals to enclosure : 2050 V.AC, 60 s
Insulation resistance (IR)	C ≤ 0.33 μF : IR ≥ 15000 MΩ (20 °C, 100 V.DC, 60 s) C > 0.33 μF : IR ≥ 5000 MΩ · μF (20 °C, 100 V.DC, 60 s) IR ≥ 2000 MΩ (20 °C, 500 V.DC, 60 s)

* Use of this capacitor is limited to AC voltage (50 Hz or 60 Hz sine wave).

Dimensions

$L \pm 0.5^*$
 $T \pm 0.5^*$
 $H \pm 0.5^*$
 $F \pm 0.4$
 $\phi d \pm 0.05$
 $Q \pm 0.14$
 P (Lead location limits from center)
 20 min.
 Cut lead (Suffix A)
 Solder-plated copper-clad steel wire
 4.0 ± 0.5
 Unit : mm

Marking example		
STYLE	(A) side	(B) side
1 0.0010 μF to 0.0068 μF	M .001 μF K	ECQUL 275V~ X2
2 0.0082 μF to 1.0 μF	M .0082 μF K	ECQUL 275V~ X2
3 1.2 μF to 2.2 μF	M 1.5 μF K	ECQUL 275V~ X2

Note : Only $\pm 10\%$ as cap. tol. be marked as "K".
 Note : Date code.

* $\geq 1.2 \mu\text{F} \pm 1.0$

Rating · Dimensions · Quantity

- Capacitance tolerance : $\pm 10\%$ (K), $\pm 20\%$ (M)

Part No.	Capacitance (μF)	Dimensions (mm)							Min. order Q'ty	
		L	T	H	F	ϕd	P	Q	Straight	Cut lead
ECQU2A102□L ()	0.0010	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3	500	500
ECQU2A122□L ()	0.0012	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A152□L ()	0.0015	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A182□L ()	0.0018	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A222□L ()	0.0022	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A272□L ()	0.0027	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A332□L ()	0.0033	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A392□L ()	0.0039	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A472□L ()	0.0047	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A562□L ()	0.0056	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A682□L ()	0.0068	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A822□L ()	0.0082	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A103□L ()	0.010	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A123□L ()	0.012	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A153□L ()	0.015	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A183□L ()	0.018	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A223□L ()	0.022	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A273□L ()	0.027	15.0	5.0	11.5	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A333□L ()	0.033	15.0	6.0	13.0	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A393□L ()	0.039	15.0	6.0	13.0	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A473□L ()	0.047	15.0	6.0	13.0	12.5	0.6	0 \pm 0.50	1.3		
ECQU2A563□L ()	0.056	17.5	4.5	11.5	15.0	0.6	0 \pm 0.50	1.3		
ECQU2A683□L ()	0.068	17.5	4.5	11.5	15.0	0.6	0 \pm 0.50	1.3		
ECQU2A823□L ()	0.082	17.5	5.5	12.0	15.0	0.6	0 \pm 0.50	1.3		
ECQU2A104□L ()	0.10	17.5	5.5	12.0	15.0	0.6	0 \pm 0.50	1.3		
ECQU2A124□L ()	0.12	17.5	6.5	14.5	15.0	0.6	0 \pm 0.50	1.3		
ECQU2A154□L ()	0.15	17.5	6.5	14.5	15.0	0.6	0 \pm 0.50	1.3		
ECQU2A184□L ()	0.18	17.5	8.0	16.0	15.0	0.6	0 \pm 0.50	1.3		
ECQU2A224□L ()	0.22	17.5	8.0	16.0	15.0	0.6	0 \pm 0.50	1.3		
ECQU2A274□L ()	0.27	17.5	9.5	17.5	15.0	0.8	0 \pm 0.50	1.3		
ECQU2A334□L ()	0.33	17.5	9.5	17.5	15.0	0.8	0 \pm 0.50	1.3		
ECQU2A394□L ()	0.39	25.5	8.5	17.5	22.5	0.8	0 \pm 0.75	1.5		
ECQU2A474□L ()	0.47	25.5	8.5	17.5	22.5	0.8	0 \pm 0.75	1.5		
ECQU2A564□L ()	0.56	25.5	10.5	19.5	22.5	0.8	0 \pm 0.75	1.5		
ECQU2A684□L ()	0.68	25.5	10.5	19.5	22.5	0.8	0 \pm 0.75	1.5		
ECQU2A824□L ()	0.82	25.5	12.0	22.0	22.5	0.8	0 \pm 0.75	1.5		
ECQU2A105□L ()	1.0	25.5	12.0	22.0	22.5	0.8	0 \pm 0.75	1.5		
ECQU2A125□L ()	1.2	30.5	16.5	26.0	27.5	0.8	0 \pm 0.75	1.5		
ECQU2A155□L ()	1.5	30.5	16.5	26.0	27.5	0.8	0 \pm 0.75	1.5		
ECQU2A185□L ()	1.8	30.5	19.0	29.5	27.5	0.8	0 \pm 0.75	1.5		
ECQU2A225□L ()	2.2	30.5	19.0	29.5	27.5	0.8	0 \pm 0.75	1.5		

* □ : Capacitance tolerance code
() : Suffix for lead form

Guidelines and precautions regarding the technical information and use of our products described in this online catalog.

- If you want to use our products described in this online catalog for applications requiring special qualities or reliability, or for applications where the failure or malfunction of the products may directly jeopardize human life or potentially cause personal injury (e.g. aircraft and aerospace equipment, traffic and transportation equipment, combustion equipment, medical equipment, accident prevention, anti-crime equipment, and/or safety equipment), it is necessary to verify whether the specifications of our products fit to such applications. Please ensure that you will ask and check with our inquiry desk as to whether the specifications of our products fit to such applications use before you use our products.
- The quality and performance of our products as described in this online catalog only apply to our products when used in isolation. Therefore, please ensure you evaluate and verify our products under the specific circumstances in which our products are assembled in your own products and in which our products will actually be used.
- If you use our products in equipment that requires a high degree of reliability, regardless of the application, it is recommended that you set up protection circuits and redundancy circuits in order to ensure safety of your equipment.
- The products and product specifications described in this online catalog are subject to change for improvement without prior notice. Therefore, please be sure to request and confirm the latest product specifications which explain the specifications of our products in detail, before you finalize the design of your applications, purchase, or use our products.
- The technical information in this online catalog provides examples of our products' typical operations and application circuits. We do not guarantee the non-infringement of third party's intellectual property rights and we do not grant any license, right, or interest in our intellectual property.
- If any of our products, product specifications and/or technical information in this online catalog is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially with regard to security and export control, shall be observed.



<Regarding the Certificate of Compliance with the EU RoHS Directive/REACH Regulations>

- The switchover date for compliance with the RoHS Directive/REACH Regulations varies depending on the part number or series of our products.
- When you use the inventory of our products for which it is unclear whether those products are compliant with the RoHS Directive/REACH Regulation, please select "Sales Inquiry" in the website inquiry form and contact us.

We do not take any responsibility for the use of our products outside the scope of the specifications, descriptions, guidelines and precautions described in this online catalog.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ECQU2A474KLA](#) on WIN SOURCE
-  [Panasonic](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management