


## Metalized Polypropylene Film Capacitor

Series : **ECQUA [Class X2]**

In accordance with UL/CSA and European safety regulation class X2  
Equipped with a safety mechanism

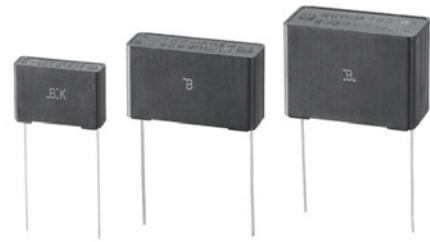


### Features

- High humidity resistance  
(THB test : 85 °C/85 %/240 V.AC/1000 h (C ≤ 1.0 μF))
- High safety (safety function installed)
- Compact
- Flame-retardant plastic case and non-combustible resin
- RoHS directive compliant

### Recommended applications

- Interference suppressors

### Explanation of part number

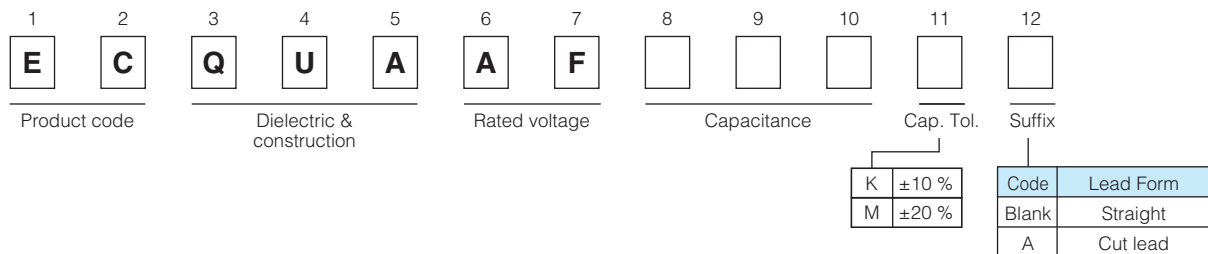

### Applicable standard

\* It is certified as type ECQUA in the following approval.

Approval		Class	Certification organization
UL	UL60384-14	Class X2	UL
CSA	CAN/CSA E60384-14	Class X2	
Europe	EN60384-14	Class X2	VDE
International	IEC60384-14	Class X2	

\* When applying this capacitor to European and American safety standards, please use type designation and rating such as ECQUA, 0.1 μF.

\* Approval number (File No.) of safety regulations are subject to revision without notice. Ask factory for a copy of the latest file No.

### Specifications

Category temperature range	-40 °C to +110 °C
Rated voltage	275 V.AC
Rated capacitance	0.10 μF to 4.7 μF
Capacitance tolerance	±10 % (K), ±20 % (M)
Dissipation factor (tan δ)	C ≤ 1.0 μF : tan δ ≤ 0.1 % ( 20 °C, 1 kHz ) C > 1.0 μF : tan δ ≤ 0.2 % ( 20 °C, 1 kHz )
Withstand voltage	Between terminals : 633 V.AC, 1183 V.DC, 60 s Between terminals to enclosure : 2050 V.AC, 60 s
Insulation resistance (IR)	C ≤ 0.33 μF : IR ≥ 15000 MΩ ( 20 °C, 100 V.DC, 60 s ) C > 0.33 μF : IR ≥ 5000 MΩ · μF ( 20 °C, 100 V.DC, 60 s ) C ≤ 0.47 μF : IR ≥ 2000 MΩ ( 20 °C, 500 V.DC, 60 s )
Maximum AC voltage *	310 V.AC

\* Use of this capacitor is limited to AC voltage (50 Hz or 60 Hz sine wave).

\* A faint corona discharge may occur inside of the capacitor element at rated voltage, however there is no influence on the reliability of the capacitor. (Suitable for series to the mains usage - for more details, please contact your Panasonic contact person.)

\* Maximum AC voltage including line voltage fluctuation is 310 V.AC.

310 V.AC is not nominal continuous applied voltage, but only indicates maximum value including in the voltage of the power supply. Basic nominal voltage is considered as 240 V.AC.

This maximum AC voltage is specified in only ECQUA type, not specified in other types.

Please refer to individual product specification, and contact us for further questions regarding design life.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.

Should a safety concern arise regarding this product, please be sure to contact us immediately.

## Dimensions

Marking Example

(A) side	(B) or (C) side

Note : Only  $\pm 10\%$  as cap. tol. be marked as "K".

Note : Date code.

Unit : mm

## Rating · Dimensions · Quantity

- Capacitance tolerance :  $\pm 10\%$  (K),  $\pm 20\%$  (M)

Part No.	Cap. ( $\mu\text{F}$ )	Dimensions (mm)							Min. order Q'ty	
		L	T	H	F	$\phi d$	P	Q	Straight	Cut lead
ECQUAAF104□( )	0.10	17.5	5.0	12.0	15.0	0.6	0 $\pm$ 0.8	1.3	1000	1000
ECQUAAF154□( )	0.15	17.5	6.0	13.0	15.0	0.6	0 $\pm$ 0.8	1.3		
ECQUAAF224□( )	0.22	17.5	7.5	14.0	15.0	0.6	0 $\pm$ 0.8	1.3		
ECQUAAF334□( )	0.33	17.5	9.0	16.0	15.0	0.6	0 $\pm$ 0.8	1.3	600	800
ECQUAAF474□( )	0.47	26.0	8.5	15.0	22.5	0.8	0 $\pm$ 0.8	1.8		
ECQUAAF684□( )	0.68	26.0	10.0	17.0	22.5	0.8	0 $\pm$ 0.8	1.8	500	500
ECQUAAF105□( )	1.0	26.0	12.0	19.0	22.5	0.8	0 $\pm$ 0.8	1.8	300	300
ECQUAAF155□( )	1.5	31.0	12.0	22.0	27.5	0.8	0 $\pm$ 0.8	1.8	200	200
ECQUAAF225□( )	2.2	31.0	14.5	24.5	27.5	0.8	0 $\pm$ 0.8	1.8		
ECQUAAF335□( )	3.3	31.0	19.0	29.0	27.5	0.8	0 $\pm$ 0.8	1.8	150	150
ECQUAAF475□( )	4.7	31.0	23.0	33.0	27.5	0.8	0 $\pm$ 0.8	1.8	100	100

\* □ : Capacitance tolerance code  
 ( ) : Suffix for lead form

## Guidelines and precautions regarding the technical information and use of our products described in this online catalog.

- If you want to use our products described in this online catalog for applications requiring special qualities or reliability, or for applications where the failure or malfunction of the products may directly jeopardize human life or potentially cause personal injury (e.g. aircraft and aerospace equipment, traffic and transportation equipment, combustion equipment, medical equipment, accident prevention, anti-crime equipment, and/or safety equipment), it is necessary to verify whether the specifications of our products fit to such applications. Please ensure that you will ask and check with our inquiry desk as to whether the specifications of our products fit to such applications use before you use our products.
- The quality and performance of our products as described in this online catalog only apply to our products when used in isolation. Therefore, please ensure you evaluate and verify our products under the specific circumstances in which our products are assembled in your own products and in which our products will actually be used.
- If you use our products in equipment that requires a high degree of reliability, regardless of the application, it is recommended that you set up protection circuits and redundancy circuits in order to ensure safety of your equipment.
- The products and product specifications described in this online catalog are subject to change for improvement without prior notice. Therefore, please be sure to request and confirm the latest product specifications which explain the specifications of our products in detail, before you finalize the design of your applications, purchase, or use our products.
- The technical information in this online catalog provides examples of our products' typical operations and application circuits. We do not guarantee the non-infringement of third party's intellectual property rights and we do not grant any license, right, or interest in our intellectual property.
- If any of our products, product specifications and/or technical information in this online catalog is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially with regard to security and export control, shall be observed.

## <Regarding the Certificate of Compliance with the EU RoHS Directive/REACH Regulations>



- The switchover date for compliance with the RoHS Directive/REACH Regulations varies depending on the part number or series of our products.
- When you use the inventory of our products for which it is unclear whether those products are compliant with the RoHS Directive/REACH Regulation, please select "Sales Inquiry" in the website inquiry form and contact us.

**We do not take any responsibility for the use of our products outside the scope of the specifications, descriptions, guidelines and precautions described in this online catalog.**

---

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ECQ-UAAF104M on WIN SOURCE](#)
-  [Panasonic Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management