



**THE DATASHEET OF  
ECW-U1C154JB9**



### Film Chip Capacitor

Type: **ECWU(B)**

Stacked metallized PEN dielectric film with simple mold-less construction


#### ■ Features

- Small in size (minimum size 3.2×1.6 mm)
- 85°C, 85%RH, W.V. × 1.0 for 500 hours
- For reflow soldering

#### ■ Recommended Applications

- Coupling
- By-pass
- General purpose

#### ■ Explanation of Part Numbers

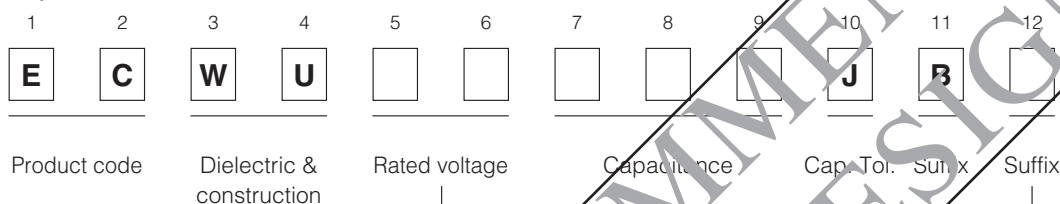


1C	16VDC
1H	50VDC
1	100VDC

Tape width	
5	8mm
8	12mm

#### ■ Specifications

Category temp. range	-55 to +105°C
Rated voltage	16VDC, 50VDC, 100VDC
Capacitance range	0.001 to 0.4 μF
Capacitance tolerance	±5% (J)
Withstand voltage	Between terminals : Rated volt. (VDC)×175% 1 to 5s
Dissipation factor	≤1.0% (20°C 1kHz)
Insulation resistance	C ≤ 0.33 μF 16VDC : ≥3000MΩ(20°C, 10VDC 60s) 50VDC : ≥3000MΩ(20°C, 50VDC 60s) 100VDC : ≥3000MΩ(20°C, 100VDC 60s)
	C > 0.33 μF 16VDC : 1000MΩ . μF min. (20°C, 10VDC 60s)
Soldering conditions	Reflow soldering : 240°C max. and 30sec max. at more than 210°C (Temp. at cap. surface)

#### ■ Construction

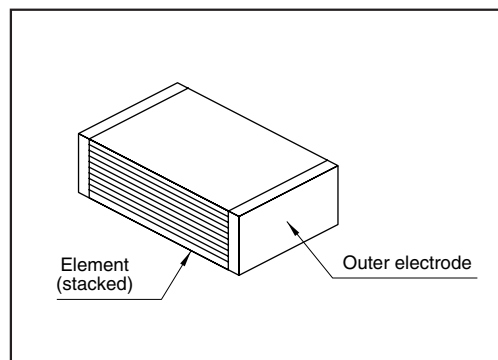

#### ■ Dimensions in mm (not to scale)

Size code	L	W	H
H1	3.2	1.6	0.8
H2	3.2	1.6	1.0
H3	3.2	1.6	1.4
G1	3.2	2.5	1.0
G2	3.2	2.5	1.4
G3	3.2	2.5	2.0
E1	4.8	3.3	1.4
E2	4.8	3.3	2.0
E3a	4.8	3.3	2.4
E3	4.8	3.3	2.8
D1	6.0	4.1	1.8
D2	6.0	4.1	2.0
D3	6.0	4.1	2.4
D4	6.0	4.1	2.8

<p>Size code H1,H2,H3,G1,G2,G3, E1,E2,E3a and E3.</p> <p>L±0.2      W±0.2      H±0.2</p> <p>0.35±0.20      0.35±0.20</p>	<p>(±0.3) *</p> <p>* To be applied only for size code E1, E2 E3a and E3.</p>
<p>Size code D1,D2,D3 and D4.</p> <p>L±0.2      W±0.3      H±0.2</p> <p>0.45±0.20      0.45±0.20</p>	

## ■Taping Specification for Automatic Insertion(Mounting)

Refer to the PDF file of taping specifications

## ■Rating, Dimensions & Quantity/Reel

Cap. (μF)	Rated volt. 16VDC					Rated volt. 50VDC					Rated volt. 100VDC																							
	Part No.	Dimensions (mm)			Code	Q'ty	Part No.	Dimensions (mm)			Code	Q'ty	Part No.	Dimensions (mm)			Code	Q'ty																
		L	W	H				L	W	H				L	W	H																		
0.001	For this rating use type ECHU(B)	For this rating use type ECHU(B)					For this rating use type ECHU(B)					ECWU1102JB5	3.2	1.6	1.0	H2	3000																	
0.0012												ECWU1122JB5	3.2	1.6	1.0	H2																		
0.0015												ECWU1152JB5	3.2	1.6	1.0	H2																		
0.0018												ECWU1182JB5	3.2	1.6	1.0	H2																		
0.0022												ECWU1222JB5	3.2	1.6	1.0	H2																		
0.0027												ECWU1272JB5	3.2	1.6	1.0	H2																		
0.0033												For this rating use type ECHU(B)	For this rating use type ECHU(B)					For this rating use type ECHU(B)					ECWU1332JB5	3.2	1.6	1.4	H3	2000						
0.0039																							ECWU1392JB5	3.2	1.6	1.4	H3							
0.0047																							ECWU1472JB5	3.2	1.6	1.4	H3							
0.0056																							ECWU1562JB5	3.2	2.5	1.4	G2							
0.0068																							ECWU1682JB5	3.2	2.5	1.4	G2							
0.0082																							ECWU1822JB5	3.2	2.5	2.0	G3							
0.01																							ECWU1103JB5	3.2	2.5	2.0	G3							
0.012																							ECWU1C123JB5	3.2	1.6	1.0	H2		ECWU1H123JB5	3.2	2.5	1.0	G1	3000
0.015																							ECWU1C153JB5	3.2	1.6	1.0	H2		ECWU1H153JB5	3.2	2.5	1.0	G1	
0.018																							ECWU1C183JB5	3.2	1.6	1.0	H2		ECWU1H183JB5	3.2	2.5	1.4	G2	
0.022	ECWU1C223JB5	3.2	1.6	1.0	H2	ECWU1H223JB5	3.2	2.5	1.4	G2	2000																							
0.027	ECWU1C273JB5	3.2	1.6	1.0	H2	ECWU1H273JB5	3.2	2.5	1.4	G2																								
0.033	ECWU1C333JB5	3.2	1.6	1.4	H3	ECWU1H333JB5	3.2	2.5	2.0	G3	3000																							
0.039	ECWU1C393JB5	3.2	1.6	1.4	H3	ECWU1H393JB5	3.2	2.5	2.0	G3																								
0.047	ECWU1C473JB5	3.2	1.6	1.4	H3	ECWU1H473JB5	3.2	2.5	2.0	G3																								
0.056	ECWU1C563JB5	3.2	2.5	1.4	G2	ECWU1H563JC9	4.8	3.3	2.0	E1	3000																							
0.068	ECWU1C683JB5	3.2	2.5	1.4	G2	ECWU1H683JC9	4.8	3.3	2.0	E2																								
0.082	ECWU1C823JB5	3.2	2.5	2.0	G3	ECWU1H823JC9	4.8	3.3	2.4	E3a	2000																							
0.1	ECWU1C104JB5	3.2	2.5	2.0	G3	ECWU1H104JC9	4.8	3.3	2.4	E3a																								
0.12	ECWU1C124JC9	4.8	3.3	1.4	E1	ECWU1H124JC9	6.0	4.1	1.8	D1	3000																							
0.15	ECWU1C154JC9	4.8	3.3	2.0	E2	ECWU1H154JC9	6.0	4.1	2.0	D2																								
0.18	ECWU1C184JC9	4.8	3.3	2.0	E2	ECWU1H184JC9	6.0	4.1	2.4	D3	2000																							
0.22	ECWU1C224JC9	4.8	3.3	2.1	E3a	ECWU1H224JC9	6.0	4.1	2.8	D4																								
0.27	ECWU1C274JC9	6.0	4.1	1.8	D1																													
0.33	ECWU1C334JC9	6.0	4.1	2.3	D2																													
0.39	ECWU1C394JC9	6.0	4.1	2.4	D3																													
0.47	ECWU1C474JC9	6.0	4.1	2.8	D4																													

## ■Example for Land Dimensions (mm)

Code	Land dimensions		
	Reflow soldering		
	A	B	C
H1	2.2	3.8	1.4
H2	2.2	3.8	1.4
H3	2.2	3.8	1.4
G1	2.2	3.8	2.3
G2	2.2	3.8	2.3
G3	2.2	3.8	2.3
E1	2.6	6.6	3.0
E2	2.6	6.6	3.0
E3a	2.6	6.6	3.0
E3	2.6	6.6	3.0
D1	3.8	7.8	3.8
D2	3.8	7.8	3.8
D3	3.8	7.8	3.8
D4	3.8	7.8	3.8

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View ECW-U1C154JB9 on WIN SOURCE](#)

 [Panasonic Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management