


To _____

No. A287-040403N-01

Date 3rd Apr. '04

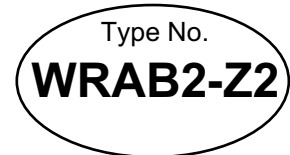

Data Sheet

WCDMA Rx SAW Filter	
Application	: Rx Filter for WCDMA
Center Frequency	: 2140MHz
Size	: 2.0x1.4mm, 5pin-layout
Impedance	: 50-100ohms unbalance-balance
Part No.	: EFCH2140TCA1

Issued *S. Tsuzuki*
Check *K. Nishimura*

CIRCUIT COMPONENTS BUSINESS UNIT
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD
KADOMA, OSAKA, JAPAN

WCDMA Rx SAW Filter

----- Unbalanced input and balanced output -----


Part No. :

Design No. : T2140D4

Parameter		Frequency	Your request			Our preliminary spec.			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Passband			2110 ... 2170			2110 ... 2170			MHz
Insertion loss		2110 ... 2170MHz					1.8	2.5	dB
Ripple in passband		2110 ... 2170MHz					0.3	1.2	dB
Amplitude imbalance		2110 ... 2170MHz				-1.5	-0.8 +0.4	+1.5	dB
Phase imbalance		2110 ... 2170MHz				-10	-2 +2	+10	deg.
Attenuation	Att1	DC ... 1980MHz				35	40		dB
	Att2	1980 ... 2050MHz				20	27		dB
	Att3	2250 ... 6000MHz				20	26		dB
VSWR	Input	2110 ... 2170MHz					1.7	2.2	
	Output	2110 ... 2170MHz					1.5	2.0	
Input impedance (Single ended)						50			Ohm
Output impedance (Differential)						100 // 5.6 nH			Ohm
Maximum drive level								13	dBm
Operating temperature						-30		+80	deg. C
Storage temperature						-40		+85	deg. C


WCDMA Rx SAW Filter

----- Unbalanced input and balanced output -----

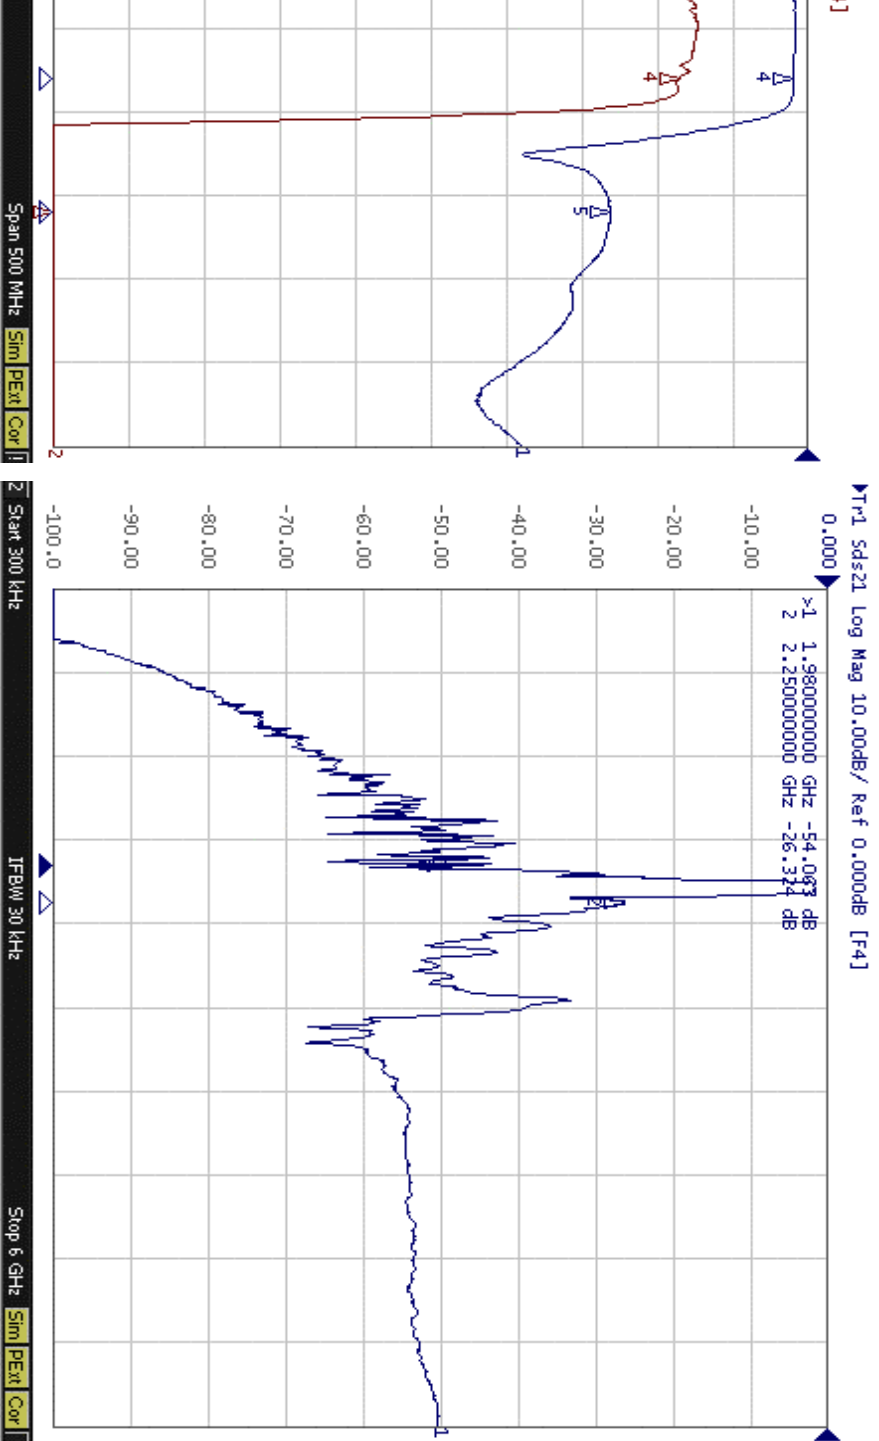



WCDMA Rx SAW Filter

----- Unbalanced input and balanced output -----

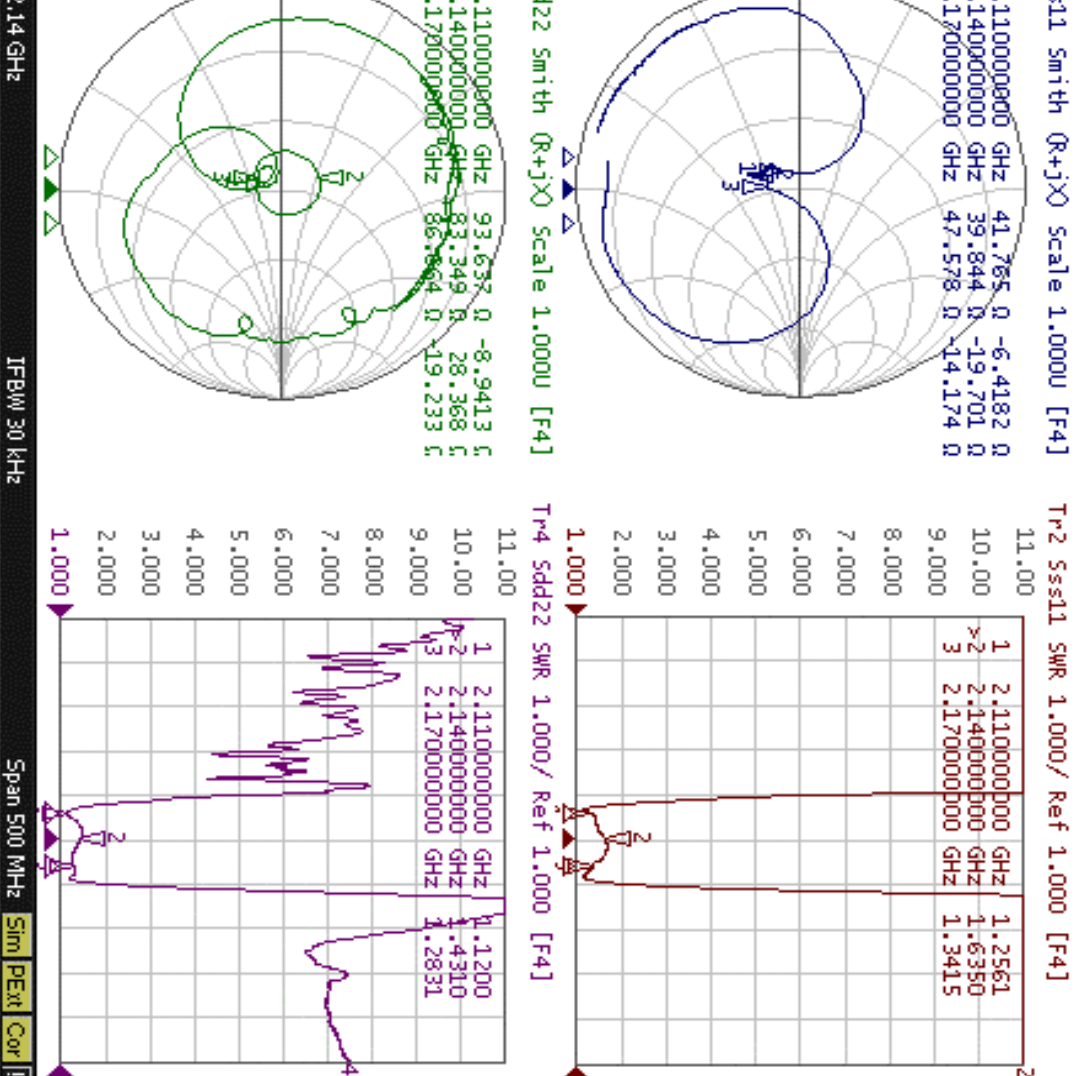


WCDMA Rx SAW Filter

----- Unbalanced input and balanced output -----

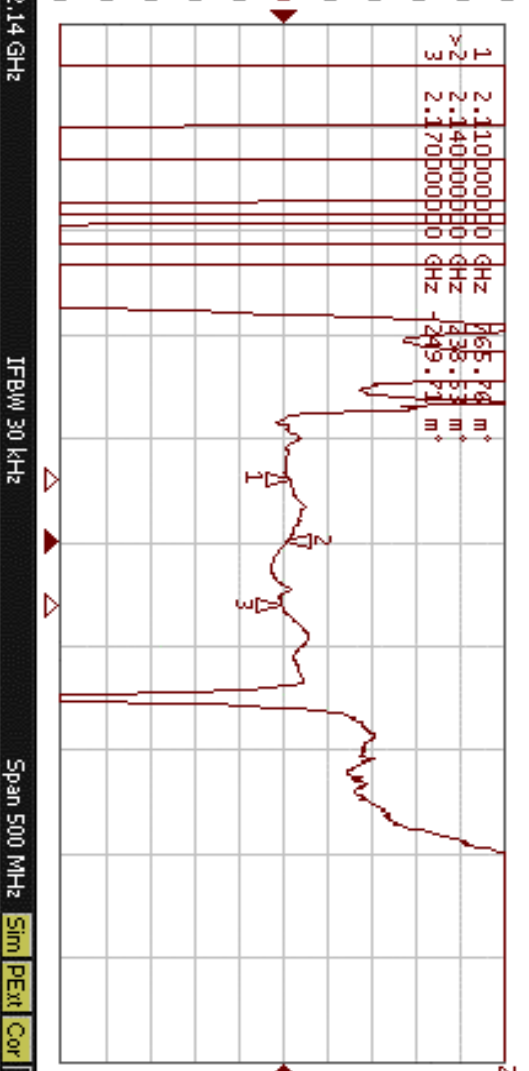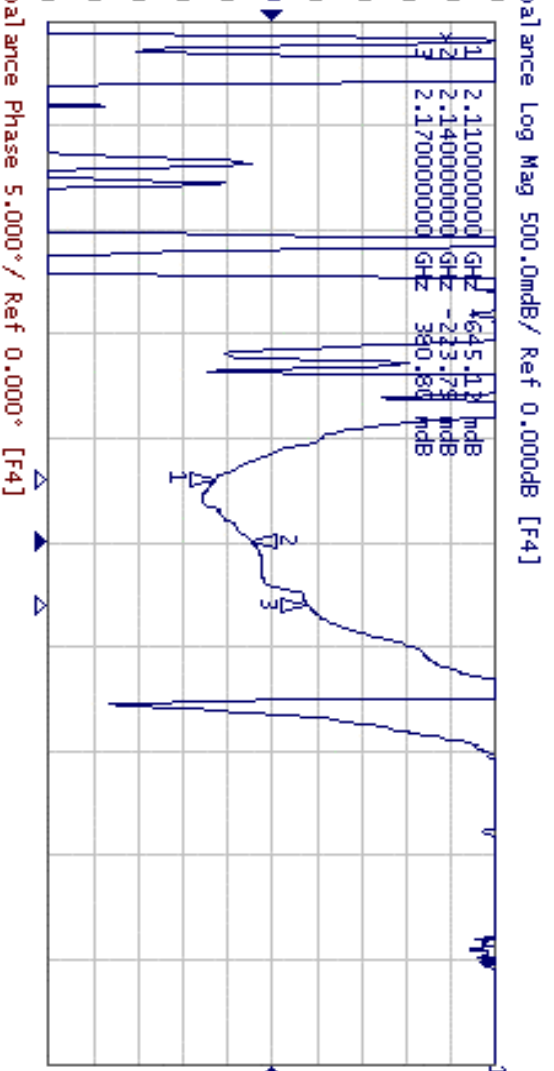

UNLESS OTHERWISE SPECIFIED	
BASIC DIMENSIONS	TOLERANCE
UP TO	INCL
TO	INCL
TO	INCL
TO	INCL
ABOVE	

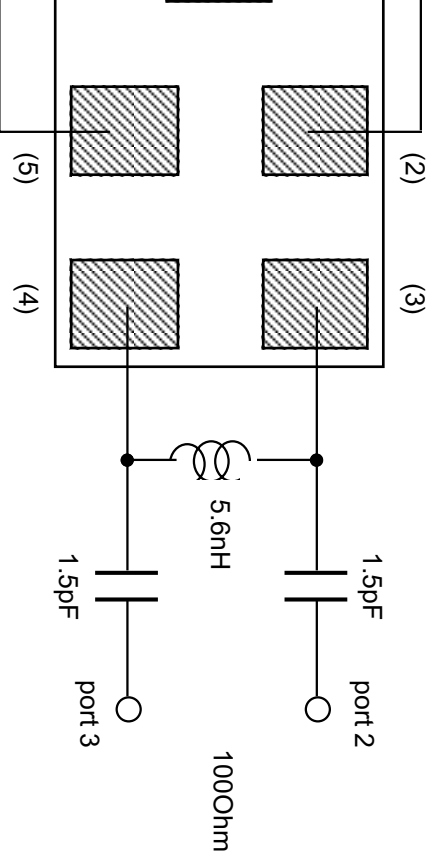

Input impedance : 50 Ohm (Single ended)
 Output Impedance : 100 Ohm (Differential)

ISSUE	REVISIONS	DATE
MATERIAL	FINISH	SCALE
DESIGN		
DRAW		
CHECK		
APPROVAL		
DRAWING NO.		



NAME	TYPE NO.
SAW Filter	

CERAMIC BUSINESS UNIT, LCR DEVICE COMPANY
 MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
 KADOMA, OSAKA, JAPAN

Fig. 2

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View EFCH2140TCA1](#) on WIN SOURCE
-  [Panasonic](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management