








# THE DATASHEET OF EL5244CSZ



**Silicon Switching Diode**

- For high-speed switching applications
- Pb-free (RoHS compliant) package <sup>1)</sup>
- Qualified according AEC Q101

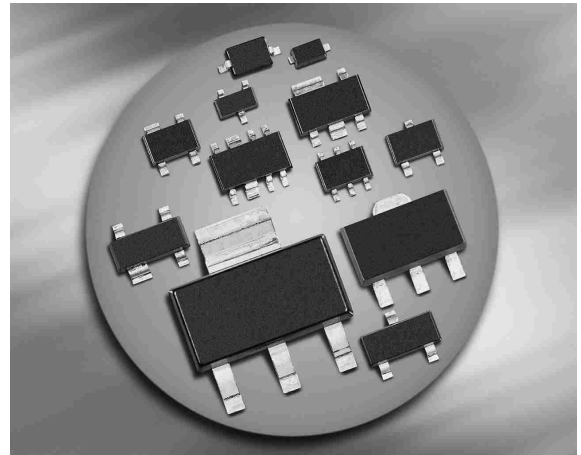
**BAS16**  
**BAS16W**
**BAS16-02L**  
**BAS16-02V**  
**BAS16-02W**  
**BAS16-03W**
**BAS16S**  
**BAS16U**
**BAS16-07L4**


| Type        | Package  | Configuration           | Marking |
|-------------|----------|-------------------------|---------|
| BAS16       | SOT23    | single                  | A6s     |
| BAS16-02L*  | TSLP-2-1 | single, leadless        | A6      |
| BAS16-02V   | SC79     | single                  | 6       |
| BAS16-02W   | SCD80    | single                  | A6      |
| BAS16-03W   | SOD323   | single                  | white B |
| BAS16-07L4* | TSLP-4-4 | parallel pair, leadless | 6A      |
| BAS16S      | SOT363   | parallel triple         | A6s     |
| BAS16U      | SC74     | parallel triple         | A6s     |
| BAS16W      | SOT323   | single                  | A6s     |

\* Preliminary Data

<sup>1</sup>Pb-containing package may be available upon special request

**Maximum Ratings** at  $T_A = 25\text{ °C}$ , unless otherwise specified

| Parameter   | Symbol    | Value       | Unit |
|---|-----------|-------------|------|
| Diode reverse voltage                               | $V_R$     | 80          | V    |
| Peak reverse voltage                                | $V_{RM}$  | 85          |      |
| Forward current                                     | $I_F$     |             | mA   |
| BAS16   |           | 250         |      |
| BAS16-02L, -07L4                                    |           | 200         |      |
| BAS16-02V, -02W                                     |           | 200         |      |
| BAS16-03W   |           | 250         |      |
| BAS16S  |           | 200         |      |
| BAS16U  |           | 200         |      |
| BAS16W  |           | 250         |      |
| Non-repetitive peak surge forward current           | $I_{FSM}$ |             | A    |
| $t = 1\ \mu\text{s}$ , BAS16/ S/ U/ W/ -03W         |           | 4.5         |      |
| $t = 1\ \mu\text{s}$ , BAS16-02L/ -02V/ -02W/ -07L4 |           | 2.5         |      |
| $t = 1\ \text{s}$                                   |           | 0.5         |      |
| Total power dissipation                             | $P_{tot}$ |             | mW   |
| BAS16, $T_S \leq 54\text{ °C}$                      |           | 370         |      |
| BAS16-02L, -07L4, $T_S \leq 130\text{ °C}$          |           | 250         |      |
| BAS16-02V, -02W, $T_S \leq 120\text{ °C}$           |           | 250         |      |
| BAS16-03W, $T_S \leq 116\text{ °C}$                 |           | 250         |      |
| BAS16S, $T_S \leq 85\text{ °C}$                     |           | 250         |      |
| BAS16U, $T_S \leq 113\text{ °C}$                    |           | 250         |      |
| BAS16W, $T_S \leq 119\text{ °C}$                    |           | 250         |      |
| Junction temperature                                | $T_j$     | 150         | °C   |
| Storage temperature                                 | $T_{stg}$ | -65 ... 150 |      |

**Thermal Resistance**

| Parameter                                | Symbol     | Value | Unit |
|--|------------|-------|------|
| Junction - soldering point <sup>1)</sup> | $R_{thJS}$ |       | K/W  |
| BAS16, BAS16S                            |            | ≤ 260 |      |
| BAS16-02L, -07L4                         |            | ≤ 80  |      |
| BAS16-02V, -02W                          |            | ≤ 120 |      |
| BAS16-03W                                |            | ≤ 135 |      |
| BAS16U                                   |            | ≤ 150 |      |
| BAS16W                                   |            | ≤ 125 |      |


**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter   | Symbol     | Values |      |                                    | Unit          |
|---|------------|--------|------|------------------------------------|---------------|
|   |            | min.   | typ. | max.                               |               |
| <b>DC Characteristics</b>   |            |        |      |                                    |               |
| Breakdown voltage<br>$I_{(BR)} = 100 \mu\text{A}$   | $V_{(BR)}$ | 85     | -    | -                                  | V             |
| Reverse current<br>$V_R = 75 \text{ V}$<br>$V_R = 25 \text{ V}, T_A = 150^\circ\text{C}$<br>$V_R = 75 \text{ V}, T_A = 150^\circ\text{C}$     | $I_R$      | -      | -    | 1<br>30<br>50                      | $\mu\text{A}$ |
| Forward voltage<br>$I_F = 1 \text{ mA}$<br>$I_F = 10 \text{ mA}$<br>$I_F = 50 \text{ mA}$<br>$I_F = 100 \text{ mA}$<br>$I_F = 150 \text{ mA}$ | $V_F$      | -      | -    | 715<br>855<br>1000<br>1200<br>1250 | mV            |
| Forward recovery voltage<br>$I_F = 10 \text{ mA}, t_P = 20 \text{ ns}$  | $V_{fr}$   | -      | -    | 1.75                               | V             |

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter  | Symbol   | Values |      |      | Unit |
|--|----------|--------|------|------|------|
|  |          | min.   | typ. | max. |      |
| <b>AC Characteristics</b>  |          |        |      |      |      |
| Diode capacitance<br>$V_R = 0\text{ V}, f = 1\text{ MHz}$  | $C_T$    | -      | -    | 2    | pF   |
| Reverse recovery time<br>$I_F = 10\text{ mA}, I_R = 10\text{ mA}$ , measured at $I_R = 1\text{ mA}$ ,<br>$R_L = 100\ \Omega$ | $t_{rr}$ | -      | -    | 4    | ns   |

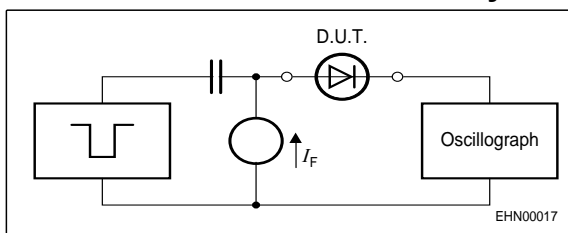
**Test circuit for reverse recovery time**


Pulse generator:  $t_p = 100\text{ ns}$ ,  $D = 0.05$ ,  $t_r = 0.6\text{ ns}$ ,  
 $R_i = 50\ \Omega$

Oscilloscope:  $R = 50\ \Omega$ ,  $t_r = 0.35\text{ ns}$ ,  $C = 0.05\text{ pF}$


Reverse current  $I_R = f(T_A)$

$V_R =$  Parameter

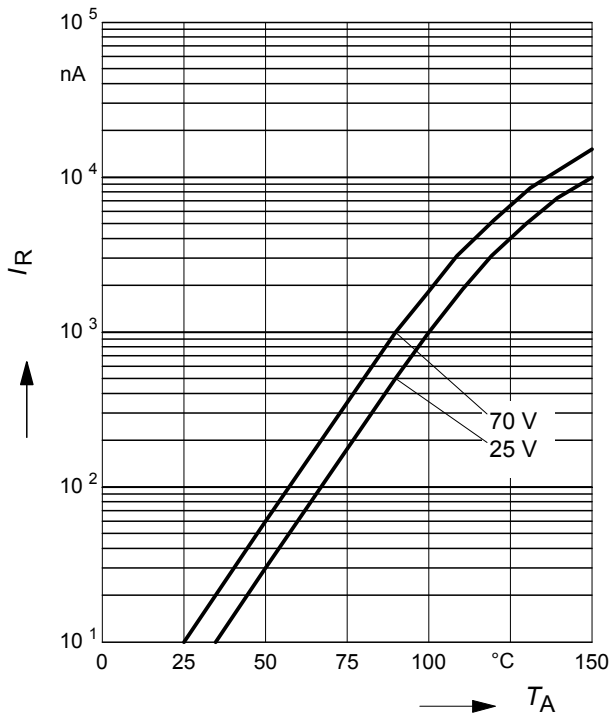


Forward Voltage  $V_F = f(T_A)$

$I_F =$  Parameter

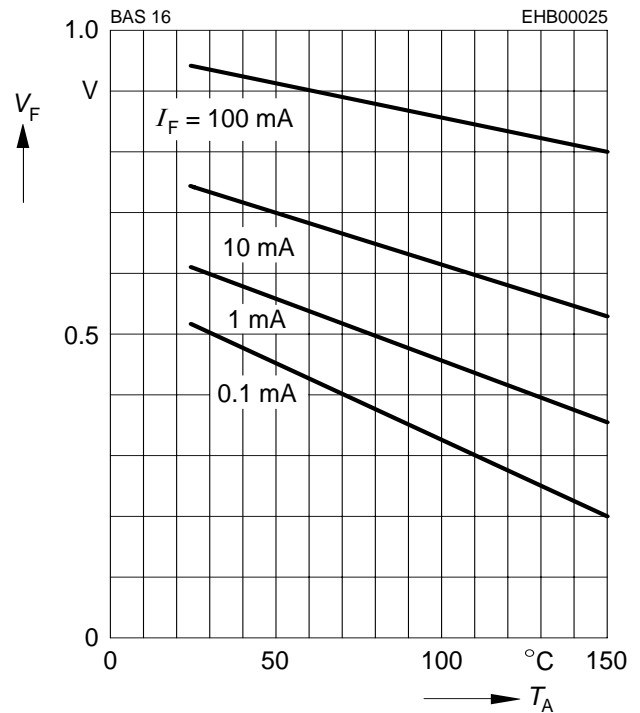


Forward current  $I_F = f(V_F)$

$T_A = 25^\circ\text{C}$

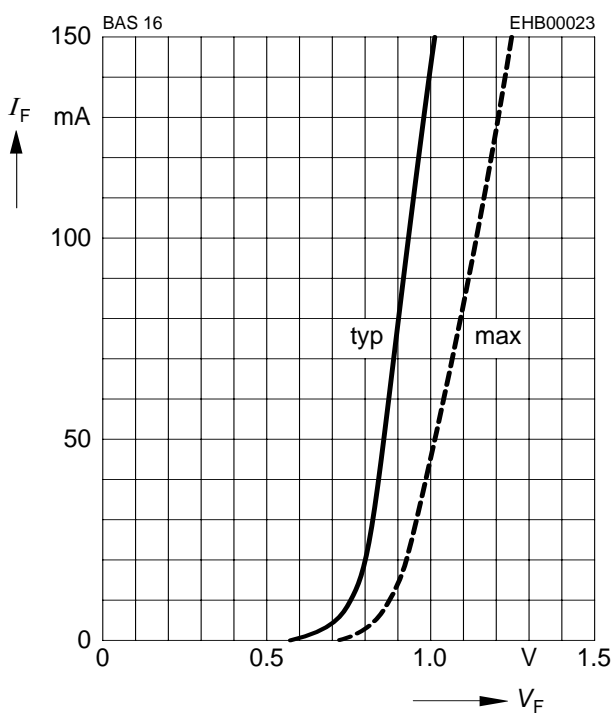


Forward current  $I_F = f(T_S)$

BAS16

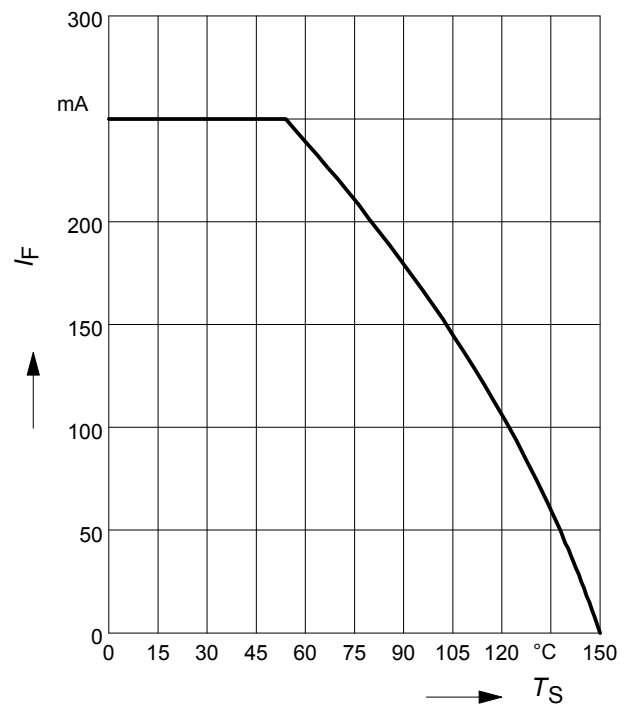


Forward current  $I_F = f(T_S)$

BAS16-02L, -07L4

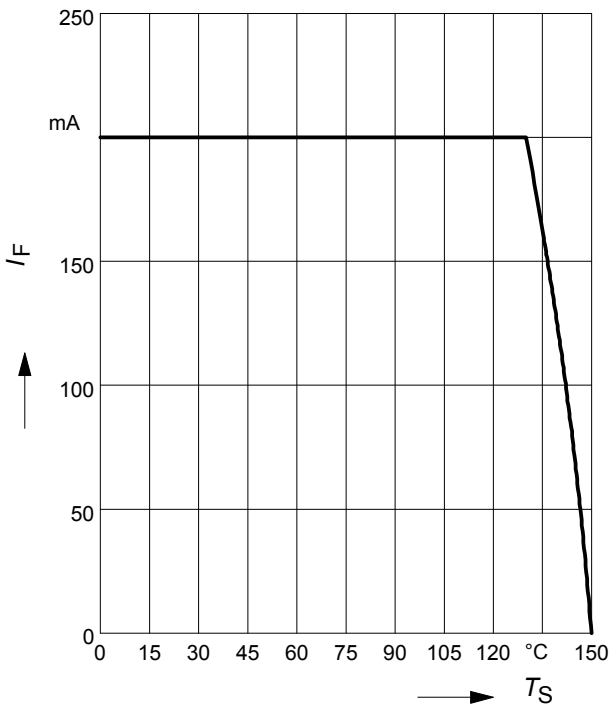


Forward current  $I_F = f(T_S)$

BAS16-02V, -02W

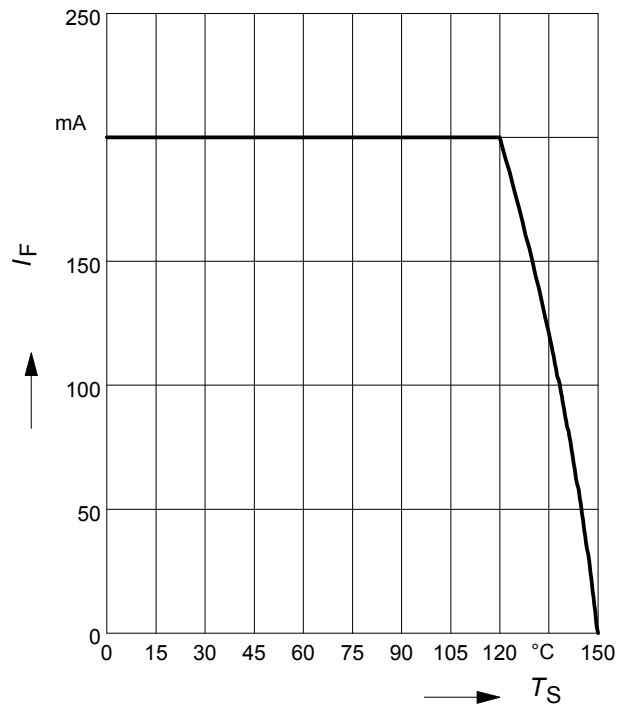


Forward current  $I_F = f(T_S)$

BAS16-03W

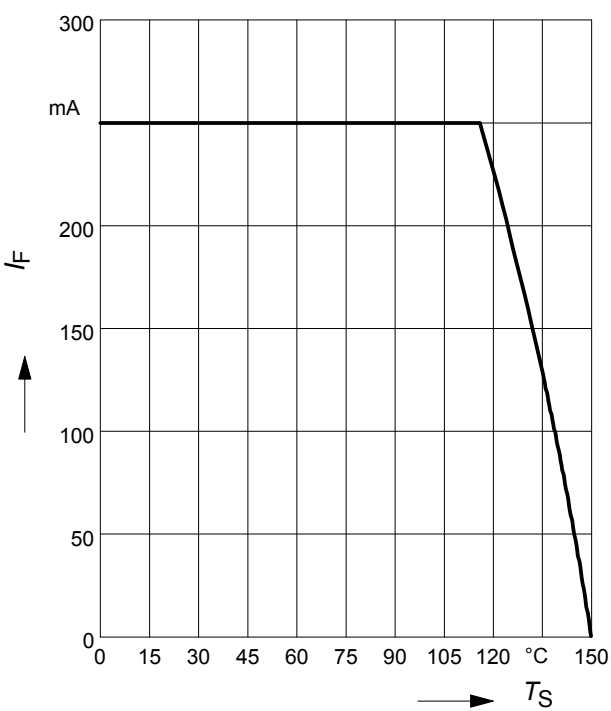


Forward current  $I_F = f(T_S)$

BAS16S

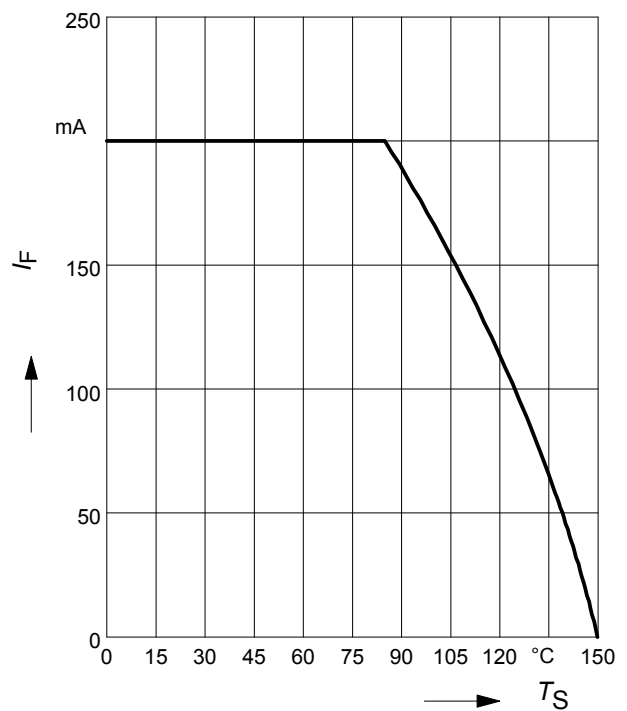


**Forward current  $I_F = f(T_S)$**

BAS16U

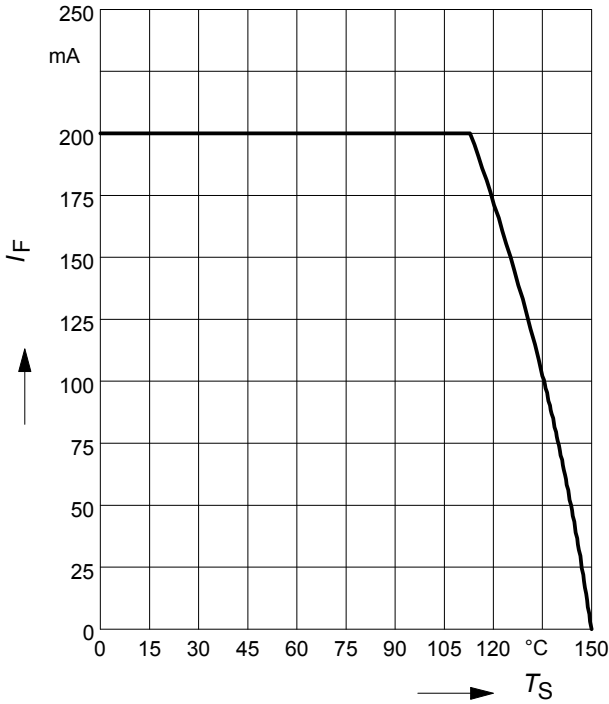


**Forward current  $I_F = f(T_S)$**

BAS16W

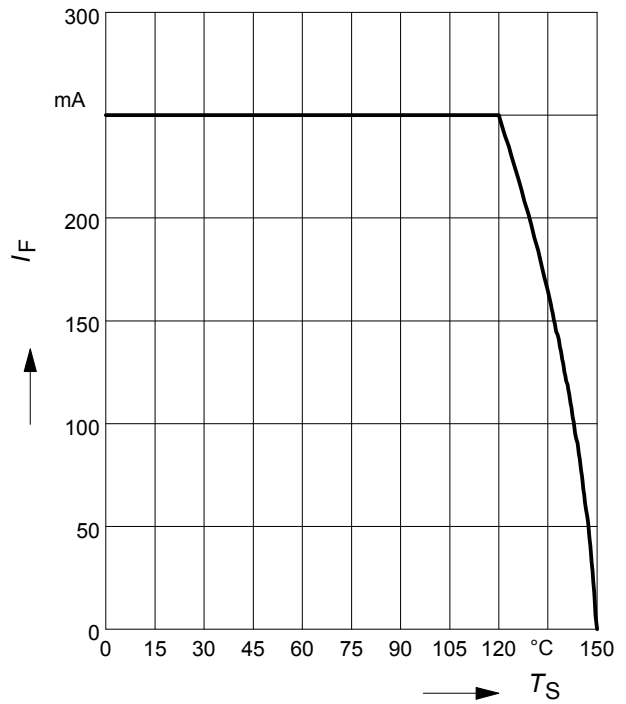

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAS16

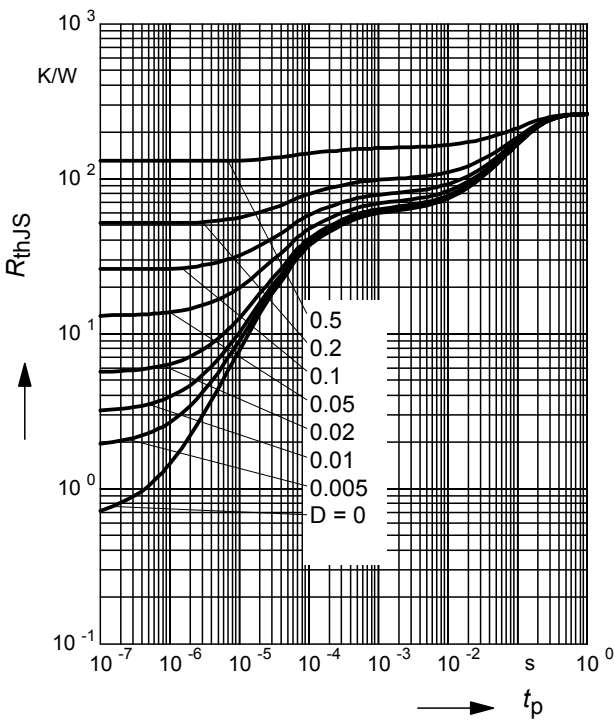

**Permissible Pulse Load**


$I_{Fmax} / I_{FDC} = f(t_p)$

BAS16

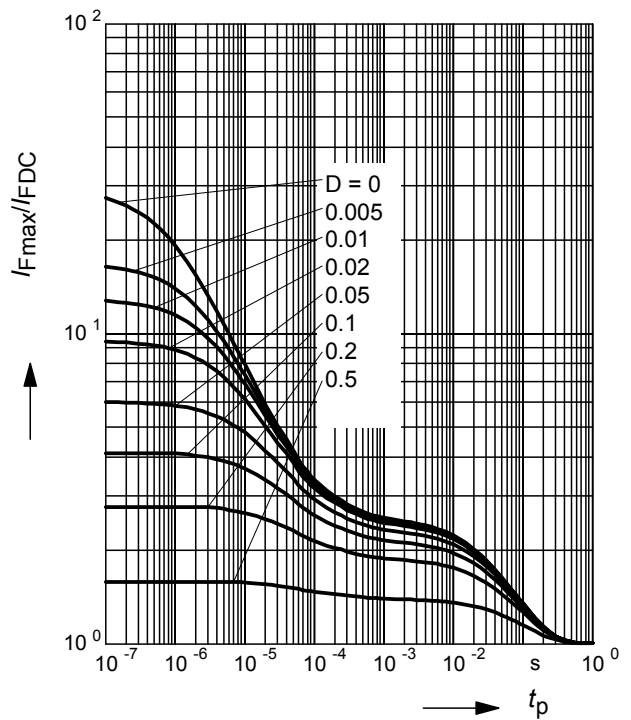

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAS16-02L, -07L4

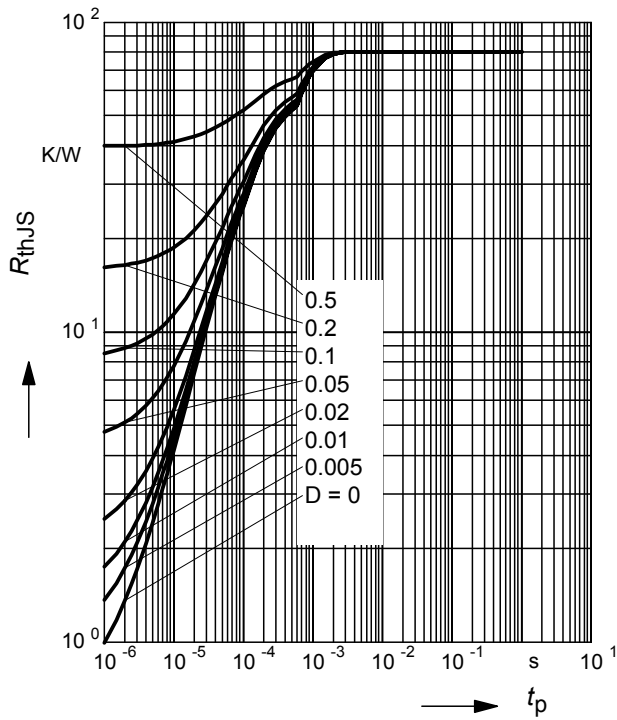

**Permissible Pulse Load**


$I_{Fmax} / I_{FDC} = f(t_p)$

BAS16-02L, -07L4

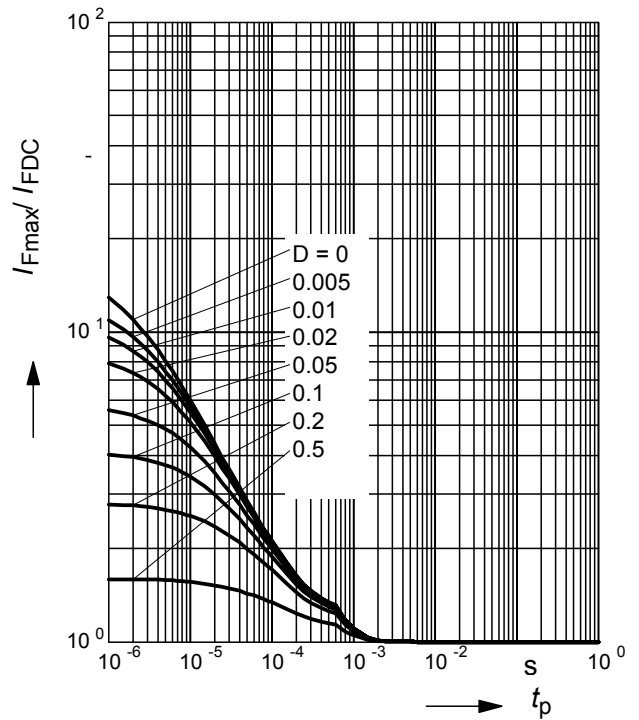

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAS16-02V, -02W

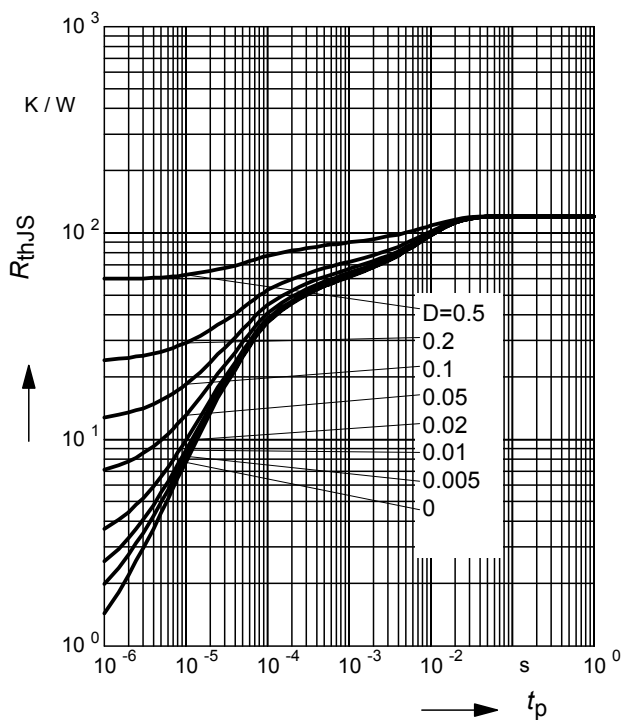

**Permissible Pulse Load**


$I_{Fmax} / I_{FDC} = f(t_p)$

BAS16-02V, -02W

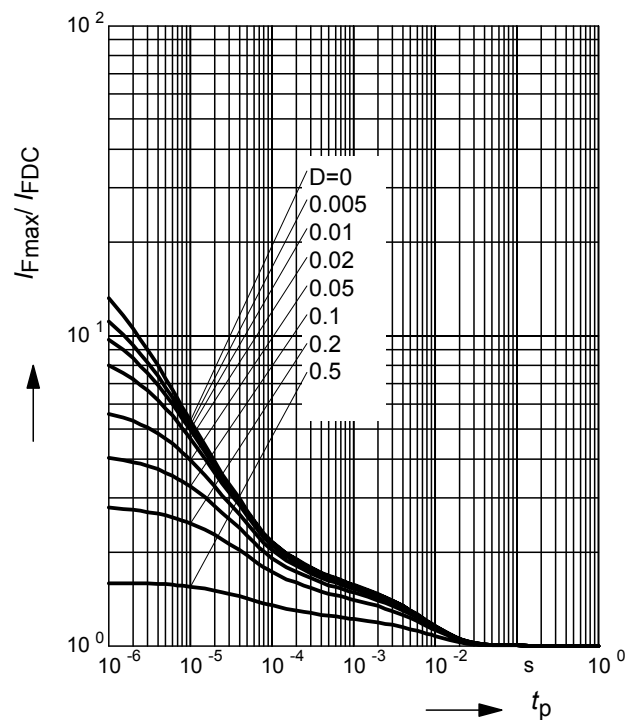

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAS16-03W

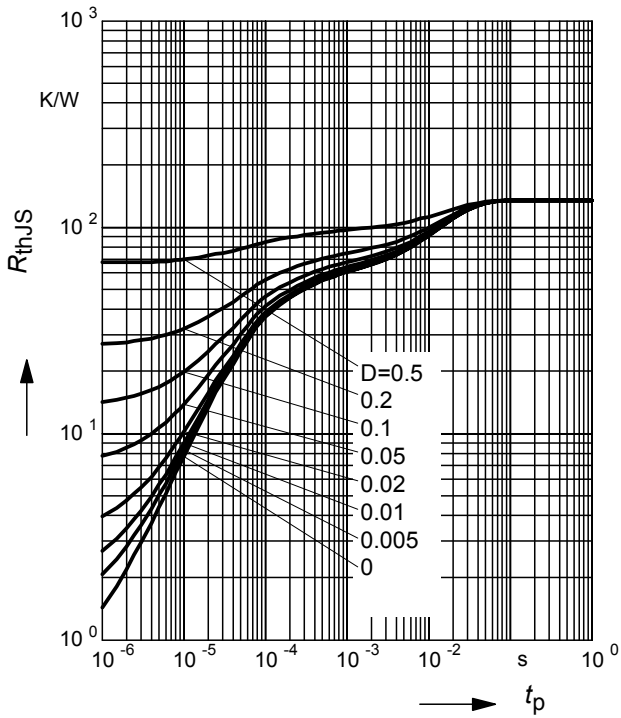

**Permissible Pulse Load**


$I_{Fmax} / I_{FDC} = f(t_p)$

BAS16-03W

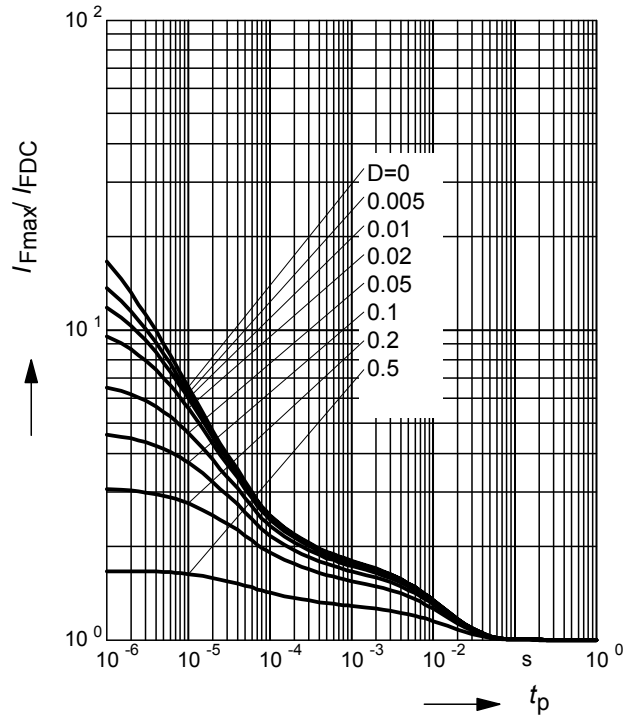

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAS16S

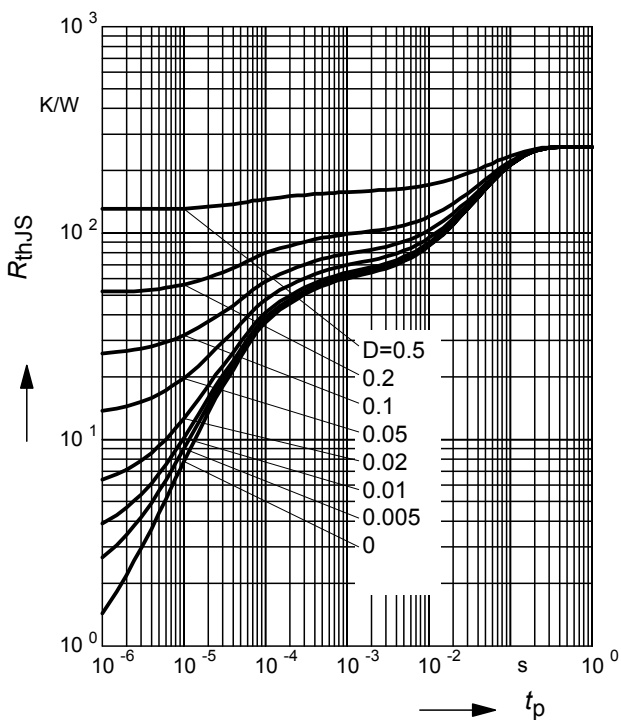

**Permissible Pulse Load**


$I_{Fmax} / I_{FDC} = f(t_p)$

BAS16S

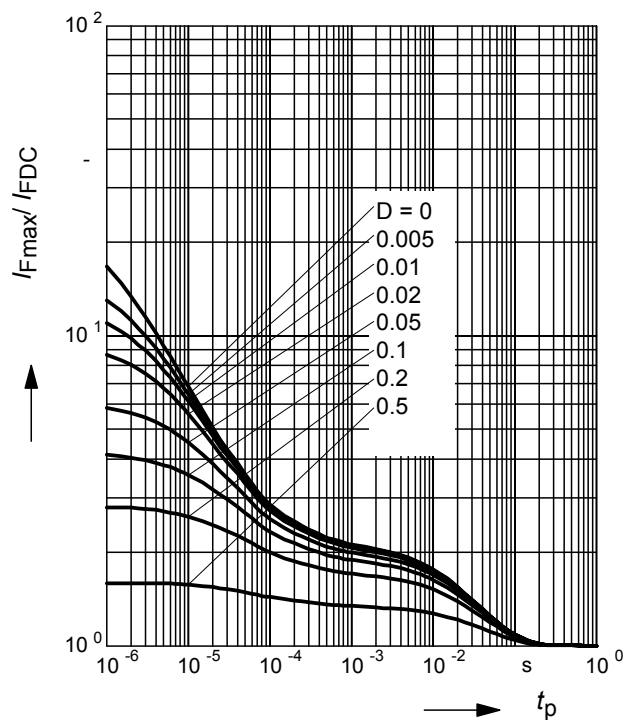

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAS16U

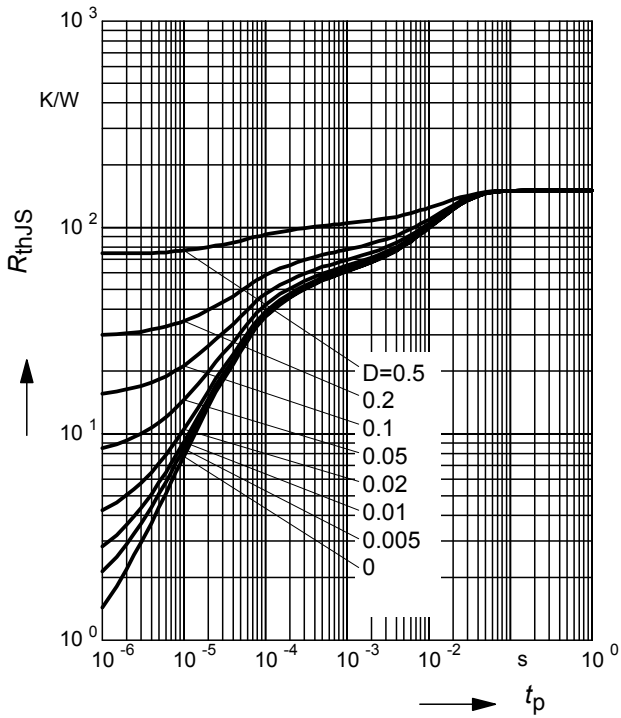

**Permissible Pulse Load**


$I_{Fmax} / I_{FDC} = f(t_p)$

BAS16U

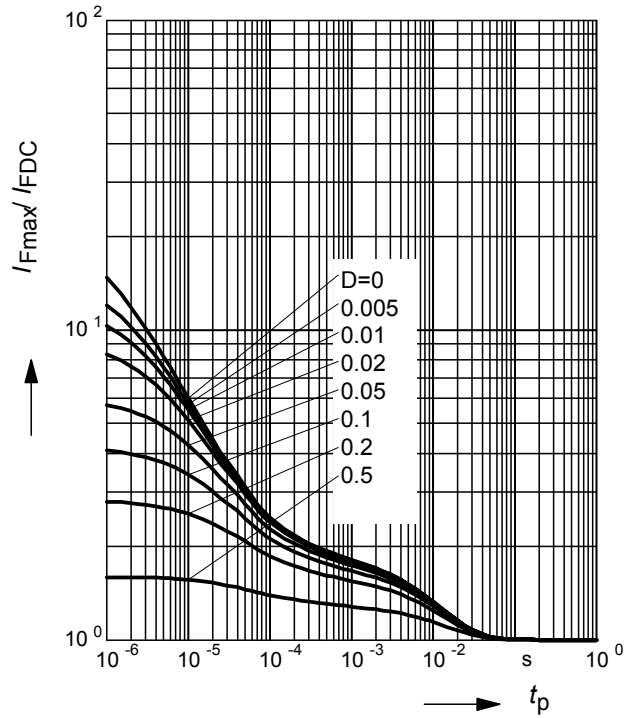

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAS16W

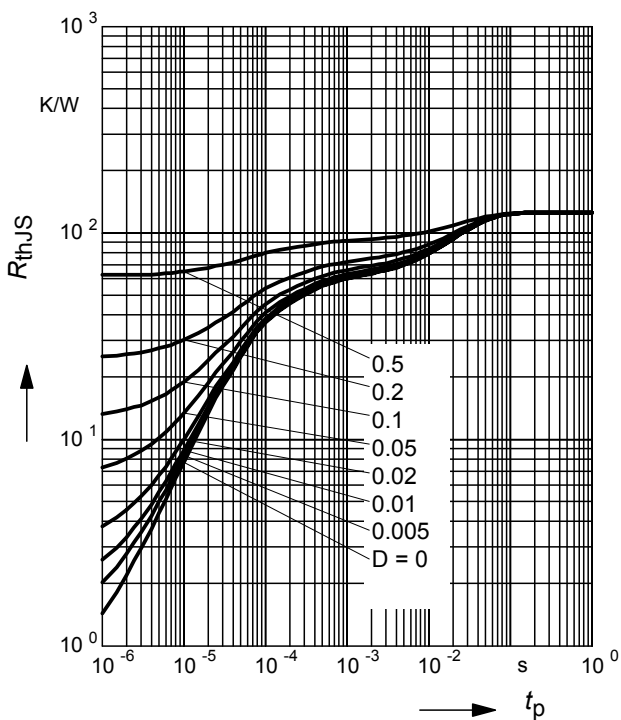


**Permissible Pulse Load**

$I_{Fmax} / I_{FDC} = f(t_p)$


BAS16W

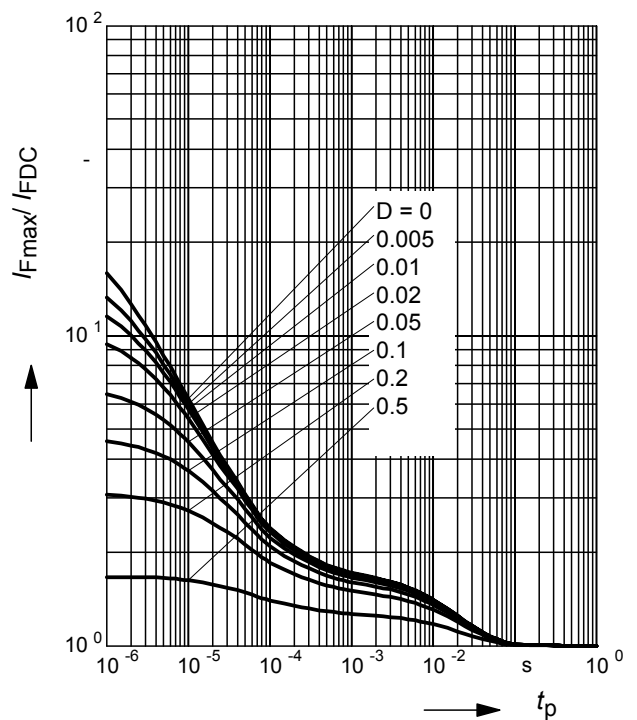

Package Outline

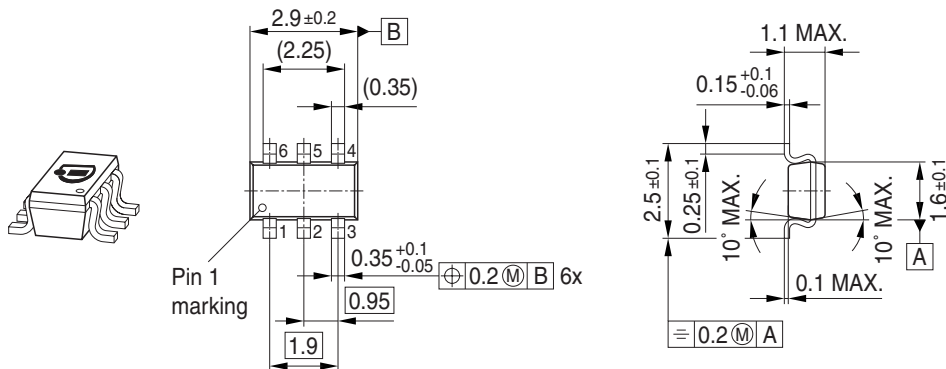


Foot Print



Marking Layout (Example)


Small variations in positioning of Date code, Type code and Manufacture are possible.

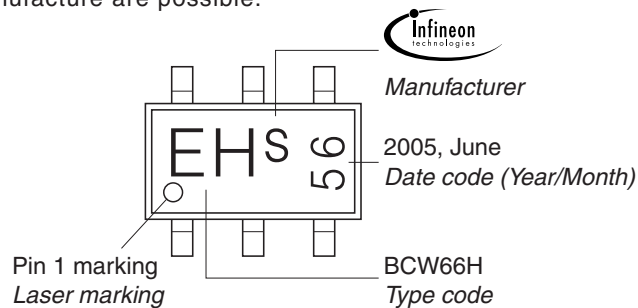


Standard Packing

Reel  $\varnothing$ 180 mm = 3.000 Pieces/Reel  
 Reel  $\varnothing$ 330 mm = 10.000 Pieces/Reel


For symmetric types no defined Pin 1 orientation in reel.

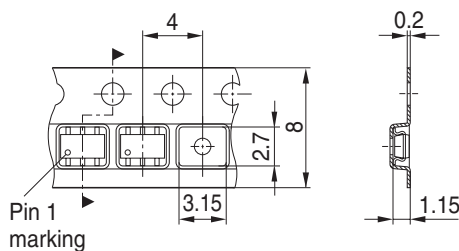


Package Outline

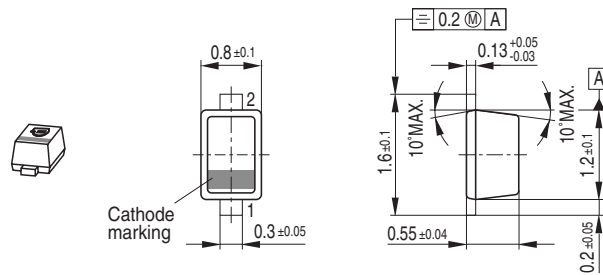

Foot Print




Marking Layout (Example)

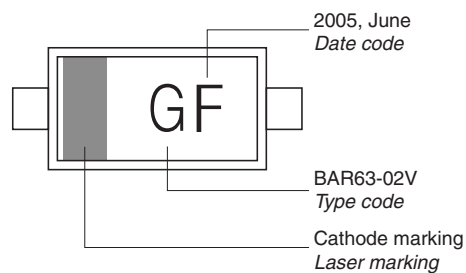


Standard Packing


Reel  $\varnothing$ 180 mm = 3.000 Pieces/Reel  
 Reel  $\varnothing$ 180 mm = 8.000 Pieces/Reel (2 mm Pitch)  
 Reel  $\varnothing$ 330 mm = 10.000 Pieces/Reel

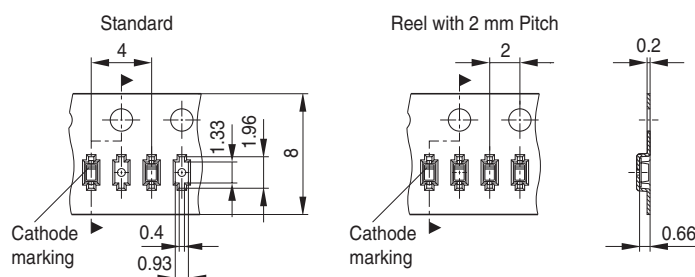


Package Outline

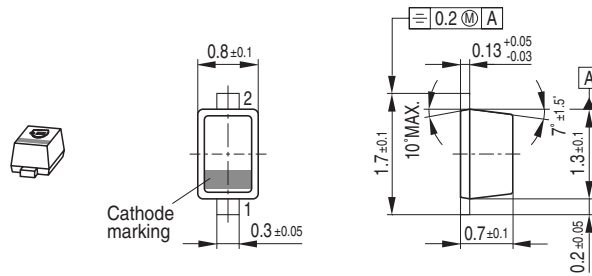

Foot Print




Marking Layout (Example)

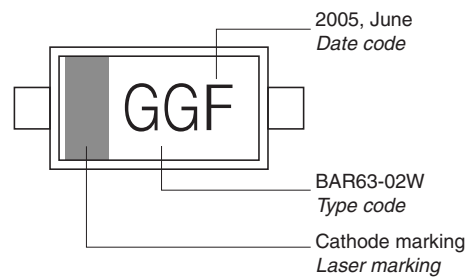

Standard Packing

Reel  $\varnothing$ 180 mm = 3.000 Pieces/Reel  
 Reel  $\varnothing$ 180 mm = 8.000 Pieces/Reel (2 mm Pitch)  
 Reel  $\varnothing$ 330 mm = 10.000 Pieces/Reel

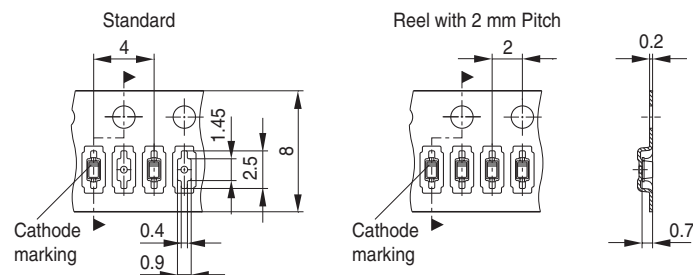


Date Code marking for discrete packages with one digit (SCD80, SC79, SC75<sup>1)</sup>) CES-Code


| Month | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 |
|-------|------|------|------|------|------|------|------|------|------|------|------|------|
| 01    | a    | p    | A    | P    | a    | p    | A    | P    | a    | p    | A    | P    |
| 02    | b    | q    | B    | Q    | b    | q    | B    | Q    | b    | q    | B    | Q    |
| 03    | c    | r    | C    | R    | c    | r    | C    | R    | c    | r    | C    | R    |
| 04    | d    | s    | D    | S    | d    | s    | D    | S    | d    | s    | D    | S    |
| 05    | e    | t    | E    | T    | e    | t    | E    | T    | e    | t    | E    | T    |
| 06    | f    | u    | F    | U    | f    | u    | F    | U    | f    | u    | F    | U    |
| 07    | g    | v    | G    | V    | g    | v    | G    | V    | g    | v    | G    | V    |
| 08    | h    | x    | H    | X    | h    | x    | H    | X    | h    | x    | H    | X    |
| 09    | j    | y    | J    | Y    | j    | y    | J    | Y    | j    | y    | J    | Y    |
| 10    | k    | z    | K    | Z    | k    | z    | K    | Z    | k    | z    | K    | Z    |
| 11    | l    | 2    | L    | 4    | l    | 2    | L    | 4    | l    | 2    | L    | 4    |
| 12    | n    | 3    | N    | 5    | n    | 3    | N    | 5    | n    | 3    | N    | 5    |

1) New Marking Layout for SC75, implemented at October 2005.


### Package Outline

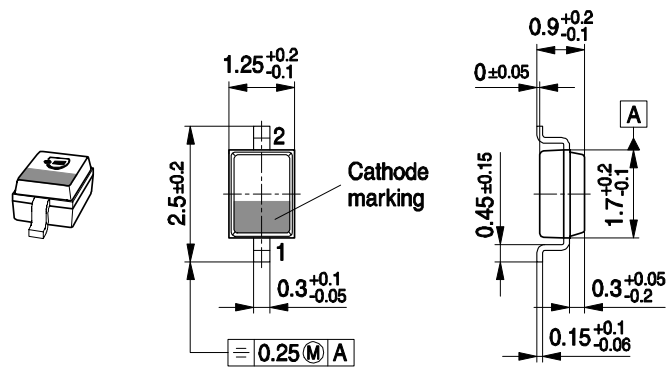

### Foot Print

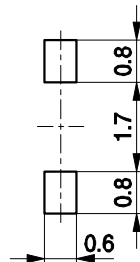


### Marking Layout (Example)

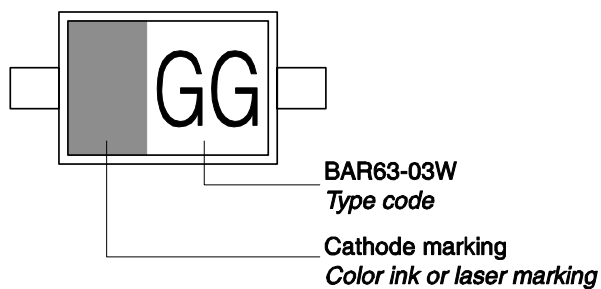


### Standard Packing

Reel  $\varnothing$ 180 mm = 3.000 Pieces/Reel  
 Reel  $\varnothing$ 330 mm = 10.000 Pieces/Reel

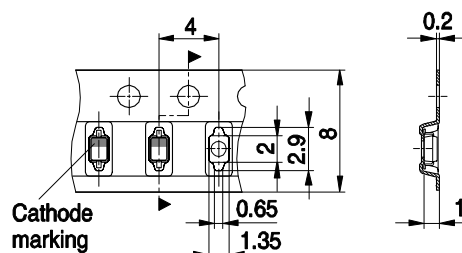


Package Outline

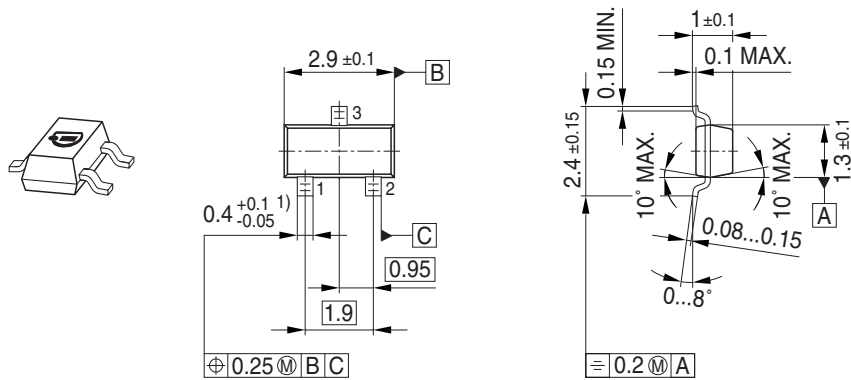


1) Lead width can be 0.6 max. in dambar area

Foot Print




Marking Layout (Example)

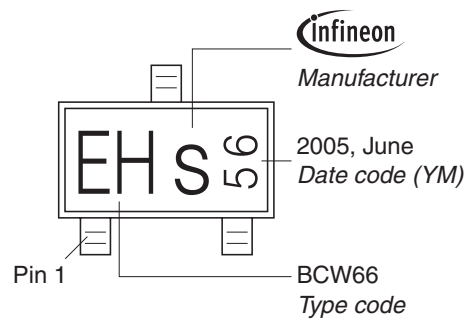


Standard Packing


Reel  $\varnothing$ 180 mm = 3.000 Pieces/Reel  
 Reel  $\varnothing$ 330 mm = 10.000 Pieces/Reel

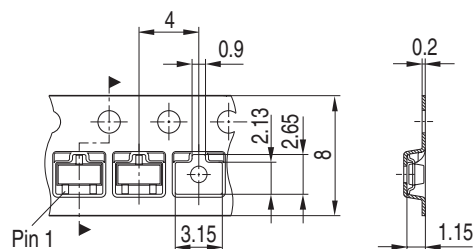


Package Outline

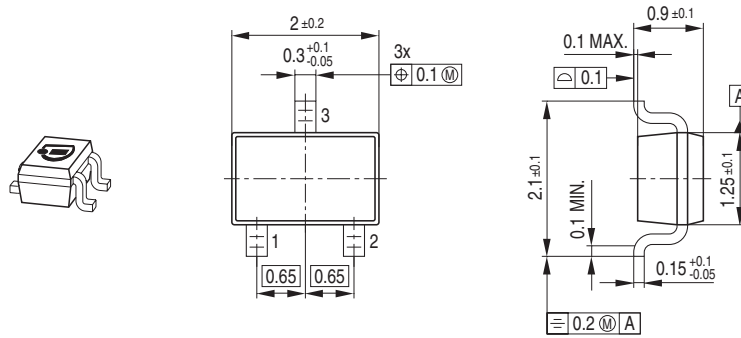

Foot Print

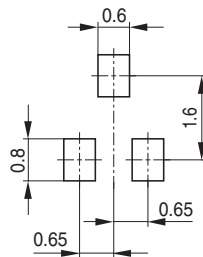


Marking Layout (Example)

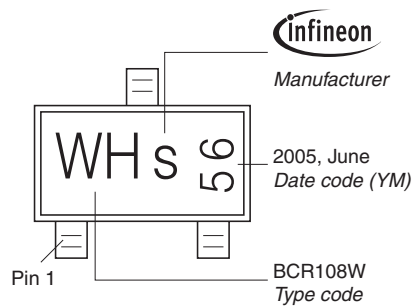


Standard Packing


Reel  $\varnothing$ 180 mm = 3.000 Pieces/Reel  
 Reel  $\varnothing$ 330 mm = 10.000 Pieces/Reel

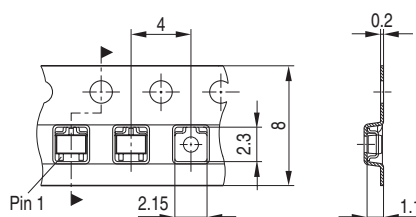

Package Outline

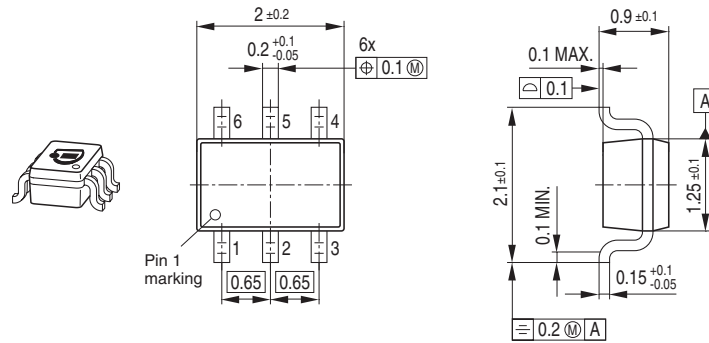


Foot Print

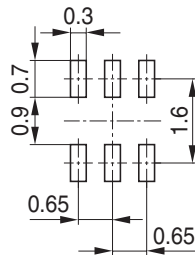

Marking Layout (Example)


Small variations in positioning of Date code, Type code and Manufacture are possible.

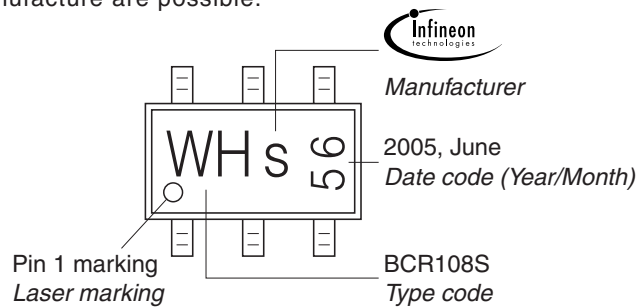


Standard Packing

Reel  $\varnothing$ 180 mm = 3.000 Pieces/Reel  
 Reel  $\varnothing$ 330 mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

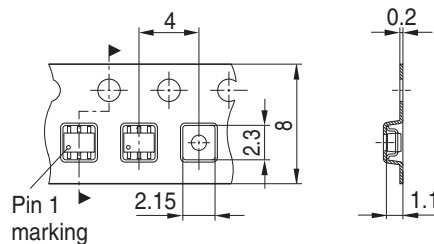


### Package Outline

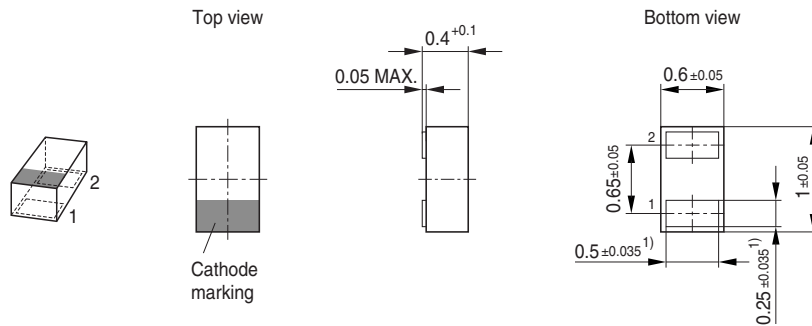

1) Dimension applies to plated terminal

### Foot Print


For board assembly information please refer to Infineon website "Packages"

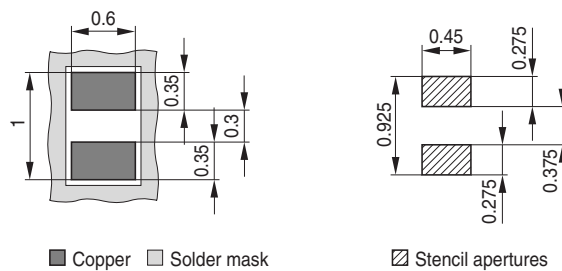

■ Copper □ Solder mask

▨ Stencil apertures

### Marking Layout (Example)

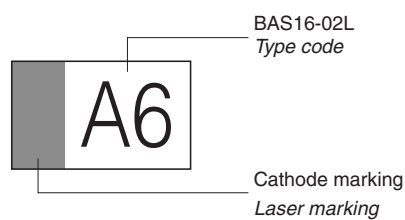


BAS16-02L  
Type code

Cathode marking  
Laser marking

### Standard Packing

Reel  $\varnothing$ 180 mm = 15.000 Pieces/Reel  
Reel  $\varnothing$ 330 mm = 50.000 Pieces/Reel (optional)

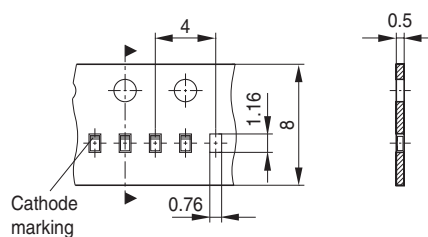



Edition 2006-02-01  
Published by  
Infineon Technologies AG  
81726 München, Germany  
© Infineon Technologies AG 2007.  
All Rights Reserved.

### **Attention please!**

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View EL5244CSZ on WIN SOURCE](#)

 [Intersil Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management