


Alchip™-MVA Series

- φ 4 through φ 18 case sizes are fully lined up
- Endurance : 2,000 hours at 85°C
- Suitable to fit for downsized equipment
- Solvent resistant type except 100 to 450V_{dc} (see PRECAUTIONS AND GUIDELINES)
- RoHS2 Compliant




◆SPECIFICATIONS

Items	Characteristics												
Category Temperature Range	-40 to +85°C												
Rated Voltage Range	4 to 450V _{dc}												
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)												
Leakage Current	Rated voltage (V _{dc})	4 to 100V						160 to 450V					
	D55 to JA0	I=0.01CV or 3μA, whichever is greater.(after 2 minutes)						—					
	KE0 to MNO	I=0.03CV or 4μA, whichever is greater.(after 1 minute)						I=0.04CV+100μA max.(after 1 minute)					
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C)												
Dissipation Factor (tan δ)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	400 & 450V	
	tan δ (Max.)	D55 to JA0	0.42	0.35	0.30	0.26	0.16	0.14	0.12	0.12	—	—	
		KE0 to MNO	—	0.38	0.34	0.30	0.26	0.22	0.18	0.14	0.10	0.20	0.25
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)													
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	4V	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	400 & 450V	
	D55 to JA0	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	2	3	—	—
		Z(-40°C)/Z(+20°C)	17	10	8	6	4	3	3	3	4	—	—
	KE0 to MNO	Z(-25°C)/Z(+20°C)	—	5	4	3	2	2	2	2	2	3	6
Z(-40°C)/Z(+20°C)		—	12	10	8	5	4	3	3	3	6	10	
(at 120Hz)													
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C.												
	Size code	D55 to JA0				D55 to JA0				KE0 to MNO			
	Rated voltage (V _{dc})	4V & 6.3V				10 to 100V				6.3 to 450V			
	Capacitance change	≤ ±30% of the initial value				≤ ±20% of the initial value				≤ ±20% of the initial value			
	D.F. (tan δ)	≤200% of the initial specified value				≤200% of the initial specified value				≤200% of the initial specified value			
	Leakage current	≤The initial specified value				≤The initial specified value				≤The initial specified value			
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.												
	Size code	D55 to JA0				D55 to JA0				KE0 to MNO			
	Rated voltage	4V & 6.3V				10 to 100V				6.3 to 450V			
	Capacitance change	≤ ±30% of the initial value				≤ ±20% of the initial value				≤ ±20% of the initial value			
	D.F. (tan δ)	≤200% of the initial specified value				≤200% of the initial specified value				≤200% of the initial specified value			
	Leakage current	≤The initial specified value				≤The initial specified value				≤The initial specified value			

◆DIMENSIONS [mm]

- Terminal Code : A
- Size code : D55 to MNO

- Terminal Code : G (Vibration resistant structure)
- Size code : LH0 to MNO

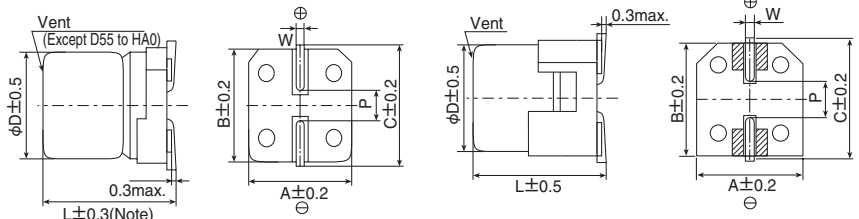


Note : L±0.5 for HA0 to MNO


▨ : Dummy terminals

Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LNO	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MHO	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MNO	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

◆MARKING



◆PART NUMBERING SYSTEM

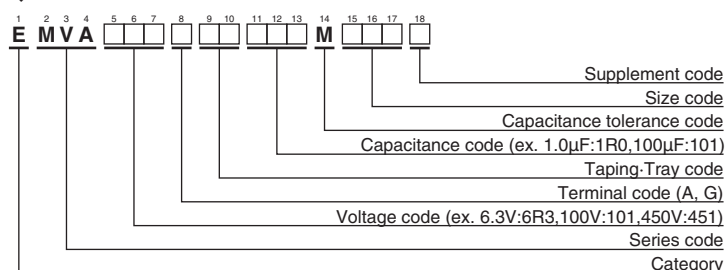

◆RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

Size code	Capacitance(μF)	Frequency(Hz)			
		120	1k	10k	100k
D55 to JA0	1.0	1.00	1.50	1.75	1.80
	2.2 to 10	1.00	1.30	1.40	1.50
	22 to 1,500	1.00	1.05	1.08	1.08
KE0 to MNO	4.7	1.00	1.75	2.30	2.50
	10 to 68	1.00	1.50	1.75	1.80
	100 to 1,000	1.00	1.30	1.40	1.50
	2,200 to 10,000	1.00	1.05	1.08	1.08

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.

Please refer to "Product code guide (surface mount type)"



SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

Standard, 85°C

Alchip™-MVA Series

◆STANDARD RATINGS

□ is not solvent resistant.

WV (V _{dc})	Cap (μF)	Size code	tan δ	Rated ripple current (mArms/85°C, 120Hz)	Part No.	WV (V _{dc})	Cap (μF)	Size code	tan δ	Rated ripple current (mArms/85°C, 120Hz)	Part No.
4	33	D55	0.42	25	EMVA4R0ARA330MD55G	35	33	F55	0.14	54	EMVA350ARA330MF55G
	47	D55	0.42	30	EMVA4R0ARA470MD55G		100	F80	0.14	120	EMVA350ARA101MF80G
	100	E55	0.42	50	EMVA4R0ARA101ME55G		150	HA0	0.14	210	EMVA350ARA151MHA0G
	220	F55	0.42	80	EMVA4R0ARA221MF55G		220	HA0	0.14	260	EMVA350ARA221MHA0G
	330	F80	0.42	135	EMVA4R0ARA331MF80G		330	JA0	0.14	360	EMVA350ARA331MJA0G
	470	F80	0.42	150	EMVA4R0ARA471MF80G		470	KE0	0.22	600	EMVA350ARA471MKE0S
1,000	HA0	0.42	320	EMVA4R0ARA102MHA0G	1,000	LH0	0.22	1,100	EMVA350□RA102MLH0S		
6.3	33	D55	0.35	30	EMVA6R3ARA330MD55G	2,200	MN0	0.24	1,700	EMVA350□RA222MMN0S	
	47	D55	0.35	33	EMVA6R3ARA470MD55G	3.3	D55	0.12	15	EMVA500ARA3R3MD55G	
	100	E55	0.35	55	EMVA6R3ARA101ME55G	4.7	D55	0.12	18	EMVA500ARA4R7MD55G	
	220	F55	0.35	88	EMVA6R3ARA221MF55G	10	E55	0.12	30	EMVA500ARA100ME55G	
	330	F80	0.35	135	EMVA6R3ARA331MF80G	22	F55	0.12	47	EMVA500ARA220MF55G	
	470	HA0	0.35	280	EMVA6R3ARA471MHA0G	33	F80	0.12	70	EMVA500ARA330MF80G	
	680	HA0	0.35	290	EMVA6R3ARA681MHA0G	47	F80	0.12	85	EMVA500ARA470MF80G	
	820	HA0	0.35	320	EMVA6R3ARA821MHA0G	100	HA0	0.12	190	EMVA500ARA101MHA0G	
	1,000	JA0	0.35	430	EMVA6R3ARA102MJA0G	220	JA0	0.12	320	EMVA500ARA221MJA0G	
	1,500	JA0	0.35	480	EMVA6R3ARA152MJA0G	330	KE0	0.18	600	EMVA500ARA331MKE0S	
	2,200	KE0	0.40	890	EMVA6R3ARA222MKE0S	470	KG5	0.18	740	EMVA500ARA471MKG5S	
	3,300	KG5	0.42	1,000	EMVA6R3ARA332MKG5S	470	LH0	0.18	850	EMVA500□RA471MLH0S	
	3,300	LH0	0.42	1,200	EMVA6R3□RA332MLH0S	1,000	LN0	0.18	1,300	EMVA500□RA102MLN0S	
	4,700	LH0	0.44	1,400	EMVA6R3□RA472MLH0S	1,000	MN0	0.18	1,400	EMVA500□RA102MMN0S	
6,800	LN0	0.48	1,750	EMVA6R3□RA682MLN0S	1.0	D55	0.12	8.0	EMVA630ARA1R0MD55G		
6,800	MH0	0.48	1,700	EMVA6R3□RA682MMH0S	2.2	D55	0.12	12	EMVA630ARA2R2MD55G		
10,000	MN0	0.56	2,000	EMVA6R3□RA103MMN0S	3.3	E55	0.12	17	EMVA630ARA3R3ME55G		
10	22	D55	0.30	26	EMVA100ARA220MD55G	4.7	E55	0.12	20	EMVA630ARA4R7ME55G	
	33	D55	0.30	30	EMVA100ARA330MD55G	10	F55	0.12	32	EMVA630ARA100MF55G	
	47	E55	0.30	44	EMVA100ARA470ME55G	22	F80	0.12	60	EMVA630ARA220MF80G	
	100	F55	0.30	70	EMVA100ARA101MF55G	33	HA0	0.12	110	EMVA630ARA330MHA0G	
	150	F55	0.30	79	EMVA100ARA151MF55G	47	HA0	0.12	130	EMVA630ARA470MHA0G	
	220	F80	0.30	130	EMVA100ARA221MF80G	56	JA0	0.12	160	EMVA630ARA560MJA0G	
	330	HA0	0.30	270	EMVA100ARA331MHA0G	68	JA0	0.12	170	EMVA630ARA680MJA0G	
	470	HA0	0.30	280	EMVA100ARA471MHA0G	100	KE0	0.14	380	EMVA630ARA101MKE0S	
	1,000	JA0	0.30	430	EMVA100ARA102MJA0G	220	KE0	0.14	580	EMVA630ARA221MKE0S	
	2,200	KE0	0.36	960	EMVA100ARA222MKE0S	330	KG5	0.14	720	EMVA630ARA331MKG5S	
	3,300	LH0	0.38	1,300	EMVA100□RA332MLH0S	330	LH0	0.14	820	EMVA630□RA331MLH0S	
	4,700	LN0	0.40	1,550	EMVA100□RA472MLN0S	470	LH0	0.14	950	EMVA630□RA471MLH0S	
	4,700	MH0	0.40	1,600	EMVA100□RA472MMH0S	470	MH0	0.14	1,000	EMVA630□RA471MMH0S	
	6,800	MN0	0.44	1,850	EMVA100□RA682MMN0S	22	HA0	0.12	90	EMVA101ARA220MHA0G	
16	22	D55	0.26	26	EMVA160ARA220MD55G	33	JA0	0.12	120	EMVA101ARA330MJA0G	
	33	E55	0.26	37	EMVA160ARA330ME55G	68	KE0	0.10	380	EMVA101ARA680MKE0S	
	47	E55	0.26	44	EMVA160ARA470ME55G	100	KE0	0.10	440	EMVA101ARA101MKE0S	
	100	F55	0.26	70	EMVA160ARA101MF55G	220	LN0	0.10	850	EMVA101□RA221MLN0S	
	150	F80	0.26	110	EMVA160ARA151MF80G	220	MH0	0.10	800	EMVA101□RA221MMH0S	
	220	F80	0.26	130	EMVA160ARA221MF80G	330	MN0	0.10	1,000	EMVA101□RA331MMN0S	
	330	HA0	0.26	270	EMVA160ARA331MHA0G	47	KG5	0.20	370	EMVA161ARA470MKG5S	
	470	HA0	0.26	280	EMVA160ARA471MHA0G	68	LH0	0.20	500	EMVA161□RA680MLH0S	
	680	JA0	0.26	380	EMVA160ARA681MJA0G	100	LN0	0.20	590	EMVA161□RA101MLN0S	
	1,000	KE0	0.30	710	EMVA160ARA102MKE0S	100	MH0	0.20	590	EMVA161□RA101MMH0S	
	2,200	LH0	0.32	1,150	EMVA160□RA222MLH0S	22	KE0	0.20	240	EMVA201ARA220MKE0S	
	3,300	LN0	0.34	1,450	EMVA160□RA332MLN0S	33	KG5	0.20	310	EMVA201ARA330MKG5S	
	3,300	MH0	0.34	1,450	EMVA160□RA332MMH0S	47	LH0	0.20	420	EMVA201□RA470MLH0S	
	4,700	MN0	0.36	1,750	EMVA160□RA472MMN0S	68	LN0	0.20	510	EMVA201□RA680MLN0S	
25	10	D55	0.16	24	EMVA250ARA100MD55G	68	MH0	0.20	510	EMVA201□RA680MMH0S	
	22	E55	0.16	41	EMVA250ARA220ME55G	100	MN0	0.20	590	EMVA201□RA101MMN0S	
	33	E55	0.16	47	EMVA250ARA330ME55G	10	KE0	0.20	150	EMVA251ARA100MKE0S	
	47	F55	0.16	60	EMVA250ARA470MF55G	22	KG5	0.20	240	EMVA251ARA220MKG5S	
	56	F55	0.16	66	EMVA250ARA560MF55G	33	LH0	0.20	340	EMVA251□RA330MLH0S	
	100	F80	0.16	120	EMVA250ARA101MF80G	47	LN0	0.20	420	EMVA251□RA470MLN0S	
	150	HA0	0.16	210	EMVA250ARA151MHA0G	47	MH0	0.20	420	EMVA251□RA470MMH0S	
	220	HA0	0.16	260	EMVA250ARA221MHA0G	68	MN0	0.20	490	EMVA251□RA680MMN0S	
	330	HA0	0.16	300	EMVA250ARA331MHA0G	4.7	KE0	0.25	120	EMVA401ARA4R7MKE0S	
	470	JA0	0.16	400	EMVA250ARA471MJA0G	10	LH0	0.25	140	EMVA401□RA100MLH0S	
	1,000	KE0	0.26	820	EMVA250ARA102MKE0S	22	LN0	0.25	280	EMVA401□RA220MLN0S	
	2,200	LN0	0.28	1,450	EMVA250□RA222MLN0S	22	MH0	0.25	280	EMVA401□RA220MMH0S	
	2,200	MH0	0.28	1,400	EMVA250□RA222MMH0S	33	MN0	0.25	350	EMVA401□RA330MMN0S	
	3,300	MN0	0.30	1,800	EMVA250□RA332MMN0S	4.7	KE0	0.25	120	EMVA451ARA4R7MKE0S	
35	4.7	D55	0.14	18	EMVA350ARA4R7MD55G	10	LH0	0.25	140	EMVA451□RA100MLH0S	
	10	D55	0.14	24	EMVA350ARA100MD55G	22	LN0	0.25	280	EMVA451□RA220MLN0S	
	22	E55	0.14	41	EMVA350ARA220ME55G	33	MN0	0.25	350	EMVA451□RA330MMN0S	

□ : Enter the appropriate terminal code.


Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View EMVA6R3ADA101ME55G on WIN SOURCE](#)

 [United Chemi-Con Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management