






**THE DATASHEET OF
1N4148W T4**



SPECIFICATION SHEET

SPECIFICATION SHEET NO.	N0729-SOD1234148WST4
DATE	July 29, 2021
REVISION	A0
DESCRIPTION	<p>SMD Fast Switching diodes, SOD-123 series, 2 pads, Type 1N4148W T4 Reverse Voltage 100V Max. Forward Current 0.30A Max. Operating Temp. Range -65°C ~+150°C, Package in Tape/Reel, 3000pcs/Reel RoHS/RoHS III compliant</p>
CUSTOMER	
CUSTOMER PART NUMBER	
CROSS REF. PART NUMBER	
ORIGINAL PART NUMBER	MDD 1N4148W T4
PART CODE	SOD1234148WST4

VENDOR APPROVE			
Issued/Checked/Approved			
DATE: July 29, 2021			

CUSTOMER APPROVE	
DATE:	

SMD FAST SWITCHING DIODES SOD123 SERIES

MAIN FEATURE

- Fast switching speed
- Surface mount package ideally suited for automatic insertion
- High conductance



APPLICATION

- For general purpose switching applications

RFQ

[Request For Quotation](#)

PART CODE GUIDE

SOD123	4148W	S	T4
1	2	3	4

- 1) **SOD123**: SMD Small Signal Fast Switching diodes, 2 pads, SOD-123 series code
- 2) **4148W**: Type Code for original part number 1N4148W T4
- 3) **S**: Package code, Tape/reel, 3000pcs/reel.
- 4) **T4**: Marking code for "T4" on the case surface, Different Marking for different specification.

SMD FAST SWITCHING DIODES SOD123 SERIES




DIMENSION (Unit: Inch/mm)

Image for reference




Marking: T4

SOD-123

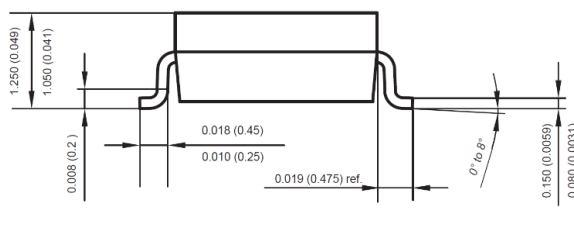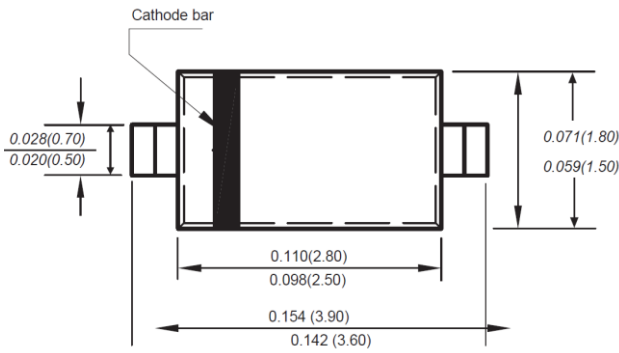

Recommend Pad Layout

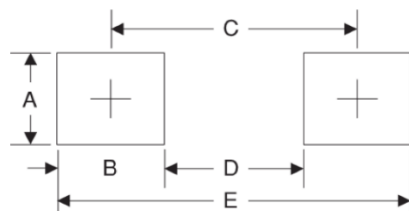

Symbol	Unit (inch)	Unit (mm)
A	0.047	1.20
B	0.047	1.20
C	0.126	3.20
D	0.079	2.00
E	0.173	4.40

SMD FAST SWITCHING DIODES SOD123 SERIES
MECHANICAL DATA

Case	Terminals	Polarity	Mounting Position	Weight per piece
JEDEC SOD-123 molded plastic body	Solder plated, Solderable per MIL-STD-750, Method 2026	Polarity symbol marking on case	Any	0.0007 Ounce, 0.0021 grams

ABSOLUTE MAX. RATING AT 25 °C

Parameter	SYMBOLS	VALUE			UNITS
		Min.	Typical	Max.	
Repetitive peak reverse voltage	V _{RRM}			100	Volts
RMS voltage	V _{RMS}			75	Volts
Forward continuous current	I _{FM}			150	mA
Non-repetitive Peak Forward Surge Current @=1.0 s @1.0µs	I _{FSM}			1.0 2.0	A
Power Dissipation	P _{tot}			400	mW
Thermal resistance junction to ambient	R _{QA}			250	°C/W
Operating Junction temperature range	T _J	-65		+150	°C
Storage temperature range	T _{STG}	-65		+150	°C

CHARACTERISTICS at Ta= 25 °C


Parameter	SYMBOLS	VALUE			UNIT	Condition
		Min.	Typ.	Max.		
Forward Voltage	V _{F1}			0.720	V	I _F = 10 µA
	V _{F2}			0.855	V	I _F = 5 mA
	V _{F3}			1.00	V	I _F = 100 mA
	V _{F4}			1.25	V	I _F 150 mA
Reverse Current	I _{R1}			25	nA	at V _R = 20 V, T _j = 25°C
	I _{R2}			1.0	µA	at V _R = 75 V, T _j = 25°C
Junction Capacitance	C _{tot}		2		pF	
Reverse Breakdown Voltage	V _{(BR)R}			75	V	at I _R =1µ
Reverse recovery time	t _{rr}			4	ns	

SMD FAST SWITCHING DIODES SOD123 SERIES
RELIABILITY

Number	Experiment Items	Experiment Method And Conditions	Reference Documents
1	Solder Resistance Test	Test 260°C± 5°C for 10 ± 2 sec. Immerse body into solder 1/16" ± 1/32"	MIL-STD-750D METHOD-2031.2
2	Solderability Test	230°C ±5°C for 5 sec.	MIL-STD-750D METHOD-2026.1 0
3	Pull Test	1 kg in axial lead direction for 10 sec.	MIL-STD-750D METHOD-2036.4
4	Bend Test	0.5Kg Weight Applied To Each Lead, Bending Arcs 90 °C ± 5 °C For 3 Times	MIL-STD-750D METHOD-2036.4
5	High Temperature Reverse Bias Test	TA=100°C for 1000 Hours at VR=80% Rated VR	MIL-STD-750D METHOD-1038.4
6	Forward Operation Life Test	TA=25°C Rated Average Rectified Current	MIL-STD-750D METHOD-1027.3
7	Intermittent Operation Life Test	On state: 5 min with rated IRMS Power Off state: 5 min with Cool Forced Air. On and off for 1000 cycles.	MIL-STD-750D METHOD-1036.3
8	Pressure Cooker Test	15 PSIG, TA=121°C, 4 hours	MIL-S-19500 APPENOIXC
9	Temperature Cycling Test	-55°C~+125°C; 30 Minutes For Dwelled Time 5 minutes for transferred time. Total: 10 cycles.	MIL-STD-750D METHOD-1051.7
10	Thermal Shock Test	0°C for 5 minutes., 100°C for 5minutes, Total: 10 cycles	MIL-STD-750D METHOD-1056.7
11	Forward Surge Test	8.3ms Single Sale Sine-wave One Surge.	MIL-STD-750D METHOD-4066.4
12	Humidity Test	TA=65°C, RH=98% for 1000 hours.	MIL-STD-750D METHOD-1021.3
13	High Temperature Storage life Test	150°C for 1000 Hours	MIL-STD-750D METHOD-1031.5

SMD FAST SWITCHING DIODES SOD123 SERIES

SUGGESTED REFLOW PROFILE (For Reference Only)

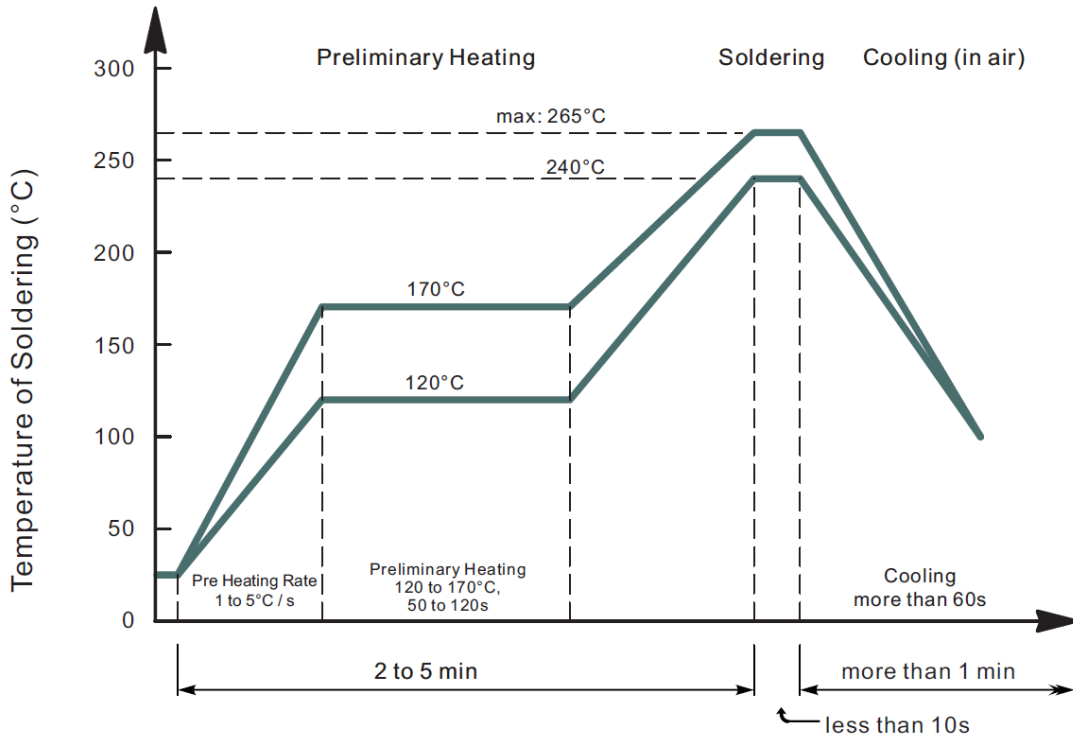

- Recommended peak temperature is over 245°C, If peak temperature is below 245 °C, you may adjust the following parameters; time length of peak temperature (longer), time length of soldering (longer), thickness of solder paste (thicker)
- Welding shall not exceed 2 times
- Remark: lead free solder paste (96.5 sn/3.0 Ag/0.5Cu)

SMD FAST SWITCHING DIODES SOD123 SERIES

RATINGS AND CHARACTERISTIC CURVES (For Reference Only)

FIG. 1- POWER DERATING CURVE

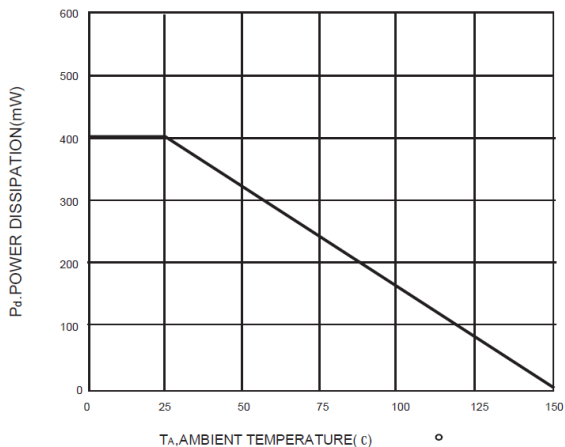


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

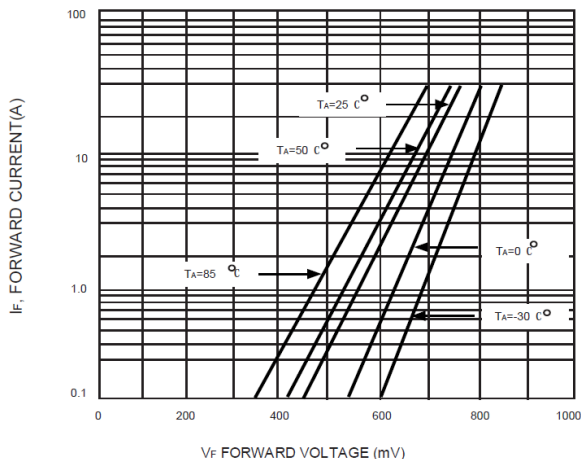


FIG. 3- TYPICAL REVERSE CHARACTERISTICS

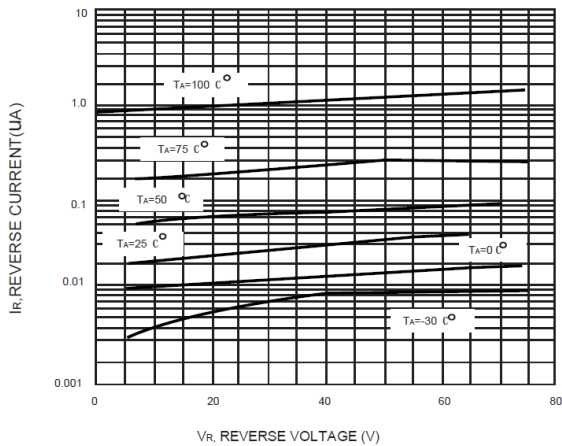


FIG. 4- REVERSE RECOVERY TIME VS FORWARD CURRENT


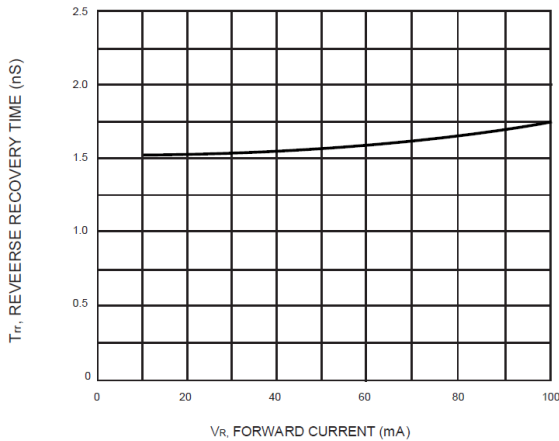



FIG. 5- TOTAL CAPACITANCE VS REVERSE VOLTAGE

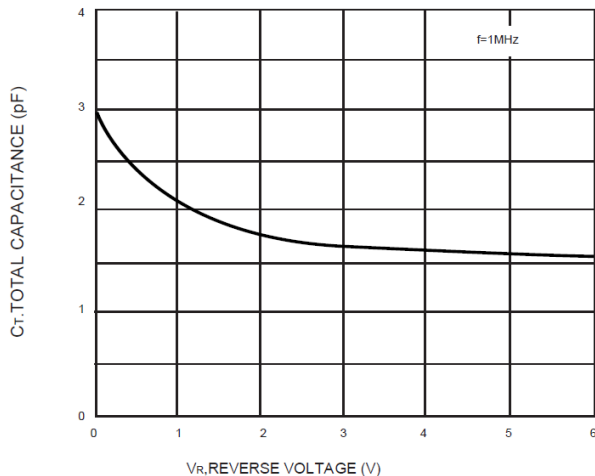

SMD FAST SWITCHING DIODES SOD123 SERIES

TAPE/REEL (Unit: mm)

All Devices are packed in accordance with EIA standard RS-481-A and specifications.

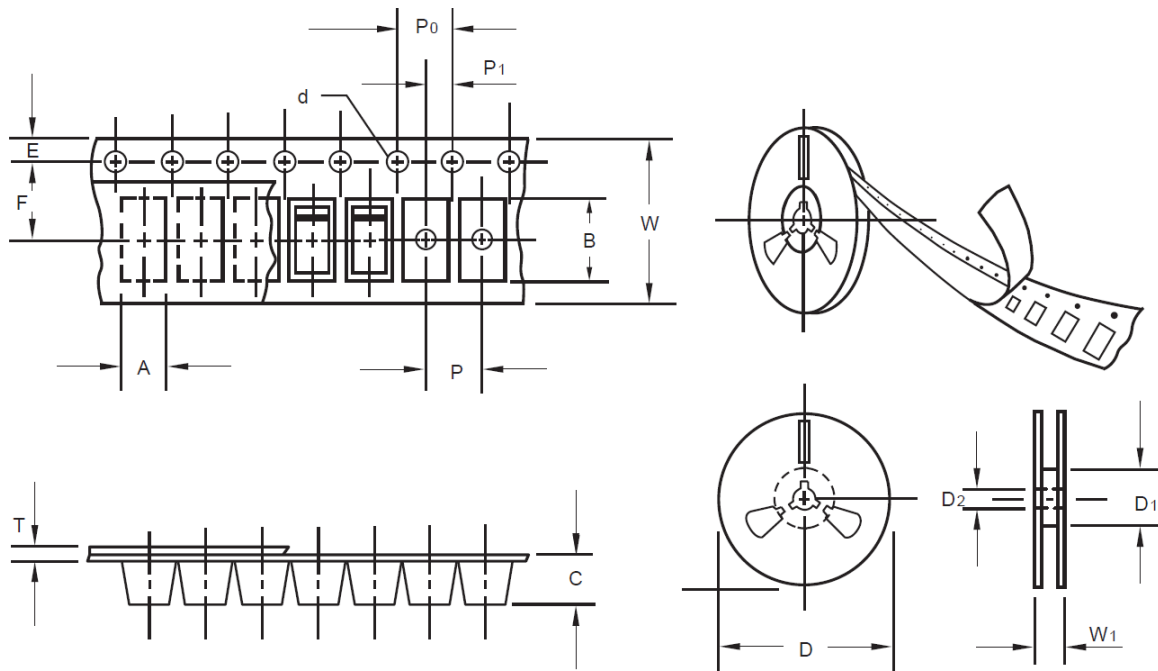


Item	Symbol	Tolerance	SO-123
Carrier width	A	0.1	2.10
Carrier Length	B	0.1	4.00
Carrier Depth	C	0.1	1.60
Sprocket hole	d	0.05	1.55
13" Reel outside diameter	-	-	-
13" Reel inner diameter	-	-	-
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	Min.	50.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.25
Tape width	W	0.3	8.15
Reel width	W1	1.0	10.50

SMD FAST SWITCHING DIODES SOD123 SERIES

PACKAGE

Case Code	Reel Size	MPQ (pcs)	Component Spacing (mm)	Qty. Per Box (pcs)	Inner Box L*W*H (mm)	Reel Size (mm)	Carton size L*W*H (mm)	Qty. Per Carton (pcs)	G. W (kg)
SOD-123	7"	3,000	-	24,000	210*208*203	178	400*400*250	180,000	9.0

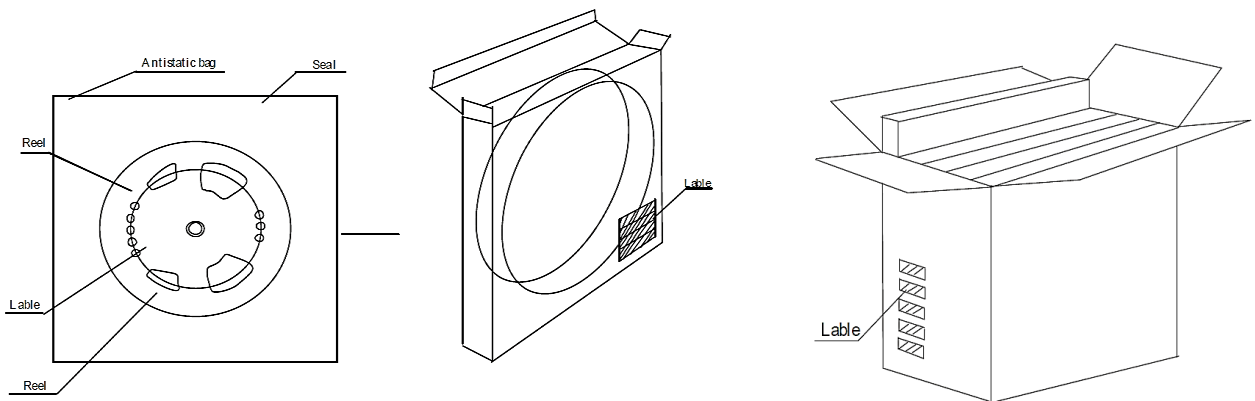

DISCLAIMER

NextGen Component, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information







Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1N4148W T4 on WIN SOURCE](#)

 [MDD Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management