




**THE DATASHEET OF
Y174630R0000Q0R**



Models #303139 and #303140 – Molded Surface Mount Space and Military Grade Resistors SMRxZDZ with Screen/Test Flow in Compliance with EEE-INST-002, (Tables 2A and 3A, Film/Foil, Level 1) and MIL-PRF-55182

FEATURES

- Temperature coefficient of resistance (TCR): ± 0.2 ppm/°C typical (-55°C to $+125^{\circ}\text{C}$, $+25^{\circ}\text{C}$ ref.)
- Tolerance: to $\pm 0.02\%$
- Power coefficient of resistance (PCR)
- “ ΔR due to self heating”: 5 ppm at rated power
- Flexible terminations ensure minimal stress transference from the PCB due to a difference in thermal coefficient of expansions (TCE)
- Electrostatic discharge (ESD): at least to 25 000 V
- Load life stability: $\pm 0.005\%$ (70°C , 2000 h at rated power)
- Resistance range: 5 Ω to 40 k Ω
- Vishay Foil resistors are not restricted to standard values; specific “as requested” values can be supplied at no extra cost or delivery (e.g., 1K2345 vs. 1K)
- Maximum power: to 600 mW at 70°C
- Non-inductive, non-capacitive design
- Current noise: -40 dB
- Voltage coefficient: < 0.1 ppm/V
- Non-inductive: < 0.08 μH
- Non hot spot design
- Terminal finish; tin/lead alloy
- Matched sets with TCR tracking are available upon request
- For oriented performances, please contact us
- For prototype units, append a “U” to the model number (example: 303139U). These units pass all tests per table 3 (page 4) with no destructive qualification testing required (table 4, page 4). For more information, please contact: foil@vpgsensors.com

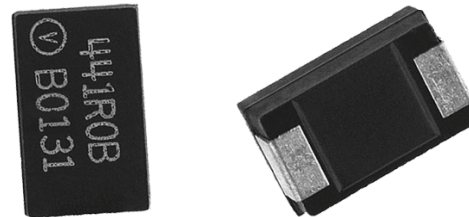

INTRODUCTION

The 303139, 303140 are ultra high precision molded surface mountable resistors offering all the elements of precision; including low TCR, tight tolerance, long term stability, low noise, low thermal EMF, and non-measurable voltage coefficient. One of the important parameters influencing stability is the temperature coefficient of resistance (TCR). Although the TCR of foil resistors is considered extremely low, this characteristic has been further refined over the years. These resistors utilize ultra high precision Bulk Metal[®]Z-Foil.

The Z-Foil technology provides a significant reduction of the resistive element’s sensitivity to ambient temperature variations (TCR) and to self heating when power is applied (power coefficient).

Voltage division with tight tracking < 2 ppm/°C can be achieved with 2 **randomly** selected units even with a large ratio between the two values.

Our application engineering department is available to advise and make recommendations.

Table 1 – Tolerance and TCR Vs. Resistance Value (-55°C to $+125^{\circ}\text{C}$, $+25^{\circ}\text{C}$ ref.)

VALUE	ABSOLUTE TOLERANCE	TYPICAL TCR AND MAX. SPREAD (ppm/°C)
250 Ω to 40 k Ω	$\pm 0.02\%$	$\pm 0.2 \pm 1.8$
50 Ω to $< 250 \Omega$	$\pm 0.05\%$	$\pm 0.2 \pm 1.8$
20 Ω to $< 50 \Omega$	$\pm 0.1\%$	$\pm 0.2 \pm 2.8$
10 Ω to $< 20 \Omega$	$\pm 0.2\%$	$\pm 0.2 \pm 4.8$
5 Ω to $< 10 \Omega$	$\pm 0.5\%$	$\pm 0.2 \pm 6.8$

Figure 1 – Power Derating Curve


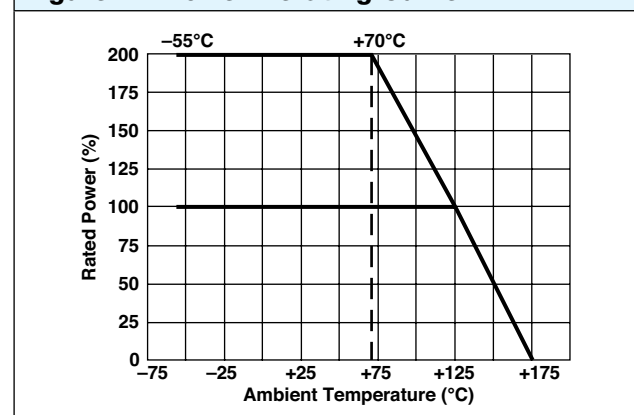


Table 2 – Performance Specifications						
TEST	CONDITIONS				MAXIMUM LIMIT (1)	
	303139		303140		303139	303140
Resistance Range	5 Ω to 14 kΩ		5 Ω to 40 kΩ			
Power Rating	5 Ω to < 10 kΩ 0.250 W at 70°C 0.125 W at 125°C	10 kΩ to 14 kΩ 0.160 W at 70°C 0.08 W at 125°C	5 Ω to < 30 kΩ 0.6 W at 70°C 0.3 W at 125°C	30 kΩ to 40 kΩ 0.4 W at 70°C 0.2 W at 125°C	See figure 1	
Maximum Working Voltage					47 V	127 V
Maximum Operating Temperature	+175°C (see figure 1)					
Working Temperature Range	–55°C to +125°C (MIL range)					
Thermal Shock	–65°C to +150°C; 25 cycles				0.02% for values higher than 100 Ω 0.03% for values between 5 Ω to 100 Ω	
Short Time Overload	6.25 x rated power (at +125°C); 5 s, not to exceed 70.5 V for 303139, 190 V for 303140				±0.01% (100 ppm)	
Low Temperature Operation	–65°C, 24 h (no load); 45 min at rated power				±0.01% (100 ppm)	
Dielectric Withstanding Voltage	Atmospheric pressure; AC 200 V; 1 min				±0.01% (100 ppm)	
Insulation Resistance (MΩ)	DC 100 V; 1 min				over 10 000 MΩ	
Resistance to Soldering Heat (%)	260°C; 10 s				±0.03%	
Moisture Resistance	+65°C to –10°C; 90% to 98% RH; rated power; 240 h				±0.03% (300 ppm)	
Shock	100 G; sawtooth; axes Y, Z; 10 shocks per each axis				±0.01% (100 ppm)	
Vibration, High Frequency	10 Hz ~ 2000 Hz ~ 10 Hz; 20 G; axes Y, Z; 4 h in each axis				±0.01% (100 ppm)	
Load Life Stability (2000 h)	125°C, rated power				±0.05% (500 ppm)	
High Temperature Exposure	175°C; no load 2000 h				±0.1% (1000 ppm)	
Weight					0.1143 g	0.244 g
Packaging	Bulk (loose) or tape and reel, per EIA-481-1					

Note


(1) As shown +0.01 Ω to allow for measurement error at low values

Figure 2 – Dimensions in inches (millimeters)

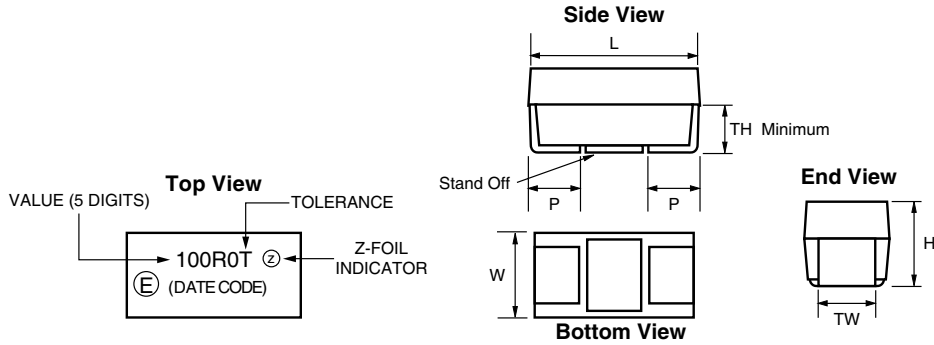

MODEL	L	W	H	P	TW	TH (minimum)
303139	0.236±0.012 (5.99±0.30)	0.126±0.012 (3.20±0.30)	0.098±0.012 (2.49±0.30)	0.051±0.012 (1.30±0.30)	0.087±0.004 (2.21±0.10)	0.039(0.99)
303140	0.287±0.012 (7.29±0.30)	0.170±0.012 (4.32±0.30)	0.110±0.012 (2.79±0.30)	0.051±0.012 (1.30±0.30)	0.095±0.004 (2.41±0.10)	0.039(0.99)


Figure 3 – Recommended Mounting Pad Geometries in inches (millimeters)

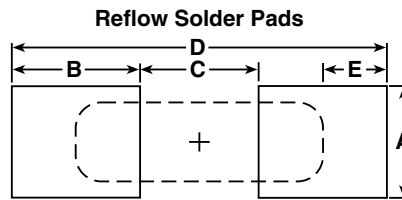

MODEL	METHOD	A MIN.	B REF	C REF	D ±0.04 (±1.02)	E REF
303139	Reflow	0.110 (2.79)	0.106 (2.69)	0.124 (3.15)	0.337 (8.55)	0.050 (1.27)
303140	Reflow	0.118 (3.00)	0.106 (2.69)	0.175 (4.45)	0.388 (9.86)	0.050 (1.27)


Per IPC-SM-782 Rev A

Figure 4 – Trimming to Values

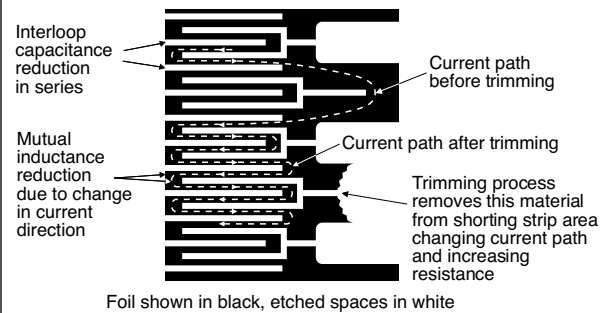

Note
To acquire a precision resistance value, the Bulk Metal® Foil chip is trimmed by selectively removing built-in “shorting bars.” To increase the resistance in known increments, marked areas are cut, producing progressively smaller increases in resistance. This method reduces the effect of “hot spots” and improves the long-term stability of Bulk Metal® Foil resistors.

Figure 5 – Typical Resistance/Temperature Curve (Z-Foil)

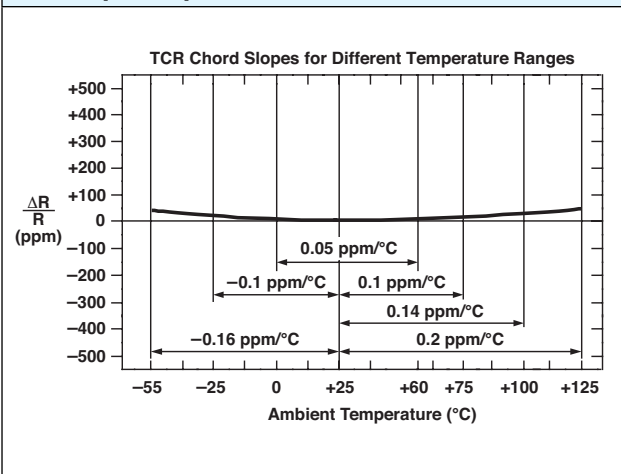

NOTES

- For prototype units, append a “U” to the model number (example: 303139U). These units have all of the table 2A 100% tests performed, with no destructive qualification testing required.
- Measurement error allowed for ΔR limits: 0.01 Ω.

Table 3 – EEE-INST-002 (Table 2A Film/Foil, Level 1) 100% Tests/Inspections	
Pre-cap Visual Inspection	Performed in production flow on welded chip on strip
RC Record	In tolerance
Thermal Shock	25 × (−65°C to +150°C)
Short Time Overload	6.25 × rated power (at +125°C), 5 s, not to exceed 70.5 V for 303139, 190 V for 303140
RC Record	In tolerance, ΔR = 0.02% for values higher than 100 Ω, ΔR = 0.03% for values between 5 Ω to 100 Ω
Power Conditioning	Rated power, 100 h, +125°C
RC Record	In tolerance ΔR ≤200 ppm for R >100 Ω, ΔR ≤500 ppm for R ≤100 Ω
Final Inspection	PDA 3% on ΔR >0.05% only
Visual Inspection	Materials, design, marking, etc.
Mechanical Inspection	Physical dimensions sample size: 3 units. For a min. of one failure –100% inspection

Table 4 – EEE-INST-002 (Table 3A Film/Foil, Level 1) Destructive Tests														
Group 2	Sample size: 3(0)													
	Solderability Resistance to solvents	MIL-STD-202, method 208 MIL-STD-202, method 215												
Group 3	Sample size: 10(0)													
	Thermal shock	25 × (−65°C to +150°C) ΔR = 0.02% for values higher than 100 Ω ΔR = 0.03% for values between 5 Ω to 100 Ω												
	MIL-STD-202, method 107	<table border="1"> <thead> <tr> <th colspan="2">303139, 303140</th> </tr> <tr> <th>Values</th> <th>TCR limits</th> </tr> </thead> <tbody> <tr> <td>100 Ω to 40 kΩ</td> <td>±2 ppm/°C</td> </tr> <tr> <td>20 Ω to <100 Ω</td> <td>±3 ppm/°C</td> </tr> <tr> <td>10 Ω to <20 Ω</td> <td>±5 ppm/°C</td> </tr> <tr> <td>5 Ω to <10 Ω</td> <td>±7ppm/°C</td> </tr> </tbody> </table>	303139, 303140		Values	TCR limits	100 Ω to 40 kΩ	±2 ppm/°C	20 Ω to <100 Ω	±3 ppm/°C	10 Ω to <20 Ω	±5 ppm/°C	5 Ω to <10 Ω	±7ppm/°C
	303139, 303140													
	Values	TCR limits												
	100 Ω to 40 kΩ	±2 ppm/°C												
20 Ω to <100 Ω	±3 ppm/°C													
10 Ω to <20 Ω	±5 ppm/°C													
5 Ω to <10 Ω	±7ppm/°C													
TCR – mounted on FR4	Temperature range: −55°C/+25°C/+125°C													
Low temperature storage	−65°C no load dwell for 24 h ±4 h +25°C ambient no load dwell for 2 h to 8 h ΔR = 0.01%													
Low temperature operation	−65°C no load dwell for 1 h rated power (at +125°C) for 45 min +25°C ambient no load dwell for 24 h ±4 h													
Short time overload	ΔR = 0.01% 6.25 × rated power (at +125°C), not to exceed 70.5 V for 303139, 190 V for 303140													

Table 4 – EEE-INST-002 (Table 3A Film/Foil, Level 1) Destructive Tests

Group 4	Sample size: 9(0) DWV MIL-STD-202, method 301 Insulation resistance MIL-STD-202, method 302 Resistance to soldering heat – mounted on FR4 MIL-STD-202, method 210 condition B Moisture resistance	$\Delta R = 0.01\%$ Atmospheric pressure, 200 VAC, 1 min 100 VDC $IR \geq 10^4 \text{ M}\Omega$ $\Delta R = 0.03\%$ 260°C, 10 s $\Delta R = 0.03\%$
	MIL-STD-202, method 106 DWV, at 200 VAC, 1 min atmospheric pressure Insulation resistance, at 100 VDC	$\Delta R = 0.01\%$ $IR \geq 100 \text{ M}\Omega$
Group 5	Sample size: 9(0) – mounted on FR4 Shock	$\Delta R = 0.01\%$
	MIL-PRF-55182 and MIL-STD-202, method 213, condition I 10 shocks in each of two mutually perpendicular planes (Y, Z) 100 G, 6 ms, sawtooth Vibration	$\Delta R = 0.01\%$
Group 6	Sample size: 12(0) – mounted on FR4 Life	$\Delta R = 0.05\%$
	MIL-STD-202, method 108 1.5 h on, 0.5 h off, 125°C, rated power (at +125°C), 2000 h	
Group 8	Sample Size: 5(0) – not mounted Voltage coefficient MIL-PRF-55182 and MIL-STD-202, method 309	5 ppm/V Working voltage Resistance range >1 K
	Group 9	Sample size: 5(0) High temperature exposure
Group 10	Thermal outgassing	Contact Vishay Foil Resistors application engineering for review

Note

The sample units of table 4 should be randomly selected from lots which successfully passed the table 3 tests.

Table 5 – Global Part Number Information

Model #	303139	303140
Base Model	SMR1DZ	SMR3DZ
Value Range (Space Applications)	5 Ω to 14 k Ω	5 Ω to 40 k Ω

Part Number: **{Model} - {Value} - {Tolerance} - {Termination} - {Packaging}**

Absolute Tolerance	Code	Termination	Code	Packaging	Code
0.02%	Q	Tin/lead	B	Bulk	L
0.05%	A			Tape and reel	T
0.1%	B				
0.2%	E				
0.5%	D				

Example: 303139 - 8K0225 - QBT
303139, 8.0225 k Ω , 0.02%, tin/lead termination, tape and reel packaging



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.



The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.






Copyright Vishay Precision Group, Inc., 2014. All rights reserved.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View Y174630R0000Q0R on WIN SOURCE](#)
-  [VPG Foil Resistors Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management