



**THE DATASHEET OF
FP1010R1-R150-R**



FP1010R

High frequency, high current power inductors



Product features

- High current carrying capacity
- Low core loss, magnetically shielded
- Tight tolerance DCR for sensing circuits
- Inductance range from 70 nH to 330 nH
- Current range from 20 A to 124 A
- 10 mm x 7.0 mm and 9.6 mm x 6.4 mm footprint surface mount package in 10 mm - 10.4 mm height
- Ferrite core material
- Moisture sensitivity level (MSL): 1
- Weight: FP1010R1 2.86 grams typical, FP1010R3 2.56 grams typical

Applications

- Multi-phase and Vcore regulators
- Voltage Regulator Modules (VRMs)
 - Server and desktop
 - Central processing unit (CPU)
 - Graphics processing unit (GPU)
 - Application specific integrated circuit (ASIC)
 - High power density
- Data networking and storage systems
- Graphics cards and battery power systems
- Portable electronics
- Point-of-load modules
- DCR Sensing circuits

Environmental compliance and general specifications

- Storage temperature range (Component): -40 °C to +125 °C
- Operating temperature range: -40 °C to +125 °C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020 (latest revision) compliant



Product Specifications


Part number ⁹	OCL ¹ (nH)	FLL ² (nH) minimum	I _{rms} ³ (A)	I _{sat} 1 ⁴ (A)	I _{sat} 2 ⁵ (A)	I _{sat} 3 ⁶ (A)	I _{sat} 3 ⁷ (A)	DCR (mΩ) ±5% @ 20°C	K-factor ⁸	Dimension C (mm) maximum
FP1010R1-R120-R	120 ±15%	84	50	94	na	80	75	0.185	371	10
FP1010R1-R150-R	150 ±15%	105	50	80	na	68	64	0.185	371	10
FP1010R1-R330-R	330 ±15%	230	50	30	na	25	23	0.185	371	10
FP1010R3-R070-R	70 ±10%	50	78	124	120	115	107	0.145	432	10.4
FP1010R3-R100-R	100 ±10%	72	78	95	88	82	77	0.145	432	10.2
FP1010R3-R120-R	120 ±10%	86	78	78	71	67	63	0.145	432	10.1
FP1010R3-R150-R	150 ±10%	100	78	60	54	52	49	0.145	432	10
FP1010R3-R180-R	180 ±10%	129	78	49	45	43	40	0.145	432	10
FP1010R3-R220-R	220 ±10%	158	78	38	36	34	31	0.145	432	10
FP1010R3-R270-R	270 ±10%	194	78	30	29	27	24	0.145	432	10
FP1010R3-R300-R	300 ±10%	210	78	27	24	23	22	0.145	432	10
FP1010R3-R330-R	330 ±15%	237	78	20	19	17	16	0.145	432	10

1. Open Circuit Inductance (OCL) Test Parameters: 100 kHz, 0.1 Vrms, 0.0 Adc, +25 °C
2. Full Load Inductance (FLL) Test Parameters: 100 kHz, 0.1 Vrms, Isat1, +25 °C
3. I_{rms}: DC current for an approximate temperature rise of 40 °C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed +125 °C under worst case operating conditions verified in the end application.

4. I_{sat}1: Peak current for approximately 20% rolloff @ +25 °C
5. I_{sat}2: Peak current for approximately 20% rolloff @ +75 °C
6. I_{sat}3: Peak current for approximately 20% rolloff @ +100 °C
7. I_{sat}4: Peak current for approximately 20% rolloff @ +125 °C
8. K-factor: Used to determine Bp-p for core loss (see graph). Bp-p = K * L * ΔI * 10³. Bp-p:(Gauss), K: (K-factor from table), L: (Inductance in nH), Symbol I (Peak to peak ripple current in Amps).
9. Part Number Definition: FP1010Rx-Rxxx-R
FP1010R= Product code and size
x= Version indicator
-Rxxx= Inductance value in μH, R= decimal point
-R suffix = RoHS compliant




Dimensions (mm)

FP1010R1



Recommended Pad Layout

Schematic

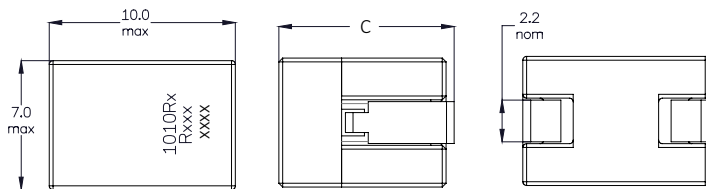

Part marking: 1010Rx (x = Version Indicator), Rxxx = Inductance value in uH (R= decimal point)

xxxx= lot code

Tolerances are ±0.15 millimeters unless stated otherwise

All soldering surfaces to be coplanar within 0.1 millimeters


Pad layout tolerances are ±0.1 millimeters unless stated otherwise

DCR measured from point "a" to point "b"

Traces or vias underneath the inductor is not recommended

Dimensions (mm)


FP1010R3

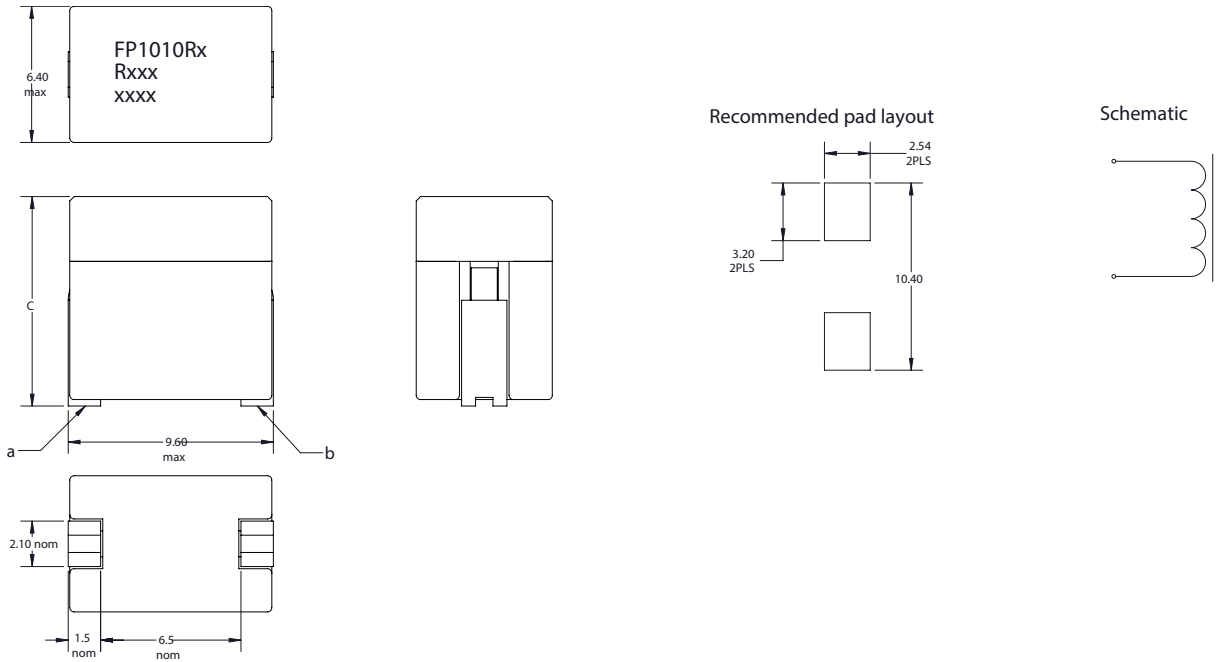

Part marking: FP1010Rx (x = Version indicator), Rxxx = Inductance value in uH (R= decimal point)
 xxxx= lot code
 Tolerances are ± 0.15 millimeters unless stated otherwise
 All soldering surfaces to be coplanar within 0.1 millimeters
 Pad layout tolerances are ± 0.1 millimeters unless stated otherwise
 DCR measured from point "a" to point "b"
 Traces or vias underneath the inductor is not recommended


Packaging information (mm)

FP1010R1 Supplied in tape and reel packaging , 300 parts per 13" diameter reel


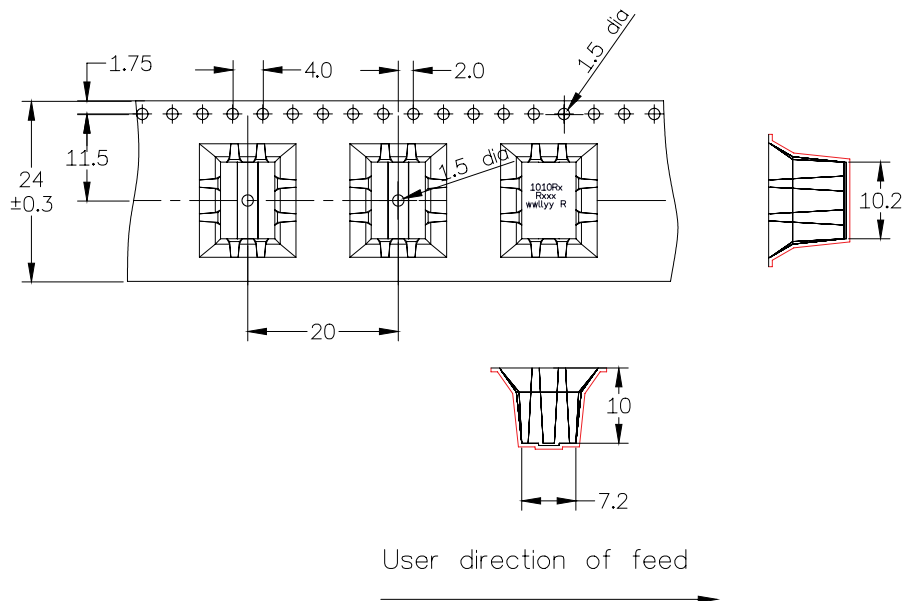


Packaging information (mm)



FP1010R3 Supplied in tape and reel packaging , 500 parts per 13" diameter reel

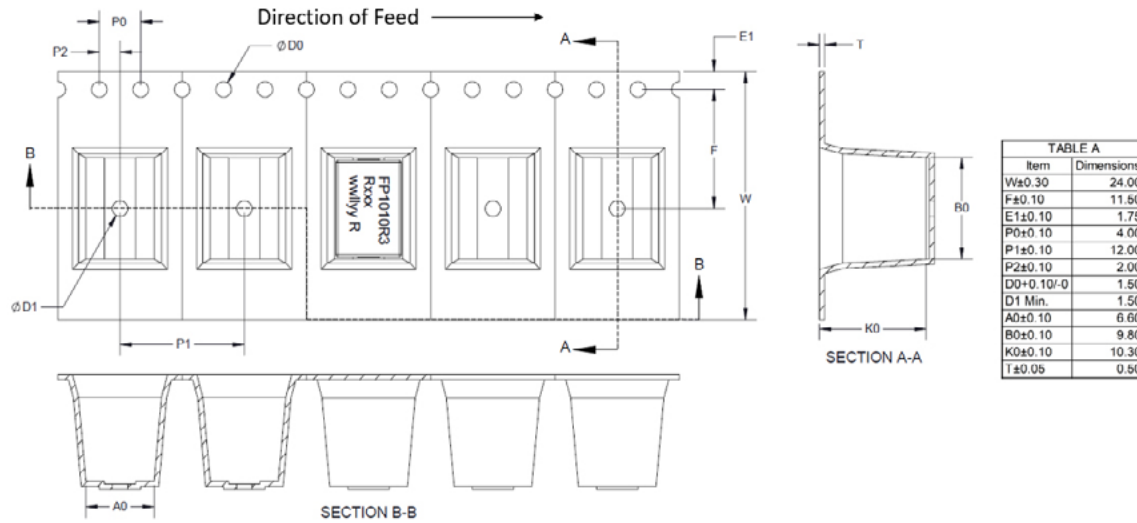




Temperature rise vs. total loss

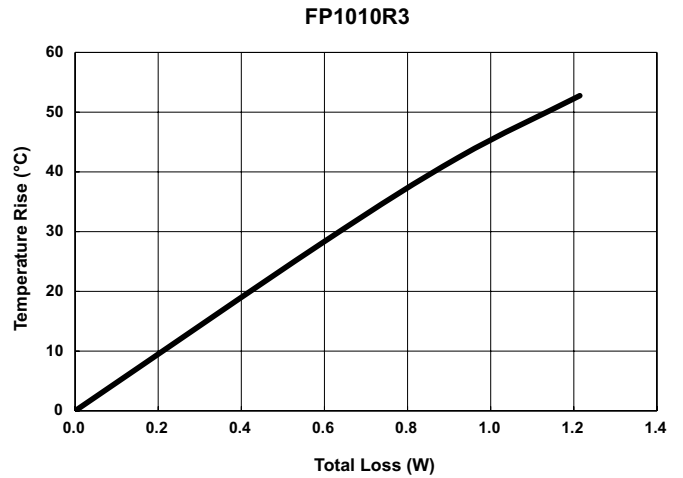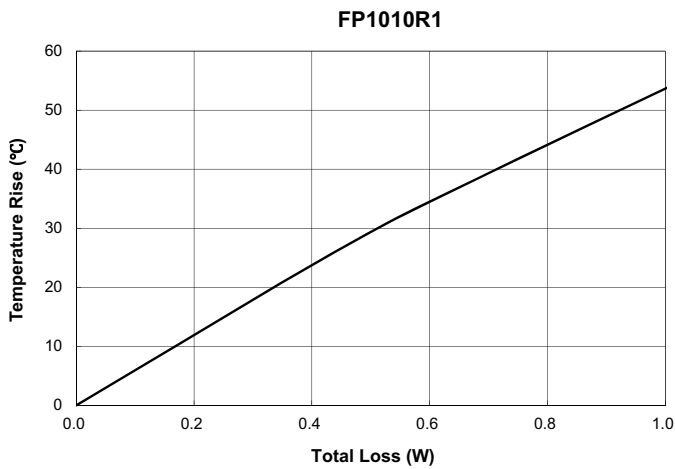

Core loss vs. B_{p-p}

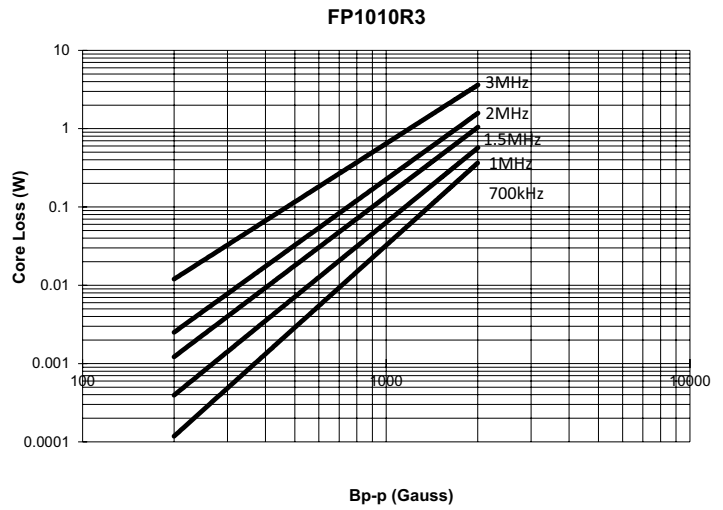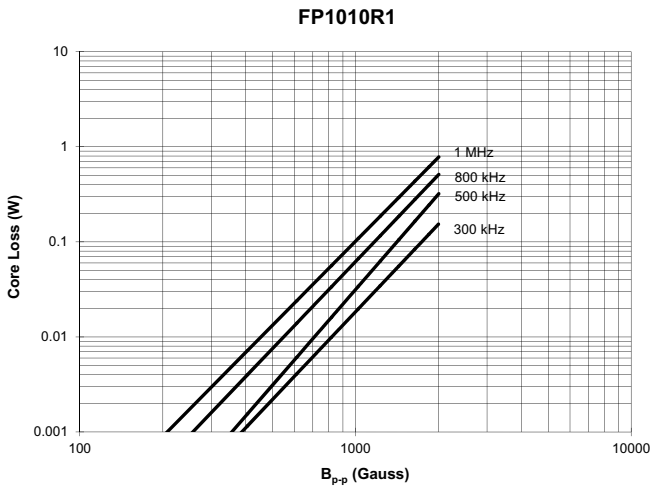


Inductance characteristics

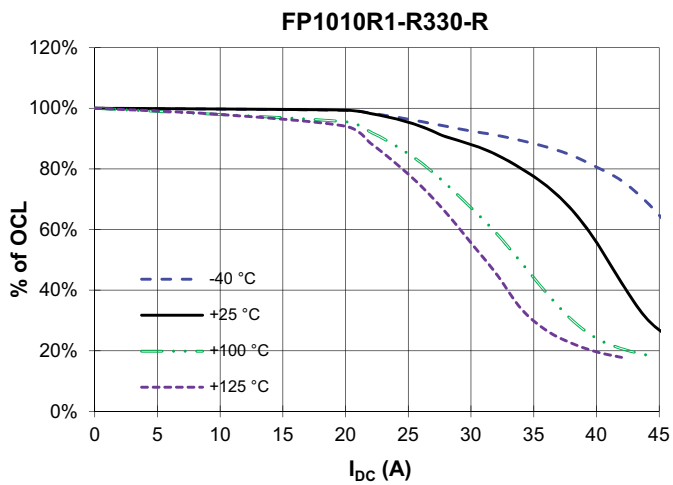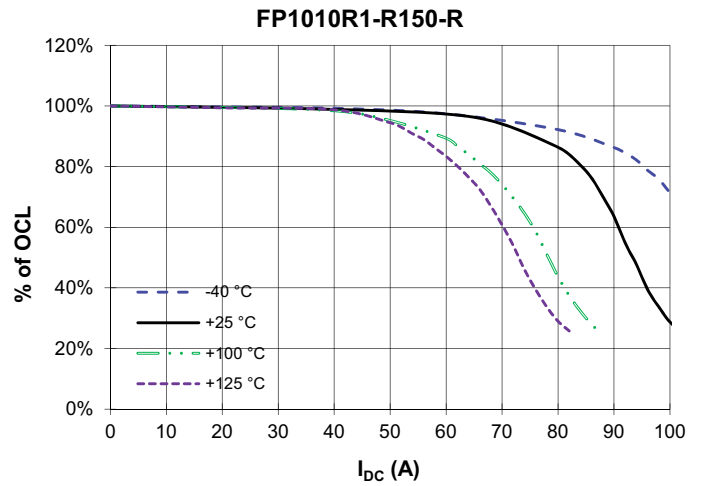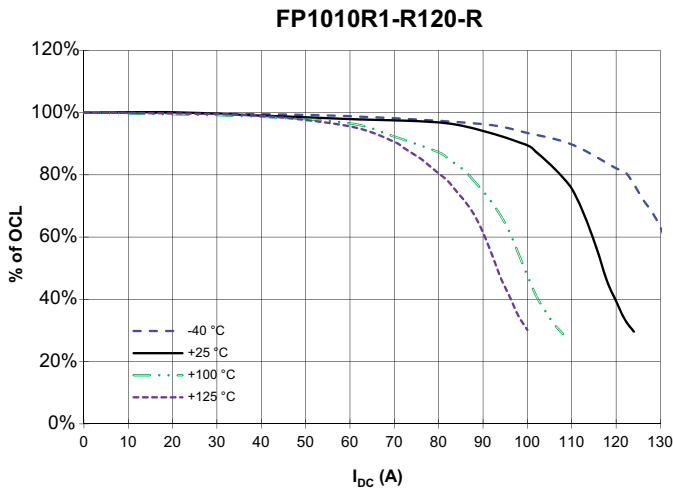


Inductance characteristics


FP1010R3-R070-R

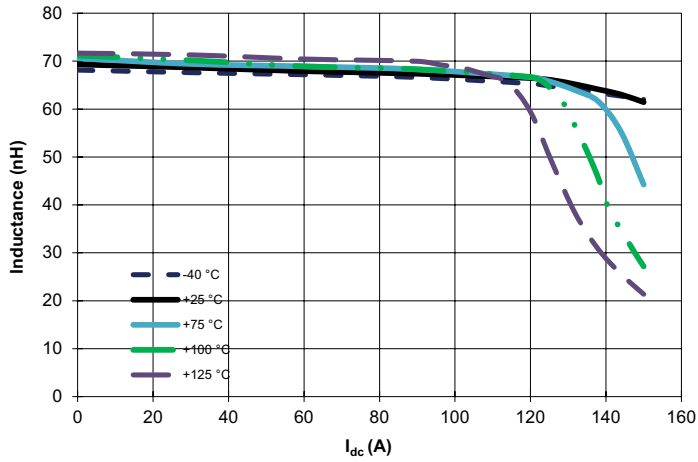


FP1010R3-R100-R

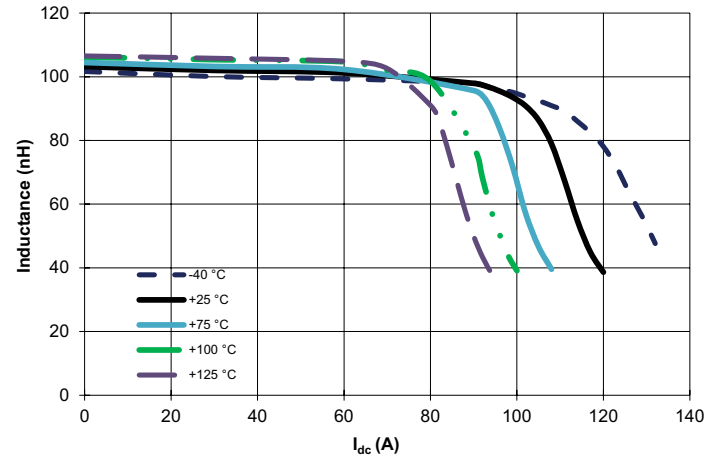


FP1010R3-R120-R

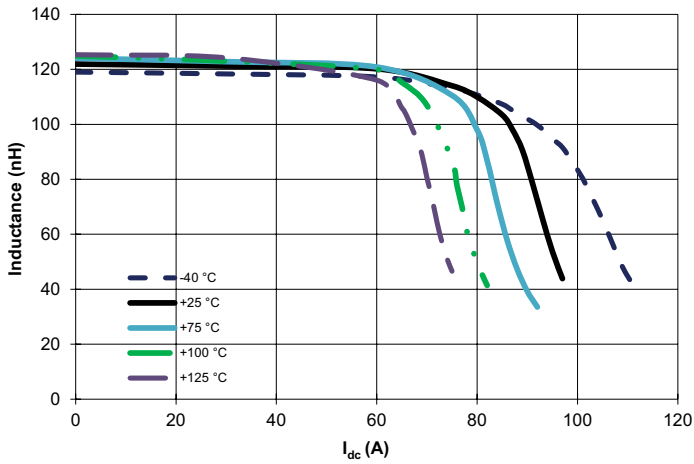


FP1010R3-R150-R

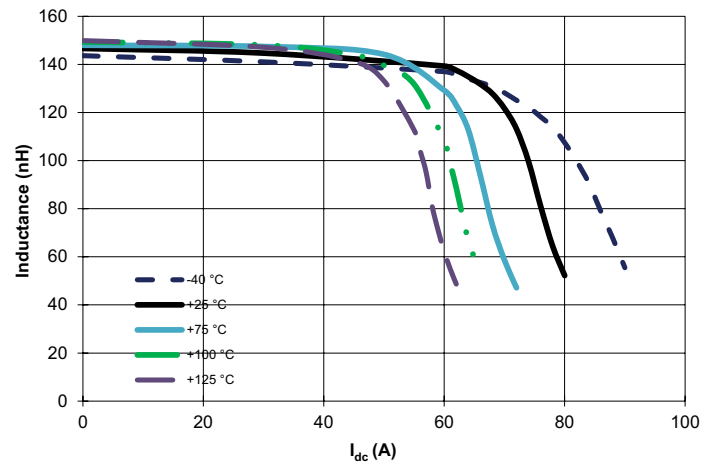




FP1010R3-R180-R

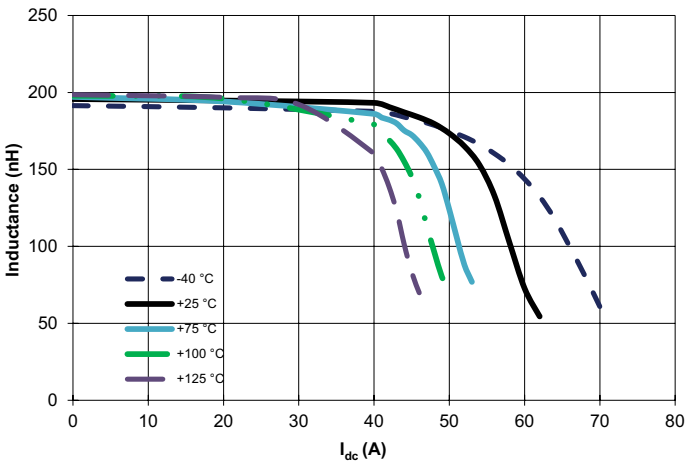

FP1010R3-R220-R

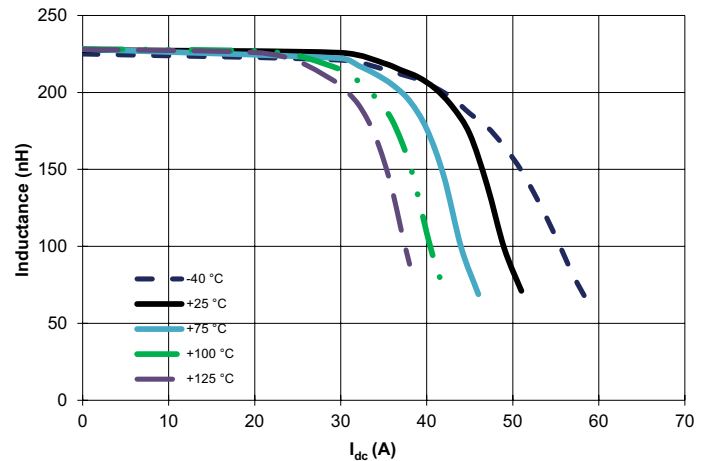

Inductance characteristics

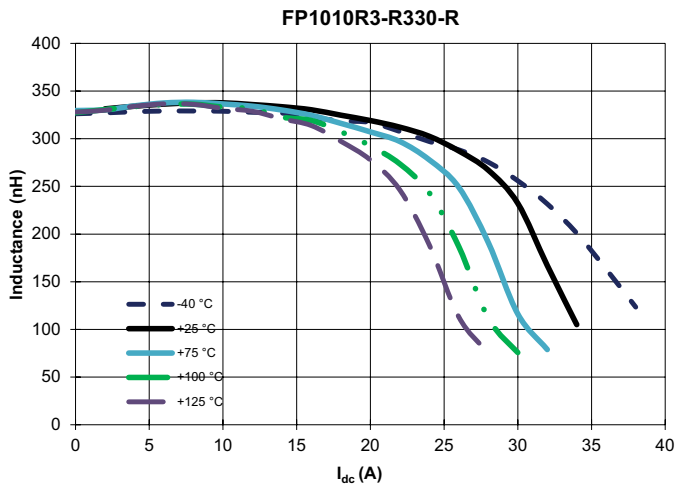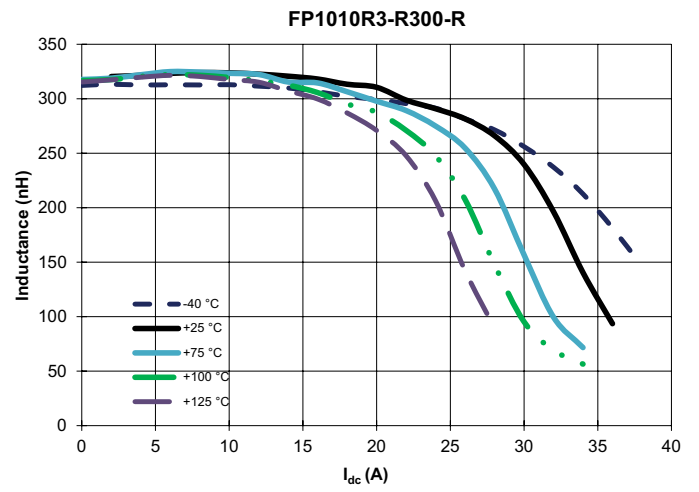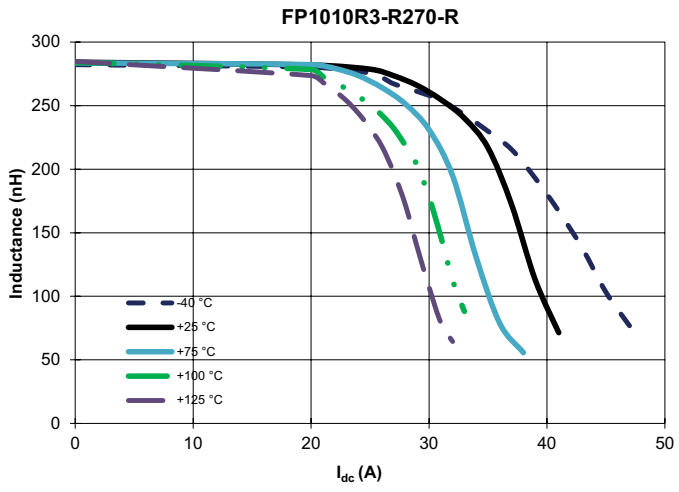

Solder reflow profile

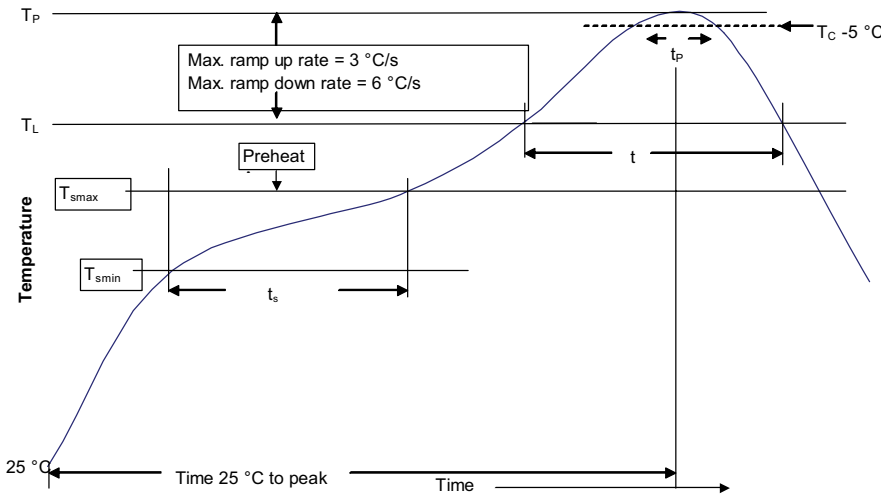


Table 1 - Standard SnPb solder (T_c)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_c)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T _{smin})	100 °C	150 °C
• Temperature max. (T _{smax})	150 °C	200 °C
• Time (T _{smin} to T _{smax}) (t _s)	60-120 seconds	60-120 seconds
Ramp up rate T _L to T _P	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T _L)	183 °C	217 °C
Time (t _L) maintained above T _L	60-150 seconds	60-150 seconds
Peak package body temperature (T _P)*	Table 1	Table 2
Time (t _p)* within 5 °C of the specified classification temperature (T _c)	20 seconds*	30 seconds*
Ramp-down rate (T _P to T _L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2020 Eaton
All Rights Reserved
Printed in USA
Publication No. 10531
June 2020

Eaton is a registered trademark.
All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View FP1010R1-R150-R on WIN SOURCE](#)

 [Eaton Bussmann Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management