




**THE DATASHEET OF**  
**2170680-2**





Connectors > Pluggable IO Connectors & Cages

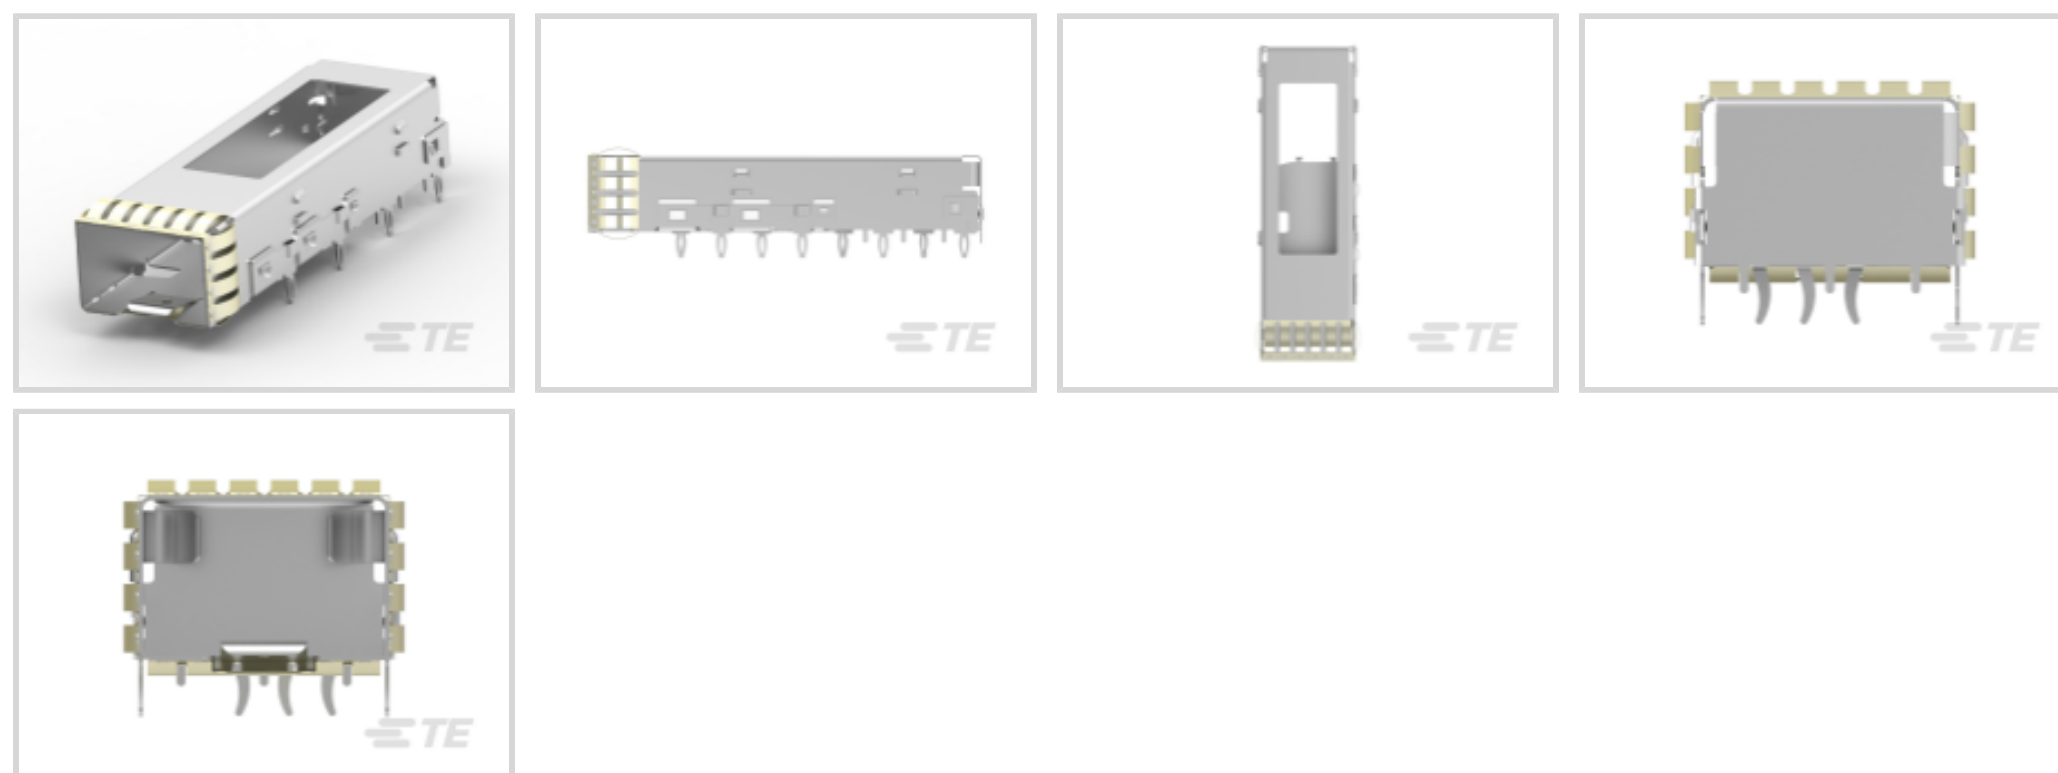

Pluggable I/O Product Type: **Cage Assembly**

Sealable: **Yes**

Circuit Application: **Signal**

Operating Temperature Range: **-55 – 105 °C [-67 – 221 °F]**

Data Rate (Max): **16 Gb/s**

## Features

### Product Type Features

Cage Type	Single
Pluggable I/O Product Type	Cage Assembly
Sealable	Yes
Form Factor	SFP+

### Configuration Features

Number of Ports	1
Port Matrix Configuration	1 x 1

### Electrical Characteristics

Data Rate (Max)	16 Gb/s
-----------------	---------


### Termination Features

Termination Method to Printed Circuit Board	Through Hole - Press-Fit
---	--------------------------

### Housing Features

Cage Material	Nickel Silver Alloy
---------------	---------------------

### Dimensions





PCB Thickness (Recommended)	1.5 mm
-----------------------------	--------

### Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

### Operation/Application

Pluggable I/O Applications	SFP+
----------------------------	------

Heat Sink Compatible	Yes
----------------------	-----

Circuit Application	Signal
---------------------	--------

### Packaging Features

Packaging Method	Tray
------------------	------

### Other

Included Lightpipe	No
--------------------	----

EMI Containment Feature Type	Internal/External EMI Springs
------------------------------	-------------------------------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # CAT-C11-N490333  
 QSFP28-Four SFP+ Cable Assembly:  
 30 AWG



TE Part # CAT-C11-N490325  
 QSFP28-Four SFP+ Cable Assembly:  
 26 AWG



TE Part # 2334985-2  
 SFP28 DIRECT ATTACH CA, 1M,  
 32AWG



TE Part # CAT-C11-N4901114  
 SFP28 to SFP28 Cable Assembly: 30  
 AWG



TE Part # CAT-C11-N49011  
 SFP28 to SFP28 Cable Assembly: 26  
 AWG



TE Part # CAT-Q17-N49011  
 QSFP56-Four SFP56 Cable Assembly:  
 30 AWG



TE Part # CAT-Q17-N490333  
 QSFP56-Four SFP56 Cable Assembly:  
 26 AWG




TE Part # 4-2821224-5  
 SFP56 DIRECT ATTACH CA, 3M,  
 26AWG



TE Part # 4-2334985-2  
 SFP56 DIRECT ATTACH CA, 1M,  
 32AWG




TE Part # 4-2821222-5  
 SFP56 DIRECT ATTACH CA, 2M,  
 30AWG



TE Part # 2821033-8  
 QSFP TO [4]SFP+, 28G, 1M, 33AWG

## Customers Also Bought

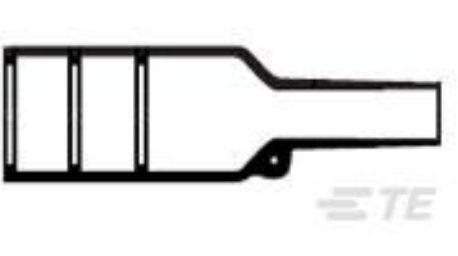


TE Part #408452-000  
 202K111-25/225-0



TE Part #7-188275-6  
 MICRO-MATCH SMD FTE



TE Part #4-1879233-9  
 SMW5 10R 5%



TE Part #434716-000  
 STD03W-3




TE Part #CQ50483001  
RAY-101-7.5(10)




TE Part #CQ50303001  
RAY-101-10.0(10)



TE Part #224512-E  
MSPEED 50 F SMD F6 \* AB VV 137 094  
\*\* E

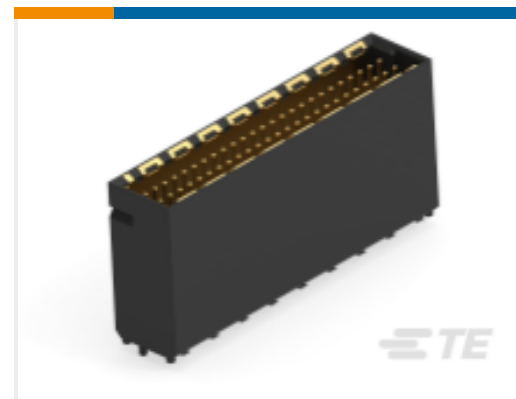

TE Part #224559-E  
MSPEED 50 M SMD M9 \* AB VV 137  
176 \*\* E

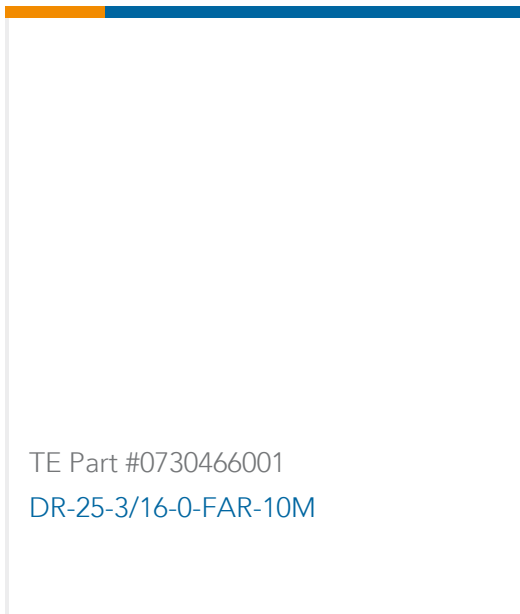

TE Part #0730466001  
DR-25-3/16-0-FAR-10M

## Documents

### CAD Files

[3D PDF](#)

[3D](#)

**Customer View Model**

[ENG\\_CVM\\_CVM\\_2170680-2\\_A.2d\\_dxf.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_2170680-2\\_A.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_2170680-2\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications

[Application Specification](#)

English

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

[View 2170680-2 on WIN SOURCE](#)

[TE Connectivity Information](#)

### Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management