


# SIM7070 Series

## SIMCom LPWA Module

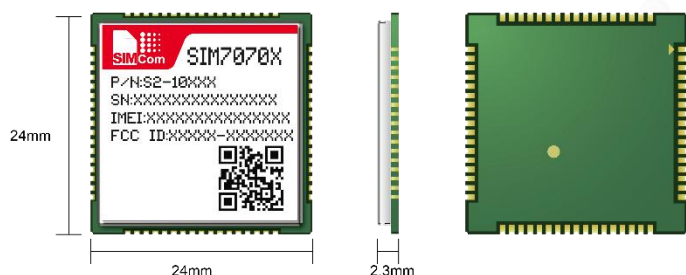


### Product Description

The SIM7070 series is the LPWA module which supports wireless communication modes of Cat-M/Cat-NB/GPRS/EDGE.

The SIM7070 series adopts LCC form factor and has a compact size of 24mm\*24mm which makes it ideal for compact products design.

The SIM7070 series has powerful expansibility with abundant interfaces including UART, GPIO, PCM, SPI, I2C etc. The SIM7070 series is designed for applications that need low latency, low throughput data communication in a variety of radio propagation conditions. Due to the unique combination of performance, security and flexibility, this module is ideally suited for M2M applications, such as metering, asset tracking, remote monitoring, E-health etc.

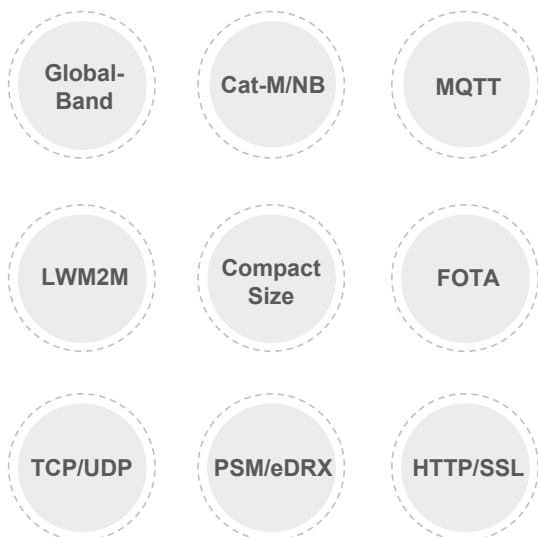

### Key Benefits

- ◆ With Power Saving Mode(PSM) and Extended Discontinuous Reception(eDRX), the SIM7070 series can extend battery life up to 10 years
- ◆ The SIM7070 series provides deeper coverage enhancement compared to GSM
- ◆ The form factor and AT commands of the SIM7070 series are compatible with SIM7000X/SIM800F/SIM900

Product	SIM7070G	SIM7070G-MN	SIM7070G-M	SIM7070G-HP
<b>Form Factor</b>	LCC, 68PIN	LCC, 68PIN	LCC, 68PIN	LCC, 68PIN
<b>Dimensions(mm)</b>	24*24*2.3	24*24*2.3	24*24*2.3	24*24*2.3
<b>Frequency Bands</b>	<b>Cat-M</b>	B1/B2/B3/B4/B5/B8/B12/B13/B14/B18/B19/B20/B25/B26/B27/B28/B66/B85	B1/B2/B3/B4/B5/B8/B12/B13/B14/B18/B19/B20/B25/B26/B27/B28/B66/B85	B1/B2/B3/B4/B5/B8/B12/B13/B14/B18/B19/B20/B25/B26/B27/B28/B66/B85
	<b>Cat-NB</b>	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B28/B66/B71/B85	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B28/B66/B71/B85	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B28/B66/B71*/85*
	<b>GSM</b>	850/900/1800/1900MHz		
<b>LTE RF Power Class</b>	Class 5 (Typ. 21dbm)	Class 5 (Typ. 21dbm)	Class 5 (Typ. 21dbm)	Class 3 (Typ. 23dbm)
<b>GNSS</b>	○	○	○	○
<b>Temperature</b>	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
<b>Electrical Features</b>				
<b>Supply Voltage Range(V)</b>	3.0~ 4.6	3.0~ 4.6	3.0~ 4.6	3.0~ 4.5
<b>Power Consumption</b>	@PSM(μA)	3.2	3.2	4
	@Sleep(mA)	0.8	0.8	0.8
	@Idle(mA)	10	10	10
<b>Data Transfer</b>				
<b>Cat-M(Kbps)</b>	589(DL)/1119(UL)	589(DL)/1119(UL)	589(DL)/1119(UL)	589(DL)/1119(UL)
<b>Cat-NB(Kbps)</b>	127(DL)/158.5(UL)	127(DL)/158.5(UL)		127(DL)/158.5(UL)
<b>EGPRS(Kbps)</b>	296(DL)/236.8(UL)			
<b>Software Features</b>				
<b>Protocol</b>	TCP/UDP/HTTP/HTTPS/FTP/TLS/DTLS/PING/LWM2M/COAP/MQTT	TCP/UDP/HTTP/HTTPS/FTP/TLS/DTLS/PING/LWM2M/COAP/MQTT	TCP/UDP/HTTP/HTTPS/FTP/TLS/DTLS/PING/LWM2M/COAP/MQTT	TCP/UDP/HTTP/HTTPS/FTP/TLS/DTLS/PING/LWM2M/COAP/MQTT
<b>FOTA</b>	●	●	●	●
<b>Embedded AT</b>	●	●	●	●
<b>Firmware Upgrade</b>	USB/FOTA	USB/FOTA	USB/FOTA	USB/FOTA
<b>Interfaces</b>				
<b>SIM Card</b>	1.8V	1.8V	1.8V	1.8V
<b>UART</b>	●	●	●	●
<b>USB</b>	●	●	●	●
<b>PCM/I2S</b>	●	●	●	●
<b>ADC</b>	●	●	●	●
<b>SPI</b>	●	●	●	●
<b>I2C</b>	●	●	●	●
<b>Embedded SIM</b>	○	○	○	○
<b>Certification</b>				
<b>Regulatory</b>	FCC/IC/CE/RCM/JATE/TELEC/NCC/ANATEL*/GCF/PTCRB/RoHS/REACH	FCC/IC/CE/RCM/JATE/TELEC/NCC/ANATEL*/GCF/PTCRB/RoHS/REACH	FCC/IC/CE/RCM/JATE/TELEC/NCC/ANATEL*/GCF/PTCRB/RoHS/REACH	FCC*/IC*/CE*/RCM*/KC*/RoHS*/REACH*
<b>Carrier</b>	Deutsche Telekom/AT&T/VERIZON*/T-MOBILE US/US Cellular*/ROGERS*/TELSTR A*/VDF*/SoftBank*/DoCoMo*/KDDI*	Deutsche Telekom/AT&T/VERIZON*/T-MOBILE US/US Cellular*/ROGERS*/TELSTR A*/VDF*/SoftBank*/DoCoMo*/KDDI*	Deutsche Telekom/AT&T/VERIZON*/T-MOBILE US/US Cellular*/ROGERS*/TELSTR A*/VDF*/SoftBank*/DoCoMo*/KDDI*	



●: Support ○: Optional \*: Under developing/On-going/Planning

Product		SIM7070E
Form Factor		LCC, 68PIN
Dimensions(mm)		24*24*2.3
Frequency Bands	Cat-M	B1/B2/B3/B4/B5/B8/B12/B13/B14/B18/B19/B20/B25/B26/ B27/B28/B31/B66/B72/B85
	Cat-NB	B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B28/ B31/B66/B85
	GSM	850/900/1800/1900MHz
LTE RF Power Class		Class 5 (Typ. 21dbm) Class 2@B31&72
GNSS		○
Temperature		-40°C ~ +85°C
Electrical Features		
Supply Voltage Range(V)		3.2~ 4.2
Power Consumption	@PSM(uA)	3.2
	@Sleep(mA)	0.8
	@Idle(mA)	10
Data Transfer		
Cat-M(Kbps)		589(DL)/1119(UL)
Cat-NB(Kbps)		127(DL)/158.5(UL)
EGPRS(Kbps)		296(DL)/236.8(UL)
Software Features		
Protocol		TCP/UDP/HTTP/HTTPS/FTP/TLS/DTLS/PING/LWM2M/ COAP/MQTT
FOTA		•
Embedded AT		•
Firmware Upgrade		USB/FOTA
Interfaces		
SIM Card		1.8V
UART		•
USB		•
PCM/I2S		•
ADC		•
SPI		•
I2C		•
Embedded SIM		○
Certification		
Regulatory		CE/RCM/RoHS/REACH
Carrier		







•: Support ○: Optional \*: Under developing/On-going/Planning

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SIM7070G-PCIE on WIN SOURCE](#)
-  [Simcom Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management