



### Material and Finish

Housing: High Temp, 94V-0  
 Terminals: Copper Alloy  
 Silver Plated

### Electrical Characteristics

Contact Resistance:  
 Before Test: 50 milliohms max.  
 After Durability Test:  
 100 milliohms max.  
 Rated Voltage: 16V DC  
 Rated Current: 0.3A  
 Insulation Resistance:  
 100 Megohms min.  
 at 500V DC  
 Dielectric Strength:  
 500V AC RMS for 1 minute  
 Operating Temp:  
 -25°C to +70°C

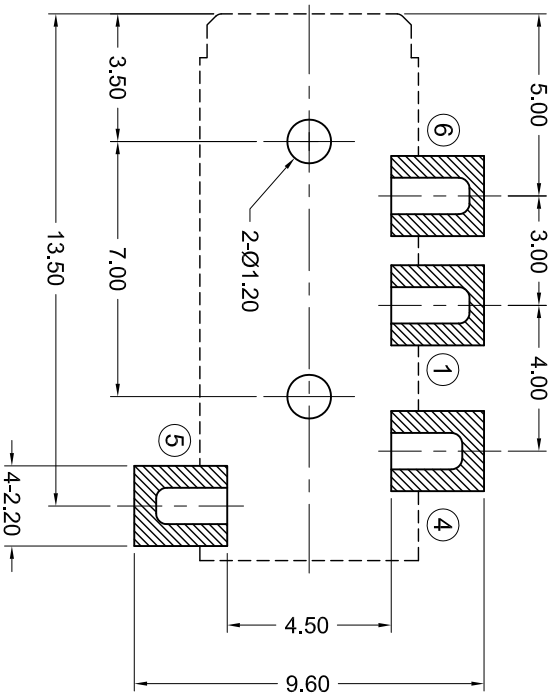

SCHEMATIC

V. BY	CHK. BY	DRAWN BY	DATE
L.L.H.	H.MA	WILL H.	1/22/08
H.MA	N/A		UNITS
V.Ben	H.MA		mm
H.MA	H.MA		
H.MA	W. Cook		

**STX-35331-4N-TR**

Ø3.5mm Audio Jack, RoHS Compliant  
**SMT, 4 Positions**



LR78160  
 US

Tolerances  
 X.X ± 0.25  
 X.XX ± 0.15  
 Unless Stated  
 Otherwise



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View STX-35331-4N-TR on WIN SOURCE](#)

 [Kycon, Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management