



**THE DATASHEET OF
CGA9N1C0G2J683J230KE**




MULTILAYER CERAMIC CHIP CAPACITORS

Automotive grade, soft termination

CGA series

| | |
|-------------|-------------------------|
| CGA2 | 1005 [0402 inch] |
| CGA3 | 1608 [0603 inch] |
| CGA4 | 2012 [0805 inch] |
| CGA5 | 3216 [1206 inch] |
| CGA6 | 3225 [1210 inch] |
| CGA7 | 4520 [1808 inch] |
| CGA8 | 4532 [1812 inch] |
| CGA9 | 5750 [2220 inch] |
| CGAD | 7563 [3025 inch] |

* Dimensions code: JIS[EIA]

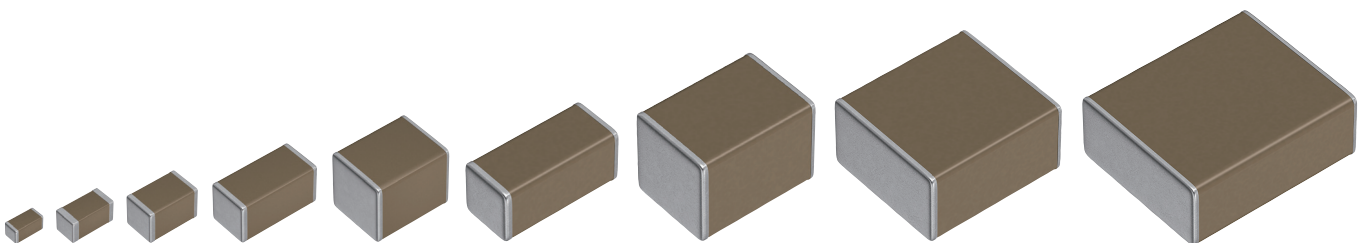

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products

REMINDERS

1. The products listed in this specification are intended for use in automotive applications under normal operation and usage conditions. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality requires a more stringent level of safety or reliability, or whose failure, malfunction or defect could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet. If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in this specification, please contact us.

- | | |
|--|--|
| (1) Aerospace/aviation equipment | (7) Transportation control equipment |
| (2) Transportation equipment (electric trains, ships, etc.) | (8) Public information-processing equipment |
| (3) Medical equipment (excepting Pharmaceutical Affairs Law classification Class1,2) | (9) Military equipment |
| (4) Power-generation control equipment | (10) Electric heating apparatus, burning equipment |
| (5) Atomic energy-related equipment | (11) Disaster prevention/crime prevention equipment |
| (6) Seabed equipment | (12) Safety equipment |
| | (13) Other applications that are not considered general-purpose applications |

When designing your equipment involving the Products, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc. in your equipment, to ensure higher safety.

- We may modify products or discontinue production of a product listed in this catalog without prior notification.
- We provide "Delivery Specification" that explain precautions for the specifications and safety of each product listed in this catalog. We strongly recommend that you exchange these delivery specifications with customers that use one of these products.
- If you plan to export a product listed in this catalog, keep in mind that it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in harmony with this law.
- Any reproduction or transferring of the contents of this catalog is prohibited without prior permission from our company.
- We are not responsible for problems that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. We do not grant license of these rights.
- This catalog only applies to products purchased through our company or one of our company's official agencies. This catalog does not apply to products that are purchased through other third parties.

Notice: Effective January 2013, TDK will use a new catalog number which adds product thickness and packaging specification detail. This new catalog number should be referenced on all catalog orders going forward, and is not applicable for OEM part number orders. Please be aware the last five digits of the catalog number will differ from the item description (internal control number) on the product label. Contact your local TDK Sales representative for more information.

(Example)

| Catalog issued date | Catalog number | Item description (on delivery label) |
|------------------------|-----------------------|--------------------------------------|
| Prior to January 2013 | C1608C0G1E103J(080AA) | C1608C0G1E103JT000N |
| January 2013 and later | C1608C0G1E103J080AA | C1608C0G1E103JT000N |

CGA series

soft termination



Type: CGA2/1005 [0402 inch]、CGA3/1608 [0603 inch]、CGA4/2012 [0805 inch]、
CGA5/3216 [1206 inch]、CGA6/3225 [1210 inch]、CGA7/4520 [1808 inch]、
CGA8/4532 [1812 inch]、CGA9/5750 [2220 inch]、CGAD/7563 [3025 inch]

SERIES OVERVIEW

Automotive grade Soft termination CGA series is a product incorporating a conductive resin layer into the terminal electrodes. The resin layer protects the ceramic body from cracks by relieving stress caused by thermal shock and board flexure.

FEATURES

- High resistance to mechanical stress and thermal shock by resin layers
- X8R and X8L type whose maximum temperature are up to 150°C are available
- C0G type having excellent stable temperature and DC-bias characteristics is also available
- Qualified based on AEC-Q200
- Qualified based on VW80808-2 (Qualification of MLCCs with Soft Termination) *Rated voltage is 100V or less

SHAPE & DIMENSIONS




| | |
|---|------------------|
| L | Body length |
| W | Body width |
| T | Body height |
| B | Terminal width |
| G | Terminal spacing |

APPLICATION

- Fail-safe design for battery line
- Prevention of ceramic element crack by board bending
- Prevention of solder crack by thermal shock
- Equipment such as mobile devices and smart key having a high possibility of drop


TERMINAL ELECTRODE STRUCTURES

General type



3-layer structure of Cu, Ni and Sn.

Soft termination

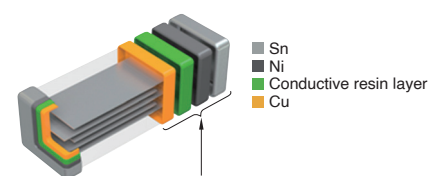

4-layer structure including conductive resin layer.

Dimensions in mm

| Type | L | W | T | B | G |
|------|-----------------|-----------------|-----------------|-----------|-----------|
| CGA2 | 1.00+0.15,-0.05 | 0.50+0.10,-0.05 | 0.50+0.10,-0.05 | 0.10 min. | 0.30 min. |
| CGA3 | 1.60+0.20,-0.10 | 0.80+0.15,-0.10 | 0.80+0.15,-0.10 | 0.20 min. | 0.30 min. |
| CGA4 | 2.00+0.45,-0.20 | 1.25+0.25,-0.20 | 1.25+0.25,-0.20 | 0.20 min. | 0.50 min. |
| CGA5 | 3.20+0.40,-0.20 | 1.60+0.30,-0.20 | 1.60+0.30,-0.20 | 0.20 min. | 1.00 min. |
| CGA6 | 3.20+0.50,-0.40 | 2.50±0.30 | 2.50±0.30 | 0.20 min. | — |
| CGA7 | 4.50+0.50,-0.40 | 2.00+0.30,-0.20 | 1.30±0.20 | 0.20 min. | — |
| CGA8 | 4.50+0.50,-0.40 | 3.20±0.40 | 2.50±0.30 | 0.20 min. | — |
| CGA9 | 5.70+0.50,-0.40 | 5.00±0.40 | 2.50±0.30 | 0.20 min. | — |
| CGAD | 7.50±0.50 | 6.30±0.50 | 2.50 max. | 0.30 min. | — |

* Dimensional tolerances are typical values.

MULTILAYER CERAMIC CHIP CAPACITORS



CATALOG NUMBER CONSTRUCTION

| | | | | | | | | | | |
|------------|----------|----------|----------|------------|-----------|------------|----------|------------|----------|----------|
| CGA | 4 | J | 1 | X7R | 0J | 106 | K | 125 | A | E |
| (1) | (2) | (3) | (4) | (5) | (6) | (7) | (8) | (9) | (10) | (11) |

(1)Series

(2)Dimensions L x W (mm)

| Code | EIA | Length | Width | 端子 Width |
|------|--------|--------|-------|----------|
| 2 | CC0402 | 1.00 | 0.50 | 0.10 |
| 3 | CC0603 | 1.60 | 0.80 | 0.20 |
| 4 | CC0805 | 2.00 | 1.25 | 0.20 |
| 5 | CC1206 | 3.20 | 1.60 | 0.20 |
| 6 | CC1210 | 3.20 | 2.50 | 0.20 |
| 7 | CC1808 | 4.50 | 2.00 | 0.20 |
| 8 | CC1812 | 4.50 | 3.20 | 0.20 |
| 9 | CC2220 | 5.70 | 5.00 | 0.20 |
| D | CC3025 | 7.50 | 6.30 | 0.30 |

(3)Thickness code

| Code | Thickness |
|------|-----------|
| B | 0.50 mm |
| C | 0.60 mm |
| E | 0.80 mm |
| F | 0.85 mm |
| H | 1.15 mm |
| J | 1.25 mm |
| K | 1.30 mm |
| L | 1.60 mm |
| M | 2.00 mm |
| N | 2.30 mm |
| P | 2.50 mm |

(4)Voltage condition for life test

| Symbol | Condition |
|--------|------------|
| 1 | 1 x R.V. |
| 2 | 2 x R.V. |
| 3 | 1.5 x R.V. |
| 4 | 1.2 x R.V. |

(5)Temperature characteristics

| Temperature characteristics | Temperature coefficient or capacitance change | Temperature range |
|-----------------------------|---|-------------------|
| C0G | 0±30 ppm/°C | -55 to +125°C |
| X7R | ±15% | -55 to +125°C |
| X7S | ±22% | -55 to +125°C |
| X7T | +22, -33% | -55 to +125°C |
| X8R | ±15% | -55 to +150°C |
| X8L | +15, -40% | -55 to +150°C |

(6)Rated voltage (DC)

| Code | Voltage (DC) |
|------|--------------|
| 0J | 6.3V |
| 1A | 10V |
| 1C | 16V |
| 1E | 25V |
| 1V | 35V |
| 1H | 50V |
| 2A | 100V |
| 2E | 250V |
| 2W | 450V |
| 2J | 630V |
| 3A | 1000V |
| 3D | 2000V |
| 3F | 3000V |

(7)Nominal capacitance (pF)

The capacitance is expressed in three digit codes and in units of pico Farads (pF). The first and second digits identify the first and second significant figures of the capacitance. The third digit identifies the multiplier. R designates a decimal point.

(Example) 0R5 = 0.5pF
 101 = 100pF
 225 = 2,200,000pF = 2.2μF

(8)Capacitance tolerance

| Code | Tolerance |
|------|-----------|
| G | ±2% |
| J | ±5% |
| K | ±10% |
| M | ±20% |

(9)Thickness

| Code | Thickness |
|------|-----------|
| 050 | 0.50 mm |
| 060 | 0.60 mm |
| 080 | 0.80 mm |
| 085 | 0.85 mm |
| 115 | 1.15 mm |
| 125 | 1.25 mm |
| 130 | 1.30 mm |
| 160 | 1.60 mm |
| 200 | 2.00 mm |
| 230 | 2.30 mm |
| 250 | 2.50 mm |

(10)Packaging style

| Code | Style |
|------|------------------------|
| A | 178mm reel, 4mm pitch |
| B | 178mm reel, 2mm pitch |
| K | 178mm reel, 8mm pitch |
| L | 330mm reel, 12mm pitch |


(11)Special reserved code


| Code | Description |
|------|------------------|
| E | Soft termination |


Capacitance range chart


CGA2/1005 [0402 inch]

| Capacitance | | COG | | X7R | | | | X7S | | X8R | | | |
|-------------|------|--------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|-------------|-------------|-------------|
| (pF) | Code | 2A (100V) | 1H (50V) | 1H (50V) | 1V (35V) | 1E (25V) | 1C (16V) | 1C (16V) | 1A (10V) | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) |
| 100 | 101 | ■ | ■ | | | | | | | | | | |
| 150 | 151 | ■ | ■ | | | | | | | ■ | ■ | | |
| 220 | 221 | | | | | | | | | ■ | ■ | | |
| 330 | 331 | | | | | | | | | ■ | ■ | | |
| 470 | 471 | | | | | | | | | | | | |
| 680 | 681 | | | | | | | | | | | | |
| 1,000 | 102 | ■ | ■ | ■ | | | | | | ■ | ■ | | |
| 1,500 | 152 | | | | | | | | | | | | |
| 2,200 | 222 | | | ■ | | | | | | | | | |
| 3,300 | 332 | | | ■ | | | | | | ■ | ■ | | |
| 4,700 | 472 | | | ■ | | | | | | | | | |
| 6,800 | 682 | | | | | | | | | | | ■ | |
| 10,000 | 103 | | | ■ | | | | | | | ■ | ■ | |
| 15,000 | 153 | | | | | | | | | | | | |
| 22,000 | 223 | | | ■ | | | | | | | | | |
| 33,000 | 333 | | | | | | | | | | | ■ | ■ |
| 47,000 | 473 | | | ■ | | | | | | | | | ■ |
| 100,000 | 104 | | | ■ | | | | | | | | | |
| 220,000 | 224 | | | | ■ | ■ | ■ | | | | | | |
| 470,000 | 474 | | | | | | | ■ | ■ | | | | |

Standard thickness  0.50 mm

 Background gray: These products are not recommended for new designs.

 Click the charts for details.


 For details such as the catalog numbers, please refer to the capacitance range table on page 11 and after.


MULTILAYER CERAMIC CHIP CAPACITORS


Capacitance range chart


CGA3/1608 [0603 inch]

| Capacitance | | COG | | | X7R | | | | X7S | | | X8R | | | |
|-------------|------|--------------|--------------|-------------|--------------|-------------|-------------|-------------|--------------|-------------|-------------|--------------|-------------|-------------|-------------|
| (pF) | Code | 2E (250V) | 2A (100V) | 1H (50V) | 2A (100V) | 1H (50V) | 1V (35V) | 1E (25V) | 2A (100V) | 1C (16V) | 1A (10V) | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) |
| 100 | 101 | | | | | | | | | | | | | | |
| 330 | 331 | | | | | | | | | | | | | | |
| 470 | 471 | | | | | | | | | | | | | | |
| 680 | 681 | | | | | | | | | | | | | | |
| 1,000 | 102 | | | | | | | | | | | | | | |
| 1,200 | 122 | | | | | | | | | | | | | | |
| 1,500 | 152 | | | | | | | | | | | | | | |
| 1,800 | 182 | | | | | | | | | | | | | | |
| 2,200 | 222 | | | | | | | | | | | | | | |
| 2,700 | 272 | | | | | | | | | | | | | | |
| 3,300 | 332 | | | | | | | | | | | | | | |
| 3,900 | 392 | | | | | | | | | | | | | | |
| 4,700 | 472 | | | | | | | | | | | | | | |
| 5,600 | 562 | | | | | | | | | | | | | | |
| 6,800 | 682 | | | | | | | | | | | | | | |
| 8,200 | 822 | | | | | | | | | | | | | | |
| 10,000 | 103 | | | | | | | | | | | | | | |
| 15,000 | 153 | | | | | | | | | | | | | | |
| 22,000 | 223 | | | | | | | | | | | | | | |
| 33,000 | 333 | | | | | | | | | | | | | | |
| 47,000 | 473 | | | | | | | | | | | | | | |
| 68,000 | 683 | | | | | | | | | | | | | | |
| 100,000 | 104 | | | | | | | | | | | | | | |
| 150,000 | 154 | | | | | | | | | | | | | | |
| 220,000 | 224 | | | | | | | | | | | | | | |
| 330,000 | 334 | | | | | | | | | | | | | | |
| 470,000 | 474 | | | | | | | | | | | | | | |
| 1,000,000 | 105 | | | | | | | | | | | | | | |
| 2,200,000 | 225 | | | | | | | | | | | | | | |

Standard thickness  0.80 mm

 Background gray: These products are not recommended for new designs.

 Click the charts for details.

 For details such as the catalog numbers, please refer to the capacitance range table on page 11 and after.

MULTILAYER CERAMIC CHIP CAPACITORS TDK

Capacitance range chart

CGA4/2012 [0805 inch]

| Capacitance | | COG | | | | X7R | | | | | | X7S | | | | |
|-------------|------|-----------|-----------|-----------|----------|-----------|-----------|----------|----------|----------|----------|-----------|-----------|----------|----------|----------|
| (pF) | Code | 2W (450V) | 2E (250V) | 2A (100V) | 1H (50V) | 2E (250V) | 2A (100V) | 1H (50V) | 1V (35V) | 1E (25V) | 1C (16V) | 0J (6.3V) | 2A (100V) | 1E (25V) | 1C (16V) | 1A (10V) |
| 100 | 101 | █ | | | | | | | | | | | | | | |
| 150 | 151 | █ | | | | | | | | | | | | | | |
| 220 | 221 | █ | | | | | | | | | | | | | | |
| 330 | 331 | █ | | | | | | | | | | | | | | |
| 470 | 471 | █ | | | | | | | | | | | | | | |
| 680 | 681 | █ | | | | | | | | | | | | | | |
| 1,000 | 102 | | | | | █ | █ | | | | | | | | | |
| 1,200 | 122 | | | | | █ | █ | | | | | | | | | |
| 1,500 | 152 | | | | | █ | █ | | | | | | | | | |
| 1,800 | 182 | | | | | █ | █ | | | | | | | | | |
| 2,200 | 222 | | | | | █ | █ | | | | | | | | | |
| 2,700 | 272 | | | | | █ | █ | | | | | | | | | |
| 3,300 | 332 | | █ | | | | | | | | | | | | | |
| 3,900 | 392 | | █ | | | | | | | | | | | | | |
| 4,700 | 472 | | █ | | | █ | █ | | | | | | | | | |
| 5,600 | 562 | | █ | | | █ | █ | | | | | | | | | |
| 6,800 | 682 | | █ | | | █ | █ | | | | | | | | | |
| 10,000 | 103 | | | █ | █ | █ | █ | | | | | | | | | |
| 15,000 | 153 | | | █ | █ | █ | █ | | | | | | | | | |
| 22,000 | 223 | | | █ | █ | █ | █ | | | | | | | | | |
| 33,000 | 333 | | | █ | █ | █ | █ | | | | | | | | | |
| 47,000 | 473 | | | █ | █ | █ | █ | | | | | | | | | |
| 100,000 | 104 | | | | | █ | █ | █ | | | | | | | | |
| 220,000 | 224 | | | | | █ | █ | █ | █ | | | █ | █ | | | |
| 470,000 | 474 | | | | | | | | █ | █ | | █ | █ | | | |
| 1,000,000 | 105 | | | | | | | | █ | █ | | | █ | █ | | |
| 2,200,000 | 225 | | | | | | | | █ | █ | | | █ | █ | | |
| 4,700,000 | 475 | | | | | | | | █ | █ | | | █ | █ | | |
| 10,000,000 | 106 | | | | | | | | | | | █ | █ | █ | █ | |

| Capacitance | | X7T | | X8R | | | | X8L | | | |
|-------------|------|-----------|-----------|-----------|----------|----------|----------|----------|----------|----------|----------|
| (pF) | Code | 2W (450V) | 2E (250V) | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) | 1H (50V) | 1V (35V) | 1E (25V) | 1A (10V) |
| 10,000 | 103 | █ | | | | | | | | | |
| 22,000 | 223 | █ | | █ | | | | | | | |
| 33,000 | 333 | | | █ | | | | | | | |
| 47,000 | 473 | █ | █ | | | | | | | | |
| 68,000 | 683 | | | █ | █ | | | | | | |
| 100,000 | 104 | | █ | | █ | | | | | | |
| 150,000 | 154 | | | | | █ | █ | | | | |
| 220,000 | 224 | | | | | █ | █ | | | | |
| 330,000 | 334 | | | | | █ | █ | | | | |
| 470,000 | 474 | | | | | █ | █ | █ | | | |
| 680,000 | 684 | | | | | █ | █ | | | | |
| 1,000,000 | 105 | | | | | █ | █ | █ | | | |
| 2,200,000 | 225 | | | | | █ | █ | | █ | | |
| 4,700,000 | 475 | | | | | █ | █ | | █ | | |
| 10,000,000 | 106 | | | | | | | | | | █ |

Standard thickness █ 0.60 mm █ 0.85 mm █ 1.25 mm

█ Background gray: These products are not recommended for new designs.

█ Click the charts for details.

█ For details such as the catalog numbers, please refer to the capacitance range table on page 11 and after.

Capacitance range chart

CGA5/3216 [1206 inch]

| Capacitance | | COG | | | | | X7R | | | | | | X7S | |
|-------------|------|--------------|--------------|--------------|--------------|-------------|--------------|--------------|--------------|-------------|-------------|-------------|--------------|--------------|
| (pF) | Code | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) | 1H (50V) | 2J (630V) | 2E (250V) | 2A (100V) | 1H (50V) | 1V (35V) | 1E (25V) | 0J (6.3V) | 2A (100V) |
| 1,000 | 102 | | | | | | ■ | | | | | | | |
| 2,200 | 222 | | | | | | ■ | | | | | | | |
| 3,300 | 332 | | | | | | ■ | | | | | | | |
| 3,900 | 392 | ■ | | | | | ■ | | | | | | | |
| 4,700 | 472 | | | | | | ■ | | | | | | | |
| 5,600 | 562 | ■ | | | | | ■ | | | | | | | |
| 6,800 | 682 | | ■ | | | | | | | | | | | |
| 8,200 | 822 | | ■ | | | | | | | | | | | |
| 10,000 | 103 | ■ | | | | | ■ | | | | | | | |
| 15,000 | 153 | | | ■ | | | | | | | | | | |
| 22,000 | 223 | | | | | | ■ | ■ | | | | | | |
| 33,000 | 333 | | | | | | ■ | | | | | | | |
| 47,000 | 473 | | | | ■ | ■ | | ■ | | | | | | |
| 68,000 | 683 | | | | ■ | ■ | | | | | | | | |
| 100,000 | 104 | | | | ■ | ■ | | ■ | | | | | | |
| 220,000 | 224 | | | | | | | | | | | | | |
| 470,000 | 474 | | | | | | | | | | | | | |
| 1,000,000 | 105 | | | | | | | | | ■ | | | | |
| 2,200,000 | 225 | | | | | | | | | ■ | | | ■ | |
| 4,700,000 | 475 | | | | | | | | | ■ | | | ■ | |
| 10,000,000 | 106 | | | | | | | | | ■ | | | ■ | |
| 22,000,000 | 226 | | | | | | | | | | | | ■ | |

| Capacitance | | X7T | | | | X8R | | | X8L |
|-------------|------|--------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------|
| (pF) | Code | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) | 1E (25V) |
| 47,000 | 473 | ■ | | | | | | | |
| 100,000 | 104 | | ■ | | ■ | | | | |
| 150,000 | 154 | | | | ■ | | | | |
| 220,000 | 224 | | | ■ | | | | | |
| 330,000 | 334 | | | | ■ | ■ | | | |
| 470,000 | 474 | | | | | ■ | | | |
| 680,000 | 684 | | | | | | | | |
| 1,000,000 | 105 | | | | | ■ | ■ | | |
| 1,500,000 | 155 | | | | | | ■ | | |
| 2,200,000 | 225 | | | | | | | | |
| 3,300,000 | 335 | | | | | | | ■ | |
| 4,700,000 | 475 | | | | | | | | |
| 10,000,000 | 106 | | | | | | | | ■ |

Standard thickness ■ 0.85 mm ■ 1.15 mm ■ 1.30 mm ■ 1.60 mm

■ Click the charts for details.

■ For details such as the catalog numbers, please refer to the capacitance range table on page 11 and after.

MULTILAYER CERAMIC CHIP CAPACITORS TDK

Capacitance range chart

CGA6/3225 [1210 inch]

| Capacitance | | COG | | | | | X7R | | | | | X7S | | X7T | | |
|-------------|------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|-------------|--------------|-------------|--------------|--------------|--------------|
| (pF) | Code | 3A (1kV) | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) | 2J (630V) | 2E (250V) | 2A (100V) | 1H (50V) | 1E (25V) | 2A (100V) | 1H (50V) | 2J (630V) | 2W (450V) | 2E (250V) |
| 1,000 | 102 | █ | | | | | | | | | | | | | | |
| 1,200 | 122 | █ | | | | | | | | | | | | | | |
| 1,500 | 152 | █ | | | | | | | | | | | | | | |
| 1,800 | 182 | █ | | | | | | | | | | | | | | |
| 2,200 | 222 | █ | | | | | | | | | | | | | | |
| 2,700 | 272 | █ | | | | | | | | | | | | | | |
| 3,300 | 332 | █ | | | | | | | | | | | | | | |
| 3,900 | 392 | █ | | | | | | | | | | | | | | |
| 4,700 | 472 | █ | | | | | | | | | | | | | | |
| 5,600 | 562 | █ | | | | | | | | | | | | | | |
| 6,800 | 682 | █ | | | | | | | | | | | | | | |
| 8,200 | 822 | █ | | | | | | | | | | | | | | |
| 15,000 | 153 | | █ | | | | | | | | | | | | | |
| 22,000 | 223 | | █ | | █ | | | | | | | | | | | |
| 33,000 | 333 | | █ | █ | | | | | | | | | | | | |
| 47,000 | 473 | | | | | | | | | | | | | | | |
| 68,000 | 683 | | | | | █ | | █ | | | | | | | | |
| 100,000 | 104 | | | | | █ | | █ | | | | | | | | |
| 150,000 | 154 | | | | | | | | | | | | █ | | | |
| 220,000 | 224 | | | | | | | █ | | | | | | █ | | |
| 330,000 | 334 | | | | | | | | | | | | | | █ | |
| 470,000 | 474 | | | | | | | | | | | | | | | █ |
| 1,000,000 | 105 | | | | | | | | █ | | | | | | | |
| 2,200,000 | 225 | | | | | | | | █ | █ | | | | | | |
| 3,300,000 | 335 | | | | | | | | | | █ | | | | | |
| 4,700,000 | 475 | | | | | | | | | █ | | █ | | | | |
| 10,000,000 | 106 | | | | | | | | | | █ | | █ | | | |
| 22,000,000 | 226 | | | | | | | | | | █ | | | | | |

| Capacitance | | X8R | | |
|-------------|------|--------------|-------------|-------------|
| (pF) | Code | 2A (100V) | 1E (25V) | 1C (16V) |
| 470,000 | 474 | █ | | |
| 680,000 | 684 | █ | | |
| 3,300,000 | 335 | | █ | |
| 4,700,000 | 475 | | █ | |
| 10,000,000 | 106 | | | █ |

Standard thickness █ 1.60 mm █ 2.00 mm █ 2.30 mm █ 2.50 mm

█ Click the charts for details.

█ For details such as the catalog numbers, please refer to the capacitance range table on page 11 and after.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

Capacitance range chart

CGA7/4520 [1808 inch]

| Capacitance | | X7R |
|-------------|------|-------------|
| (pF) | Code | 3D (2kV) |
| 1,000 | 102 | |

Standard thickness 1.30 mm

■ Click the charts for details.

■ For details such as the catalog numbers, please refer to the capacitance range table on page 11 and after.

Capacitance range chart

CGA8/4532 [1812 inch]

| Capacitance | | COG | | X7R | | | X7T | | |
|-------------|------|-------------|--------------|-------------|--------------|--------------|--------------|--------------|--------------|
| (pF) | Code | 3F (3kV) | 2J (630V) | 3D (2kV) | 2J (630V) | 2E (250V) | 2J (630V) | 2W (450V) | 2E (250V) |
| 330 | 331 | | | | | | | | |
| 2,200 | 222 | | | | | | | | |
| 33,000 | 333 | | | | | | | | |
| 100,000 | 104 | | | | | | | | |
| 220,000 | 224 | | | | | | | | |
| 470,000 | 474 | | | | | | | | |
| 1,000,000 | 105 | | | | | | | | |

Standard thickness 1.30 mm 2.00 mm 2.30 mm 2.50 mm

■ Click the charts for details.

■ For details such as the catalog numbers, please refer to the capacitance range table on page 11 and after.

Capacitance range chart

CGA9/5750 [2220 inch]

| Capacitance | | COG | | | X7R | | X7S | X7T | | |
|-------------|------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| (pF) | Code | 2J (630V) | 2E (250V) | 2A (100V) | 2J (630V) | 2E (250V) | 2A (100V) | 2J (630V) | 2W (450V) | 2E (250V) |
| 68,000 | 683 | | | | | | | | | |
| 150,000 | 154 | | | | | | | | | |
| 220,000 | 224 | | | | | | | | | |
| 470,000 | 474 | | | | | | | | | |
| 1,000,000 | 105 | | | | | | | | | |
| 2,200,000 | 225 | | | | | | | | | |
| 10,000,000 | 106 | | | | | | | | | |

Standard thickness 2.30 mm 2.50 mm

■ Click the charts for details.

■ For details such as the catalog numbers, please refer to the capacitance range table on page 11 and after.

Capacitance range chart

CGAD/7563 [3025 inch]

| Capacitance | | X7R |
|-------------|------|-------------|
| (pF) | Code | 1E (25V) |
| 47,000,000 | 476 | |

Standard thickness 2.30 mm

■ Click the charts for details.

■ For details such as the catalog numbers, please refer to the capacitance range table on page 11 and after.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristic: COG (-55 to +125 °C ,0±30ppm/ °C)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | |
|-------------|------------|-----------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | Rated voltage Edc: 3kV | Rated voltage Edc: 1kV | Rated voltage Edc: 630V | Rated voltage Edc: 450V |
| 100pF | 2012 | 0.60±0.15 | ±5% | | | | CGA4C4C0G2W101J060AE |
| 150pF | 2012 | 0.60±0.15 | ±5% | | | | CGA4C4C0G2W151J060AE |
| 220pF | 2012 | 0.60±0.15 | ±5% | | | | CGA4C4C0G2W221J060AE |
| 330pF | 2012 | 0.60±0.15 | ±5% | | | | CGA4C4C0G2W331J060AE |
| | 4532 | 2.50±0.30 | ±10% | CGA8P1C0G3F331K250KE | | | |
| 470pF | 2012 | 0.60±0.15 | ±5% | | | | CGA4C4C0G2W471J060AE |
| 680pF | 2012 | 0.60±0.15 | ±5% | | | | CGA4C4C0G2W681J060AE |
| | 2012 | 0.60±0.15 | ±5% | | | | CGA4C4C0G2W102J060AE |
| 1nF | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A102G200AE | | |
| | | | ±5% | | CGA6M1C0G3A102J200AE | | |
| | 2012 | 0.60±0.15 | ±5% | | | | CGA4C4C0G2W122J060AE |
| 1.2nF | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A122G200AE | | |
| | | | ±5% | | CGA6M1C0G3A122J200AE | | |
| | 2012 | 0.85±0.15 | ±5% | | | | CGA4F4C0G2W152J085AE |
| 1.5nF | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A152G200AE | | |
| | | | ±5% | | CGA6M1C0G3A152J200AE | | |
| | 2012 | 0.85±0.15 | ±5% | | | | CGA4F4C0G2W182J085AE |
| 1.8nF | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A182G200AE | | |
| | | | ±5% | | CGA6M1C0G3A182J200AE | | |
| | 2012 | 0.85±0.15 | ±5% | | | | CGA4F4C0G2W222J085AE |
| 2.2nF | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A222G200AE | | |
| | | | ±5% | | CGA6M1C0G3A222J200AE | | |
| | 2012 | 1.25+0.25,-0.20 | ±5% | | | | CGA4J4C0G2W272J125AE |
| 2.7nF | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A272G200AE | | |
| | | | ±5% | | CGA6M1C0G3A272J200AE | | |
| | 2012 | 1.25+0.25,-0.20 | ±5% | | | | CGA4J4C0G2W332J125AE |
| 3.3nF | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A332G200AE | | |
| | | | ±5% | | CGA6M1C0G3A332J200AE | | |
| | 2012 | 1.25+0.25,-0.20 | ±5% | | | | CGA4J4C0G2W392J125AE |
| 3.9nF | 3216 | 0.85±0.15 | ±2% | | | CGA5F4C0G2J392G085AE | |
| | | | ±5% | | CGA5F4C0G2J392J085AE | | |
| | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A392G200AE | | |
| | | | ±5% | | CGA6M1C0G3A392J200AE | | |
| 4.7nF | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A472G200AE | | |
| | | | ±5% | | CGA6M1C0G3A472J200AE | | |
| | 3216 | 1.15±0.15 | ±2% | | | CGA5H4C0G2J562G115AE | |
| | | | ±5% | | | CGA5H4C0G2J562J115AE | |
| 5.6nF | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A562G200AE | | |
| | | | ±5% | | CGA6M1C0G3A562J200AE | | |
| | 3216 | 1.15±0.15 | ±2% | | | CGA5H4C0G2J682G115AE | |
| | | | ±5% | | | CGA5H4C0G2J682J115AE | CGA5H4C0G2W682J115AE |
| 6.8nF | 3225 | 2.00+0.30,-0.20 | ±2% | | CGA6M1C0G3A682G200AE | | |
| | | | ±5% | | CGA6M1C0G3A682J200AE | | |
| | 3216 | 1.15±0.15 | ±5% | | | | CGA5H4C0G2W822J115AE |
| 8.2nF | 3225 | 2.30+0.30,-0.20 | ±2% | | | CGA5L4C0G2J822G160AE | |
| | | | ±5% | | CGA5L4C0G2J822J160AE | | |
| | 3216 | 1.60+0.30,-0.20 | ±2% | | | | CGA5L4C0G2J103G160AE |
| | | | ±5% | | | CGA5L4C0G2J103J160AE | CGA5L4C0G2W103J160AE |
| 15nF | 3225 | 1.60+0.30,-0.20 | ±2% | | | CGA6L4C0G2J153G160AE | |
| | | | ±5% | | CGA6L4C0G2J153J160AE | | |
| | 3225 | 2.50±0.30 | ±2% | | | CGA6P4C0G2J333G250AE | |
| | | | ±5% | | | CGA6P4C0G2J333J250AE | CGA6P4C0G2W333J250AE |
| 33nF | 4532 | 2.00+0.30,-0.20 | ±2% | | | | CGA8M4C0G2J333J200KE |
| | | | ±5% | | | | CGA9N1C0G2J683G230KE |
| 68nF | 5750 | 2.30+0.30,-0.20 | ±2% | | | | CGA9N1C0G2J683J230KE |
| | | | ±5% | | | | |

Click the part numbers for details.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristic: COG (-55 to +125 °C ,0±30ppm/ °C)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | |
|-------------|------------|-----------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | Rated voltage Edc: 250V | Rated voltage Edc: 100V | Rated voltage Edc: 50V |
| 100pF | 1005 | 0.50+0.10,-0.05 | ±5% | | CGA2B2C0G2A101J050BE | CGA2B2C0G1H101J050BE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | | CGA3E2C0G1H101J080AE |
| 150pF | 1005 | 0.50+0.10,-0.05 | ±5% | | CGA2B2C0G2A151J050BE | CGA2B2C0G1H151J050BE |
| | 1005 | 0.50+0.10,-0.05 | ±5% | | CGA2B2C0G2A221J050BE | CGA2B2C0G1H221J050BE |
| 330pF | 1005 | 0.50+0.10,-0.05 | ±5% | | CGA2B2C0G2A331J050BE | CGA2B2C0G1H331J050BE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E2C0G2A331J080AE | CGA3E2C0G1H331J080AE |
| 470pF | 1005 | 0.50+0.10,-0.05 | ±5% | | CGA2B1C0G2A471J050BE | CGA2B2C0G1H471J050BE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E2C0G2A471J080AE | CGA3E2C0G1H471J080AE |
| 680pF | 1005 | 0.50+0.10,-0.05 | ±5% | | CGA2B1C0G2A681J050BE | CGA2B2C0G1H681J050BE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E2C0G2A681J080AE | CGA3E2C0G1H681J080AE |
| 1nF | 1005 | 0.50+0.10,-0.05 | ±5% | | CGA2B1C0G2A102J050BE | CGA2B2C0G1H102J050BE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | CGA3E3C0G2E102J080AE | CGA3E2C0G2A102J080AE | CGA3E2C0G1H102J080AE |
| 1.2nF | 1608 | 0.80+0.15,-0.10 | ±5% | CGA3E3C0G2E122J080AE | CGA3E2C0G2A122J080AE | CGA3E2C0G1H122J080AE |
| 1.5nF | 1608 | 0.80+0.15,-0.10 | ±5% | CGA3E3C0G2E152J080AE | CGA3E2C0G2A152J080AE | CGA3E2C0G1H152J080AE |
| 1.8nF | 1608 | 0.80+0.15,-0.10 | ±5% | CGA3E3C0G2E182J080AE | CGA3E2C0G2A182J080AE | CGA3E2C0G1H182J080AE |
| 2.2nF | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E2C0G2A222J080AE | CGA3E2C0G1H222J080AE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E1C0G2A272J080AE | CGA3E2C0G1H272J080AE |
| 3.3nF | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E1C0G2A332J080AE | CGA3E2C0G1H332J080AE |
| | 2012 | 0.85±0.15 | ±5% | CGA4F3C0G2E332J085AE | | |
| 3.9nF | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E1C0G2A392J080AE | CGA3E2C0G1H392J080AE |
| | 2012 | 1.25+0.25,-0.20 | ±5% | CGA4J3C0G2E392J125AE | | |
| 4.7nF | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E1C0G2A472J080AE | CGA3E2C0G1H472J080AE |
| | 2012 | 1.25+0.25,-0.20 | ±5% | CGA4J3C0G2E472J125AE | | |
| 5.6nF | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E1C0G2A562J080AE | CGA3E2C0G1H562J080AE |
| | 2012 | 1.25+0.25,-0.20 | ±5% | CGA4J3C0G2E562J125AE | | |
| 6.8nF | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E1C0G2A682J080AE | CGA3E2C0G1H682J080AE |
| | 2012 | 1.25+0.25,-0.20 | ±5% | CGA4J3C0G2E682J125AE | | |
| 8.2nF | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E1C0G2A822J080AE | CGA3E2C0G1H822J080AE |
| | 1608 | 0.80+0.15,-0.10 | ±5% | | CGA3E1C0G2A103J080AE | CGA3E2C0G1H103J080AE |
| 10nF | 3216 | 1.15±0.15 | ±5% | CGA5H3C0G2E103J115AE | | |
| | 2012 | 0.85±0.15 | ±5% | | CGA4F1C0G2A153J085AE | CGA4F2C0G1H153J085AE |
| 15nF | 3216 | 1.60+0.30,-0.20 | ±5% | CGA5L3C0G2E153J160AE | | |
| | 2012 | 1.25+0.25,-0.20 | ±5% | | CGA4J1C0G2A223J125AE | CGA4J2C0G1H223J125AE |
| 22nF | 3225 | 1.60+0.30,-0.20 | ±5% | CGA6L3C0G2E223J160AE | | |
| | 2012 | 1.25+0.25,-0.20 | ±5% | | CGA4J1C0G2A333J125AE | CGA4J2C0G1H333J125AE |
| 33nF | 3216 | 1.15±0.15 | ±5% | CGA5H1C0G2A473J115AE | | |
| | 3216 | 1.60+0.30,-0.20 | ±5% | CGA5L1C0G2A683J160AE | CGA5L2C0G1H683J160AE | |
| 47nF | 3216 | 1.60+0.30,-0.20 | ±5% | CGA6N2C0G2A683J230AE | | |
| | 3225 | 2.30+0.30,-0.20 | ±5% | | CGA5L2C0G1H104J160AE | |
| 68nF | 3216 | 1.60+0.30,-0.20 | ±5% | CGA5L1C0G2A104J160AE | CGA5L2C0G1H104J160AE | |
| | 3216 | 1.60+0.30,-0.20 | ±5% | CGA9N4C0G2E154J230KE | CGA9N2C0G2A154J230KE | |

Click the part numbers for details.

MULTILAYER CERAMIC CHIP CAPACITORS

Capacitance range table

Temperature characteristic: X7R (-55 to +125°C, ±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | | |
|-------------|------------|------------------|--------------------------------------|------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | Rated voltage Edc: 2kV | Rated voltage Edc: 630V | Rated voltage Edc: 250V | Rated voltage Edc: 100V | Rated voltage Edc: 50V |
| 1nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | CGA2B2X7R1H102K050BE |
| | | | ±20% | | | | CGA2B2X7R1H102M050BE | |
| | 1608 | 0.80 +0.15,-0.10 | ±10% | | | | CGA3E2X7R2A102K080AE | CGA3E2X7R1H102K080AE |
| | | | ±20% | | | | CGA3E2X7R2A102M080AE | CGA3E2X7R1H102M080AE |
| | 2012 | 0.85±0.15 | ±10% | | | CGA4F3X7R2E102K085AE | CGA4F2X7R2A102K085AE | |
| | | | ±20% | | | CGA4F3X7R2E102M085AE | CGA4F2X7R2A102M085AE | |
| 3216 | 1.15±0.15 | ±10% | | | CGA5H4X7R2J102K115AE | CGA5H4X7R2J102M115AE | | |
| | | ±20% | | | CGA5H4X7R2J102M115AE | | | |
| 4520 | 1.30±0.20 | ±10% | CGA7K1X7R3D102K130KE | | | | | |
| | | ±20% | CGA7K1X7R3D102M130KE | | | | | |
| 2.2nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | CGA2B2X7R1H222K050BE |
| | | | ±20% | | | | CGA2B2X7R1H222M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | CGA3E2X7R2A222K080AE | CGA3E2X7R1H222K080AE |
| | | | ±20% | | | | CGA3E2X7R2A222M080AE | CGA3E2X7R1H222M080AE |
| | 2012 | 0.85±0.15 | ±10% | | | CGA4F3X7R2E222K085AE | CGA4F2X7R2A222K085AE | |
| | | | ±20% | | | CGA4F3X7R2E222M085AE | CGA4F2X7R2A222M085AE | |
| 3216 | 1.15±0.15 | ±10% | | | CGA5H4X7R2J222K115AE | CGA5H4X7R2J222M115AE | | |
| | | ±20% | | | CGA5H4X7R2J222M115AE | | | |
| 4532 | 1.30±0.20 | ±10% | CGA8K1X7R3D222K130KE | | | | | |
| | | ±20% | CGA8K1X7R3D222M130KE | | | | | |
| 3.3nF | 3216 | 1.15±0.15 | ±10% | | | CGA5H4X7R2J332K115AE | | |
| | | | ±20% | | | CGA5H4X7R2J332M115AE | | |
| 4.7nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | CGA2B2X7R1H472K050BE |
| | | | ±20% | | | | CGA2B2X7R1H472M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | CGA3E2X7R2A472K080AE | CGA3E2X7R1H472K080AE |
| | | | ±20% | | | | CGA3E2X7R2A472M080AE | CGA3E2X7R1H472M080AE |
| | 2012 | 0.85±0.15 | ±10% | | | CGA4F3X7R2E472K085AE | CGA4F2X7R2A472K085AE | |
| | | | ±20% | | | CGA4F3X7R2E472M085AE | CGA4F2X7R2A472M085AE | |
| 3216 | 1.15±0.15 | ±10% | | | CGA5H4X7R2J472K115AE | CGA5H4X7R2J472M115AE | | |
| | | ±20% | | | CGA5H4X7R2J472M115AE | | | |
| 10nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | CGA2B3X7R1H103K050BE |
| | | | ±20% | | | | CGA2B3X7R1H103M050BE | |
| | 1608 | 0.80 +0.15,-0.10 | ±10% | | | | CGA3E2X7R2A103K080AE | CGA3E2X7R1H103K080AE |
| | | | ±20% | | | | CGA3E2X7R2A103M080AE | CGA3E2X7R1H103M080AE |
| | 2012 | 0.85±0.15 | ±10% | | | | CGA4F2X7R2A103K085AE | CGA4F2X7R2A103M085AE |
| | | | ±20% | | | | CGA4F2X7R2A103M085AE | |
| 3216 | 1.15±0.15 | ±10% | | | CGA4J3X7R2E103K125AE | CGA4J3X7R2E103M125AE | | |
| | | ±20% | | | CGA4J3X7R2E103M125AE | | | |
| 22nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | CGA2B3X7R1H223K050BE |
| | | | ±20% | | | | CGA2B3X7R1H223M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | CGA3E2X7R2A223K080AE | CGA3E2X7R1H223K080AE |
| | | | ±20% | | | | CGA3E2X7R2A223M080AE | CGA3E2X7R1H223M080AE |
| | 2012 | 1.25 +0.25,-0.20 | ±10% | | | CGA4J3X7R2E223K125AE | CGA4J2X7R2A223K125AE | |
| | | | ±20% | | | CGA4J3X7R2E223M125AE | CGA4J2X7R2A223M125AE | |
| 3216 | 1.15±0.15 | ±10% | | | | CGA5H3X7R2E223K115AE | | |
| | | ±20% | | | | CGA5H3X7R2E223M115AE | | |
| 33nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | | CGA2B3X7R1H223K050BE |
| | | | ±20% | | | | CGA2B3X7R1H223M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | CGA3E2X7R2A223K080AE | CGA3E2X7R1H223K080AE |
| | | | ±20% | | | | CGA3E2X7R2A223M080AE | CGA3E2X7R1H223M080AE |
| | 2012 | 1.25 +0.25,-0.20 | ±10% | | | CGA4J3X7R2E223K125AE | CGA4J2X7R2A223K125AE | |
| | | | ±20% | | | CGA4J3X7R2E223M125AE | CGA4J2X7R2A223M125AE | |
| 3216 | 1.30±0.20 | ±10% | | | CGA5K4X7R2J223K130AE | CGA5K4X7R2J223M130AE | | |
| | | ±20% | | | CGA5K4X7R2J223M130AE | | | |
| 33nF | 3216 | 1.60+0.30,-0.20 | ±10% | | | CGA5L4X7R2J333K160AE | CGA5L4X7R2J333M160AE | |
| | | | ±20% | | | CGA5L4X7R2J333M160AE | | |

■ Gray items: These products are not recommended for new designs.
Click the part numbers for details.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.


MULTILAYER CERAMIC CHIP CAPACITORS

Capacitance range table

Temperature characteristic: X7R (-55 to +125°C, ±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | |
|-------------|-----------------|-----------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | Rated voltage Edc: 630V | Rated voltage Edc: 250V | Rated voltage Edc: 100V | Rated voltage Edc: 50V |
| 47nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | CGA2B3X7R1H473K050BE |
| | | | ±20% | | | | CGA2B3X7R1H473M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | CGA3E2X7R1H473K080AE |
| | | | ±20% | | | | CGA3E2X7R1H473M080AE |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | | CGA4J2X7R2A473K125AE | |
| | | | ±20% | | | CGA4J2X7R2A473M125AE | |
| 3216 | 1.60+0.30,-0.20 | ±10% | | CGA5L3X7R2E473K160AE | | | |
| | | ±20% | | CGA5L3X7R2E473M160AE | | | |
| 3225 | 2.00+0.30,-0.20 | ±10% | CGA6M4X7R2J473K200AE | | | | |
| | | ±20% | CGA6M4X7R2J473M200AE | | | | |
| 68nF | 3225 | 2.00+0.30,-0.20 | ±10% | CGA6M4X7R2J683K200AE | | | |
| | | | ±20% | CGA6M4X7R2J683M200AE | | | |
| 100nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | | CGA2B3X7R1H104K050BE |
| | | | ±20% | | | | CGA2B3X7R1H104M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | | | CGA3E2X7R1H104K080AE |
| | | | ±20% | | | | CGA3E2X7R1H104M080AE |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | | CGA4J2X7R2A104K125AE | CGA4J2X7R1H104K125AE |
| | | | ±20% | | | CGA4J2X7R2A104M125AE | CGA4J2X7R1H104M125AE |
| 3216 | 1.60+0.30,-0.20 | ±10% | | CGA5L3X7R2E104K160AE | CGA5L2X7R2A104K160AE | | |
| | | ±20% | | CGA5L3X7R2E104M160AE | CGA5L2X7R2A104M160AE | | |
| 3225 | 2.00+0.30,-0.20 | ±10% | | CGA6M3X7R2E104K200AE | CGA6M3X7R2E104M200AE | | |
| | | ±20% | | CGA6M3X7R2E104M200AE | | | |
| 4532 | 2.30+0.30,-0.20 | ±10% | CGA8N4X7R2J104K230KE | | | | |
| | | ±20% | CGA8N4X7R2J104M230KE | | | | |
| 220nF | 1608 | 0.80+0.15,-0.10 | ±10% | | | | CGA3E3X7R1H224K080AE |
| | | | ±20% | | | | CGA3E3X7R1H224M080AE |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | | | CGA4J2X7R1H224K125AE |
| | | | ±20% | | | | CGA4J2X7R1H224M125AE |
| | 3216 | 1.15±0.15 | ±10% | | | CGA5H2X7R2A224K115AE | |
| | | | ±20% | | | CGA5H2X7R2A224M115AE | |
| 3225 | 2.00+0.30,-0.20 | ±10% | | CGA6M3X7R2E224K200AE | | | |
| | | ±20% | | CGA6M3X7R2E224M200AE | | | |
| 5750 | 2.30+0.30,-0.20 | ±10% | CGA9N4X7R2J224K230KE | | | | |
| | | ±20% | CGA9N4X7R2J224M230KE | | | | |
| 470nF | 1608 | 0.80+0.15,-0.10 | ±10% | | | | CGA3E3X7R1H474K080AE |
| | | | ±20% | | | | CGA3E3X7R1H474M080AE |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | | | CGA4J3X7R1H474K125AE |
| | | | ±20% | | | | CGA4J3X7R1H474M125AE |
| | 3216 | 1.60+0.30,-0.20 | ±10% | | | CGA5L2X7R2A474K160AE | |
| | | | ±20% | | | CGA5L2X7R2A474M160AE | |
| 3225 | 2.00+0.30,-0.20 | ±10% | | | CGA6M2X7R2A474K200AE | | |
| | | ±20% | | | CGA6M2X7R2A474M200AE | | |
| 4532 | 2.30+0.30,-0.20 | ±10% | | CGA8N3X7R2E474K230KE | | | |
| | | ±20% | | CGA8N3X7R2E474M230KE | | | |
| 1µF | 2012 | 1.25+0.25,-0.20 | ±10% | | | | CGA4J3X7R1H105K125AE |
| | | | ±20% | | | | CGA4J3X7R1H105M125AE |
| | 3216 | 1.60+0.30,-0.20 | ±10% | | | CGA5L2X7R2A105K160AE | CGA5L3X7R1H105K160AE |
| | | | ±20% | | | CGA5L2X7R2A105M160AE | CGA5L3X7R1H105M160AE |
| | 3225 | 1.60+0.30,-0.20 | ±10% | | | CGA6L2X7R1H105K160AE | CGA6L2X7R1H105M160AE |
| | | | ±20% | | | CGA6L2X7R1H105M160AE | |
| 3225 | 2.00+0.30,-0.20 | ±10% | | | CGA6M2X7R2A105K200AE | | |
| | | ±20% | | | CGA6M2X7R2A105M200AE | | |
| 5750 | 2.30+0.30,-0.20 | ±10% | | CGA9N3X7R2E105K230KE | | | |
| | | ±20% | | CGA9N3X7R2E105M230KE | | | |
| 2.2µF | 2012 | 1.25+0.25,-0.20 | ±10% | | | | CGA4J3X7R1H225K125AE |
| | | | ±20% | | | | CGA4J3X7R1H225M125AE |
| | 3216 | 1.60+0.30,-0.20 | ±10% | | | CGA5L3X7R1H225K160AE | |
| | | | ±20% | | | CGA5L3X7R1H225M160AE | |
| | 3225 | 2.00+0.30,-0.20 | ±10% | | | CGA6M3X7R1H225K200AE | |
| | | | ±20% | | | CGA6M3X7R1H225M200AE | |
| 3225 | 2.30+0.30,-0.20 | ±10% | | | CGA6N3X7R2A225K230AE | | |
| | | ±20% | | | CGA6N3X7R2A225M230AE | | |
| 4.7µF | 2012 | 1.25+0.25,-0.20 | ±10% | | | | CGA4J1X7R1H475K125AE |
| | | | ±20% | | | | CGA5L3X7R1H475K160AE |
| | 3216 | 1.60+0.30,-0.20 | ±10% | | | | CGA5L3X7R1H475M160AE |
| ±20% | | | | | | CGA6P3X7R1H475K250AE | |
| 3225 | 2.50±0.30 | ±10% | | | | CGA6P3X7R1H475K250AE | |
| | | ±20% | | | | CGA5L1X7R1H106K160AE | |
| 10µF | 3216 | 1.60+0.30,-0.20 | ±10% | | | | |

■ Gray items: These products are not recommended for new designs.
Click the part numbers for details.

 Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

MULTILAYER CERAMIC CHIP CAPACITORS TDK

Capacitance range table

Temperature characteristic: X7R (-55 to +125°C,±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | |
|-------------|------------|-----------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | Rated voltage Edc: 35V | Rated voltage Edc: 25V | Rated voltage Edc: 16V | Rated voltage Edc: 6.3V |
| 220nF | 1005 | 0.50+0.10,-0.05 | ±10% | CGA2B1X7R1V224K050BE | CGA2B3X7R1E224K050BE | CGA2B2X7R1C224K050BE | |
| | | | ±20% | CGA2B1X7R1V224M050BE | CGA2B3X7R1E224M050BE | CGA2B2X7R1C224M050BE | |
| 470nF | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E3X7R1V224K080AE | CGA3E3X7R1E474K080AE | | |
| | | | ±20% | CGA3E3X7R1V224M080AE | CGA3E3X7R1E474M080AE | | |
| 1µF | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E1X7R1V105K080AE | CGA3E1X7R1E105K080AE | | |
| | | | ±20% | CGA3E1X7R1V105M080AE | CGA3E1X7R1E105M080AE | | |
| 2.2µF | 2012 | 1.25+0.25,-0.20 | ±10% | CGA4J3X7R1V105K125AE | CGA4J3X7R1E105K125AE | | |
| | | | ±20% | CGA4J3X7R1V105M125AE | CGA4J3X7R1E105M125AE | | |
| 4.7µF | 2012 | 1.25+0.25,-0.20 | ±10% | CGA4J1X7R1V225K125AE | CGA4J3X7R1E225K125AE | | |
| | | | ±20% | CGA4J1X7R1V225M125AE | CGA4J3X7R1E225M125AE | | |
| 10µF | 3216 | 1.60+0.30,-0.20 | ±10% | CGA5L3X7R1V225K160AE | CGA5L2X7R1E225K160AE | | |
| | | | ±20% | CGA5L3X7R1V225M160AE | CGA5L2X7R1E225M160AE | | |
| 22µF | 3216 | 1.60+0.30,-0.20 | ±10% | CGA4J1X7R1V475K125AE | CGA4J1X7R1E475K125AE | CGA4J3X7R1C475K125AE | |
| | | | ±20% | CGA4J1X7R1V475M125AE | CGA4J1X7R1E475M125AE | CGA4J3X7R1C475M125AE | |
| 47µF | 3216 | 1.60+0.30,-0.20 | ±10% | CGA5L1X7R1V475K160AE | | | |
| | | | ±20% | CGA5L1X7R1V475M160AE | | | |
| 10µF | 2012 | 1.25±0.20 | ±10% | | | | CGA4J1X7R0J106K125AE |
| | | | ±20% | CGA5L1X7R1V106K160AE | CGA5L1X7R1E106K160AE | | |
| 22µF | 3216 | 1.60+0.30,-0.20 | ±10% | CGA5L1X7R1V106M160AE | CGA5L1X7R1E106M160AE | | |
| | | | ±20% | CGA5L1X7R1V106M160AE | CGA5L1X7R1E106M160AE | | |
| 47µF | 3225 | 2.50±0.30 | ±10% | | CGA6P3X7R1E226M250AE | | CGA5L1X7R0J226M160AE |
| | | | ±20% | | CGA6P3X7R1E226M250AE | | |
| 47µF | 7563 | 2.30(2.50max.) | ±10% | | CGADN3X7R1E476M230LE | | |
| | | | ±20% | | CGADN3X7R1E476M230LE | | |

Click the part numbers for details.

Capacitance range table

Temperature characteristic: X7S (-55 to +125°C,±22%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | | |
|-------------|------------|-----------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | Rated voltage Edc: 100V | Rated voltage Edc: 50V | Rated voltage Edc: 25V | Rated voltage Edc: 16V | Rated voltage Edc: 10V |
| 47nF | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E3X7S2A473K080AE | | | | |
| | | | ±20% | CGA3E3X7S2A473M080AE | | | | |
| 100nF | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E3X7S2A104K080AE | | | | |
| | | | ±20% | CGA3E3X7S2A104M080AE | | | | |
| 220nF | 2012 | 0.85±0.15 | ±10% | CGA4F3X7S2A224K085AE | | | | |
| | | | ±20% | CGA4F3X7S2A224M085AE | | | | |
| 470nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | CGA2B1X7S1C474K050BE | CGA2B3X7S1A474K050BE | |
| | | | ±20% | | | CGA2B1X7S1C474M050BE | CGA2B3X7S1A474M050BE | |
| 1µF | 2012 | 1.25+0.25,-0.20 | ±10% | CGA4J3X7S2A474K125AE | | | | |
| | | | ±20% | CGA4J3X7S2A474M125AE | | | | |
| 2.2µF | 1608 | 0.80+0.15,-0.10 | ±10% | CGA4J3X7S2A105K125AE | | | CGA3E1X7S1C225K080AE | CGA3E3X7S1A225K080AE |
| | | | ±20% | CGA4J3X7S2A105M125AE | | | CGA3E1X7S1C225M080AE | CGA3E3X7S1A225M080AE |
| 3.3µF | 3225 | 2.00+0.30,-0.20 | ±10% | CGA5L3X7S2A225K160AE | | | | |
| | | | ±20% | CGA5L3X7S2A225M160AE | | | | |
| 4.7µF | 3225 | 2.00+0.30,-0.20 | ±10% | CGA6M3X7S2A335K200AE | | | | |
| | | | ±20% | CGA6M3X7S2A335M200AE | | | | |
| 10µF | 2012 | 1.25+0.25,-0.20 | ±10% | CGA6M3X7S2A475K200AE | | | | |
| | | | ±20% | CGA6M3X7S2A475M200AE | | | | |
| 10µF | 3225 | 2.50±0.30 | ±10% | | CGA6N3X7S1H475K230AE | | CGA4J1X7S1E106K125AE | CGA4J1X7S1C106K125AE |
| | | | ±20% | | CGA6N3X7S1H475M230AE | | CGA4J1X7S1E106M125AE | CGA4J1X7S1C106M125AE |
| 10µF | 5750 | 2.30+0.30,-0.20 | ±10% | CGA9N3X7S2A106K230KE | CGA6P3X7S1H106K250AE | | CGA4J3X7S1A106K125AE | CGA4J3X7S1A106M125AE |
| | | | ±20% | CGA9N3X7S2A106M230KE | CGA6P3X7S1H106M250AE | | CGA4J3X7S1A106M125AE | CGA4J3X7S1A106M125AE |

■ Gray items: These products are not recommended for new designs.

Click the part numbers for details.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

MULTILAYER CERAMIC CHIP CAPACITORS



Capacitance range table

Temperature characteristic: X7T (-55 to +125°C,+22, -33%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | |
|-------------|-----------------|-----------------|--------------------------------------|--------------------------------------|--------------------------------------|-------------------------|
| | | | | Rated voltage Edc: 630V | Rated voltage Edc: 450V | Rated voltage Edc: 250V |
| 10 nF | 2012 | 0.85±0.15 | ± 10% | CGA4F4X7T2W103K085AE | | |
| | | | ± 20% | CGA4F4X7T2W103M085AE | | |
| 22 nF | 2012 | 1.25+0.25,-0.20 | ± 10% | CGA4J4X7T2W223K125AE | | |
| | | | ± 20% | CGA4J4X7T2W223M125AE | | |
| 47 nF | 2012 | 1.25+0.25,-0.20 | ± 10% | CGA4J4X7T2W473K125AE | CGA4J3X7T2E473K125AE | |
| | | | ± 20% | CGA4J4X7T2W473M125AE | CGA4J3X7T2E473M125AE | |
| | 3216 | 1.60+0.30,-0.20 | ± 10% | CGA5L1X7T2J473K160AE | | |
| | | | ± 20% | CGA5L1X7T2J473M160AE | | |
| 100 nF | 2012 | 1.25+0.25,-0.20 | ± 10% | CGA4J3X7T2E104K125AE | | |
| | | | ± 20% | CGA4J3X7T2E104M125AE | | |
| | 3216 | 1.60+0.30,-0.20 | ± 10% | CGA5L4X7T2W104K160AE | | |
| | | | ± 20% | CGA5L4X7T2W104M160AE | | |
| 3225 | 1.60+0.30,-0.20 | ± 10% | CGA6L1X7T2J104K160AE | | | |
| | | ± 20% | CGA6L1X7T2J104M160AE | | | |
| 150 nF | 3225 | 2.00+0.30,-0.20 | ± 10% | CGA6M1X7T2J154K200AE | | |
| | | | ± 20% | CGA6M1X7T2J154M200AE | | |
| 220 nF | 3216 | 1.60+0.30,-0.20 | ± 10% | CGA5L3X7T2E224K160AE | | |
| | | | ± 20% | CGA5L3X7T2E224M160AE | | |
| | 3225 | 2.00+0.30,-0.20 | ± 10% | CGA6M4X7T2W224K200AE | | |
| | | | ± 20% | CGA6M4X7T2W224M200AE | | |
| 4532 | 2.00+0.30,-0.20 | ± 10% | CGA8M1X7T2J224K200KE | | | |
| | | ± 20% | CGA8M1X7T2J224M200KE | | | |
| 330 nF | 3225 | 2.00+0.30,-0.20 | ± 10% | CGA6M3X7T2E334K200AE | | |
| | | | ± 20% | CGA6M3X7T2E334M200AE | | |
| 470 nF | 4532 | 2.30+0.30,-0.20 | ± 10% | CGA8N4X7T2W474K230KE | | |
| | | | ± 20% | CGA8N4X7T2W474M230KE | | |
| | 5750 | 2.50±0.30 | ± 10% | CGA9P1X7T2J474K250KE | | |
| | | | ± 20% | CGA9P1X7T2J474M250KE | | |
| 1 µF | 4532 | 2.50±0.30 | ± 10% | CGA8P3X7T2E105K250KE | | |
| | | | ± 20% | CGA8P3X7T2E105M250KE | | |
| 5750 | 2.50±0.30 | ± 10% | CGA9P4X7T2W105K250KE | | | |
| | | ± 20% | CGA9P4X7T2W105M250KE | | | |
| 2.2 µF | 5750 | 2.50±0.30 | ± 10% | CGA9P3X7T2E225K250KE | | |
| | | | ± 20% | CGA9P3X7T2E225M250KE | | |

Click the part numbers for details.

MULTILAYER CERAMIC CHIP CAPACITORS TDK

Capacitance range table

Temperature characteristic: X8R (-55 to +150°C, ±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | |
|-------------|-----------------|-----------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | Rated voltage Edc: 100V | Rated voltage Edc: 50V | Rated voltage Edc: 25V | Rated voltage Edc: 16V |
| 150pF | 1005 | 0.50+0.10,-0.05 | ±10% | CGA2B2X8R2A151K050BE | CGA2B2X8R1H151K050BE | | |
| | | | ±20% | CGA2B2X8R2A151M050BE | CGA2B2X8R1H151M050BE | | |
| 220pF | 1005 | 0.50+0.10,-0.05 | ±10% | CGA2B2X8R2A221K050BE | CGA2B2X8R1H221K050BE | | |
| | | | ±20% | CGA2B2X8R2A221M050BE | CGA2B2X8R1H221M050BE | | |
| 330pF | 1005 | 0.50+0.10,-0.05 | ±10% | CGA2B2X8R2A331K050BE | CGA2B2X8R1H331K050BE | | |
| | | | ±20% | CGA2B2X8R2A331M050BE | CGA2B2X8R1H331M050BE | | |
| 470pF | 1005 | 0.50+0.10,-0.05 | ±10% | CGA2B2X8R2A471K050BE | CGA2B2X8R1H471K050BE | | |
| | | | ±20% | CGA2B2X8R2A471M050BE | CGA2B2X8R1H471M050BE | | |
| 680pF | 1005 | 0.50+0.10,-0.05 | ±10% | CGA2B2X8R2A681K050BE | CGA2B2X8R1H681K050BE | | |
| | | | ±20% | CGA2B2X8R2A681M050BE | CGA2B2X8R1H681M050BE | | |
| 1nF | 1005 | 0.50+0.10,-0.05 | ±10% | CGA2B2X8R2A102K050BE | CGA2B2X8R1H102K050BE | | |
| | | | ±20% | CGA2B2X8R2A102M050BE | CGA2B2X8R1H102M050BE | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E2X8R2A102K080AE | CGA3E2X8R1H102K080AE | | |
| | | | ±20% | CGA3E2X8R2A102M080AE | CGA3E2X8R1H102M080AE | | |
| 1.5nF | 1005 | 0.50+0.10,-0.05 | ±10% | CGA2B2X8R2A152K050BE | CGA2B2X8R1H152K050BE | | |
| | | | ±20% | CGA2B2X8R2A152M050BE | CGA2B2X8R1H152M050BE | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E2X8R2A152K080AE | CGA3E2X8R1H152K080AE | | |
| | | | ±20% | CGA3E2X8R2A152M080AE | CGA3E2X8R1H152M080AE | | |
| 2.2nF | 1005 | 0.50+0.10,-0.05 | ±10% | CGA2B2X8R2A222K050BE | CGA2B2X8R1H222K050BE | | |
| | | | ±20% | CGA2B2X8R2A222M050BE | CGA2B2X8R1H222M050BE | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E2X8R2A222K080AE | CGA3E2X8R1H222K080AE | | |
| | | | ±20% | CGA3E2X8R2A222M080AE | CGA3E2X8R1H222M080AE | | |
| 3.3nF | 1005 | 0.50+0.10,-0.05 | ±10% | CGA2B3X8R2A332K050BE | CGA2B3X8R1H332K050BE | | |
| | | | ±20% | CGA2B3X8R2A332M050BE | CGA2B3X8R1H332M050BE | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E2X8R2A332K080AE | CGA3E2X8R1H332K080AE | | |
| | | | ±20% | CGA3E2X8R2A332M080AE | CGA3E2X8R1H332M080AE | | |
| 4.7nF | 1005 | 0.50+0.10,-0.05 | ±10% | | CGA2B2X8R1H472K050BE | | |
| | | | ±20% | | CGA2B2X8R1H472M050BE | | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E2X8R2A472K080AE | CGA3E2X8R1H472K080AE | | |
| | | | ±20% | CGA3E2X8R2A472M080AE | CGA3E2X8R1H472M080AE | | |
| 6.8nF | 1005 | 0.50+0.10,-0.05 | ±10% | | CGA2B3X8R1H682K050BE | CGA2B2X8R1E682K050BE | |
| | | | ±20% | | CGA2B3X8R1H682M050BE | CGA2B2X8R1E682M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E2X8R2A682K080AE | CGA3E2X8R1H682K080AE | | |
| | | | ±20% | CGA3E2X8R2A682M080AE | CGA3E2X8R1H682M080AE | | |
| 10nF | 1005 | 0.50+0.10,-0.05 | ±10% | | CGA2B3X8R1H103K050BE | CGA2B2X8R1E103K050BE | |
| | | | ±20% | | CGA2B3X8R1H103M050BE | CGA2B2X8R1E103M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E2X8R2A103K080AE | CGA3E2X8R1H103K080AE | | |
| | | | ±20% | CGA3E2X8R2A103M080AE | CGA3E2X8R1H103M080AE | | |
| 15nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | CGA2B3X8R1E153K050BE | |
| | | | ±20% | | | CGA2B3X8R1E153M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E2X8R2A153K080AE | CGA3E2X8R1H153K080AE | | |
| | | | ±20% | CGA3E2X8R2A153M080AE | CGA3E2X8R1H153M080AE | | |
| 22nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | CGA2B3X8R1E223K050BE | |
| | | | ±20% | | | CGA2B3X8R1E223M050BE | |
| | 1608 | 0.80+0.15,-0.10 | ±10% | CGA3E3X8R2A223K080AE | CGA3E2X8R1H223K080AE | | |
| | | | ±20% | CGA3E3X8R2A223M080AE | CGA3E2X8R1H223M080AE | | |
| 2012 | 1.25+0.25,-0.20 | ±10% | CGA4J2X8R2A223K125AE | | | | |
| | | ±20% | CGA4J2X8R2A223M125AE | | | | |
| 33nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | CGA2B1X8R1E333K050BE | CGA2B3X8R1C333K050BE |
| | | | ±20% | | | CGA2B1X8R1E333M050BE | CGA2B3X8R1C333M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | CGA3E2X8R1H333K080AE | | |
| | | | ±20% | | CGA3E2X8R1H333M080AE | | |
| 2012 | 1.25+0.25,-0.20 | ±10% | CGA4J3X8R2A333K125AE | | | | |
| | | ±20% | CGA4J3X8R2A333M125AE | | | | |
| 47nF | 1005 | 0.50+0.10,-0.05 | ±10% | | | CGA2B1X8R1E473K050BE | CGA2B3X8R1C473K050BE |
| | | | ±20% | | | CGA2B1X8R1E473M050BE | CGA2B3X8R1C473M050BE |
| | 1608 | 0.80+0.15,-0.10 | ±10% | | CGA3E2X8R1H473K080AE | | |
| | | | ±20% | | CGA3E2X8R1H473M080AE | | |
| 2012 | 1.25+0.25,-0.20 | ±10% | CGA4J3X8R2A473K125AE | | | | |
| | | ±20% | CGA4J3X8R2A473M125AE | | | | |
| 68nF | 1608 | 0.80+0.15,-0.10 | ±10% | | CGA3E3X8R1H683K080AE | CGA3E2X8R1E683K080AE | |
| | | | ±20% | | CGA3E3X8R1H683M080AE | CGA3E2X8R1E683M080AE | |
| | 2012 | 1.25+0.25,-0.20 | ±10% | CGA4J3X8R2A683K125AE | CGA4J2X8R1H683K125AE | | |
| | | | ±20% | CGA4J3X8R2A683M125AE | CGA4J2X8R1H683M125AE | | |

■ Gray items: These products are not recommended for new designs.
Click the part numbers for details.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
Please note that the contents may change without any prior notice due to reasons such as upgrading.

MULTILAYER CERAMIC CHIP CAPACITORS TDK

Capacitance range table

Temperature characteristic: X8R (-55 to +150°C, ±15%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | |
|-------------|-----------------|-----------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | Rated voltage Edc: 100V | Rated voltage Edc: 50V | Rated voltage Edc: 25V | Rated voltage Edc: 16V |
| 100nF | 1608 | 0.80+0.15,-0.10 | ±10% | | CGA3E3X8R1H104K080AE | CGA3E2X8R1E104K080AE | |
| | | | ±20% | | CGA3E3X8R1H104M080AE | CGA3E2X8R1E104M080AE | |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | CGA4J2X8R1H104K125AE | | |
| | | | ±20% | | CGA4J2X8R1H104M125AE | | |
| 3216 | 1.15±0.15 | ±10% | CGA5H2X8R2A104K115AE | | | | |
| | | ±20% | CGA5H2X8R2A104M115AE | | | | |
| 150nF | 1608 | 0.80+0.15,-0.10 | ±10% | | | CGA3E3X8R1E154K080AE | |
| | | | ±20% | | | CGA3E3X8R1E154M080AE | |
| | 2012 | 0.85±0.15 | ±10% | | | CGA4F2X8R1E154K085AE | |
| | | | ±20% | | | CGA4F2X8R1E154M085AE | |
| 3216 | 1.60+0.30,-0.20 | ±10% | | CGA4J3X8R1H154K125AE | | | |
| | | ±20% | | CGA4J3X8R1H154M125AE | | | |
| 220nF | 1608 | 0.80+0.15,-0.10 | ±10% | | | CGA3E3X8R1E224K080AE | |
| | | | ±20% | | | CGA3E3X8R1E224M080AE | |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | CGA4J3X8R1H224K125AE | CGA4J2X8R1E224K125AE | |
| | | | ±20% | | CGA4J3X8R1H224M125AE | CGA4J2X8R1E224M125AE | |
| 3216 | 1.60+0.30,-0.20 | ±10% | CGA5L2X8R2A154K160AE | | | | |
| | | ±20% | CGA5L2X8R2A154M160AE | | | | |
| 330nF | 1608 | 0.80+0.15,-0.10 | ±10% | | | CGA3E1X8R1E334K080AE | CGA3E3X8R1C334K080AE |
| | | | ±20% | | | CGA3E1X8R1E334M080AE | CGA3E3X8R1C334M080AE |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | | CGA4J2X8R1E334K125AE | |
| | | | ±20% | | | CGA4J2X8R1E334M125AE | |
| 3216 | 1.60+0.30,-0.20 | ±10% | CGA5L3X8R2A334K160AE | CGA5L2X8R1H334K160AE | | | |
| | | ±20% | CGA5L3X8R2A334M160AE | CGA5L2X8R1H334M160AE | | | |
| 470nF | 1608 | 0.80+0.15,-0.10 | ±10% | | | CGA3E3X8R1C474K080AE | CGA3E3X8R1C474M080AE |
| | | | ±20% | | | CGA3E3X8R1C474K080AE | CGA3E3X8R1C474M080AE |
| | 2012 | 1.25+0.25,-0.20 | ±10% | | | CGA4J3X8R1E474K125AE | |
| | | | ±20% | | | CGA4J3X8R1E474M125AE | |
| 3216 | 1.60+0.30,-0.20 | ±10% | | CGA5L2X8R1H474K160AE | | | |
| | | ±20% | | CGA5L2X8R1H474M160AE | | | |
| 680nF | 2012 | 1.25+0.25,-0.20 | ±10% | | | CGA4J1X8R1E684K125AE | CGA4J3X8R1C684K125AE |
| | | | ±20% | | | CGA4J1X8R1E684M125AE | CGA4J3X8R1C684M125AE |
| | 3216 | 1.60+0.30,-0.20 | ±10% | | CGA5L3X8R1H684K160AE | | |
| | | | ±20% | | CGA5L3X8R1H684M160AE | | |
| 3225 | 2.50±0.30 | ±10% | CGA6P3X8R2A684K250AE | | | | |
| | | ±20% | CGA6P3X8R2A684M250AE | | | | |
| 1µF | 2012 | 1.25+0.25,-0.20 | ±10% | | | CGA4J1X8R1E105K125AE | CGA4J3X8R1C105K125AE |
| | | | ±20% | | | CGA4J1X8R1E105M125AE | CGA4J3X8R1C105M125AE |
| | 3216 | 1.60+0.30,-0.20 | ±10% | | CGA5L3X8R1H105K160AE | CGA5L2X8R1E105K160AE | |
| | | | ±20% | | CGA5L3X8R1H105M160AE | CGA5L2X8R1E105M160AE | |
| 1.5µF | 3216 | 1.60+0.30,-0.20 | ±10% | | | CGA5L3X8R1E155K160AE | |
| | | | ±20% | | | CGA5L3X8R1E155M160AE | |
| | 3216 | 1.60+0.30,-0.20 | ±10% | | | CGA5L3X8R1E225K160AE | |
| | | | ±20% | | | CGA5L3X8R1E225M160AE | |
| 3.3µF | 3216 | 1.60+0.30,-0.20 | ±10% | | | CGA5L1X8R1E335K160AE | CGA5L3X8R1C335K160AE |
| | | | ±20% | | | CGA5L1X8R1E335M160AE | CGA5L3X8R1C335M160AE |
| | 3225 | 2.50±0.30 | ±10% | | | CGA6P2X8R1E335K250AE | |
| | | | ±20% | | | CGA6P2X8R1E335M250AE | |
| 4.7µF | 3216 | 1.60+0.30,-0.20 | ±10% | | | CGA5L1X8R1E475K160AE | CGA5L3X8R1C475K160AE |
| | | | ±20% | | | CGA5L1X8R1E475M160AE | CGA5L3X8R1C475M160AE |
| | 3225 | 2.50±0.30 | ±10% | | | CGA6P3X8R1E475K250AE | |
| | | | ±20% | | | CGA6P3X8R1E475M250AE | |
| 10µF | 3225 | 2.50±0.30 | ±10% | | | CGA6P1X8R1E106K250AE | CGA6P3X8R1C106K250AE |
| | | | ±20% | | | CGA6P1X8R1E106M250AE | CGA6P3X8R1C106M250AE |

Click the part numbers for details.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

Capacitance range table

Temperature characteristic: X8L (-55 to +150°C,+15,-40%)

| Capacitance | Dimensions | Thickness (mm) | Capacitance tolerance | Catalog number | | | |
|-------------|------------|-------------------|--------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | Rated voltage Edc: 50V | Rated voltage Edc: 35V | Rated voltage Edc: 25V | Rated voltage Edc: 10V |
| 470nF | 2012 | 1.25+0.25,-0.20 | ±10% | CGA4J1X8L1H474K125AE | | | |
| 1µF | 2012 | 1.25+0.25,-0.20 | ±10% | CGA4J1X8L1H105K125AE | | | |
| 2.2µF | 2012 | 1.25+0.25,-0.20 | ±10% | | CGA4J1X8L1V225K125AE | | |
| 4.7µF | 2012 | 1.25+0.25,-0.20 | ±10% | | | CGA4J1X8L1E475K125AE | |
| 10µF | 2012 | 1.25+0.25,-0.20 | ±10% | | | | CGA4J1X8L1A106K125AE |
| | 3216 | 1.60+0.30,-0.20 | ±10% | | | CGA5L1X8L1E106K160AE | |

Click the part numbers for details.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View CGA9N1C0G2J683J230KE on WIN SOURCE](#)
- ⊖ [TDK Corporation](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management