



**THE DATASHEET OF  
1437038**



# SACC-CI-M12MS-8CON-L90 SH SCO - Contact carrier



1437038

<https://www.phoenixcontact.com/us/products/1437038>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 8-position, Pin, angled, M12, coding: A, PCB mounting, Wave soldering, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239644

## Your advantages

- Reduced mounting costs thanks to two-piece device connector
- All common pin assignments and codings available
- Easy device integration thanks to mechanical port screw connections with threaded attachment, press-in contour or direct integration in the front plate
- Additional gasket for the device when not plugged in

## Commercial data

Item number	1437038
Packing unit	20 pc
Minimum order quantity	1 pc
Sales key	AB23
Product key	ABQAHA
Catalog page	Page 252 (C-2-2013)
GTIN	4046356438605
Weight per piece (including packing)	5.396 g
Weight per piece (excluding packing)	4.95 g
Customs tariff number	85366990
Country of origin	DE

# SACC-CI-M12MS-8CON-L90 SH SCO - Contact carrier



1437038

<https://www.phoenixcontact.com/us/products/1437038>

## Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

### Product properties

Product type	Contact insert
Application	Signal
Number of positions	8
Seal present	yes
Shielded	yes
Coding	A
Thread type	M12

### Data management status

Article revision	05
------------------	----

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	30 V
Nominal current $I_N$	2 A

### Connection data

Connection method	Wave soldering
-------------------	----------------

### Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM / EPDM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6

### Connector

#### Connection 1

Head design	Pin
-------------	-----

# SACC-CI-M12MS-8CON-L90 SH SCO - Contact carrier



1437038

<https://www.phoenixcontact.com/us/products/1437038>

Head cable outlet	angled
Head thread type	M12
Coding	A

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP67
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)

## Standards and regulations

### M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

## Mounting

Mounting type	PCB mounting
---------------	--------------

## Packaging specifications

Type of packaging	Blister
-------------------	---------

# SACC-CI-M12MS-8CON-L90 SH SCO - Contact carrier




1437038

<https://www.phoenixcontact.com/us/products/1437038>

## Drawings

Schematic diagram

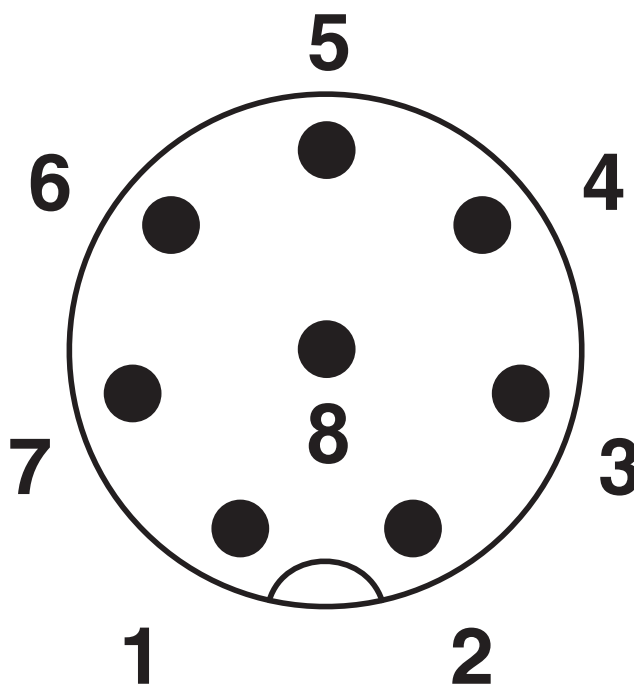

Pin assignment M12 plug, 8-pos., A-coded, view plug side

# SACC-CI-M12MS-8CON-L90 SH SCO - Contact carrier




1437038

<https://www.phoenixcontact.com/us/products/1437038>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1437038>

 <b>UL Recognized</b> Approval ID: E118976-20100522	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	30 V	2 A	24 - 24	-

# SACC-CI-M12MS-8CON-L90 SH SCO - Contact carrier



1437038

<https://www.phoenixcontact.com/us/products/1437038>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27460201

### ETIM

ETIM 9.0	EC002637
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# SACC-CI-M12MS-8CON-L90 SH SCO - Contact carrier



1437038

<https://www.phoenixcontact.com/us/products/1437038>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1437038 on WIN SOURCE](#)

 [Phoenix Contact](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management