# dsPIC33CK256MP508 FAMILY

## 28/36/48/64/80-Pin, 16-Bit Digital Signal Controllers with High-Resolution PWM and CAN Flexible Data (CAN FD)

### Operating Conditions

- 3.0V to 3.6V, -40°C to +125°C, DC to 100 MIPS
- 3.0V to 3.6V, -40°C to +150°C, DC to 70 MIPS

### Core: 16-Bit dsPIC33CK CPU

- 32-256 Kbytes of Program Flash with ECC and 8-24K RAM
- Fast 6-Cycle Divide
- LiveUpdate
- Code Efficient (C and Assembly) Architecture
- 40-Bit Wide Accumulators
- Single-Cycle (MAC/MPY) with Dual Data Fetch
- Single-Cycle, Mixed-Sign MUL Plus Hardware Divide
- 32-Bit Multiply Support
- Four Sets of Interrupt Context Saving Registers which Include Accumulator and STATUS for Fast Interrupt Handling
- Zero Overhead Looping
- RAM Memory Built-In Self-Test (MBIST)

### Clock Management

- Internal Oscillator
- Programmable PLLs and Oscillator Clock Sources
- Reference Clock Output
- Fail-Safe Clock Monitor (FSCM)
- Fast Wake-up and Start-up
- Backup Internal Oscillator

### Power Management

- Low-Power Management Modes (Sleep, Idle, Doze)
- Integrated Power-on Reset and Brown-out Reset

### High-Speed PWM

- Eight PWM Pairs
- Up to 250 ps PWM Resolution
- Dead Time for Rising and Falling Edges
- Dead-Time Compensation
- Clock Chopping for High-Frequency Operation
- PWM Support for:
  - DC/DC, AC/DC, inverters, PFC, lighting
  - BLDC, PMSM, ACIM, SRM motors
- Fault and Current Limit Inputs
- Flexible Trigger Configuration for ADC Triggering

### Timers/Output Compare/Input Capture

- One General Purpose Timer
- Peripheral Trigger Generator (PTG):
  - Up to 15 trigger sources to other peripheral modules
  - CPU independent state machine-based instruction sequencer
- Nine MCCP/SCCP modules which Include Timer, Capture/Compare and PWM:
  - One MCCP
  - Eight SCCPs
  - 16 or 32-bit time base
  - 16 or 32-bit capture
  - 4-deep capture buffer
- Fully Asynchronous Operation, Available in Sleep Modes

© 2017-2021 Microchip Technology Inc.

## Advanced Analog Features

- High-Speed ADC module:
  - 12-bit with two dedicated SAR ADC cores and one shared SAR ADC core
  - Configurable resolution (up to 12-bit) for each ADC core
  - Up to 3.5 Msps conversion rate per channel at 12-bit resolution
  - Up to 24 input channels
  - Dedicated result buffer for each analog channel
  - Flexible and independent ADC trigger sources
  - Four digital comparators
  - Four oversampling filters for increased resolution
- Up to Three Analog Comparators:
  - 15 ns analog comparator
- Up to Three Op Amps
- Three 12-Bit DACs:
  - Hardware slope compensation

## Communication Interfaces

- Three Protocol UARTs with Automated Protocol Handling Support for:
  - LIN 2.2
  - DMX
  - IrDA®
- 3 Four-Wire SPI/$I^2S$ modules
- CAN Flexible Data (FD) module
- Three $I^2C$ modules with SMBus Support
- PPS to Allow Function Remap
- Programmable Cyclic Redundancy Check (CRC)
- Two SENT modules
- Parallel Master Port (PMP)

## Direct Memory Access (DMA)

- Four DMA Channels

## Debugger Development Support

- In-Circuit and In-Application Programming and Debugging
- Three Complex, Five Simple Breakpoints
- IEEE 1149.2 Compatible (JTAG) Boundary Scan
- Trace Buffer and Run-Time Watch

## Safety Features

- Clock Monitor System with Backup Oscillator
- DMT (Deadman Timer)
- ECC (Error Correcting Code)
- WDT (Watchdog Timer)
- CodeGuard™ Security
- CRC (Cyclic Redundancy Check)
- Flash OTP by ICSP™ Write Inhibit
- RAM Memory Built-In Self-Test (MBIST)
- Two-Speed Start-up
- Fail-Safe Clock Monitoring (FSCM)
- Backup FRC (BFRC)
- Capless Internal Voltage Regulator
- Virtual Pins for Redundancy and Monitoring

## Functional Safety

- Class B Safety Library – IEC 60730
- For ASIL B and Beyond Applications – ISO 26262
- FMEDA Computation Spreadsheet (Evaluation of Random Hardware Failures Metric)
- Functional Safety Manual
- Functional Safety Diagnostics Suite

## Qualification Support

- AEC-Q100 REV-H (Grade 1: -40°C to +125°C) Compliant
- AEC-Q100 REV-H (Grade 0: -40°C to +150°C) Compliant


© 2017-2021 Microchip Technology Inc.

## dsPIC33CK256MP508 PRODUCT FAMILIES

The device names, pin counts, memory sizes and peripheral availability of each device are listed in Table 1 and Table 2. The following pages

**TABLE 1: dsPIC33CK256MP508 FAMILY WITH CAN FD**

| Product | Pins | Flash | Data RAM | ADC Module | ADC Channels | Timers | MCCP/SCCP | CAN FD | DMA Channels | SENT | UART | SPI | I²C | QEI | CLC | PTG | CRC | PWM Outputs | Analog Comparators |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| dsPIC33CK256MP508 | 80 | 256K | 24K | 3 | 24 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK256MP506 | 64 | 256K | 24K | 3 | 20 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK256MP505 | 48 | 256K | 24K | 3 | 19 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK256MP503 | 36 | 256K | 24K | 3 | 16 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 6 | 3 |
| dsPIC33CK256MP502 | 28 | 256K | 24K | 3 | 12 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 4 | 3 |
| dsPIC33CK128MP508 | 80 | 128K | 16K | 3 | 24 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK128MP506 | 64 | 128K | 16K | 3 | 20 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK128MP505 | 48 | 128K | 16K | 3 | 19 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK128MP503 | 36 | 128K | 16K | 3 | 16 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 6 | 3 |
| dsPIC33CK128MP502 | 28 | 128K | 16K | 3 | 12 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 4 | 3 |
| dsPIC33CK64MP508 | 80 | 64K | 8K | 3 | 24 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK64MP506 | 64 | 64K | 8K | 3 | 20 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK64MP505 | 48 | 64K | 8K | 3 | 19 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK64MP503 | 36 | 64K | 8K | 3 | 16 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 6 | 3 |
| dsPIC33CK64MP502 | 28 | 64K | 8K | 3 | 12 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 4 | 3 |
| dsPIC33CK32MP506 | 64 | 32K | 8K | 3 | 20 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK32MP505 | 48 | 32K | 8K | 3 | 19 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK32MP503 | 36 | 32K | 8K | 3 | 16 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 6 | 3 |
| dsPIC33CK32MP502 | 28 | 32K | 8K | 3 | 12 | 1 | 1/8 | 1 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 4 | 3 |

© 2017-2021 Microchip Technology Inc.

**TABLE 2: dsPIC33CK256MP508 FAMILY WITHOUT CAN FD**

| Product | Pins | Flash | Data RAM | ADC Module | ADC Channels | Timers | MCCP/SCCP | CAN FD | DMA Channels | SENT | UART | SPI | $I^2C$ | QEI | CLC | PTG | CRC | PWM Outputs | Analog Comparators |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| dsPIC33CK256MP208 | 80 | 256K | 24K | 3 | 24 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK256MP206 | 64 | 256K | 24K | 3 | 20 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK256MP205 | 48 | 256K | 24K | 3 | 19 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK256MP203 | 36 | 256K | 24K | 3 | 16 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 6 | 3 |
| dsPIC33CK256MP202 | 28 | 256K | 24K | 3 | 12 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 4 | 3 |
| dsPIC33CK128MP208 | 80 | 128K | 16K | 3 | 24 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK128MP206 | 64 | 128K | 16K | 3 | 20 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK128MP205 | 48 | 128K | 16K | 3 | 19 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK128MP203 | 36 | 128K | 16K | 3 | 16 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 6 | 3 |
| dsPIC33CK128MP202 | 28 | 128K | 16K | 3 | 12 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 4 | 3 |
| dsPIC33CK64MP208 | 80 | 64K | 8K | 3 | 24 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK64MP206 | 64 | 64K | 8K | 3 | 20 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK64MP205 | 48 | 64K | 8K | 3 | 19 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK64MP203 | 36 | 64K | 8K | 3 | 16 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 6 | 3 |
| dsPIC33CK64MP202 | 28 | 64K | 8K | 3 | 12 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 4 | 3 |
| dsPIC33CK32MP206 | 64 | 32K | 8K | 3 | 20 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK32MP205 | 48 | 32K | 8K | 3 | 19 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 8 | 3 |
| dsPIC33CK32MP203 | 36 | 32K | 8K | 3 | 16 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 6 | 3 |
| dsPIC33CK32MP202 | 28 | 32K | 8K | 3 | 12 | 1 | 1/8 | 0 | 4 | 2 | 3 | 3 | 3 | 2 | 4 | 1 | 1 | 4 | 3 |

© 2017-2021 Microchip Technology Inc.

## Pin Diagrams

**28-Pin SSOP**

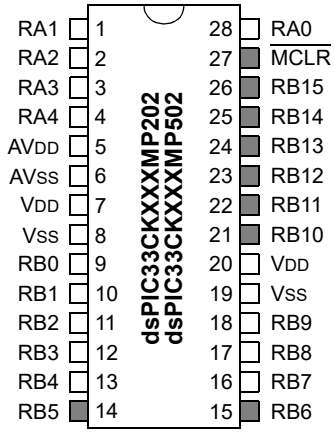


**Note:** Shaded pins are up to 5 VDC tolerant.

### TABLE 3: 28-PIN SSOP(1)

| Pin # | Function | Pin # | Function |
|---|---|---|---|
| 1 | OA1IN-/ANA1/RA1 | 15 | PGC3/**RP38**/SCL2/RB6 |
| 2 | OA1IN+/AN9/RA2 | 16 | TDO/AN2/CMP3A/**RP39**/SDA3/RB7 |
| 3 | DACOUT1/AN3/CMP1C/RA3 | 17 | PGD1/AN10/**RP40**/SCL1/RB8 |
| 4 | AN4/CMP3B/IBIAS3/RA4 | 18 | PGC1/AN11/**RP41**/SDA1/RB9 |
| 5 | AVDD | 19 | VSS |
| 6 | AVSS | 20 | VDD |
| 7 | VDD | 21 | TMS/**RP42**/PWM3H/RB10(2) |
| 8 | VSS | 22 | TCK/**RP43**/PWM3L/RB11 |
| 9 | OSCI/CLKI/AN5/**RP32**/RB0 | 23 | TDI/**RP44**/PWM2H/RB12 |
| 10 | OSCO/CLKO/AN6/**RP33**/RB1(3) | 24 | **RP45**/PWM2L/RB13 |
| 11 | OA2OUT/AN1/AN7/ANA0/CMP1D/CMP2D/CMP3D/**RP34**/SCL3/INT0/RB2 | 25 | **RP46**/PWM1H/RB14 |
| 12 | PGD2/OA2IN-/AN8/**RP35**/RB3 | 26 | **RP47**/PWM1L/RB15 |
| 13 | PGC2/OA2IN+/**RP36**/RB4 | 27 | MCLR |
| 14 | PGD3/**RP37**/SDA2/RB5 | 28 | OA1OUT/AN0/CMP1A/IBIAS0/RA0 |

**Note 1:** **RPn** represents remappable peripheral functions.

**2:** A pull-up resistor is connected to this pin when device is erased (JTAG enabled) and during programming.

**3:** This pin is toggled during programming.

## Pin Diagrams (Continued)

**28-Pin UQFN(1,2)**

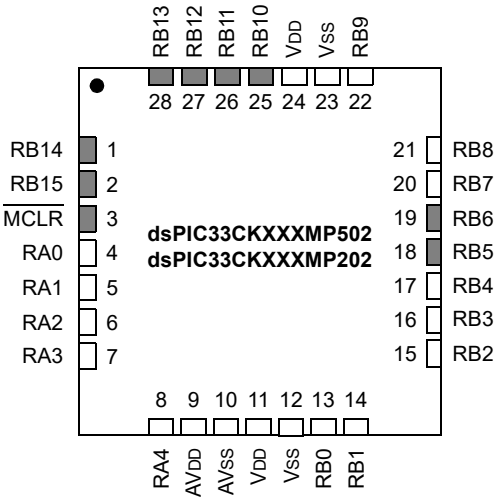


**Note 1:** Shaded pins are up to 5 VDC tolerant.

**2:** The large center pad on the bottom of the package may be left floating or connected to VSS. The four-corner anchor pads are internally connected to the large bottom pad, and therefore, must be connected to the same net as the large center pad.

**TABLE 4: 28-PIN UQFN(1)**

| Pin # | Function | Pin # | Function |
|---|---|---|---|
| 1 | **RP46**/PWM1H/RB14 | 15 | OA2OUT/AN1/AN7/ANA0/CMP1D/CMP2D/CMP3D/**RP34**/SCL3/INT0/RB2 |
| 2 | **RP47**/PWM1L/RB15 | 16 | PGD2/OA2IN-/AN8/**RP35**/RB3 |
| 3 | MCLR | 17 | PGC2/OA2IN+/**RP36**/RB4 |
| 4 | OA1OUT/AN0/CMP1A/IBIAS0/RA0 | 18 | PGD3/**RP37**/SDA2/RB5 |
| 5 | OA1IN-/ANA1/RA1 | 19 | PGC3/**RP38**/SCL2/RB6 |
| 6 | OA1IN+/AN9/RA2 | 20 | TDO/AN2/CMP3A/**RP39**/SDA3/RB7 |
| 7 | DACOUT1/AN3/CMP1C/RA3 | 21 | PGD1/AN10/**RP40**/SCL1/RB8 |
| 8 | AN4/CMP3B/IBIAS3/RA4 | 22 | PGC1/AN11/**RP41**/SDA1/RB9 |
| 9 | AVDD | 23 | VSS |
| 10 | AVSS | 24 | VDD |
| 11 | VDD | 25 | TMS/**RP42**/PWM3H/RB10(2) |
| 12 | VSS | 26 | TCK/**RP43**/PWM3L/RB11 |
| 13 | OSCI/CLKI/AN5/**RP32**/RB0 | 27 | TDI/**RP44**/PWM2H/RB12 |
| 14 | OSCO/CLKO/AN6/**RP33**/RB1(3) | 28 | **RP45**/PWM2L/RB13 |

**Note 1:** **RPn** represents remappable peripheral functions.

**2:** A pull-up resistor is connected to this pin when device is erased (JTAG enabled) and during programming.

**3:** This pin is toggled during programming.


© 2017-2021 Microchip Technology Inc.

## Pin Diagrams (Continued)

**36-Pin UQFN(1,2)**

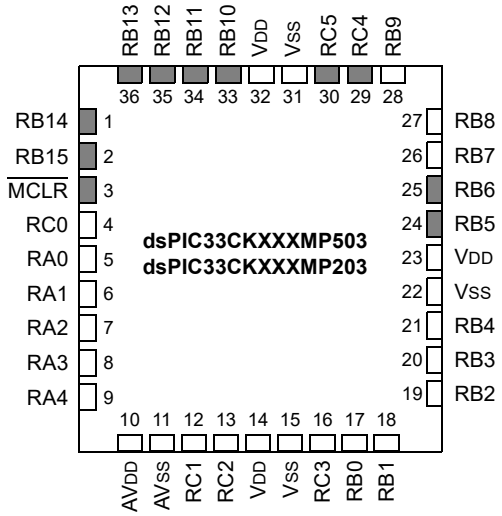


**Note 1:** Shaded pins are up to 5 VDC tolerant.

**2:** The large center pad on the bottom of the package may be left floating or connected to VSS. The four-corner anchor pads are internally connected to the large bottom pad, and therefore, must be connected to the same net as the large center pad.

**TABLE 5: 36-PIN UQFN(1)**

| Pin # | Function | Pin # | Function |
|---|---|---|---|
| 1 | **RP46**/PWM1H/RB14 | 19 | OA2OUT/AN1/AN7/ANA0/CMP1D/CMP2D/CMP3D/**RP34**/SCL3/INT0/RB2 |
| 2 | **RP47**/PWM1L/RB15 | 20 | PGD2/OA2IN-/AN8/**RP35**/RB3 |
| 3 | MCLR | 21 | PGC2/OA2IN+/**RP36**/RB4 |
| 4 | AN12/ANN0/**RP48**/RC0 | 22 | VSS |
| 5 | OA1OUT/AN0/CMP1A/IBIAS0/RA0 | 23 | VDD |
| 6 | OA1IN-/ANA1/RA1 | 24 | PGD3/**RP37**/PWM6L/SDA2/RB5 |
| 7 | OA1IN+/AN9/RA2 | 25 | PGC3/**RP38**/PWM6H/SCL2/RB6 |
| 8 | DACOUT1/AN3/CMP1C/RA3 | 26 | TDO/AN2/CMP3A/**RP39**/SDA3/RB7 |
| 9 | OA3OUT/AN4/CMP3B/IBIAS3/RA4 | 27 | PGD1/AN10/**RP40**/SCL1/RB8 |
| 10 | AVDD | 28 | PGC1/AN11/**RP41**/SDA1/RB9 |
| 11 | AVSS | 29 | **RP52**/PWM5H/ASDA2/RC4 |
| 12 | OA3IN-/AN13/CMP1B/ISRC0/**RP49**/RC1 | 30 | **RP53**/PWM5L/ASCL2/RC5 |
| 13 | OA3IN+/AN14/CMP2B/ISRC1/**RP50**/RC2 | 31 | VSS |
| 14 | VDD | 32 | VDD |
| 15 | VSS | 33 | TMS/**RP42**/PWM3H/RB10(2) |
| 16 | AN15/CMP2A/IBIAS2/**RP51**/RC3 | 34 | TCK/**RP43**/PWM3L/RB11 |
| 17 | OSCI/CLKI/AN5/**RP32**/RB0 | 35 | TDI/**RP44**/PWM2H/RB12 |
| 18 | OSCO/CLKO/AN6/**RP33**/RB1(3) | 36 | **RP45**/PWM2L/RB13 |

**Note 1:** **RPn** represents remappable peripheral functions.

**2:** A pull-up resistor is connected to this pin when device is erased (JTAG enabled) and during programming.

**3:** This pin is toggled during programming.

## Pin Diagrams (Continued)

**48-Pin TQFP, UQFN(1,2)**

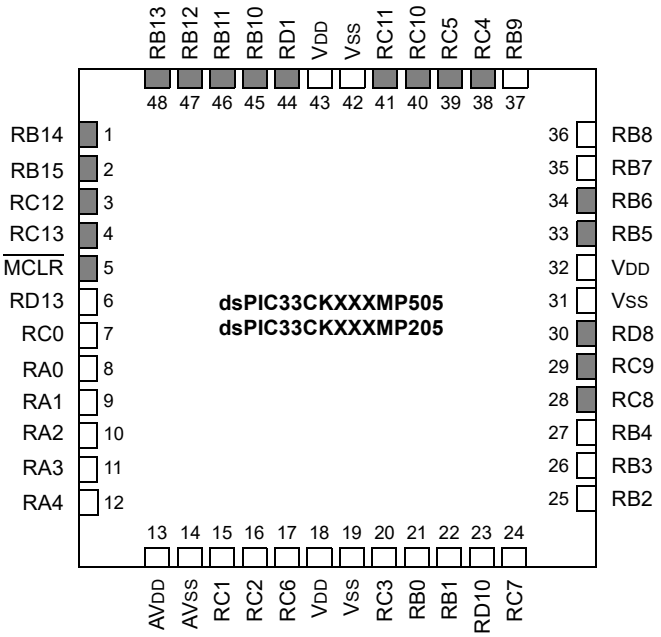


**Note 1:** Shaded pins are up to 5 VDC tolerant.

**2:** The large center pad on the bottom of the package may be left floating or connected to VSS. The four-corner anchor pads are internally connected to the large bottom pad, and therefore, must be connected to the same net as the large center pad.


© 2017-2021 Microchip Technology Inc.

**TABLE 6: 48-PIN TQFP, UQFN(1)**

| Pin # | Function | Pin # | Function |
|---|---|---|---|
| 1 | **RP46**/PWM1H/RB14 | 25 | OA2OUT/AN1/AN7/ANA0/CMP1D/CMP2D/CMP3D/**RP34**/SCL3/INT0/RB2 |
| 2 | **RP47**/PWM1L/RB15 | 26 | PGD2/OA2IN-/AN8/**RP35**/RB3 |
| 3 | **RP60**/PWM8H/RC12 | 27 | PGC2/OA2IN+/**RP36**/RB4 |
| 4 | **RP61**/PWM8L/RC13 | 28 | **RP56**/ASDA1/SCK2/RC8 |
| 5 | $\overline{\text{MCLR}}$ | 29 | **RP57**/ASCL1/SDI2/RC9 |
| 6 | ANN2/**RP77**/RD13 | 30 | **RP72**/SDO2/PCI19/RD8 |
| 7 | AN12/ANN0/**RP48**/RC0 | 31 | VSS |
| 8 | OA1OUT/AN0/CMP1A/IBIAS0/RA0 | 32 | VDD |
| 9 | OA1IN-/ANA1/RA1 | 33 | PGD3/**RP37**/PWM6L/SDA2/RB5 |
| 10 | OA1IN+/AN9/RA2 | 34 | PGC3/**RP38**/PWM6H/SCL2/RB6 |
| 11 | DACOUT1/AN3/CMP1C/RA3 | 35 | TDO/AN2/CMP3A/**RP39**/SDA3/RB7 |
| 12 | OA3OUT/AN4/CMP3B/IBIAS3/RA4 | 36 | PGD1/AN10/**RP40**/SCL1/RB8 |
| 13 | AVDD | 37 | PGC1/AN11/**RP41**/SDA1/RB9 |
| 14 | AVSS | 38 | **RP52**/PWM5H/ASDA2/RC4 |
| 15 | OA3IN-/AN13/CMP1B/ISRC0/**RP49**/RC1 | 39 | **RP53**/PWM5L/ASCL2/RC5 |
| 16 | OA3IN+/AN14/CMP2B/ISRC1/**RP50**/RC2 | 40 | **RP58**/PWM7H/RC10 |
| 17 | AN17/ANN1/IBIAS1/**RP54**/RC6 | 41 | **RP59**/PWM7L/RC11 |
| 18 | VDD | 42 | VSS |
| 19 | VSS | 43 | VDD |
| 20 | AN15/CMP2A/IBIAS2/**RP51**/RC3 | 44 | **RP65**/PWM4H/RD1 |
| 21 | OSCI/CLKI/AN5/**RP32**/RB0 | 45 | TMS/**RP42**/PWM3H/RB10(2) |
| 22 | OSCO/CLKO/AN6/**RP33**/RB1(3) | 46 | TCK/**RP43**/PWM3L/RB11 |
| 23 | AN18/CMP3C/ISRC3/**RP74**/RD10 | 47 | TDI/**RP44**/PWM2H/RB12 |
| 24 | AN16/ISRC2/**RP55**/RC7 | 48 | **RP45**/PWM2L/RB13 |

**Note 1:** **RPn** represents remappable peripheral functions.

**2:** A pull-up resistor is connected to this pin when device is erased (JTAG enabled) and during programming.

**3:** This pin is toggled during programming.

## Pin Diagrams (Continued)

**64-Pin TQFP, QFN**

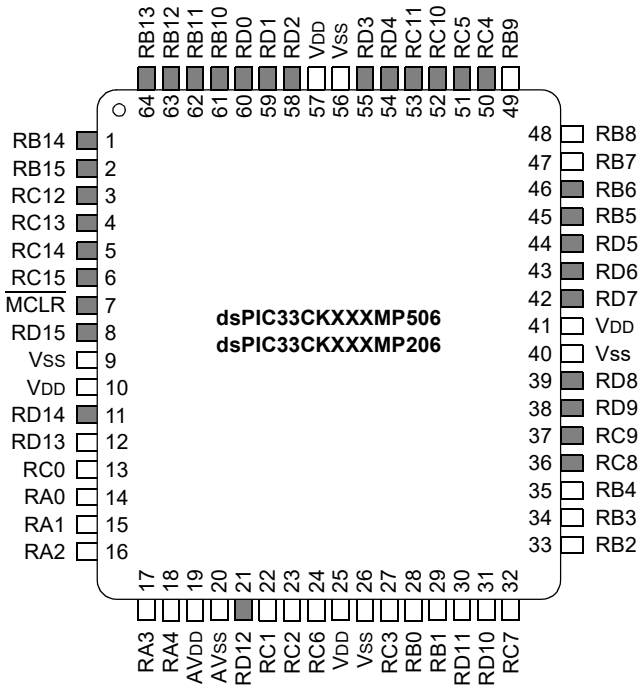


**Note:** Shaded pins are up to 5 VDC tolerant.


© 2017-2021 Microchip Technology Inc.

**TABLE 7: 64-PIN TQFP, QFN(1)**

| Pin # | Function | Pin # | Function |
|---|---|---|---|
| 1 | **RP46**/PWM1H/PMD5/RB14 | 33 | OA2OUT/AN1/AN7/ANA0/CMP1D/CMP2D/CMP3D/**RP34**/SCL3/INT0/RB2 |
| 2 | **RP47**/PWM1L/PMD6/RB15 | 34 | PGD2/OA2IN-/AN8/**RP35**/RB3 |
| 3 | **RP60**/PWM8H/PMD7/RC12 | 35 | PGC2/OA2IN+/**RP36**/RB4 |
| 4 | **RP61**/PWM8L/PMA5/RC13 | 36 | **RP56**/ASDA1/SCK2/RC8 |
| 5 | **RP62**/PWM6H/PMA4/RC14 | 37 | **RP57**/ASCL1/SDI2/RC9 |
| 6 | **RP63**/PWM6L/PMA3/RC15 | 38 | **RP73**/PCI20/RD9 |
| 7 | $\overline{\text{MCLR}}$ | 39 | **RP72**/SDO2/PCI19/RD8 |
| 8 | **RP79**/PCI22/PMA2/RD15 | 40 | VSS |
| 9 | VSS | 41 | VDD |
| 10 | VDD | 42 | **RP71**/PMD15/RD7 |
| 11 | **RP78**/PCI21/RD14 | 43 | **RP70**/PMD14/RD6 |
| 12 | ANN2/**RP77**/RD13 | 44 | **RP69**/PMA15/PMCS2/RD5 |
| 13 | AN12/ANN0/**RP48**/RC0 | 45 | PGD3/**RP37**/SDA2/PMA14/PMCS1/PSCS/RB5 |
| 14 | OA1OUT/AN0/CMP1A/IBIAS0/RA0 | 46 | PGC3/**RP38**/SCL2/RB6 |
| 15 | OA1IN-/ANA1/RA1 | 47 | TDO/AN2/CMP3A/**RP39**/SDA3/RB7 |
| 16 | OA1IN+/AN9/PMA6/RA2 | 48 | PGD1/AN10/**RP40**/SCL1/RB8 |
| 17 | DACOUT1/AN3/CMP1C/RA3 | 49 | PGC1/AN11/**RP41**/SDA1/RB9 |
| 18 | OA3OUT/AN4/CMP3B/IBIAS3/RA4 | 50 | **RP52**/PWM5H/ASDA2/RC4 |
| 19 | AVDD | 51 | **RP53**/PWM5L/ASCL2/PMWR/PMENB/PSWR/RC5 |
| 20 | AVss | 52 | **RP58**/PWM7H/PMRD/$\overline{\text{PMWR}}$/PSRD/RC10 |
| 21 | **RP76**/RD12 | 53 | **RP59**/PWM7L/RC11 |
| 22 | OA3IN-/AN13/CMP1B/ISRC0/**RP49**/PMA7/RC1 | 54 | **RP68**/ASDA3/RD4 |
| 23 | OA3IN+/AN14/CMP2B/ISRC1/**RP50**/PMD13/PMA13/RC2 | 55 | **RP67**/ASCL3/RD3 |
| 24 | AN17/ANN1/IBIAS1/**RP54**/PMD12/PMA12/RC6 | 56 | VSS |
| 25 | VDD | 57 | VDD |
| 26 | VSS | 58 | **RP66**/RD2 |
| 27 | AN15/CMP2A/IBIAS2/**RP51**/PMD11/PMA11/RC3 | 59 | **RP65**/PWM4H/RD1 |
| 28 | OSCI/CLKI/AN5/**RP32**/PMD10/PMA10/RB0 | 60 | **RP64**/PWM4L/PMD0/RD0 |
| 29 | OSCO/CLKO/AN6/**RP33**/PMA1/PMALH/PSA1/RB1(3) | 61 | TMS/**RP42**/PWM3H/PMD1/RB10(2) |
| 30 | AN19/CMP2C/**RP75**/PMA0/PMALL/PSA0/RD11 | 62 | TCK/**RP43**/PWM3L/PMD2/RB11 |
| 31 | AN18/CMP3C/ISRC3/**RP74**/PMD9/PMA9/RD10 | 63 | TDI/**RP44**/PWM2H/PMD3/RB12 |
| 32 | AN16/ISRC2/**RP55**/PMD8/PMA8/RC7 | 64 | **RP45**/PWM2L/PMD4/RB13 |

**Note 1:** **RPn** represents remappable peripheral functions.

**2:** A pull-up resistor is connected to this pin when device is erased (JTAG enabled) and during programming.

**3:** This pin is toggled during programming.

## Pin Diagrams (Continued)

**80-Pin TQFP**

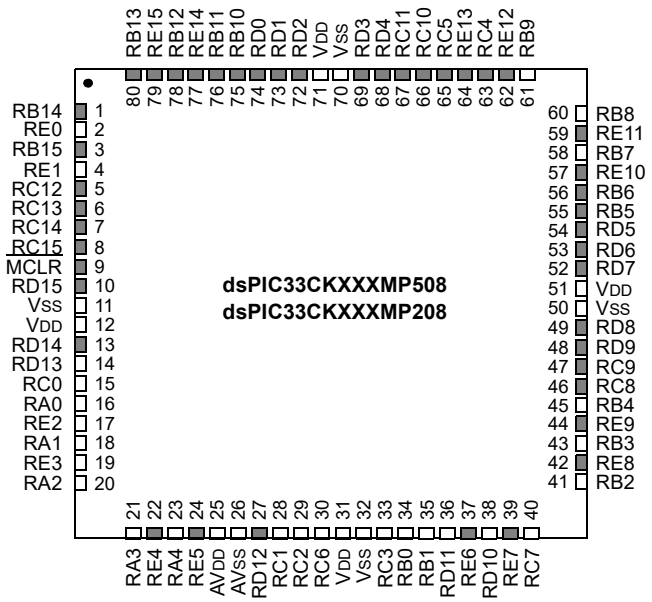


**Note:** Shaded pins are up to 5 VDC tolerant.


© 2017-2021 Microchip Technology Inc.

**TABLE 8: 80-PIN TQFP(1)**

| Pin # | Function | Pin # | Function |
|---|---|---|---|
| 1 | **RP46**/PWM1H/PMD5/RB14 | 41 | OA2OUT/AN1/AN7/ANA0/CMP1D/CMP2D/CMP3D/**RP34**/SCL3/INT0/RB2 |
| 2 | AN20/RE0 | 42 | RE8 |
| 3 | **RP47**/PWM1L/PMD6/RB15 | 43 | PGD2/OA2IN-/AN8/**RP35**/RB3 |
| 4 | AN21/RE1 | 44 | RE9 |
| 5 | **RP60**/PWM8H/PMD7/RC12 | 45 | PGC2/OA2IN+/**RP36**/RB4 |
| 6 | **RP61**/PWM8L/PMA5/RC13 | 46 | **RP56**/ASDA1/SCK2/RC8 |
| 7 | **RP62**/PWM6H/PMA4/RC14 | 47 | **RP57**/ASCL1/SDI2/RC9 |
| 8 | **RP63**/PWM6L/PMA3/RC15 | 48 | **RP73**/PCI20/RD9 |
| 9 | $\overline{\text{MCLR}}$ | 49 | **RP72**/SDO2/PCI19/RD8 |
| 10 | **RP79**/PCI22/PMA2/RD15 | 50 | VSS |
| 11 | VSS | 51 | VDD |
| 12 | VDD | 52 | **RP71**/PMD15/RD7 |
| 13 | **RP78**/PCI21/RD14 | 53 | **RP70**/PMD14/RD6 |
| 14 | ANN2/**RP77**/RD13 | 54 | **RP69**/PMA15/PMCS2/RD5 |
| 15 | AN12/ANN0/**RP48**/RC0 | 55 | PGD3/**RP37**/SDA2/PMA14/PMCS1/PSCS/RB5 |
| 16 | OA1OUT/AN0/CMP1A/IBIAS0/RA0 | 56 | PGC3/**RP38**/SCL2/RB6 |
| 17 | AN22/RE2 | 57 | RE10 |
| 18 | OA1IN-/ANA1/RA1 | 58 | TDO/AN2/CMP3A/**RP39**/SDA3/RB7 |
| 19 | AN23/RE3 | 59 | RE11 |
| 20 | OA1IN+/AN9/PMA6/RA2 | 60 | PGD1/AN10/**RP40**/SCL1/RB8 |
| 21 | DACOUT1/AN3/CMP1C/RA3 | 61 | PGC1/AN11/**RP41**/SDA1/RB9 |
| 22 | RE4 | 62 | RE12 |
| 23 | OA3OUT/AN4/CMP3B/IBIAS3/RA4 | 63 | **RP52**/PWM5H/ASDA2/RC4 |
| 24 | RE5 | 64 | RE13 |
| 25 | AVDD | 65 | **RP53**/PWM5L/ASCL2/PMWR/PMENB/PSWR/RC5 |
| 26 | AVss | 66 | **RP58**/PWM7H/PMRD/$\overline{\text{PMWR}}$/PSRD/RC10 |
| 27 | **RP76**/RD12 | 67 | **RP59**/PWM7L/RC11 |
| 28 | OA3IN-/AN13/CMP1B/ISRC0/**RP49**/PMA7/RC1 | 68 | **RP68**/ASDA3/RD4 |
| 29 | OA3IN+/AN14/CMP2B/ISRC1/**RP50**/PMD13/PMA13/RC2 | 69 | **RP67**/ASCL3/RD3 |
| 30 | AN17/ANN1/IBIAS1/**RP54**/PMD12/PMA12/RC6 | 70 | VSS |
| 31 | VDD | 71 | VDD |
| 32 | VSS | 72 | **RP66**/RD2 |
| 33 | AN15/CMP2A/IBIAS2/**RP51**/PMD11/PMA11/RC3 | 73 | **RP65**/PWM4H/RD1 |
| 34 | OSCI/CLKI/AN5/**RP32**/PMD10/PMA10/RB0 | 74 | **RP64**/PWM4L/PMD0/RD0 |
| 35 | OSCO/CLKO/AN6/**RP33**/PMA1/PMALH/PSA1/RB1(3) | 75 | TMS/**RP42**/PWM3H/PMD1/RB10(2) |
| 36 | AN19/CMP2C/**RP75**/PMA0/PMALL/PSA0/RD11 | 76 | TCK/**RP43**/PWM3L/PMD2/RB11 |
| 37 | RE6 | 77 | RE14 |
| 38 | AN18/CMP3C/ISRC3/**RP74**/PMD9/PMA9/RD10 | 78 | TDI/**RP44**/PWM2H/PMD3/RB12 |
| 39 | RE7 | 79 | RE15 |
| 40 | AN16/ISRC2/**RP55**/PMD8/PMA8/RC7 | 80 | **RP45**/PWM2L/PMD4/RB13 |

**Note 1:** **RPn** represents remappable peripheral functions.

**2:** A pull-up resistor is connected to this pin when device is erased (JTAG enabled) and during programming.

**3:** This pin is toggled during programming.

## Table of Contents

1.0 Device Overview ..... 19
2.0 Guidelines for Getting Started with 16-Bit Digital Signal Controllers ..... 25
3.0 CPU ..... 31
4.0 Memory Organization ..... 43
5.0 Flash Program Memory ..... 81
6.0 Resets ..... 97
7.0 Interrupt Controller ..... 101
8.0 I/O Ports ..... 121
9.0 Oscillator with High-Frequency PLL ..... 185
10.0 Direct Memory Access (DMA) Controller ..... 211
11.0 Controller Area Network (CAN FD) Module ..... 221
12.0 High-Resolution PWM with Fine Edge Placement ..... 265
13.0 High-Speed, 12-Bit Analog-to-Digital Converter (ADC) ..... 301
14.0 High-Speed Analog Comparator with Slope Compensation DAC ..... 331
15.0 Quadrature Encoder Interface (QEI) ..... 343
16.0 Universal Asynchronous Receiver Transmitter (UART) ..... 363
17.0 Serial Peripheral Interface (SPI) ..... 385
18.0 Inter-Integrated Circuit ($I^2C$) ..... 403
19.0 Parallel Master Port (PMP) ..... 413
20.0 Single-Edge Nibble Transmission (SENT) ..... 427
21.0 Timer1 ..... 437
22.0 Capture/Compare/PWM/Timer Modules (SCCP/MCCP) ..... 441
23.0 Configurable Logic Cell (CLC) ..... 455
24.0 Peripheral Trigger Generator (PTG) ..... 467
25.0 32-Bit Programmable Cyclic Redundancy Check (CRC) Generator ..... 483
26.0 Current Bias Generator (CBG) ..... 487
27.0 Operational Amplifier ..... 491
28.0 Deadman Timer (DMT) ..... 495
29.0 Power-Saving Features ..... 503
30.0 Special Features ..... 515
31.0 Instruction Set Summary ..... 541
32.0 Development Support ..... 551
33.0 Electrical Characteristics ..... 553
34.0 High-Temperature Electrical Characteristics ..... 591
35.0 Packaging Information ..... 601
Appendix A: Revision History ..... 627
Index ..... 631
The Microchip Website ..... 639
Customer Change Notification Service ..... 639
Customer Support ..... 639
Product Identification System ..... 641


© 2017-2021 Microchip Technology Inc.

## TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at **docerrors@microchip.com**. We welcome your feedback.

### Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Website at:

**http://www.microchip.com**

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000000A is version A of document DS30000000).

### Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Website; **http://www.microchip.com**
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include literature number) you are using.

### Customer Notification System

Register on our website at **www.microchip.com** to receive the most current information on all of our products.

## Referenced Sources

This device data sheet is based on the following individual chapters of the *"dsPIC33/PIC24 Family Reference Manual"*. These documents should be considered as the general reference for the operation of a particular module or device feature.

**Note 1:** To access the documents listed below, browse to the documentation section of the dsPIC33CK256MP508 product page of the Microchip website (www.microchip.com) or select a family reference manual section from the following list.

In addition to parameters, features and other documentation, the resulting page provides links to the related family reference manual sections.

- **"Introduction"** (www.microchip.com/DS70573)
- **"Enhanced CPU"** (www.microchip.com/DS70005158)
- **"dsPIC33/PIC24 Program Memory"** (www.microchip.com/DS70000613)
- **"Data Memory"** (www.microchip.com/DS70595)
- **"Dual Partition Flash Program Memory"** (www.microchip.com/DS70005156)
- **"Flash Programming"** (www.microchip.com/DS70000609)
- **"Reset"** (www.microchip.com/DS70602)
- **"Interrupts"** (www.microchip.com/DS70000600)
- **"I/O Ports with Edge Detect"** (www.microchip.com/DS70005322)
- **"Oscillator Module with High-Speed PLL"** (www.microchip.com/DS70005255)
- **"Direct Memory Access Controller (DMA)"** (www.microchip.com/DS30009742)
- **"CAN Flexible Data-Rate (FD) Protocol Module"** (www.microchip.com/DS70005340)
- **"High-Resolution PWM with Fine Edge Placement"** (www.microchip.com/DS70005320)
- **"12-Bit High-Speed, Multiple SARs A/D Converter (ADC)"** (www.microchip.com/DS70005213)
- **"High-Speed Analog Comparator Module with Slope Compensation DAC"** (www.microchip.com/DS70005280)
- **"Quadrature Encoder Interface (QEI)"** (www.microchip.com/DS70000601)
- **"Multiprotocol Universal Asynchronous Receiver Transmitter (UART) Module"** (www.microchip.com/DS70005288)
- **"Serial Peripheral Interface (SPI) with Audio Codec Support"** (www.microchip.com/DS70005136)
- **"Inter-Integrated Circuit ($I^2C$)"** (www.microchip.com/DS70000195)
- **"Parallel Master Port (PMP)"** (www.microchip.com/DS70005344)
- **"Single-Edge Nibble Transmission (SENT) Module"** (www.microchip.com/DS70005145)
- **"Timer1 Module"** (www.microchip.com/DS70005279)
- **"Capture/Compare/PWM/Timer (MCCP and SCCP)"** (www.microchip.com/DS30003035)
- **"Configurable Logic Cell (CLC)"** (www.microchip.com/DS70005298)
- **"Peripheral Trigger Generator (PTG)"** (www.microchip.com/DS70000669)
- **"32-Bit Programmable Cyclic Redundancy Check (CRC)"** (www.microchip.com/DS30009729)
- **"Current Bias Generator (CBG)"** (www.microchip.com/DS70005253)
- **"Deadman Timer"** (www.microchip.com/DS70005155)
- **"Watchdog Timer and Power-Saving Modes"** (www.microchip.com/DS70615)
- **"CodeGuard™ Intermediate Security"** (www.microchip.com/DS70005182)
- **"Dual Watchdog Timer"** (www.microchip.com/DS70005250)
- **"Programming and Diagnostics"** (www.microchip.com/DS70608)


© 2017-2021 Microchip Technology Inc.

## Terminology Cross Reference

Table 9 provides updated terminology for depreciated naming conventions. Register and bit names remain unchanged, however, descriptions and usage guidance may have been updated.

**TABLE 9: TERMINOLOGY CROSS REFERENCES**

| Use Case | Deprecated Term | New Term |
|---|---|---|
| CPU | Master | Initiator |
| DMA | Master | Initiator |
| $I^2C$ | Master | Host |
| | Slave | Client |
| SPI | Master | Host |
| | Slave | Client |
| PMP | Master | Host |
| | Slave | Client |
| UART, LIN mode | Master | Commander |
| | Slave | Responder |
| PWM | Master | Host |
| | Slave | Client |

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 1.0 DEVICE OVERVIEW

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive resource. To complement the information in this data sheet, refer to the related section of the *"dsPIC33/PIC24 Family Reference Manual"*, which is available from the Microchip website (www.microchip.com).

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 "Memory Organization"** in this data sheet for device-specific register and bit information.

This document contains device-specific information for the dsPIC33CK256MP508 Digital Signal Controller (DSC) devices.

dsPIC33CK256MP508 devices contain extensive Digital Signal Processor (DSP) functionality with a high-performance, 16-bit MCU architecture.

Figure 1-1 shows a general block diagram of the core and peripheral modules of the dsPIC33CK256MP508 family. Table 1-1 lists the functions of the various pins shown in the pinout diagrams.

**FIGURE 1-1: dsPIC33CK256MP508 FAMILY BLOCK DIAGRAM(1)**

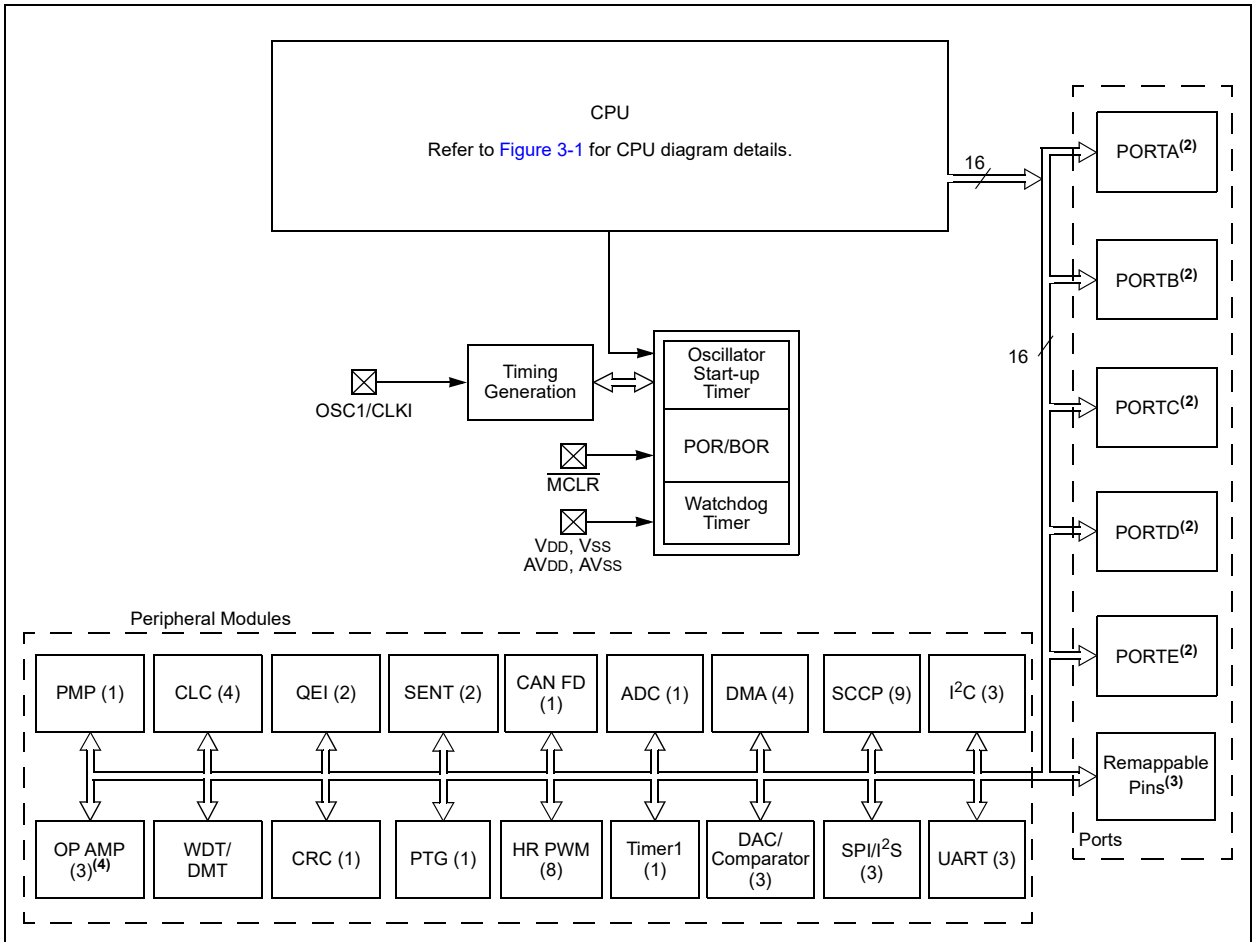


**Note 1:** The numbers in the parentheses are the number of instantiations of the module indicated.

**2:** Not all I/O pins or features are implemented on all device pinout configurations.

**3:** Some peripheral I/Os are only accessible through Peripheral Pin Select (PPS).

**4:** 28-lead devices have only two op amp instances.

**TABLE 1-1: PINOUT I/O DESCRIPTIONS**

| Pin Name(1) | Pin Type | Buffer Type | PPS | Description |
|---|---|---|---|---|
| AN0-AN23 | I | Analog | No | Analog input channels |
| ANA0-ANA1 | I | Analog | No | Analog alternate inputs |
| ANN0-ANN2 | I | Analog | No | Analog negative inputs |
| ADTRG31 | I | ST | Yes | ADC Trigger Input 31 |
| CLKI | I | ST/ CMOS | No | External Clock (EC) source input. Always associated with OSCI pin function. |
| CLKO | O | — | No | Oscillator crystal output. Connects to crystal or resonator in Crystal Oscillator mode. Optionally functions as CLKO in RC and EC modes. Always associated with OSCO pin function. |
| OSCI | I | ST/ CMOS | No | Oscillator crystal input. ST buffer when configured in RC mode; CMOS otherwise. |
| OSCO | I/O | — | No | Oscillator crystal output. Connects to crystal or resonator in Crystal Oscillator mode. Optionally functions as CLKO in RC and EC modes. |
| REFCLKO | O | — | Yes | Reference clock output |
| REFOI | I | ST | Yes | Reference clock input |
| INT0 | I | ST | No | External Interrupt 0 |
| INT1 | I | ST | Yes | External Interrupt 1 |
| INT2 | I | ST | Yes | External Interrupt 2 |
| INT3 | I | ST | Yes | External Interrupt 3 |
| IOCA[4:0] | I | ST | No | Interrupt-on-Change input for PORTA |
| IOCB[15:0] | I | ST | No | Interrupt-on-Change input for PORTB |
| IOCC[15:0] | I | ST | No | Interrupt-on-Change input for PORTC |
| IOCD[15:0] | I | ST | No | Interrupt-on-Change input for PORTD |
| IOCE[15:0] | I | ST | No | Interrupt-on-Change input for PORTE |
| RP32-RP71 | I/O | ST | Yes | Remappable I/O ports |
| RA0-RA4 | I/O | ST | No | PORTA is a bidirectional I/O port |
| RB0-RB15 | I/O | ST | No | PORTB is a bidirectional I/O port |
| RC0-RC15 | I/O | ST | No | PORTC is a bidirectional I/O port |
| RD0-RD15 | I/O | ST | No | PORTD is a bidirectional I/O port |
| RE0-RE15 | I/O | ST | No | PORTE is a bidirectional I/O port |
| T1CK | I | ST | Yes | Timer1 external clock input |
| CAN1RX | I | ST | Yes | CAN1 receive input |
| CAN1TX | O | — | Yes | CAN1 transmit output |
| $\overline{U1CTS}$ | I | ST | Yes | UART1 Clear-to-Send |
| $\overline{U1RTS}$ | O | — | Yes | UART1 Request-to-Send |
| U1RX | I | ST | Yes | UART1 receive |
| U1TX | O | — | Yes | UART1 transmit |
| $\overline{U1DSR}$ | I | ST | Yes | UART1 Data-Set-Ready |
| $\overline{U1DTR}$ | O | — | Yes | UART1 Data-Terminal-Ready |

**Legend:** CMOS = CMOS compatible input or output; Analog = Analog input; P = Power
ST = Schmitt Trigger input with CMOS levels; O = Output; I = Input
PPS = Peripheral Pin Select; TTL = TTL input buffer; DIG = Digital

**Note 1:** Not all pins are available in all package variants. See the **"Pin Diagrams"** section for pin availability.

**2:** PWM4L and PWM4H pins are available on PPS as well as dedicated.

**3:** SPI2 supports dedicated pins as well as PPS on 48, 64 and 80-pin devices.

**4:** Only 48, 64 and 80-pin devices have all eight PWM output pairs on dedicated pins. Refer to the **"Pin Diagrams"** for PWM pin availability on other packages.


© 2017-2021 Microchip Technology Inc.

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name[1] | Pin Type | Buffer Type | PPS | Description |
|---|---|---|---|---|
| U2CTS | I | ST | Yes | UART2 Clear-to-Send |
| U2RTS | O | — | Yes | UART2 Request-to-Send |
| U2RX | I | ST | Yes | UART2 receive |
| U2TX | O | — | Yes | UART2 transmit |
| U2DSR | I | ST | Yes | UART2 Data-Set-Ready |
| U2DTR | O | — | Yes | UART2 Data-Terminal-Ready |
| U3CTS | I | ST | Yes | UART3 Clear-to-Send |
| U3RTS | O | — | Yes | UART3 Request-to-Send |
| U3RX | I | ST | Yes | UART3 receive |
| U3TX | O | — | Yes | UART3 transmit |
| U3DSR | I | ST | Yes | UART3 Data-Set-Ready |
| U3DTR | O | — | Yes | UART3 Data-Terminal-Ready |
| SCK1 | I/O | ST | Yes | Synchronous serial clock input/output for SPI1 |
| SDI1 | I | ST | Yes | SPI1 data in |
| SDO1 | O | — | Yes | SPI1 data out |
| SS1 | I/O | ST | Yes | SPI1 client synchronization or frame pulse I/O |
| SCK2 | I/O | ST | Yes[3] | Synchronous serial clock input/output for SPI2 |
| SDI2 | I | ST | Yes[3] | SPI2 data in |
| SDO2 | O | — | Yes[3] | SPI2 data out |
| SS2 | I/O | ST | Yes[3] | SPI2 client synchronization or frame pulse I/O |
| SCK3 | I/O | ST | Yes | Synchronous serial clock input/output for SPI3 |
| SDI3 | I | ST | Yes | SPI3 data in |
| SDO3 | O | — | Yes | SPI3 data out |
| SS3 | I/O | ST | Yes | SPI3 client synchronization or frame pulse I/O |
| SCL1 | I/O | ST | No | Synchronous serial clock input/output for I2C1 |
| SDA1 | I/O | ST | No | Synchronous serial data input/output for I2C1 |
| ASCL1 | I/O | ST | No | Alternate synchronous serial clock input/output for I2C1 |
| ASDA1 | I/O | ST | No | Alternate synchronous serial data input/output for I2C1 |
| SCL2 | I/O | ST | No | Synchronous serial clock input/output for I2C2 |
| SDA2 | I/O | ST | No | Synchronous serial data input/output for I2C2 |
| ASCL2 | I/O | ST | No | Alternate synchronous serial clock input/output for I2C2 |
| ASDA2 | I/O | ST | No | Alternate synchronous serial data input/output for I2C2 |
| SCL3 | I/O | ST | No | Synchronous serial clock input/output for I2C3 |
| SDA3 | I/O | ST | No | Synchronous serial data input/output for I2C3 |
| ASCL3 | I/O | ST | No | Alternate synchronous serial clock input/output for I2C3 |
| ASDA3 | I/O | ST | No | Alternate synchronous serial data input/output for I2C3 |
| QEIA1-QEIA2 | I | ST | Yes | QEI Inputs A1 and A2 |
| QEIB1-QEIB2 | I | ST | Yes | QEI Inputs B1 and B2 |
| QEINDX1-QEINDX2 | I | ST | Yes | QEI Index Inputs 1 and 2 |
| QEIHOM1-QEIHOM2 | I | ST | Yes | QEI Home Inputs 1 and 2 |
| QEICMP1-QEICMP2 | O | — | Yes | QEI Comparator Outputs 1 and 2 |
| SENT1-SENT2 | I | ST | Yes | SENT1 and SENT2 inputs |
| SENT1OUT-SENT2OUT | O | — | Yes | SENT1 and SENT2 outputs |

**Legend:** CMOS = CMOS compatible input or output; Analog = Analog input; P = Power
ST = Schmitt Trigger input with CMOS levels; O = Output; I = Input
PPS = Peripheral Pin Select; TTL = TTL input buffer; DIG = Digital

**Note 1:** Not all pins are available in all package variants. See the **"Pin Diagrams"** section for pin availability.

**2:** PWM4L and PWM4H pins are available on PPS as well as dedicated.

**3:** SPI2 supports dedicated pins as well as PPS on 48, 64 and 80-pin devices.

**4:** Only 48, 64 and 80-pin devices have all eight PWM output pairs on dedicated pins. Refer to the **"Pin Diagrams"** for PWM pin availability on other packages.

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name[1] | Pin Type | Buffer Type | PPS | Description |
|---|---|---|---|---|
| TMS | I | ST | No | JTAG Test mode select pin |
| TCK | I | ST | No | JTAG test clock input pin |
| TDI | I | ST | No | JTAG test data input pin |
| TDO | O | — | No | JTAG test data output pin |
| PCI8-PCI18 | I | ST | Yes | PWM PCI Inputs 8 through 18 |
| PCI19-PCI22 | I | ST | No | PWM PCI Inputs 19 through 22 |
| PWM1L-PWM8L[2] | O | — | No[4] | PWM Low Outputs 1 through 8 |
| PWM1H-PWM8H[2] | O | — | No[4] | PWM High Outputs 1 through 8 |
| PWMEA-PWMED | O | — | Yes | PWM Event Outputs A through D |
| CMP1A-CMP3A | I | Analog | No | Comparator Channels 1A through 3A inputs |
| CMP1B-CMP3B | I | Analog | No | Comparator Channels 1B through 3B inputs |
| CMP1C-CMP3C | I | Analog | No | Comparator Channels 1C through 3C inputs |
| CMP1D-CMP3D | I | Analog | No | Comparator Channels 1D through 3D inputs |
| DACOUT1 | O | — | No | DAC output voltage |
| TCKI1-TCKI9 | I | ST | Yes | SCCP/MCCP Timer Inputs 1 through 9 |
| ICM1-ICM9 | I | ST | Yes | SCCP/MCCP Capture Inputs 1 through 9 |
| OCFA-OCFD | O | — | Yes | SCCP/MCCP Fault Inputs A through D |
| OCM1-OCM9 | O | — | Yes | SCCP/MCCP Compare Outputs 1 through 9 |
| IBIAS0-IBIAS3 | O | Analog | No | 50 µA Constant-Current Outputs 0 through 3 |
| ISRC0-ISRC3 | O | Analog | No | 10 µA Constant-Current Outputs 0 through 3 |
| OA1IN+ | I | — | No | Op Amp 1+ Input |
| OA1IN- | I | — | No | Op Amp 1- Input |
| OA1OUT | O | — | No | Op Amp 1 Output |
| OA2IN+ | I | — | No | Op Amp 2+ Input |
| OA2IN- | I | — | No | Op Amp 2- Input |
| OA2OUT | O | — | No | Op Amp 2 Output |
| OA3IN+ | I | — | No | Op Amp 3+ Input |
| OA3IN- | I | — | No | Op Amp 3- Input |
| OA3OUT | O | — | No | Op Amp 3 Output |
| PMA0/PMALL | O | ST/TTL | No | PMP Address 0 or address latch low |
| PMA1/PMALH | O | ST/TTL | No | PMP Address 1 or address latch high |
| PMA14/PMCS1 | O | ST/TTL | No | PMP Address 14 or Chip Select 1 |
| PMA15/PMCS2 | O | ST/TTL | No | PMP Address 15 or Chip Select 2 |
| PMA2-PMA13 | O | ST/TTL | No | PMP Address Lines 2-13 |
| PMD0-PMD15 | I/O | ST/TTL | No | PMP Data Lines 0-15 |
| PMRD/$\overline{\text{PMWR}}$ | O | ST/TTL | No | PMP read or read/write signal |
| PMWR/PMENB | O | ST/TTL | No | PMP write or data enable signal |
| PSA0 | I | ST/TTL | No | PMP Client Address 0 |
| PSA1 | I | ST/TTL | No | PMP Client Address 1 |
| PSCS | I | ST/TTL | No | PMP client chip select |
| PSRD | I | ST/TTL | No | PMP client read |
| PSWR | I | ST/TTL | No | PMP client write |
| CLCINA-CLCIND | I | ST | Yes | CLC Inputs A through D |
| CLC1OUT-CLC4OUT | O | — | Yes | CLC Outputs 1 through 4 |

**Legend:** CMOS = CMOS compatible input or output; Analog = Analog input; P = Power
ST = Schmitt Trigger input with CMOS levels; O = Output; I = Input
PPS = Peripheral Pin Select; TTL = TTL input buffer; DIG = Digital

**Note 1:** Not all pins are available in all package variants. See the **"Pin Diagrams"** section for pin availability.

**2:** PWM4L and PWM4H pins are available on PPS as well as dedicated.

**3:** SPI2 supports dedicated pins as well as PPS on 48, 64 and 80-pin devices.

**4:** Only 48, 64 and 80-pin devices have all eight PWM output pairs on dedicated pins. Refer to the **"Pin Diagrams"** for PWM pin availability on other packages.


© 2017-2021 Microchip Technology Inc.

**TABLE 1-1: PINOUT I/O DESCRIPTIONS (CONTINUED)**

| Pin Name[1] | Pin Type | Buffer Type | PPS | Description |
|---|---|---|---|---|
| PGD1 | I/O | ST | No | Data I/O pin for Programming/Debugging Communication Channel 1 |
| PGC1 | I | ST | No | Clock input pin for Programming/Debugging Communication Channel 1 |
| PGD2 | I/O | ST | No | Data I/O pin for Programming/Debugging Communication Channel 2 |
| PGC2 | I | ST | No | Clock input pin for Programming/Debugging Communication Channel 2 |
| PGD3 | I/O | ST | No | Data I/O pin for Programming/Debugging Communication Channel 3 |
| PGC3 | I | ST | No | Clock input pin for Programming/Debugging Communication Channel 3 |
| $\overline{MCLR}$ | I/P | ST | No | Master Clear (Reset) input. This pin is an active-low Reset to the device. |
| AVDD | P | P | No | Positive supply for analog modules. This pin must be connected at all times. |
| AVSS | P | P | No | Ground reference for analog modules. This pin must be connected at all times. |
| VDD | P | — | No | Positive supply for peripheral logic and I/O pins |
| VSS | P | — | No | Ground reference for logic and I/O pins |

**Legend:** CMOS = CMOS compatible input or output; Analog = Analog input; P = Power
ST = Schmitt Trigger input with CMOS levels; O = Output; I = Input
PPS = Peripheral Pin Select; TTL = TTL input buffer; DIG = Digital

**Note 1:** Not all pins are available in all package variants. See the **"Pin Diagrams"** section for pin availability.

**2:** PWM4L and PWM4H pins are available on PPS as well as dedicated.

**3:** SPI2 supports dedicated pins as well as PPS on 48, 64 and 80-pin devices.

**4:** Only 48, 64 and 80-pin devices have all eight PWM output pairs on dedicated pins. Refer to the **"Pin Diagrams"** for PWM pin availability on other packages.

**NOTES:**


© 2017-2021 Microchip Technology Inc.

# 2.0 GUIDELINES FOR GETTING STARTED WITH 16-BIT DIGITAL SIGNAL CONTROLLERS

## 2.1 Basic Connection Requirements

Getting started with the family devices of the dsPIC33CK256MP508 requires attention to a minimal set of device pin connections before proceeding with development. The following is a list of pin names which must always be connected:

- All VDD and VSS pins
  (see **Section 2.2 "Decoupling Capacitors"**)
- All AVDD and AVSS pins
  regardless if ADC module is not used (see **Section 2.2 "Decoupling Capacitors"**)
- MCLR pin
  (see **Section 2.3 "Master Clear (MCLR) Pin"**)
- PGCx/PGDx pins
  used for In-Circuit Serial Programming™ (ICSP™) and debugging purposes (see **Section 2.4 "ICSP Pins"**)
- OSCI and OSCO pins
  when an external oscillator source is used (see **Section 2.5 "External Oscillator Pins"**)

## 2.2 Decoupling Capacitors

The use of decoupling capacitors on every pair of power supply pins, such as VDD, VSS, AVDD and AVSS is required.

Consider the following criteria when using decoupling capacitors:

- **Value and type of capacitor:** Recommendation of 0.1 µF (100 nF), 10-20V. This capacitor should be a low-ESR and have resonance frequency in the range of 20 MHz and higher. It is recommended to use ceramic capacitors.
- **Placement on the Printed Circuit Board:** The decoupling capacitors should be placed as close to the pins as possible. It is recommended to place the capacitors on the same side of the board as the device. If space is constricted, the capacitor can be placed on another layer on the PCB using a via; however, ensure that the trace length from the pin to the capacitor is within one-quarter inch (6 mm) in length.
- **Handling high-frequency noise:** If the board is experiencing high-frequency noise, above tens of MHz, add a second ceramic-type capacitor in parallel to the above described decoupling capacitor. The value of the second capacitor can be in the range of 0.01 µF to 0.001 µF. Place this second capacitor next to the primary decoupling capacitor. In high-speed circuit designs, consider implementing a decade pair of capacitances as close to the power and ground pins as possible. For example, 0.1 µF in parallel with 0.001 µF.
- **Maximizing performance:** On the board layout from the power supply circuit, run the power and return traces to the decoupling capacitors first, and then to the device pins. This ensures that the decoupling capacitors are first in the power chain. Equally important is to keep the trace length between the capacitor and the power pins to a minimum, thereby reducing PCB track inductance.

**FIGURE 2-1: RECOMMENDED MINIMUM CONNECTION**

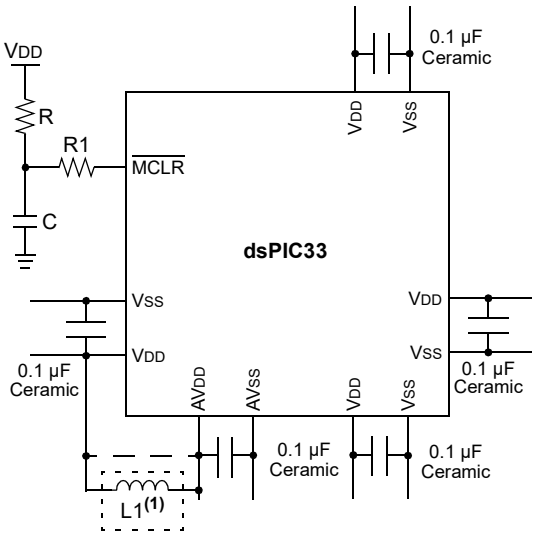


**Note 1:** As an option, instead of a hard-wired connection, an inductor (L1) can be substituted between VDD and AVDD to improve ADC noise rejection. The inductor impedance should be less than 1Ω and the inductor capacity greater than 10 mA.

Where:

$$f = \frac{FCNV}{2}$$ (i.e., ADC Conversion Rate/2)

$$f = \frac{1}{(2\pi\sqrt{LC})}$$

$$L = \left(\frac{1}{(2\pi f\sqrt{C})}\right)^2$$

### 2.2.1 BULK CAPACITORS

On boards with power traces running longer than six inches in length, it is suggested to use a bulk capacitor for integrated circuits, including DSCs, to supply a local power source. The value of the bulk capacitor should be determined based on the trace resistance that connects the power supply source to the device and the maximum current drawn by the device in the application. In other words, select the bulk capacitor so that it meets the acceptable voltage sag at the device. Typical values range from 4.7 µF to 47 µF.

## 2.3 Master Clear (MCLR) Pin

The MCLR pin provides two specific device functions:

- Device Reset
- Device Programming and Debugging.

During device programming and debugging, the resistance and capacitance that can be added to the pin must be considered. Device programmers and debuggers drive the MCLR pin. Consequently, specific voltage levels (VIH and VIL) and fast signal transitions must not be adversely affected. Therefore, specific values of R and C will need to be adjusted based on the application and PCB requirements.

For example, as shown in Figure 2-2, it is recommended that the capacitor, C, be isolated from the MCLR pin during programming and debugging operations.

Place the components, as shown in Figure 2-2, within one-quarter inch (6 mm) from the MCLR pin.

**FIGURE 2-2: EXAMPLE OF MCLR PIN CONNECTIONS**

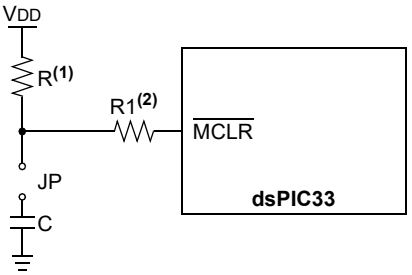


**Note 1:** R ≤ 10 kΩ is recommended. A suggested starting value is 10 kΩ. Ensure that the MCLR pin VIH and VIL specifications are met.

**2:** R1 ≤ 470Ω will limit any current flowing into MCLR from the external capacitor, C, in the event of MCLR pin breakdown due to Electrostatic Discharge (ESD) or Electrical Overstress (EOS). Ensure that the MCLR pin VIH and VIL specifications are met.

## 2.4 ICSP Pins

The PGCx and PGDx pins are used for ICSP and debugging purposes. It is recommended to keep the trace length between the ICSP connector and the ICSP pins on the device as short as possible. If the ICSP connector is expected to experience an ESD event, a series resistor is recommended, with the value in the range of a few tens of Ohms, not to exceed 100 Ohms.

Pull-up resistors, series diodes and capacitors on the PGCx and PGDx pins are not recommended as they will interfere with the programmer/debugger communications to the device. If such discrete components are an application requirement, they should be removed from the circuit during programming and debugging. Alternatively, refer to the AC/DC characteristics and timing requirements information in the respective device Flash programming specification for information on capacitive loading limits and pin Voltage Input High (VIH) and Voltage Input Low (VIL) requirements.

Ensure that the "Communication Channel Select" (i.e., PGCx/PGDx pins) programmed into the device matches the physical connections for the ICSP to the programmer/debugger.

For more information regarding Microchip's programmers and debuggers, refer to **Section 32.0 "Development Support"**.

## 2.5 External Oscillator Pins

When the Primary Oscillator (POSC) circuit is used to connect a crystal oscillator, special care and consideration is needed to ensure proper operation. The POSC circuit should be tested across the environmental conditions that the end product is intended to be used. The load capacitors specified in the crystal oscillator data sheet can be used as a starting point, however, the parasitic capacitance from the PCB traces can affect the circuit, and the values may need to be altered to ensure proper start-up and operation. Excessive trace length and other physical interaction can lead to poor signal quality. Poorly tuned oscillator circuits can have reduced amplitude, incorrect frequency (runt pulses), distorted waveforms and long start-up times that may result in unpredictable application behavior, such as instruction misexecution, illegal op code fetch, etc. Ensure that the crystal oscillator circuit is at full amplitude and correct frequency before the system begins to execute code. In planning the application's routing and I/O assignments, ensure that adjacent port pins, and other signals in close proximity to the oscillator do not have high frequencies, short rise and fall times and other similar noise. For further information on the primary oscillator see **Section 9.4 "Primary Oscillator (POSC)"**.


© 2017-2021 Microchip Technology Inc.

## 2.6 External Oscillator Layout Guidance

Use best practices during PCB layout to ensure robust start-up and operation. The oscillator circuit should be placed on the same side of the board as the device. Also, place the oscillator circuit close to the respective oscillator pins, not exceeding one-half inch (12 mm) distance between them. The load capacitors should be placed next to the oscillator itself, on the same side of the board. Use a grounded copper pour around the oscillator circuit to isolate them from surrounding circuits. The grounded copper pour should be routed directly to the MCU ground. Do not run any signal traces or power traces inside the ground pour. If using a two-sided board, avoid any traces on the other side of the board where the crystal is placed. Suggested layouts are shown in Figure 2-3. With fine-pitch packages, it is not always possible to completely surround the pins and components. A suitable solution is to tie the broken guard sections to a mirrored ground layer. In all cases, the guard trace(s) must be returned to ground.

For additional information and design guidance on oscillator circuits, please refer to these Microchip Application Notes, available at the Microchip website (www.microchip.com):

- *AN943, "Practical PICmicro® Oscillator Analysis and Design"*
- *AN949, "Making Your Oscillator Work"*
- *AN1798, "Crystal Selection for Low-Power Secondary Oscillator*

**FIGURE 2-3: SUGGESTED PLACEMENT OF THE OSCILLATOR CIRCUIT**

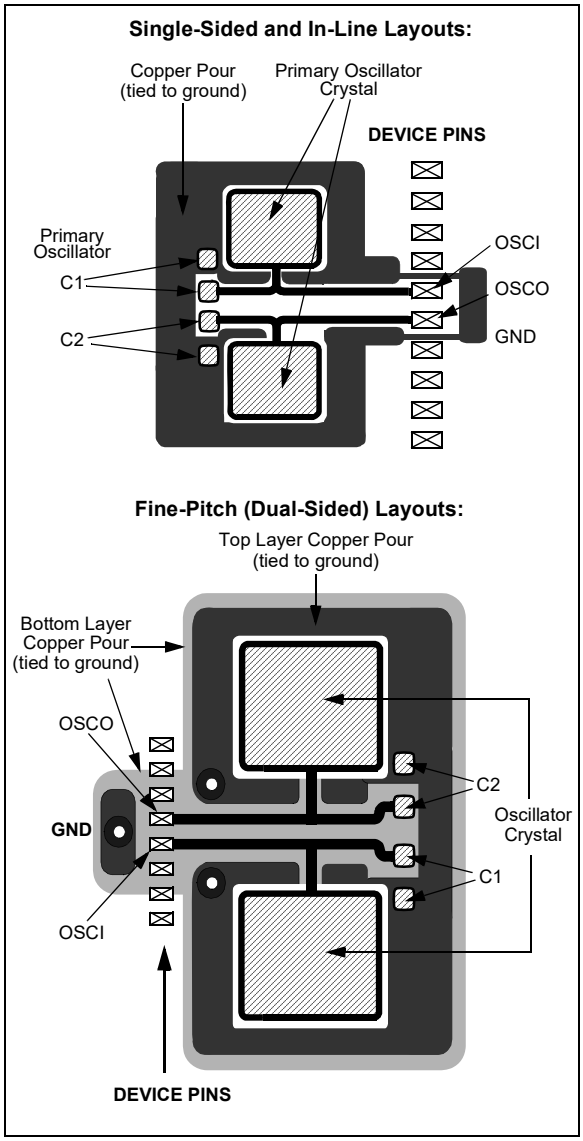

## 2.7 Oscillator Value Conditions on Device Start-up

If the PLL of the target device is enabled and configured for the device start-up oscillator, the maximum oscillator source frequency must be limited to a certain frequency (see **Section 9.0 "Oscillator with High-Frequency PLL"**) to comply with device PLL start-up conditions. This means that if the external oscillator frequency is outside this range, the application must start up in the FRC mode first. The default PLL settings after a POR with an oscillator frequency outside this range will violate the device operating speed.

Once the device powers up, the application firmware can initialize the PLL SFRs, CLKDIV and PLLFBD, to a suitable value, and then perform a clock switch to the Oscillator + PLL clock source. Note that clock switching must be enabled in the device Configuration Word.

## 2.8 Unused I/Os

Unused I/O pins should be configured as outputs and driven to a logic low state.

Alternatively, connect a 1k to 10k resistor between VSS and unused pins, and drive the output to logic low.

## 2.9 Targeted Applications

- Power Factor Correction (PFC):
  - Interleaved PFC
  - Critical Conduction PFC
  - Bridgeless PFC
- DC/DC Converters:
  - Buck, Boost, Forward, Flyback, Push-Pull
  - Half/Full-Bridge
  - Phase-Shift Full-Bridge
  - Resonant Converters
- DC/AC:
  - Half/Full-Bridge Inverter
  - Resonant Inverter
- Motor Control
  - BLDC
  - PMSM
  - SR
  - ACIM

Examples of typical application connections are shown in Figure 2-4 through Figure 2-6.

**FIGURE 2-4: INTERLEAVED PFC**

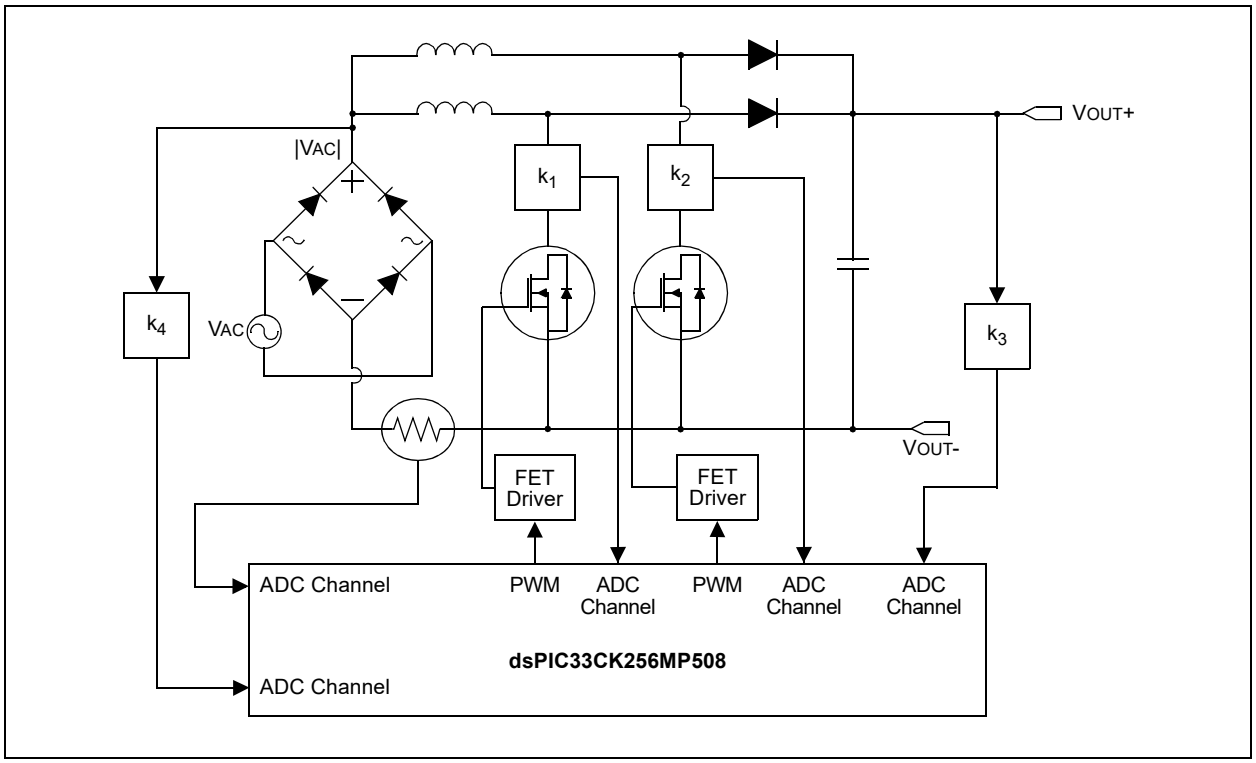



© 2017-2021 Microchip Technology Inc.

**FIGURE 2-5: PHASE-SHIFTED FULL-BRIDGE CONVERTER**

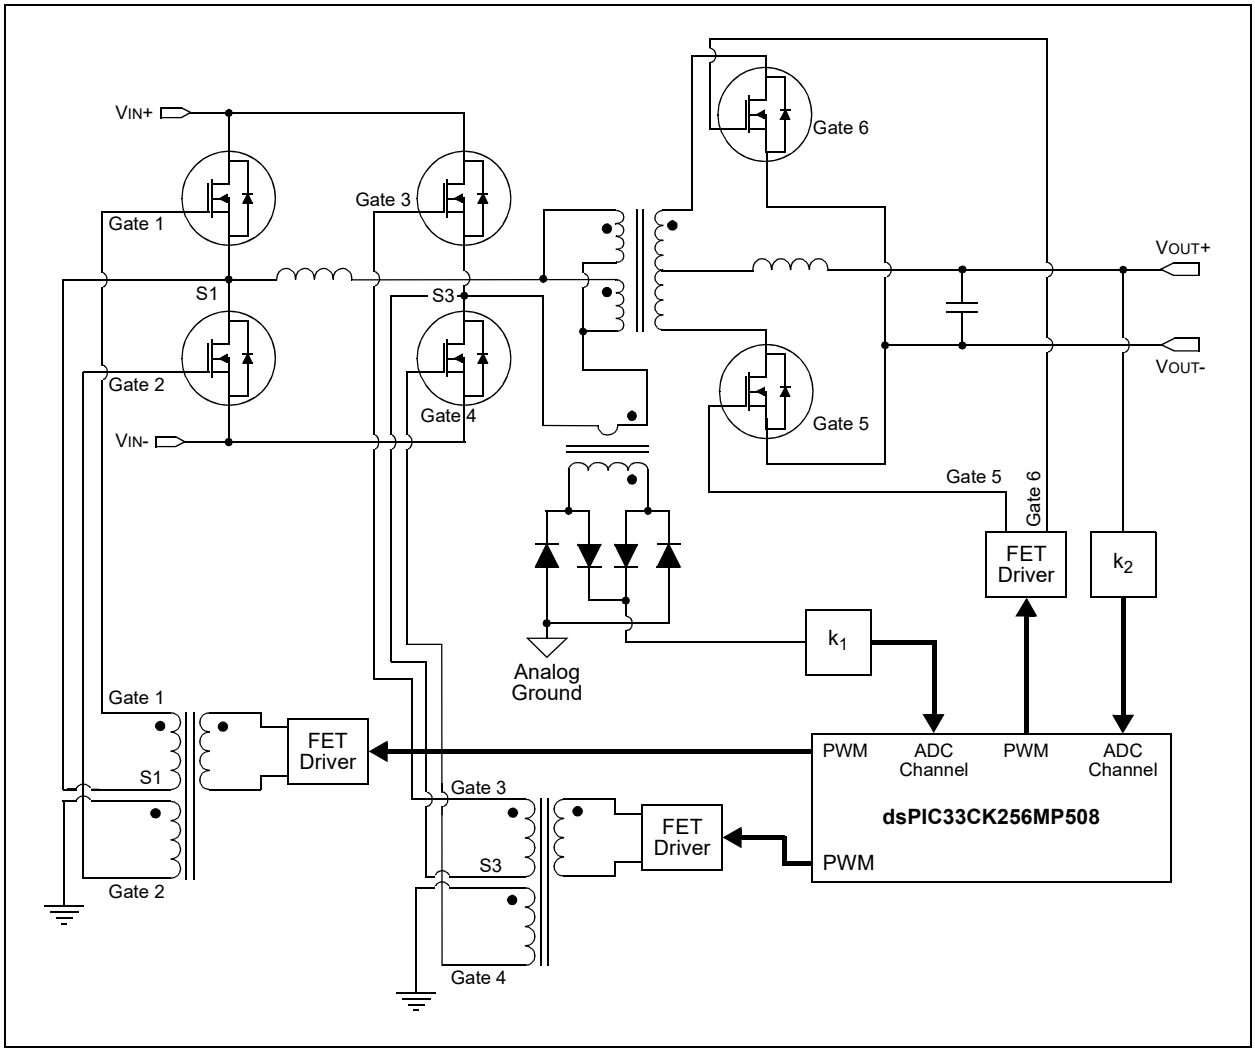

**FIGURE 2-6: OFF-LINE UPS**

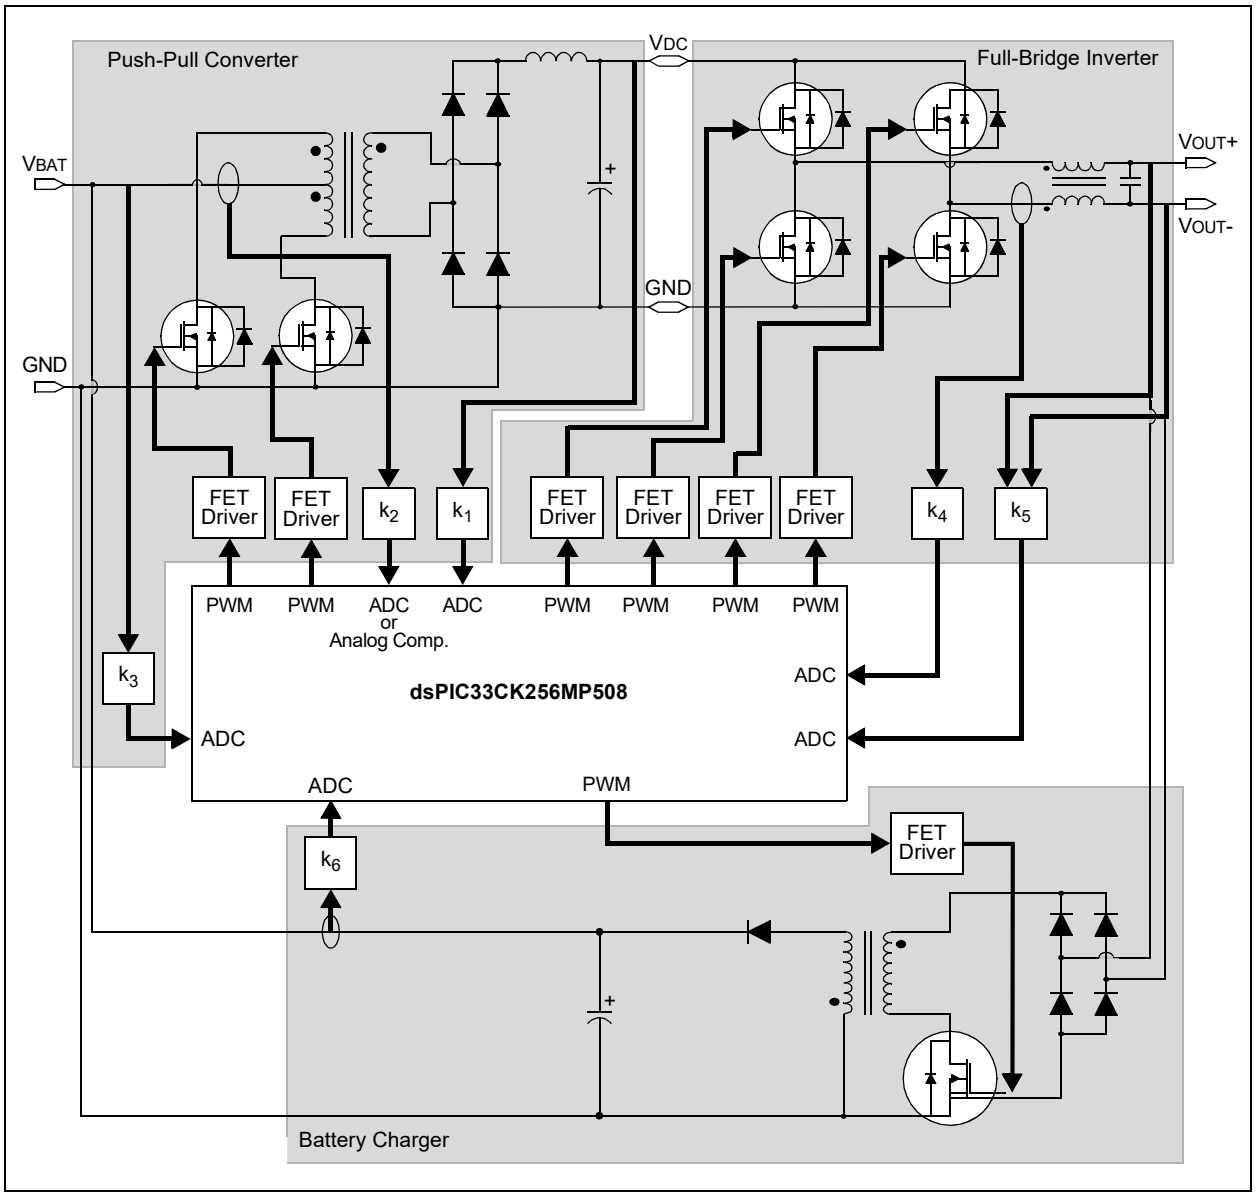



© 2017-2021 Microchip Technology Inc.

## 3.0 CPU

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Enhanced CPU"** (www.microchip.com/DS70005158) in the *"dsPIC33/PIC24 Family Reference Manual"*.

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to **Section 4.0 "Memory Organization"** in this data sheet for device-specific register and bit information.

The dsPIC33CK256MP508 family CPU has a 16-bit (data) modified Harvard architecture with an enhanced instruction set, including significant support for Digital Signal Processing (DSP). The CPU has a 24-bit instruction word with a variable length opcode field. The Program Counter (PC) is 23 bits wide and addresses up to 4M x 24 bits of user program memory space.

An instruction prefetch mechanism helps maintain throughput and provides predictable execution. Most instructions execute in a single-cycle effective execution rate, with the exception of instructions that change the program flow, the double-word move (`MOV.D`) instruction, PSV accesses and the table instructions. Overhead-free program loop constructs are supported using the `DO` and `REPEAT` instructions, both of which are interruptible at any point.

### 3.1 Registers

The dsPIC33CK256MP508 devices have sixteen, 16-bit Working registers in the programmer's model. Each of the Working registers can act as a Data, Address or Address Offset register. The 16th Working register (W15) operates as a Software Stack Pointer for interrupts and calls.

In addition, the dsPIC33CK256MP508 devices include four Alternate Working register sets, which consist of W0 through W14. The Alternate Working registers can be made persistent to help reduce the saving and restoring of register content during Interrupt Service Routines (ISRs). The Alternate Working registers can be assigned to a specific Interrupt Priority Level (IPL1 through IPL6) by configuring the CTXTx[2:0] bits in the FALTREG Configuration register. The Alternate Working registers can also be accessed manually by using the `CTXTSWP` instruction. The CCTXI[2:0] and MCTXI[2:0] bits in the CTXTSTAT register can be used to identify the current, and most recent, manually selected Working register sets.

### 3.2 Instruction Set

The instruction set for dsPIC33CK256MP508 devices has two classes of instructions: the MCU class of instructions and the DSP class of instructions. These two instruction classes are seamlessly integrated into the architecture and execute from a single execution unit. The instruction set includes many addressing modes and was designed for optimum C compiler efficiency.

### 3.3 Data Space Addressing

The base Data Space can be addressed as up to 4K words or 8 Kbytes, and is split into two blocks, referred to as X and Y data memory. Each memory block has its own independent Address Generation Unit (AGU). The MCU class of instructions operates solely through the X memory AGU, which accesses the entire memory map as one linear Data Space. Certain DSP instructions operate through the X and Y AGUs to support dual operand reads, which splits the data address space into two parts. The X and Y Data Space boundary is device-specific.

The upper 32 Kbytes of the Data Space memory map can optionally be mapped into Program Space (PS) at any 16K program word boundary. The program-to-Data Space mapping feature, known as Program Space Visibility (PSV), lets any instruction access Program Space as if it were Data Space. Refer to **"Data Memory"** (DS70595) in the *"dsPIC33/PIC24 Family Reference Manual"* for more details on PSV and table accesses.

On dsPIC33CK256MP508 family devices, overhead-free circular buffers (Modulo Addressing) are supported in both X and Y address spaces. The Modulo Addressing removes the software boundary checking overhead for DSP algorithms. The X AGU Circular Addressing can be used with any of the MCU class of instructions. The X AGU also supports Bit-Reversed Addressing to greatly simplify input or output data re-ordering for radix-2 FFT algorithms.

### 3.4 Addressing Modes

The CPU supports these addressing modes:

- Inherent (no operand)
- Relative
- Literal
- Memory Direct
- Register Direct
- Register Indirect

Each instruction is associated with a predefined addressing mode group, depending upon its functional requirements. As many as six addressing modes are supported for each instruction.

**FIGURE 3-1: dsPIC33CK256MP508 FAMILY CPU BLOCK DIAGRAM**

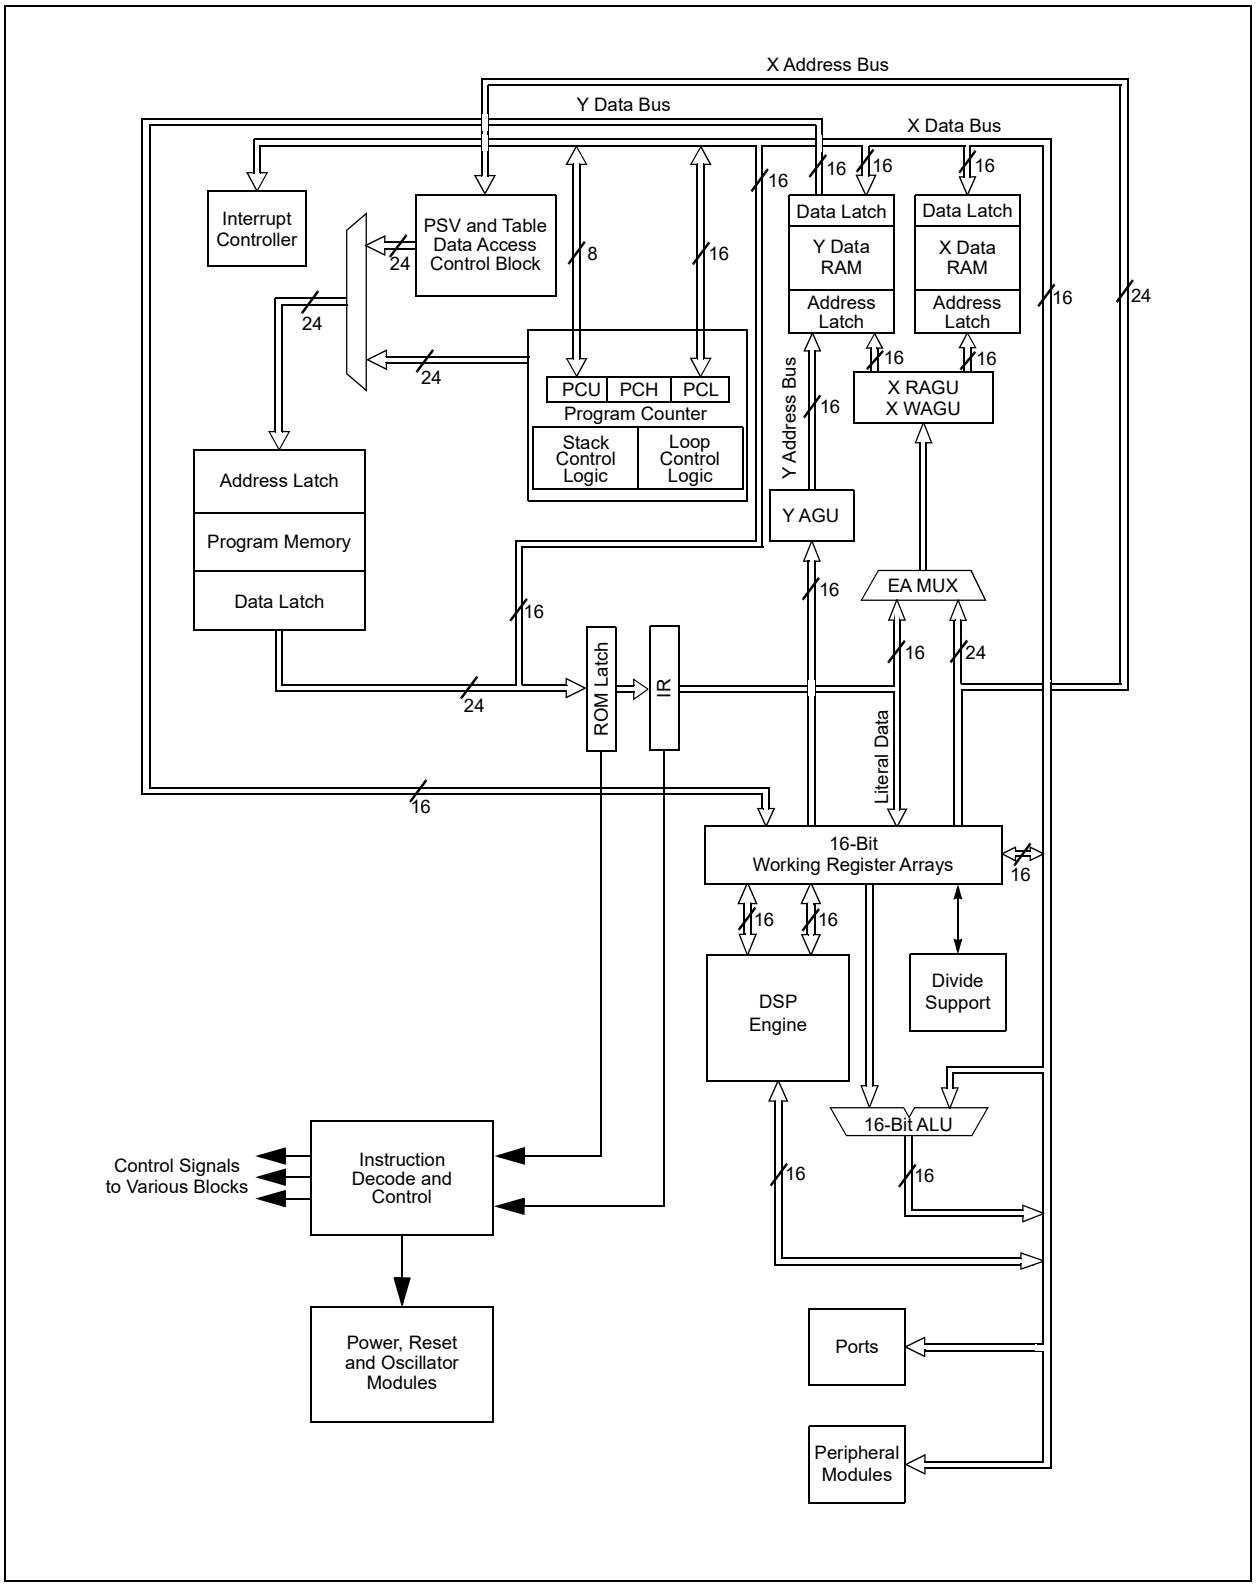



© 2017-2021 Microchip Technology Inc.

### 3.4.1 PROGRAMMER'S MODEL

The programmer's model for the dsPIC33CK256MP508 family is shown in Figure 3-2. All registers in the programmer's model are memory-mapped and can be manipulated directly by instructions. Table 3-1 lists a description of each register.

In addition to the registers contained in the programmer's model, the dsPIC33CK256MP508 devices contain control registers for Modulo Addressing, Bit-Reversed Addressing and interrupts. These registers are described in subsequent sections of this document.

All registers associated with the programmer's model are memory-mapped, as shown in Figure 3-2.

**TABLE 3-1: PROGRAMMER'S MODEL REGISTER DESCRIPTIONS**

| Register(s) Name | Description |
|---|---|
| W0 through W15(1) | Working Register Array |
| W0 through W14(1) | Alternate Working Register Array 1 |
| W0 through W14(1) | Alternate Working Register Array 2 |
| W0 through W14(1) | Alternate Working Register Array 3 |
| W0 through W14(1) | Alternate Working Register Array 4 |
| ACCA, ACCB | 40-Bit DSP Accumulators (Additional 4 Alternate Accumulators) |
| PC | 23-Bit Program Counter |
| SR | ALU and DSP Engine STATUS Register |
| SPLIM | Stack Pointer Limit Value Register |
| TBLPAG | Table Memory Page Address Register |
| DSRPAG | Extended Data Space (EDS) Read Page Register |
| RCOUNT | REPEAT Loop Counter Register |
| DCOUNT | DO Loop Counter Register |
| DOSTARTH, DOSTARTL(2) | DO Loop Start Address Register (High and Low) |
| DOENDH, DOENDL | DO Loop End Address Register (High and Low) |
| CORCON | Contains DSP Engine, DO Loop Control and Trap Status bits |

**Note 1:** Memory-mapped W0 through W14 represent the value of the register in the currently active CPU context.

**2:** The DOSTARTH and DOSTARTL registers are read-only.

**FIGURE 3-2: PROGRAMMER'S MODEL**

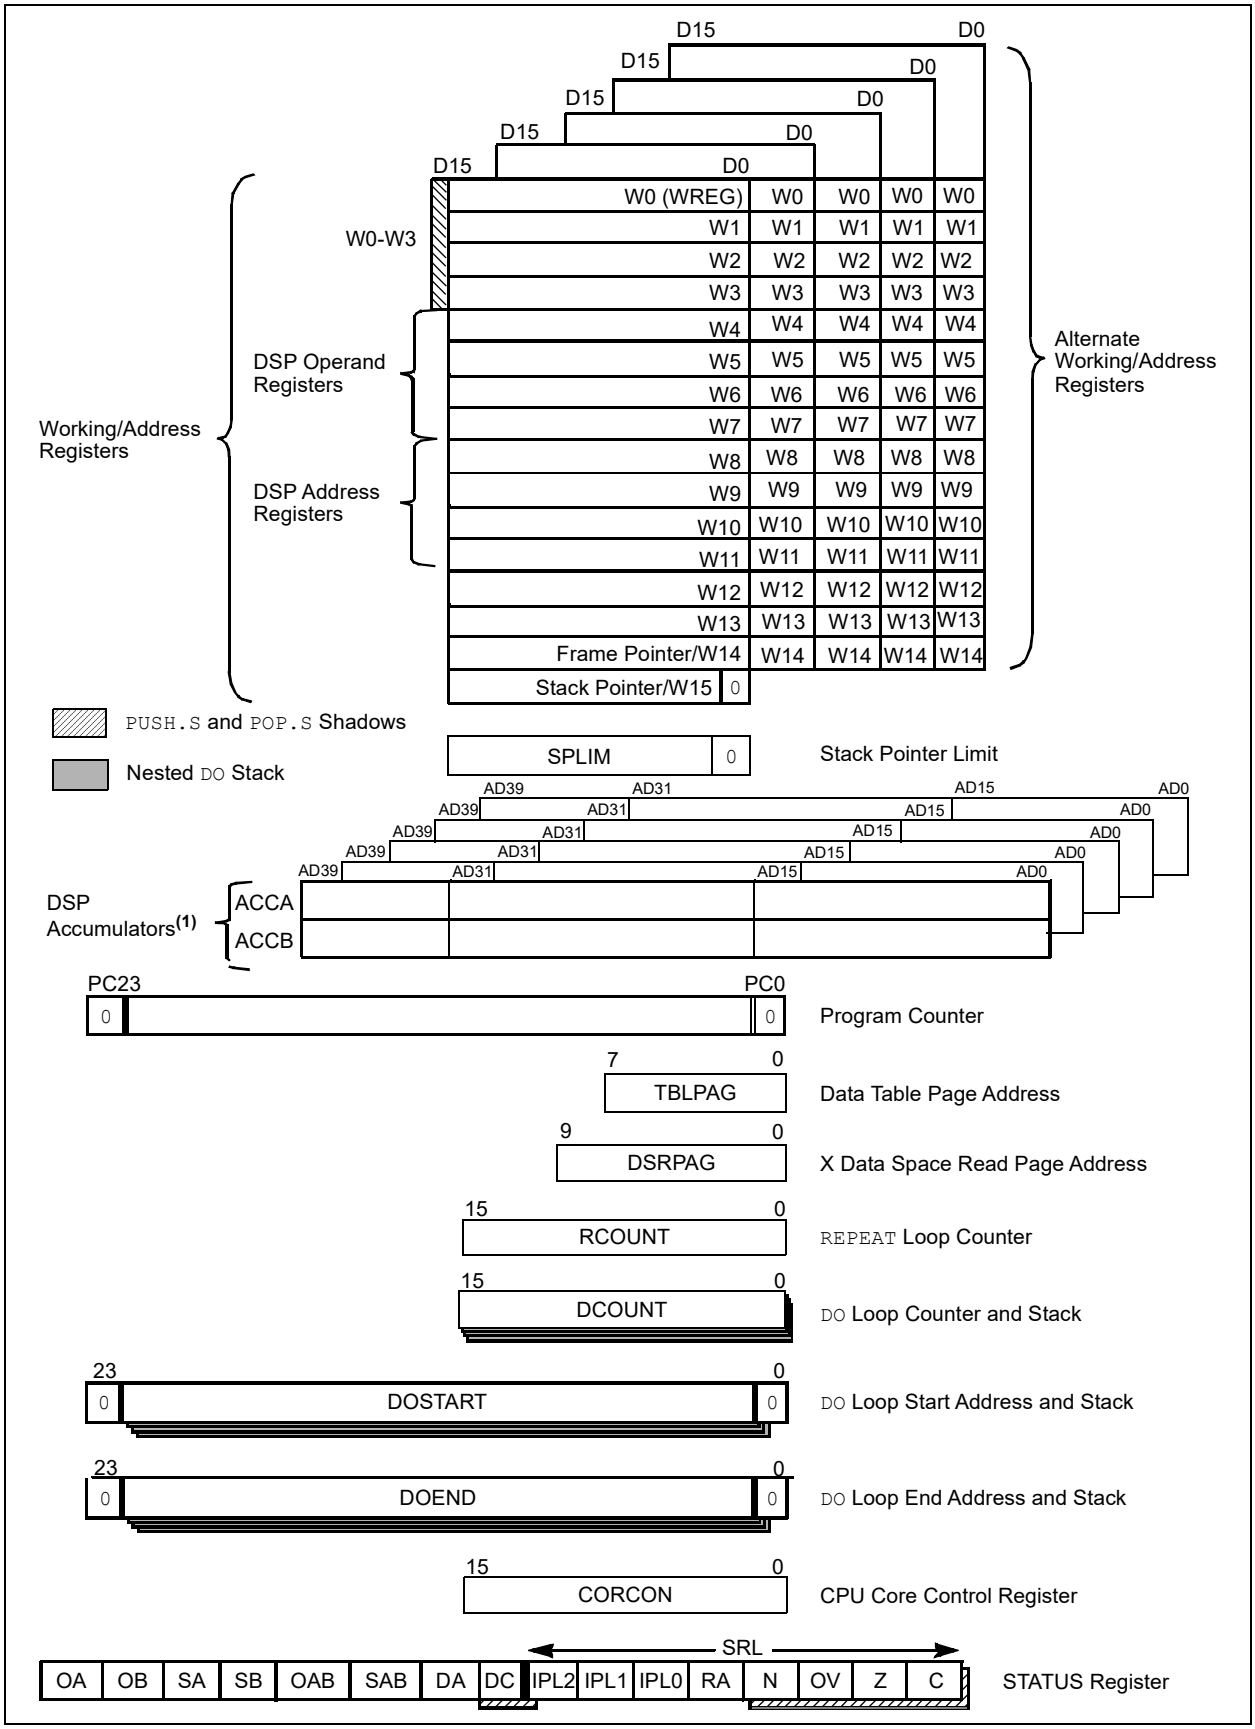



© 2017-2021 Microchip Technology Inc.

### 3.4.2 CPU RESOURCES

Many useful resources are provided on the main product page of the Microchip website for the devices listed in this data sheet. This product page contains the latest updates and additional information.

#### 3.4.2.1 Key Resources

- **"Enhanced CPU"** (DS70005158) in the *"dsPIC33/PIC24 Family Reference Manual"*
- Code Samples
- Application Notes
- Software Libraries
- Webinars
- All related *"dsPIC33/PIC24 Family Reference Manual"* Sections
- Development Tools

### 3.4.3 CPU CONTROL REGISTERS

**REGISTER 3-1: SR: CPU STATUS REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/C-0 | R/C-0 | R-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| OA | OB | SA(3) | SB(3) | OAB | SAB | DA | DC |
| bit 15 | | | | | | | bit 8 |

| R/W-0(2) | R/W-0(2) | R/W-0(2) | R-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| IPL2(1) | IPL1(1) | IPL0(1) | RA | N | OV | Z | C |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1'= Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **OA:** Accumulator A Overflow Status bit
1 = Accumulator A has overflowed
0 = Accumulator A has not overflowed

bit 14 **OB:** Accumulator B Overflow Status bit
1 = Accumulator B has overflowed
0 = Accumulator B has not overflowed

bit 13 **SA:** Accumulator A Saturation 'Sticky' Status bit(3)
1 = Accumulator A is saturated or has been saturated at some time
0 = Accumulator A is not saturated

bit 12 **SB:** Accumulator B Saturation 'Sticky' Status bit(3)
1 = Accumulator B is saturated or has been saturated at some time
0 = Accumulator B is not saturated

bit 11 **OAB:** OA || OB Combined Accumulator Overflow Status bit
1 = Accumulator A or B has overflowed
0 = Neither Accumulator A or B has overflowed

bit 10 **SAB:** SA || SB Combined Accumulator 'Sticky' Status bit
1 = Accumulator A or B is saturated or has been saturated at some time
0 = Neither Accumulator A or B is saturated

bit 9 **DA:** DO Loop Active bit
1 = DO loop is in progress
0 = DO loop is not in progress

bit 8 **DC:** MCU ALU Half Carry/Borrow bit
1 = A carry-out from the 4th low-order bit (for byte-sized data) or 8th low-order bit (for word-sized data) of the result occurred
0 = No carry-out from the 4th low-order bit (for byte-sized data) or 8th low-order bit (for word-sized data) of the result occurred

**Note 1:** The IPL[2:0] bits are concatenated with the IPL[3] bit (CORCON[3]) to form the CPU Interrupt Priority Level. The value in parentheses indicates the IPL, if IPL[3] = 1. User interrupts are disabled when IPL[3] = 1.

**2:** The IPL[2:0] Status bits are read-only when the NSTDIS bit (INTCON1[15]) = 1.

**3:** A data write to the SR register can modify the SA and SB bits by either a data write to SA and SB or by clearing the SAB bit. To avoid a possible SA or SB bit write race condition, the SA and SB bits should not be modified using bit operations.


© 2017-2021 Microchip Technology Inc.

**REGISTER 3-1: SR: CPU STATUS REGISTER (CONTINUED)**

bit 7-5 **IPL[2:0]:** CPU Interrupt Priority Level Status bits(1,2)
111 = CPU Interrupt Priority Level is 7 (15); user interrupts are disabled
110 = CPU Interrupt Priority Level is 6 (14)
101 = CPU Interrupt Priority Level is 5 (13)
100 = CPU Interrupt Priority Level is 4 (12)
011 = CPU Interrupt Priority Level is 3 (11)
010 = CPU Interrupt Priority Level is 2 (10)
001 = CPU Interrupt Priority Level is 1 (9)
000 = CPU Interrupt Priority Level is 0 (8)

bit 4 **RA:** REPEAT Loop Active bit
1 = REPEAT loop is in progress
0 = REPEAT loop is not in progress

bit 3 **N:** MCU ALU Negative bit
1 = Result was negative
0 = Result was non-negative (zero or positive)

bit 2 **OV:** MCU ALU Overflow bit
This bit is used for signed arithmetic (two's complement). It indicates an overflow of the magnitude that causes the sign bit to change state.
1 = Overflow occurred for signed arithmetic (in this arithmetic operation)
0 = No overflow occurred

bit 1 **Z:** MCU ALU Zero bit
1 = An operation that affects the Z bit has set it at some time in the past
0 = The most recent operation that affects the Z bit has cleared it (i.e., a non-zero result)

bit 0 **C:** MCU ALU Carry/$\overline{\text{Borrow}}$ bit
1 = A carry-out from the Most Significant bit of the result occurred
0 = No carry-out from the Most Significant bit of the result occurred

**Note 1:** The IPL[2:0] bits are concatenated with the IPL[3] bit (CORCON[3]) to form the CPU Interrupt Priority Level. The value in parentheses indicates the IPL, if IPL[3] = 1. User interrupts are disabled when IPL[3] = 1.

**2:** The IPL[2:0] Status bits are read-only when the NSTDIS bit (INTCON1[15]) = 1.

**3:** A data write to the SR register can modify the SA and SB bits by either a data write to SA and SB or by clearing the SAB bit. To avoid a possible SA or SB bit write race condition, the SA and SB bits should not be modified using bit operations.

**REGISTER 3-2: CORCON: CORE CONTROL REGISTER**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| VAR | — | US1 | US0 | EDT(1) | DL2 | DL1 | DL0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-1 | R/W-0 | R/C-0 | R-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SATA | SATB | SATDW | ACCSAT | IPL3(2) | SFA | RND | IF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **VAR:** Variable Exception Processing Latency Control bit
1 = Variable exception processing latency is enabled
0 = Fixed exception processing latency is enabled

bit 14 **Unimplemented:** Read as '0'

bit 13-12 **US[1:0]:** DSP Multiply Unsigned/Signed Control bits
11 = Reserved
10 = DSP engine multiplies are mixed sign
01 = DSP engine multiplies are unsigned
00 = DSP engine multiplies are signed

bit 11 **EDT:** Early DO Loop Termination Control bit(1)
1 = Terminates executing DO loop at the end of the current loop iteration
0 = No effect

bit 10-8 **DL[2:0]:** DO Loop Nesting Level Status bits
111 = Seven DO loops are active
...
001 = One DO loop is active
000 = Zero DO loops are active

bit 7 **SATA:** ACCA Saturation Enable bit
1 = Accumulator A saturation is enabled
0 = Accumulator A saturation is disabled

bit 6 **SATB:** ACCB Saturation Enable bit
1 = Accumulator B saturation is enabled
0 = Accumulator B saturation is disabled

bit 5 **SATDW:** Data Space Write from DSP Engine Saturation Enable bit
1 = Data Space write saturation is enabled
0 = Data Space write saturation is disabled

bit 4 **ACCSAT:** Accumulator Saturation Mode Select bit
1 = 9.31 saturation (super saturation)
0 = 1.31 saturation (normal saturation)

bit 3 **IPL3:** CPU Interrupt Priority Level Status bit 3(2)
1 = CPU Interrupt Priority Level is greater than 7
0 = CPU Interrupt Priority Level is 7 or less

**Note 1:** This bit is always read as '0'.
**2:** The IPL3 bit is concatenated with the IPL[2:0] bits (SR[7:5]) to form the CPU Interrupt Priority Level.


© 2017-2021 Microchip Technology Inc.

**REGISTER 3-2: CORCON: CORE CONTROL REGISTER (CONTINUED)**

bit 2 **SFA:** Stack Frame Active Status bit
1 = Stack frame is active; W14 and W15 address 0x0000 to 0xFFFF, regardless of DSRPAG
0 = Stack frame is not active; W14 and W15 address the base Data Space

bit 1 **RND:** Rounding Mode Select bit
1 = Biased (conventional) rounding is enabled
0 = Unbiased (convergent) rounding is enabled

bit 0 **IF:** Integer or Fractional Multiplier Mode Select bit
1 = Integer mode is enabled for DSP multiply
0 = Fractional mode is enabled for DSP multiply

**Note 1:** This bit is always read as '0'.
**2:** The IPL3 bit is concatenated with the IPL[2:0] bits (SR[7:5]) to form the CPU Interrupt Priority Level.

**REGISTER 3-3: MSTRPR: EDS BUS INITIATOR PRIORITY CONTROL REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | DMAPR | CANPR | — | — | — | NVMPR |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-6 **Unimplemented:** Read as '0'

bit 5 **DMAPR:** Modify DMA Controller Bus Initiator Priority Relative to CPU bit
1 = Raises DMA Controller bus Initiator priority to above that of the CPU
0 = No change to DMA Controller bus Initiator priority

bit 4 **CANPR:** Modify CAN1 Bus Initiator Priority Relative to CPU bit
1 = Raises CAN1 bus Initiator priority to above that of the CPU
0 = No change to CAN1 bus Initiator priority

bit 3-1 **Unimplemented:** Read as '0'

bit 0 **NVMPR:** Modify NVM Controller Bus Initiator Priority Relative to CPU bit
1 = Raises NVM Controller bus Initiator priority to above that of the CPU
0 = No change to NVM Controller bus Initiator priority

**REGISTER 3-4: CTXTSTAT: CPU W REGISTER CONTEXT STATUS REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | CCTXI2 | CCTXI1 | CCTXI0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | MCTXI2 | MCTXI1 | MCTXI0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-11 **Unimplemented:** Read as '0'

bit 10-8 **CCTXI[2:0]:** Current (W Register) Context Identifier bits
111 = Reserved
•
•
•
100 = Alternate Working Register Set 4 is currently in use
011 = Alternate Working Register Set 3 is currently in use
010 = Alternate Working Register Set 2 is currently in use
001 = Alternate Working Register Set 1 is currently in use
000 = Default register set is currently in use

bit 7-3 **Unimplemented:** Read as '0'

bit 2-0 **MCTXI[2:0]:** Manual (W Register) Context Identifier bits
111 = Reserved
•
•
•
100 = Alternate Working Register Set 4 was most recently manually selected
011 = Alternate Working Register Set 3 was most recently manually selected
010 = Alternate Working Register Set 2 was most recently manually selected
001 = Alternate Working Register Set 1 was most recently manually selected
000 = Default register set was most recently manually selected


© 2017-2021 Microchip Technology Inc.

### 3.4.4 ARITHMETIC LOGIC UNIT (ALU)

The dsPIC33CK256MP508 family ALU is 16 bits wide and is capable of addition, subtraction, bit shifts and logic operations. Unless otherwise mentioned, arithmetic operations are two's complement in nature. Depending on the operation, the ALU can affect the values of the Carry (C), Zero (Z), Negative (N), Overflow (OV) and Digit Carry (DC) Status bits in the SR register. The C and DC Status bits operate as Borrow and Digit Borrow bits, respectively, for subtraction operations.

The ALU can perform 8-bit or 16-bit operations, depending on the mode of the instruction that is used. Data for the ALU operation can come from the W register array or data memory, depending on the addressing mode of the instruction. Likewise, output data from the ALU can be written to the W register array or a data memory location.

Refer to the *"16-Bit MCU and DSC Programmer's Reference Manual"* (DS70000157) for information on the SR bits affected by each instruction.

The core CPU incorporates hardware support for both multiplication and division. This includes a dedicated hardware multiplier and support hardware for 16-bit divisor division.

#### 3.4.4.1 Multiplier

Using the high-speed, 17-bit x 17-bit multiplier, the ALU supports unsigned, signed or mixed-sign operation in several MCU multiplication modes:

- 16-bit x 16-bit signed
- 16-bit x 16-bit unsigned
- 16-bit signed x 5-bit (literal) unsigned
- 16-bit signed x 16-bit unsigned
- 16-bit unsigned x 5-bit (literal) unsigned
- 16-bit unsigned x 16-bit signed
- 8-bit unsigned x 8-bit unsigned

#### 3.4.4.2 Divider

The divide block supports 32-bit/16-bit and 16-bit/16-bit signed and unsigned integer divide operations with the following data sizes:

- 32-bit signed/16-bit signed divide
- 32-bit unsigned/16-bit unsigned divide
- 16-bit signed/16-bit signed divide
- 16-bit unsigned/16-bit unsigned divide

The 16-bit signed and unsigned `DIV` instructions can specify any W register for both the 16-bit divisor (Wn) and any W register (aligned) pair (W(m + 1):Wm) for the 32-bit dividend. The divide algorithm takes one cycle per bit of divisor, so both 32-bit/16-bit and 16-bit/16-bit instructions take the same number of cycles to execute. There are additional instructions: `DIV2` and `DIVF2`. Divide instructions will complete in six cycles.

### 3.4.5 DSP ENGINE

The DSP engine consists of a high-speed 17-bit x 17-bit multiplier, a 40-bit barrel shifter and a 40-bit adder/subtracter (with two target accumulators, round and saturation logic).

The DSP engine can also perform inherent accumulator-to-accumulator operations that require no additional data. These instructions are, `ADD`, `SUB`, `NEG`, `MIN` and `MAX`.

The DSP engine has options selected through bits in the CPU Core Control register (CORCON), as listed below:

- Fractional or integer DSP multiply (IF)
- Signed, unsigned or mixed-sign DSP multiply (USx)
- Conventional or convergent rounding (RND)
- Automatic saturation on/off for ACCA (SATA)
- Automatic saturation on/off for ACCB (SATB)
- Automatic saturation on/off for writes to data memory (SATDW)
- Accumulator Saturation mode selection (ACCSAT)

**TABLE 3-2: DSP INSTRUCTIONS SUMMARY**

| Instruction | Algebraic Operation | ACC Write-Back |
|---|---|---|
| `CLR` | $A = 0$ | Yes |
| `ED` | $A = (x - y)^2$ | No |
| `EDAC` | $A = A + (x - y)^2$ | No |
| `MAC` | $A = A + (x \bullet y)$ | Yes |
| `MAC` | $A = A + x^2$ | No |
| `MOVSAC` | No change in A | Yes |
| `MPY` | $A = x \bullet y$ | No |
| `MPY` | $A = x^2$ | No |
| `MPY.N` | $A = -x \bullet y$ | No |
| `MSC` | $A = A - x \bullet y$ | Yes |

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 4.0 MEMORY ORGANIZATION

**Note:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"dsPIC33/PIC24 Program Memory"** (www.microchip.com/DS70000613) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The dsPIC33CK256MP508 family architecture features separate program and data memory spaces, and buses. This architecture also allows the direct access of program memory from the Data Space (DS) during code execution.

### 4.1 Program Address Space

The program address memory space of the dsPIC33CK256MP508 family devices is 4M instructions. The space is addressable by a 24-bit value derived either from the 23-bit PC during program execution, or from table operation or Data Space remapping, as described in **Section 4.5.5 "Interfacing Program and Data Memory Spaces"**.

User application access to the program memory space is restricted to the lower half of the address range (0x000000 to 0x7FFFFF). The exception is the use of `TBLRD` operations, which use TBLPAG[7] to permit access to calibration data and Device ID sections of the configuration memory space.

The program memory maps for dsPIC33CK256MP508 devices are shown in Figure 4-1 through Figure 4-5.

**FIGURE 4-1: PROGRAM MEMORY MAP FOR dsPIC33CKXXXMP50X/20X DEVICES(1)**

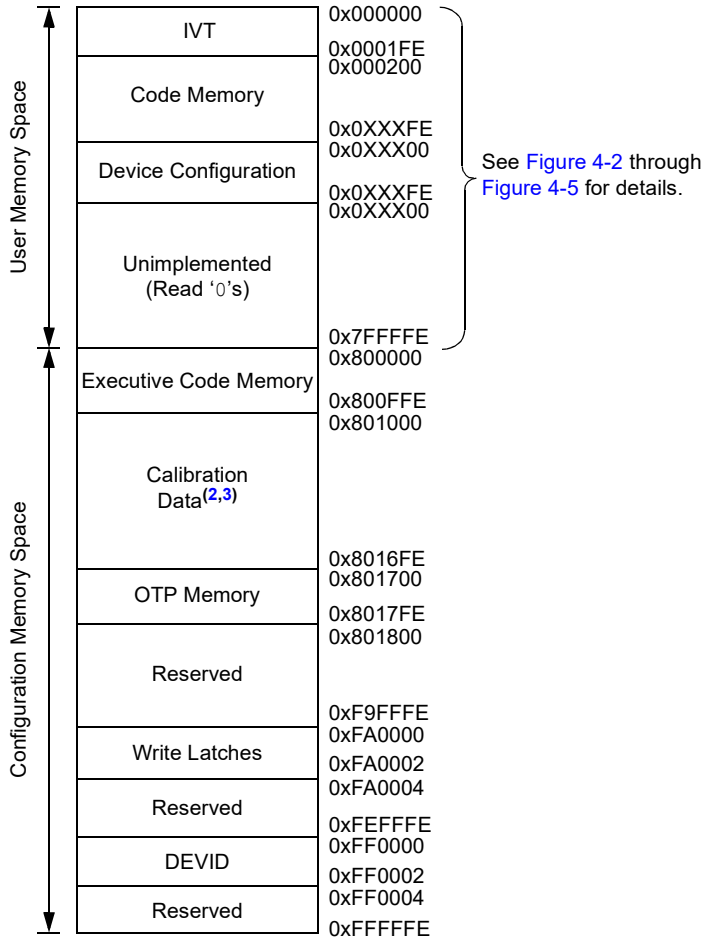


**Note 1:** Memory areas are not shown to scale.
**2:** Calibration data area must be maintained during programming.
**3:** Calibration data area includes UDID, ICSP™ Write Inhibit and FBOOT register locations.

**FIGURE 4-2: PROGRAM MEMORY MAP FOR dsPIC33CK256MP50/20X DEVICES(1)**

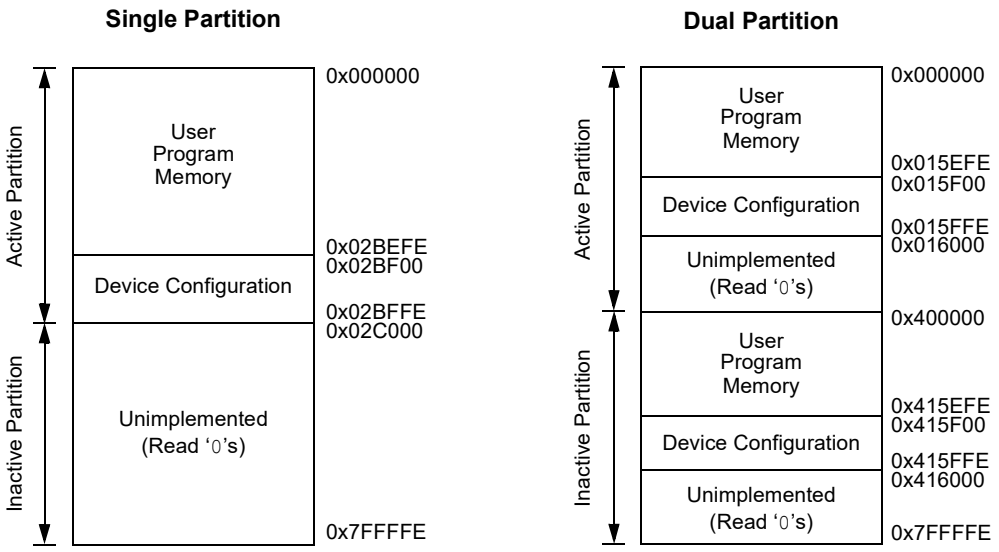


**Note 1:** Memory areas are not shown to scale.

**FIGURE 4-3: PROGRAM MEMORY MAP FOR dsPIC33CK128MP50X/20X DEVICES(1)**

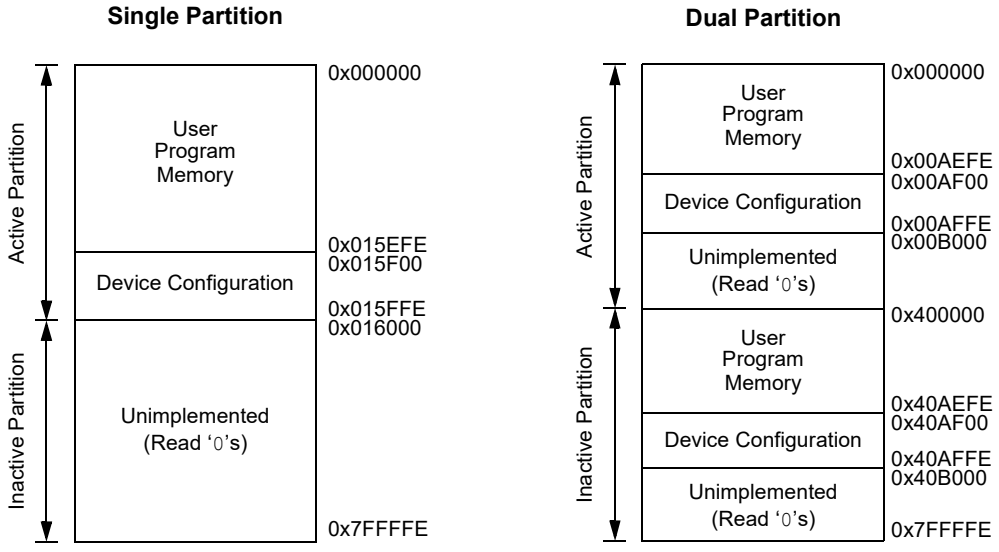


**Note 1:** Memory areas are not shown to scale.


© 2017-2021 Microchip Technology Inc.

**FIGURE 4-4: PROGRAM MEMORY MAP FOR dsPIC33CK64MP50X/20X DEVICES(1)**

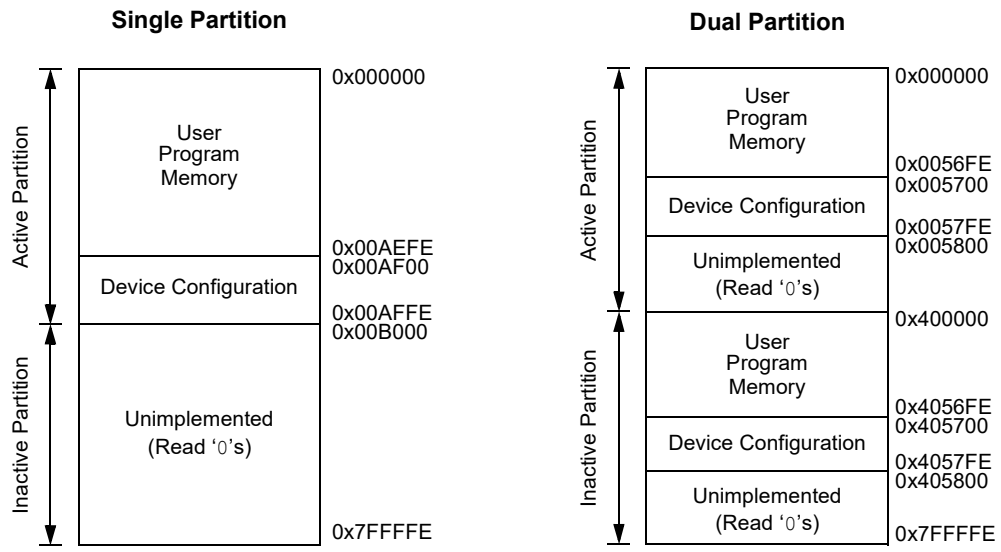


**Note 1:** Memory areas are not shown to scale.

**FIGURE 4-5: PROGRAM MEMORY MAP FOR dsPIC33CK32MP50X/20X DEVICES(1)**

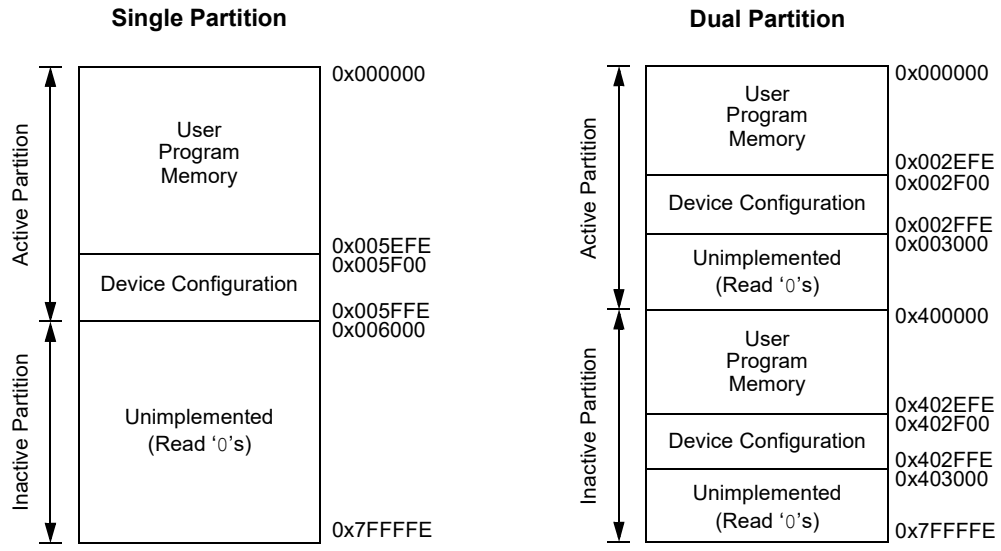


**Note 1:** Memory areas are not shown to scale.

### 4.1.1 PROGRAM MEMORY ORGANIZATION

The program memory space is organized in word-addressable blocks. Although it is treated as 24 bits wide, it is more appropriate to think of each address of the program memory as a lower and upper word, with the upper byte of the upper word being unimplemented. The lower word always has an even address, while the upper word has an odd address (Figure 4-6).

Program memory addresses are always word-aligned on the lower word, and addresses are incremented or decremented, by two, during code execution. This arrangement provides compatibility with data memory space addressing and makes data in the program memory space accessible.

### 4.1.2 INTERRUPT AND TRAP VECTORS

All dsPIC33CK256MP508 family devices reserve the addresses between 0x000000 and 0x000200 for hard-coded program execution vectors. A hardware Reset vector is provided to redirect code execution from the default value of the PC on device Reset to the actual start of code. A `GOTO` instruction is programmed by the user application at address, 0x000000, of Flash memory, with the actual address for the start of code at address, 0x000002, of Flash memory.

A more detailed discussion of the Interrupt Vector Tables (IVTs) is provided in **Section 7.0 "Interrupt Controller"**.

**FIGURE 4-6: PROGRAM MEMORY ORGANIZATION**

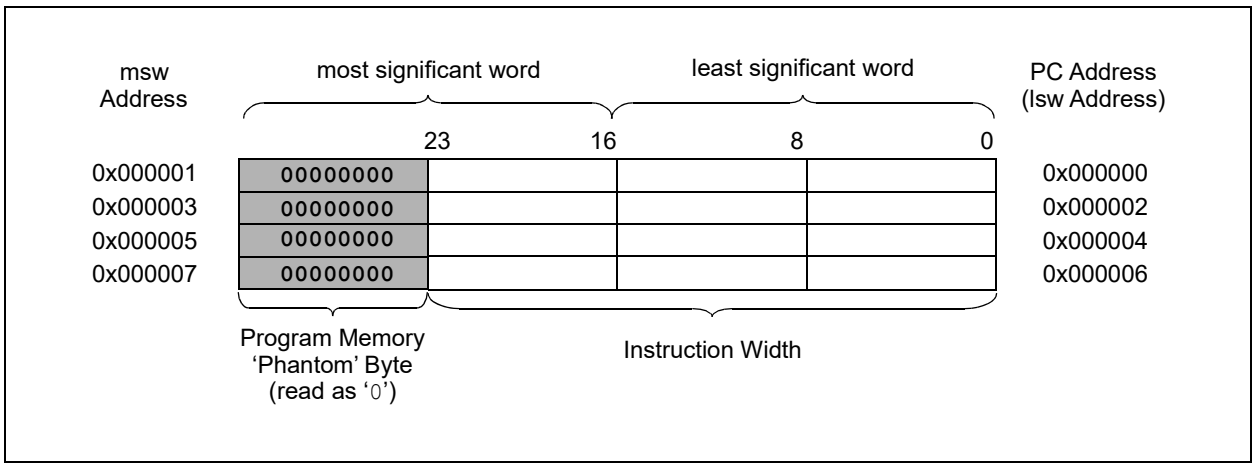



© 2017-2021 Microchip Technology Inc.

### 4.1.3 UNIQUE DEVICE IDENTIFIER (UDID)

All dsPIC33CK256MP508 family devices are individually encoded during final manufacturing with a Unique Device Identifier or UDID. The UDID cannot be erased by a bulk erase command or any other user-accessible means. This feature allows for manufacturing traceability of Microchip Technology devices in applications where this is a requirement. It may also be used by the application manufacturer for any number of things that may require unique identification, such as:

- Tracking the device
- Unique serial number
- Unique security key

The UDID comprises five 24-bit program words. When taken together, these fields form a unique 120-bit identifier.

The UDID is stored in five read-only locations, located between 0x801200 and 0x801208 in the device configuration space. Table 4-1 lists the addresses of the Identifier Words and shows their contents.

**TABLE 4-1: UDID ADDRESSES**

| UDID | Address | Description |
|---|---|---|
| UDID1 | 0x801200 | UDID Word 1 |
| UDID2 | 0x801202 | UDID Word 2 |
| UDID3 | 0x801204 | UDID Word 3 |
| UDID4 | 0x801206 | UDID Word 4 |
| UDID5 | 0x801208 | UDID Word 5 |

## 4.2 Data Address Space

The dsPIC33CK256MP508 family CPU has a separate 16-bit wide data memory space. The Data Space is accessed using separate Address Generation Units (AGUs) for read and write operations. The data memory maps are shown in Figure 4-7, Figure 4-8 and Figure 4-9.

All Effective Addresses (EAs) in the data memory space are 16 bits wide and point to bytes within the Data Space. This arrangement gives a base Data Space address range of 64 Kbytes or 32K words.

The lower half of the data memory space (i.e., when EA[15] = `0`) is used for implemented memory addresses, while the upper half (EA[15] = `1`) is reserved for the Program Space Visibility (PSV).

The dsPIC33CK256MP508 family devices implement up to 16 Kbytes of data memory. If an EA points to a location outside of this area, an all-zero word or byte is returned.

### 4.2.1 DATA SPACE WIDTH

The data memory space is organized in byte-addressable, 16-bit wide blocks. Data are aligned in data memory and registers as 16-bit words, but all Data Space EAs resolve to bytes. The Least Significant Bytes (LSBs) of each word have even addresses, while the Most Significant Bytes (MSBs) have odd addresses.

### 4.2.2 DATA MEMORY ORGANIZATION AND ALIGNMENT

To maintain backward compatibility with PIC® MCU devices and improve Data Space memory usage efficiency, the dsPIC33CK256MP508 family instruction set supports both word and byte operations. As a consequence of byte accessibility, all Effective Address calculations are internally scaled to step through word-aligned memory. For example, the core recognizes that Post-Modified Register Indirect Addressing mode [Ws++] results in a value of Ws + 1 for byte operations and Ws + 2 for word operations.

A data byte read, reads the complete word that contains the byte, using the LSb of any EA to determine which byte to select. The selected byte is placed onto the LSB of the data path. That is, data memory and registers are organized as two parallel, byte-wide entities with shared (word) address decode, but separate write lines. Data byte writes only write to the corresponding side of the array or register that matches the byte address.

All word accesses must be aligned to an even address. Misaligned word data fetches are not supported, so care must be taken when mixing byte and word operations, or translating from 8-bit MCU code. If a misaligned read or write is attempted, an address error trap is generated. If the error occurred on a read, the instruction underway is completed. If the error occurred on a write, the instruction is executed but the write does not occur. In either case, a trap is then executed, allowing the system and/or user application to examine the machine state prior to execution of the address Fault.

All byte loads into any W register are loaded into the LSB; the MSB is not modified.

A Sign-Extend (`SE`) instruction is provided to allow user applications to translate 8-bit signed data to 16-bit signed values. Alternatively, for 16-bit unsigned data, user applications can clear the MSB of any W register by executing a Zero-Extend (`ZE`) instruction on the appropriate address.

### 4.2.3 SFR SPACE

The first four Kbytes of the Near Data Space, from 0x0000 to 0x0FFF, is primarily occupied by Special Function Registers (SFRs). These are used by the dsPIC33CK256MP508 family core and peripheral modules for controlling the operation of the device.

SFRs are distributed among the modules that they control and are generally grouped together by module. Much of the SFR space contains unused addresses; these are read as '0'.

| **Note:** | The actual set of peripheral features and interrupts varies by the device. Refer to the corresponding device tables and pinout diagrams for device-specific information. |
|---|---|

### 4.2.4 NEAR DATA SPACE

The 8-Kbyte area, between 0x0000 and 0x1FFF, is referred to as the Near Data Space. Locations in this space are directly addressable through a 13-bit absolute address field within all memory direct instructions. Additionally, the whole Data Space is addressable using MOV instructions, which support Memory Direct Addressing mode with a 16-bit address field, or by using Indirect Addressing mode using a Working register as an Address Pointer.


© 2017-2021 Microchip Technology Inc.

**FIGURE 4-7: DATA MEMORY MAP FOR dsPIC33CK256MPX0X DEVICES**

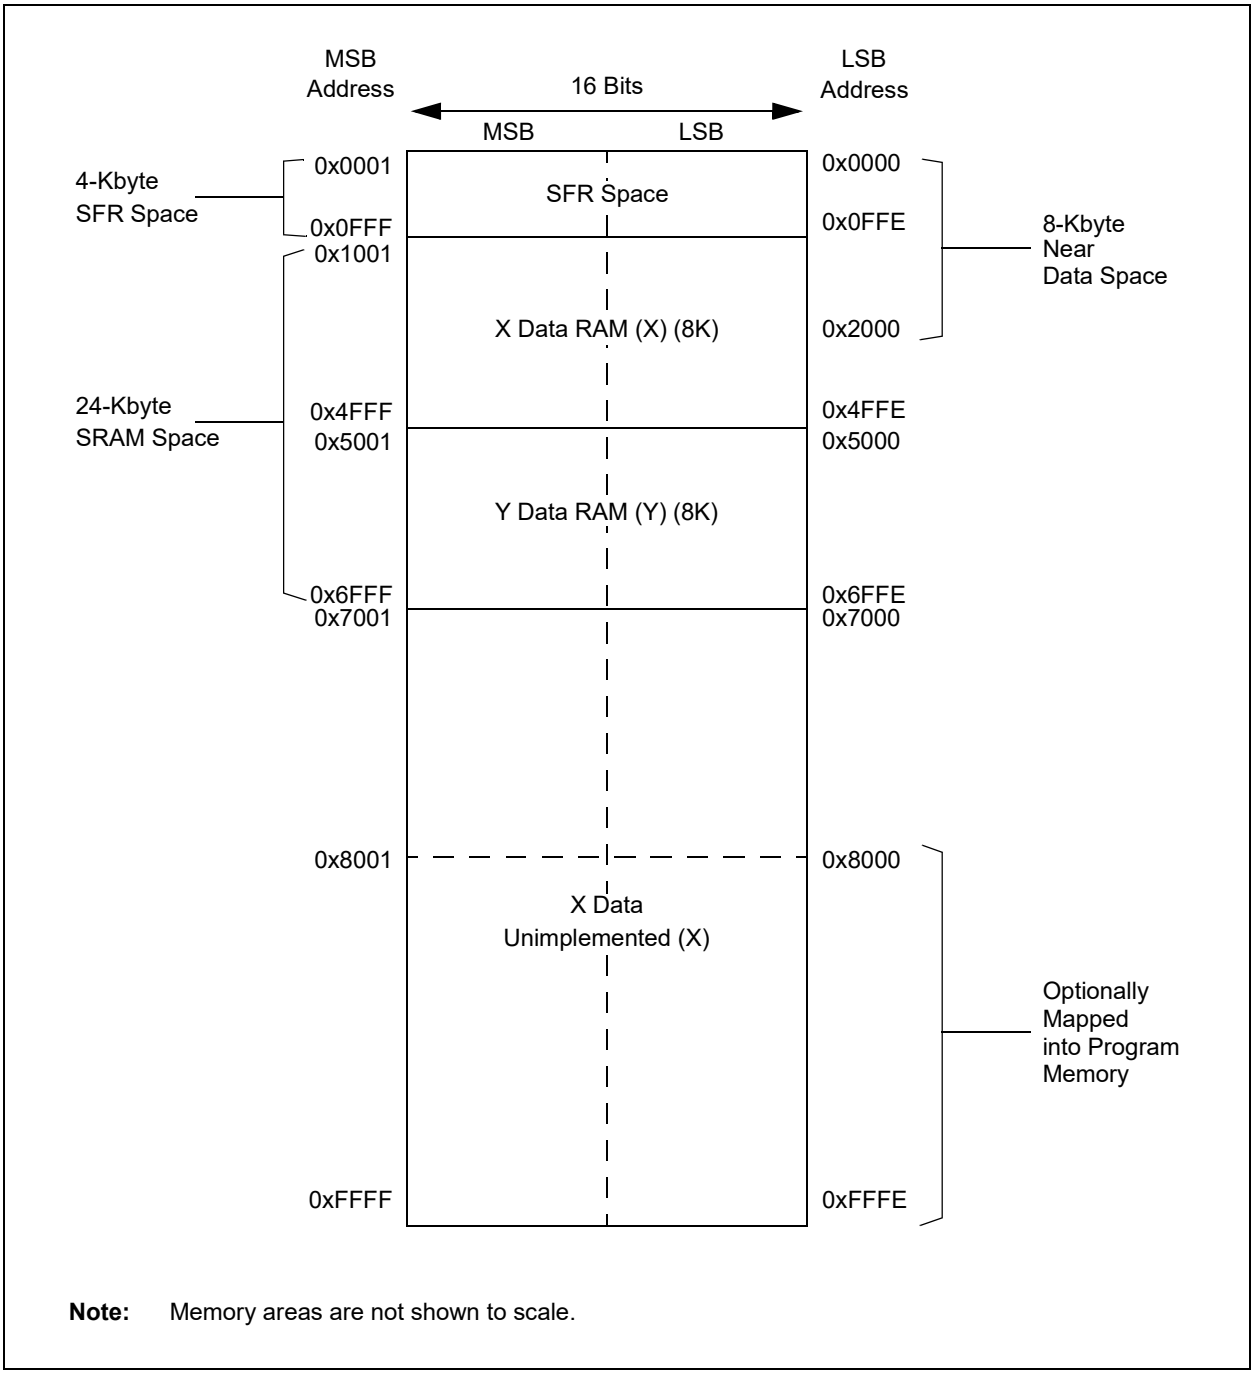


**Note:** Memory areas are not shown to scale.

**FIGURE 4-8: DATA MEMORY MAP FOR dsPIC33CK128MPX0X DEVICES**

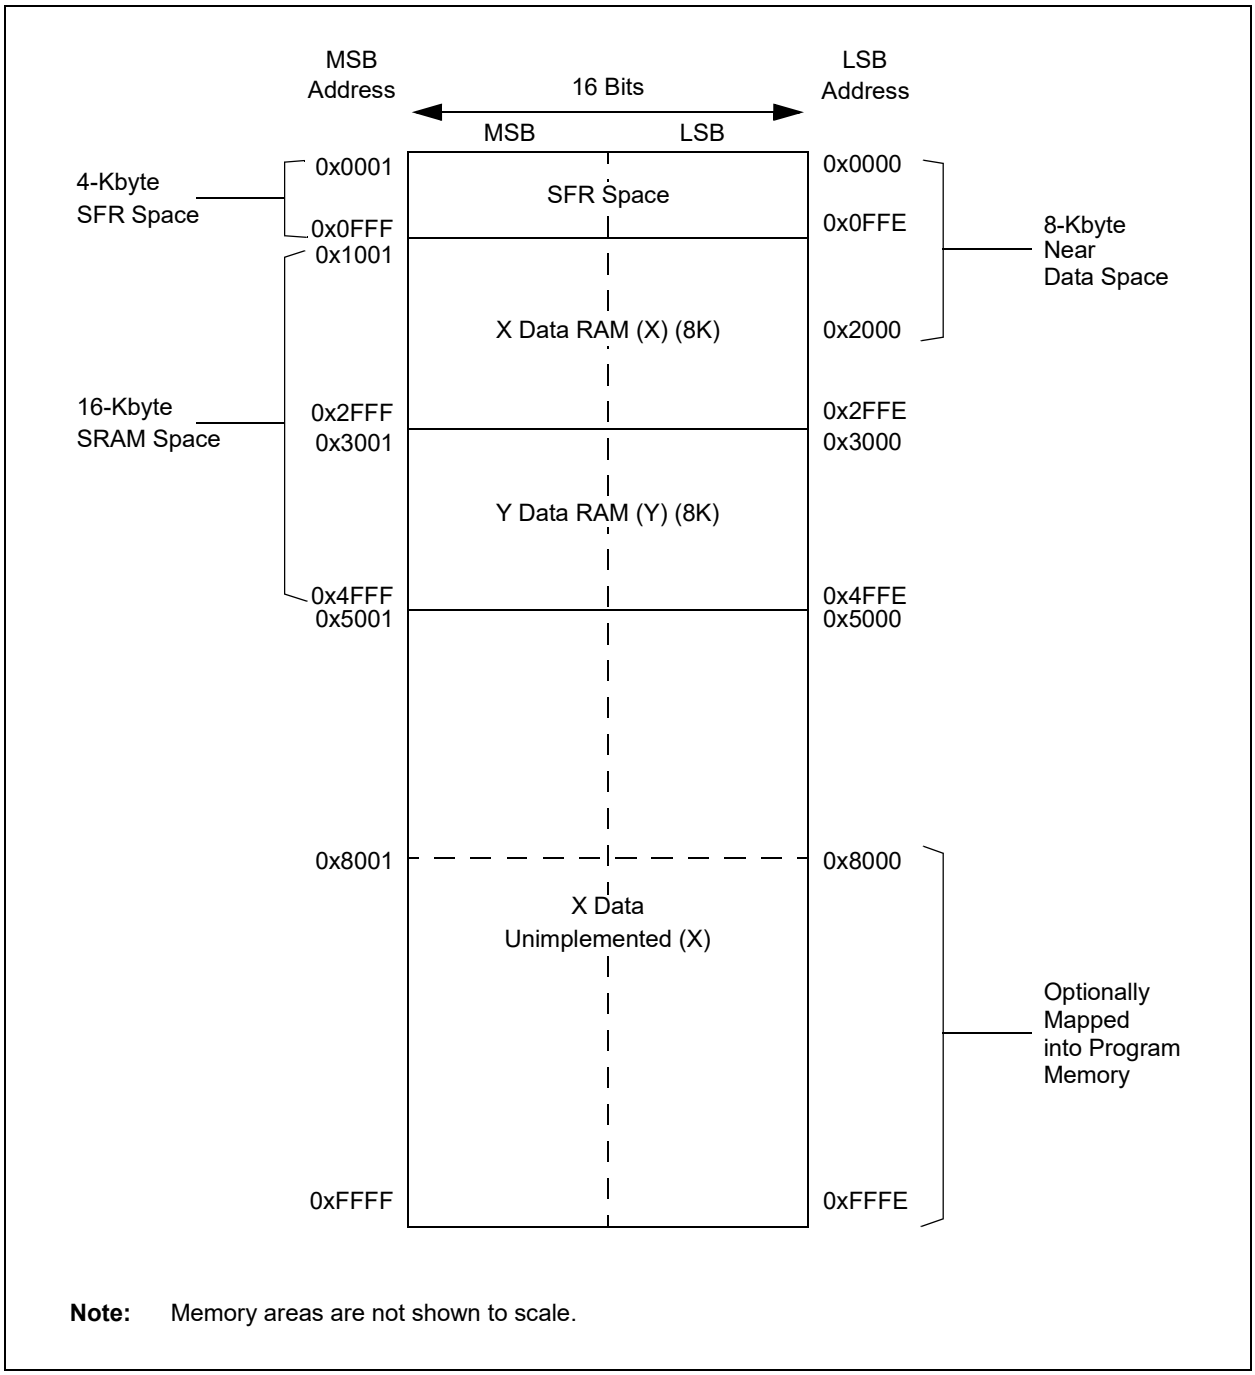


**Note:** Memory areas are not shown to scale.


© 2017-2021 Microchip Technology Inc.

**FIGURE 4-9: DATA MEMORY MAP FOR dsPIC33CK64MPX0X AND dsPIC33CK32MPX0X DEVICES**

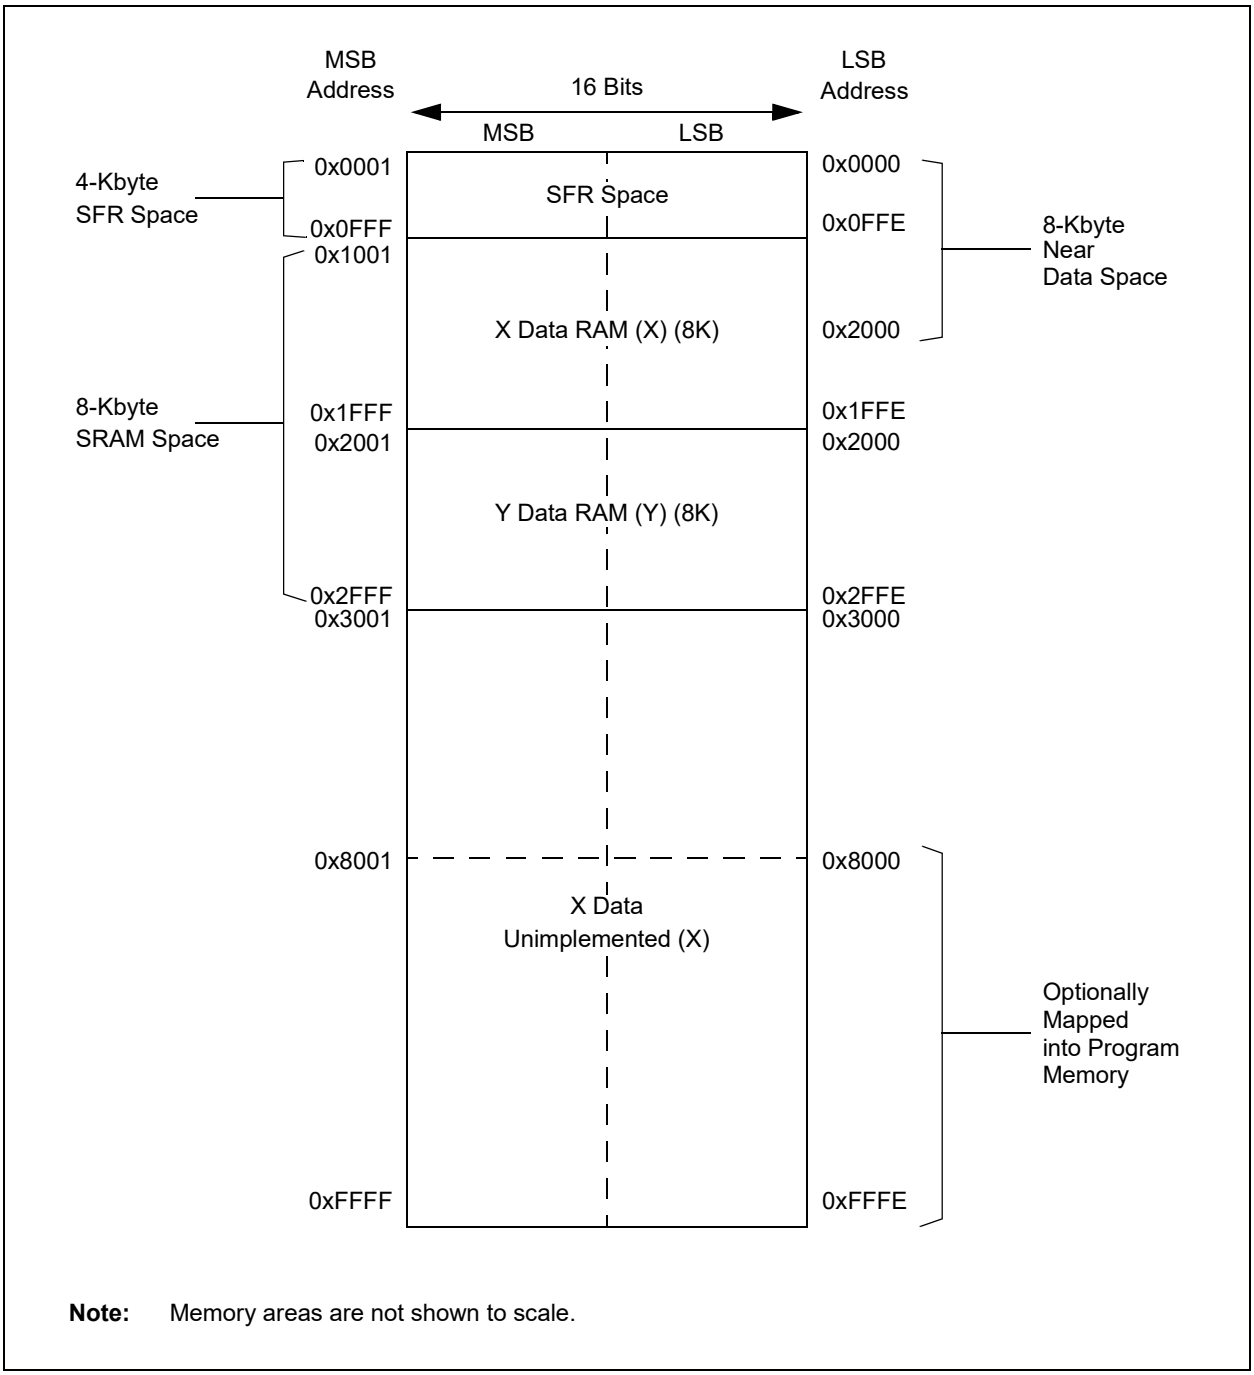


**Note:** Memory areas are not shown to scale.

### 4.2.5 X AND Y DATA SPACES

The dsPIC33CK256MP508 family core has two Data Spaces, X and Y. These Data Spaces can be considered either separate (for some DSP instructions) or as one unified linear address range (for MCU instructions). The Data Spaces are accessed using two Address Generation Units (AGUs) and separate data paths. This feature allows certain instructions to concurrently fetch two words from RAM, thereby enabling efficient execution of DSP algorithms, such as Finite Impulse Response (FIR) filtering and Fast Fourier Transform (FFT).

The X Data Space is used by all instructions and supports all addressing modes. X Data Space has separate read and write data buses. The X read data bus is the read data path for all instructions that view Data Space as combined X and Y address space. It is also the X data prefetch path for the dual operand DSP instructions (`MAC` class).

The Y Data Space is used in concert with the X Data Space by the `MAC` class of instructions (`CLR`, `ED`, `EDAC`, `MAC`, `MOVSAC`, `MPY`, `MPY.N` and `MSC`) to provide two concurrent data read paths.

Both the X and Y Data Spaces support Modulo Addressing mode for all instructions, subject to addressing mode restrictions. Bit-Reversed Addressing mode is only supported for writes to X Data Space.

All data memory writes, including in DSP instructions, view Data Space as combined X and Y address space. The boundary between the X and Y Data Spaces is device-dependent and is not user-programmable.

## 4.3 BIST Overview

The dsPIC33CK256MP508 family features a data memory Built-In Self-Test (BIST) that has the option to be run at start-up or run time. The memory test checks that all memory locations are functional and provides a pass/fail status of the RAM that can be used by software to take action if needed. If a failure is reported, the specific location(s) are not identified. The BIST feature operates with a clock of FRC+PLL, with PLL settings forced by hardware to result in a 125 MHz clock rate, at both start-up and run time.

The MBISTCON register (Register 4-1) contains control and status bits for BIST operation. The MBISTDONE bit (MBISTCON[7]) indicates if a BIST was run since the last Reset and the MBISTSTAT bit (MBISTCON[4]) provides the pass/fail result.

### 4.3.1 BIST AT START-UP

The BIST can be configured to automatically run on a POR-type Reset, as shown in Figure 4-10. By default, when BISTDIS (FPOR[6]) = `1`, the BIST is disabled and will not be part of device start-up. If the BISTDIS bit is cleared during device programming, the BIST will run after all Configuration registers have been loaded and before code execution begins.

**FIGURE 4-10: BIST FLOWCHART**

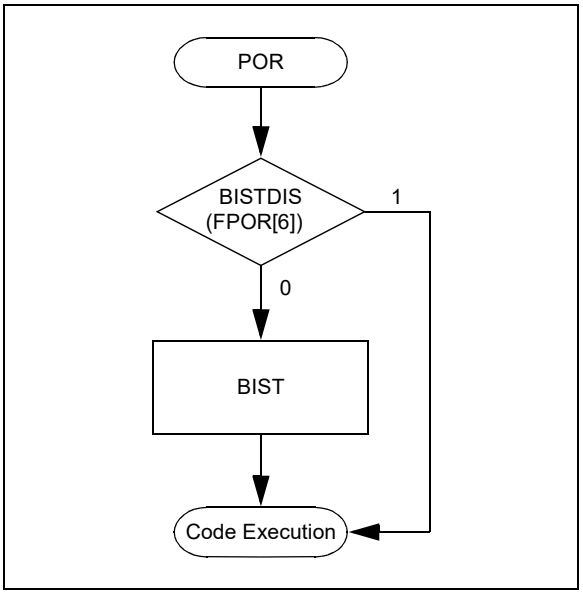


### 4.3.2 BIST AT RUN TIME

A BIST test can be requested to run on subsequent device Resets at any time.

A BIST will corrupt all of the RAM contents, including the Stack Pointer, and requires a subsequent Reset. The system should be prepared for a Reset before a BIST is performed. The BIST is invoked by setting the MBISTEN bit (MBISTCON[0]) and executing a Reset. The MBISTCON register is protected against accidental writes and requires an unlock sequence prior to writing. Only one bit can be set per unlock sequence. The procedure for a run-time BIST is as follows:

1. Execute the unlock sequence by consecutively writing 0x55 and 0xAA to the NVMKEY register.
2. Write 0x0001 to the MBISTCON SFR.
3. Execute a Software `RESET` command.
4. Verify a Software Reset has occurred by reading SWR (RCON[6]) (optional).
5. Verify that the MBISTDONE bit is set.
6. Take action depending on test result indicated by MBISTSTAT.


© 2017-2021 Microchip Technology Inc.

#### 4.3.2.1 Fault Simulation

A mechanism is available to simulate a BIST failure to allow testing of Fault handling software. When the FLTINJ bit is set during a run-time BIST, the MBISTSTAT bit will be set regardless of the test result. The procedure for a BIST Fault simulation is as follows:

1. Execute the unlock sequence by consecutively writing 0x55 and 0xAA to the NVMKEY register.
2. Set the MBISTEN bit (MBISTCON[0]).
3. Execute 2nd unlock sequence by consecutively writing 0x55 and 0xAA to the NVMKEY register.
4. Set the FLTINJ bit (MBISTCON[8]).
5. Execute a software `RESET` command.
6. Verify the MBISTDONE, MBISTSTAT and FLTINJ bits are all set.

**REGISTER 4-1: MBISTCON: MBIST CONTROL REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0[(1)] |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | FLTINJ |
| bit 15 | | | | | | | bit 8 |

| R/W/HS-0 | U-0 | U-0 | R-0 | U-0 | U-0 | U-0 | R/W/HC-0 |
|---|---|---|---|---|---|---|---|
| MBISTDONE[(1)] | — | — | MBISTSTAT | — | — | — | MBISTEN[(2)] |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HS = Hardware Settable bit | HC = Hardware Clearable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-9 **Unimplemented:** Read as '0'

bit 8 **FLTINJ:** MBIST Fault Inject Control bit[(1)]
- 1 = The MBIST test will complete and sets MBISTSTAT = 1, simulating an SRAM test failure
- 0 = The MBIST test will execute normally

bit 7 **MBISTDONE:** MBIST Done Status bit[(1)]
- 1 = An MBIST operation has been executed
- 0 = No MBIST operation has occurred on the last Reset sequence

bit 6-5 **Unimplemented:** Read as '0'

bit 4 **MBISTSTAT:** MBIST Status bit
- 1 = The last MBIST failed
- 0 = The last MBIST passed; all memory may not have been tested

bit 3-1 **Unimplemented:** Read as '0'

bit 0 **MBISTEN:** MBIST Enable bit[(2)]
- 1 = MBIST test is armed; an MBIST test will execute at the next device Reset
- 0 = MBIST test is disarmed

**Note 1:** HW resets only on a true POR Reset.
**2:** This bit will self-clear when the MBIST test is complete.

## 4.4 Memory Resources

Many useful resources are provided on the main product page of the Microchip website for the devices listed in this data sheet. This product page contains the latest updates and additional information.

### 4.4.1 KEY RESOURCES

- **"Enhanced CPU"** (DS70005158) in the *"dsPIC33/PIC24 Family Reference Manual"*
- Code Samples
- Application Notes
- Software Libraries
- Webinars
- All Related *"dsPIC33/PIC24 Family Reference Manual"* Sections
- Development Tools

## 4.5 SFR Maps

The following tables show the dsPIC33CK256MP508 family SFR names, addresses and Reset values. These tables contain all registers applicable to the dsPIC33CK256MP508 family. Not all registers are present on all device variants. Refer to Table 1 and Table 2 for peripheral availability. Table 8-1 details port availability for the different package options.

**TABLE 4-2: SFR BLOCK 000h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **Core** | | | XMODSRT | 048 | xxxxxxxxxxxxxx0 | **CRC** | | |
| WREG0 | 000 | 0000000000000000 | XMODEND | 04A | xxxxxxxxxxxxxx1 | CRCCONL | 0B0 | --000000010000-- |
| WREG1 | 002 | 0000000000000000 | YMODSRT | 04C | xxxxxxxxxxxxxx0 | CRCCONH | 0B2 | ---00000---00000 |
| WREG2 | 004 | 0000000000000000 | YMODEND | 04E | xxxxxxxxxxxxxx1 | CRCXORL | 0B4 | 000000000000000- |
| WREG3 | 006 | 0000000000000000 | XBREV | 050 | xxxxxxxxxxxxxxxx | CRCXORH | 0B6 | 0000000000000000 |
| WREG4 | 008 | 0000000000000000 | DISICNT | 052 | -xxxxxxxxxxxx00 | CRCDATL | 0B8 | 0000000000000000 |
| WREG5 | 00A | 0000000000000000 | TBLPAG | 054 | --------00000000 | CRCDATH | 0BA | 0000000000000000 |
| WREG6 | 00C | 0000000000000000 | YPAG | 056 | --------00000001 | CRCWDATL | 0BC | 0000000000000000 |
| WREG7 | 00E | 0000000000000000 | MSTRPR | 058 | ----------00---0 | CRCWDATH | 0BE | 0000000000000000 |
| WREG8 | 010 | 0000000000000000 | CTXTSTAT | 05A | -----000-----000 | **CLC** | | |
| WREG9 | 012 | 0000000000000000 | DMTCON | 05C | ---------------- | CLC1CONL | 0C0 | --0-00--000--000 |
| WREG10 | 014 | 0000000000000000 | DMTPRECLR | 060 | xxxxxxxx-------- | CLC1CONH | 0C2 | ------------0000 |
| WREG11 | 016 | 0000000000000000 | DMTCLR | 064 | --------xxxxxxxx | CLC1SEL | 0C4 | 0000-000-000-000 |
| WREG12 | 018 | 0000000000000000 | DMTSTAT | 068 | --------xxx----x | CLC1GLSL | 0C8 | 0000000000000000 |
| WREG13 | 01A | 0000000000000000 | DMTCNTL | 06C | xxxxxxxxxxxxxxxx | CLC1GLSH | 0CA | 0000000000000000 |
| WREG14 | 01C | 0000000000000000 | DMTCNTH | 06E | xxxxxxxxxxxxxxxx | CLC2CONL | 0CC | --0-00--000--000 |
| WREG15 | 01E | 0001000000000000 | DMTHOLDREG | 070 | xxxxxxxxxxxxxxxx | CLC2CONH | 0CE | ------------0000 |
| SPLIM | 020 | xxxxxxxxxxxxxxxx | DMTPSCNTL | 074 | xxxxxxxxxxxxxxxx | CLC2SELL | 0D0 | 0000-000-000-000 |
| ACCAL | 022 | xxxxxxxxxxxxxxxx | DMTPSCNTH | 076 | xxxxxxxxxxxxxxxx | CLC2GLSL | 0D4 | 0000000000000000 |
| ACCAH | 024 | xxxxxxxxxxxxxxxx | DMTPSINTVL | 078 | xxxxxxxxxxxxxxxx | CLC2GLSH | 0D6 | 0000000000000000 |
| ACCAU | 026 | xxxxxxxxxxxxxxxx | DMTPSINTVH | 07A | xxxxxxxxxxxxxxxx | CLC3CONL | 0D8 | --0-00--000--000 |
| ACCBL | 028 | xxxxxxxxxxxxxxxx | **SENT** | | | CLC3CONH | 0DA | ------------0000 |
| ACCBH | 02A | xxxxxxxxxxxxxxxx | SENT1CON1 | 080 | --0-000000-0-000 | CLC3SELL | 0DC | 0000-000-000-000 |
| ACCBU | 02C | xxxxxxxxxxxxxxxx | SENT1CON2 | 084 | 0000000000000000 | CLC3GLSL | 0E0 | 0000000000000000 |
| PCL | 02E | 0000000000000000 | SENT1CON3 | 088 | 0000000000000000 | CLC3GLSH | 0E2 | 0000000000000000 |
| PCH | 030 | --------00000000 | SENT1STAT | 08C | --------00000000 | CLC4CONL | 0E4 | --0-00--000--000 |
| DSRPAG | 032 | ------0000000001 | SENT1SYNC | 090 | 0000000000000000 | CLC4CONH | 0E6 | ------------0000 |
| DSWPAG | 034 | -------000000001 | SENT1DATL | 094 | 0000000000000000 | CLC4SELL | 0E8 | 0000-000-000-000 |
| RCOUNT | 036 | xxxxxxxxxxxxxxxx | SENT1DATH | 096 | 0000000000000000 | CLC4GLSL | 0EC | 0000000000000000 |
| DCOUNT | 038 | xxxxxxxxxxxxxxxx | SENT2CON1 | 098 | --0-000000-0-000 | CLC4GLSH | 0EE | 0000000000000000 |
| DOSTARTL | 03A | xxxxxxxxxxxxxxx0 | SENT2CON2 | 09C | 0000000000000000 | **ECC** | | |
| DOSTARTH | 03C | ---------xxxxxxx | SENT2CON3 | 0A0 | 0000000000000000 | ECCCONL | 0F0 | ---------------0 |
| DOENDL | 03E | xxxxxxxxxxxxxxx0 | SENT2STAT | 0A4 | --------00000000 | ECCCONH | 0F2 | 0000000000000000 |
| DOENDH | 040 | ---------xxxxxxx | SENT2SYNC | 0A8 | 0000000000000000 | ECCADDRL | 0F4 | 0000000000000000 |
| SR | 042 | 0000000000000000 | SENT2DATL | 0AC | 0000000000000000 | ECCADDRH | 0F6 | 0000000000000000 |
| CORCON | 044 | --xx000000100000 | SENT2DATH | 0AE | 0000000000000000 | ECCSTATL | 0F8 | 0000000000000000 |
| MODCON | 046 | 0--0000000000000 | | | | ECCSTATH | 0FA | ------0000000000 |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.


© 2017-2021 Microchip Technology Inc.

**TABLE 4-3: SFR BLOCK 100h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **Timers** | | | INDX1HLD | 16A | 0000000000000000 | INDX2HLD | 19E | 0000000000000000 |
| T1CON | 100 | --0000000-00-00- | QEI1GECL/ QEI1ICL | 16C | 0000000000000000 | QEI2GECL/ QEI2ICL | 1A0 | 0000000000000000 |
| TMR1 | 104 | 0000000000000000 | QEI1GECH/ QEI1ICH | 16E | 0000000000000000 | QEI2GECH/ QEI2ICH | 1A2 | 0000000000000000 |
| PR1 | 108 | 0000000000000000 | QEI1LECL | 170 | 0000000000000000 | QEI2LECL | 1A4 | 0000000000000000 |
| **QEI** | | | QEI1LECH | 172 | 0000000000000000 | QEI2LECH | 1A6 | 0000000000000000 |
| QEI1CON | 140 | --000000-0000000 | QEI2CON | 174 | --000000-0000000 | **PMP** | | |
| QEI1IOC | 144 | 000000000000xxxx | QEI2IOC | 178 | 000000000000xxxx | PMCON | 1A8 | --00000000000-00 |
| QEI1IOCH | 146 | ----------------0 | QEI2IOCH | 17A | ----------------0 | PMCONH | 1AA | --------0-----0- |
| QEI1STAT | 148 | --00000000000000 | QEI2STAT | 17C | --00000000000000 | PMMODE | 1AC | 0000000000000000 |
| POS1CNTL | 14C | 0000000000000000 | POS2CNTL | 180 | 0000000000000000 | PMADDR | 1B0 | 0000000000000000 |
| POS1CNTH | 14E | 0000000000000000 | POS2CNTH | 182 | 0000000000000000 | PMDOUT1 | 1B4 | 0000000000000000 |
| POS1HLD | 152 | 0000000000000000 | POS2HLD | 186 | 0000000000000000 | PMDOUT2 | 1B6 | 0000000000000000 |
| VEL1CNT | 154 | 0000000000000000 | VEL2CNT | 188 | 0000000000000000 | PMDIN1 | 1B8 | 0000000000000000 |
| VEL1CNTH | 156 | 0000000000000000 | VEL2CNTH | 18A | 0000000000000000 | PMDIN2 | 1BA | 0000000000000000 |
| VEL1HLD | 15A | 0000000000000000 | VEL2HLD | 18E | 0000000000000000 | PMAEN | 1BC | 0000000000000000 |
| INT1TMRL | 15C | 0000000000000000 | INT2TMRL | 190 | 0000000000000000 | PMSTAT | 1C0 | 00--000010--1111 |
| INT1TMRH | 15E | 0000000000000000 | INT2TMRH | 192 | 0000000000000000 | PMWADDR | 1C4 | 0000000000000000 |
| INT1HLDL | 160 | 0000000000000000 | INT2HLDL | 194 | 0000000000000000 | PMRADDR | 1C8 | 0000000000000000 |
| INT1HLDH | 162 | 0000000000000000 | INT2HLDH | 196 | 0000000000000000 | PMRDIN | 1CC | 0000000000000000 |
| INDX1CNTL | 164 | 0000000000000000 | INDX2CNTL | 198 | 0000000000000000 | | | |
| INDX1CNTH | 166 | 0000000000000000 | INDX2CNTH | 19A | 0000000000000000 | | | |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.

**TABLE 4-4: SFR BLOCK 200h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **I2C1 and I2C2** | | | U1SCCON | 258 | ----------00000- | SPI1IMSKH | 2C2 | --0000000-000000 |
| I2C1CONL | 200 | --01000000000000 | U1SCINT | 25A | --00-000--00-000 | SPI1URDTL | 2C4 | 0000000000000000 |
| I2C1CONH | 202 | ---------0000000 | U1INT | 25C | --------00---0-- | SPI1URDTH | 2C6 | 0000000000000000 |
| I2C1STAT | 204 | 000--00000000000 | U2MODE | 260 | --000-0000000000 | SPI2CON1L | 2C8 | --00000000000000 |
| I2C1ADD | 208 | ------0000000000 | U2MODEH | 262 | 00---00000000000 | SPI2CON1H | 2CA | 0000000000000000 |
| I2C1MSK | 20C | ------0000000000 | U2STA | 264 | 0000000010000000 | SPI2CON2L | 2CC | ----------00000 |
| I2C1BRG | 210 | 0000000000000000 | U2STAH | 266 | 0000-00000101110 | SPI2CON2H | 2CE | ---------------- |
| I2C1TRN | 214 | --------11111111 | U2BRG | 268 | 0000000000000000 | SPI2STATL | 2D0 | ---00--0001-1-00 |
| I2C1RCV | 218 | --------00000000 | U2BRGH | 26A | ------------0000 | SPI2STATH | 2D2 | --000000--000000 |
| I2C2CONL | 21C | --01000000000000 | U2RXREG | 26C | --------xxxxxxxx | SPI2BUFL | 2D4 | 0000000000000000 |
| I2C2CONH | 21E | ---------0000000 | U2TXREG | 270 | --------xxxxxxxx | SPI2BUFH | 2D6 | 0000000000000000 |
| I2C2STAT | 220 | 000--00000000000 | U2P1 | 274 | -------000000000 | SPI2BRGL | 2D8 | ---xxxxxxxxxxxx |
| I2C2ADD | 224 | ------0000000000 | U2P2 | 276 | -------000000000 | SPI2BRGH | 2DA | ---------------- |
| I2C2MSK | 228 | ------0000000000 | U2P3 | 278 | 0000000000000000 | SPI2IMSKL | 2DC | ---00--0000-0-00 |
| I2C2BRG | 22C | 0000000000000000 | U2P3H | 27A | --------00000000 | SPI2IMSKH | 2DE | --0000000-000000 |
| I2C2TRN | 230 | --------11111111 | U2TXCHK | 27C | --------00000000 | SPI2URDTL | 2E0 | 0000000000000000 |
| I2C2RCV | 234 | --------00000000 | U2RXCHK | 27E | --------00000000 | SPI2URDTH | 2E2 | 0000000000000000 |
| **UART1 and UART2** | | | U2SCCON | 280 | ----------00000- | SPI3CON1L | 2E4 | --00000000000000 |
| U1MODE | 238 | --000-0000000000 | U2SCINT | 282 | --00-000--00-000 | SPI3CON1H | 2E6 | 0000000000000000 |
| U1MODEH | 23A | 00---00000000000 | U2INT | 284 | --------00---0-- | SPI3CON2L | 2E8 | ----------00000 |
| U1STA | 23C | 0000000010000000 | **SPI** | | | SPI3CON2H | 2EA | ---------------- |
| U1STAH | 23E | 0000-00000101110 | SPI1CON1L | 2AC | --00000000000000 | SPI3STATL | 2EC | ---00--0001-1-00 |
| U1BRG | 240 | 0000000000000000 | SPI1CON1H | 2AE | 0000000000000000 | SPI3STATH | 2EE | --000000--000000 |
| U1BRGH | 242 | ------------0000 | SPI1CON2L | 2B0 | ----------00000 | SPI3BUFL | 2F0 | 0000000000000000 |
| U1RXREG | 244 | --------xxxxxxxx | SPI1CON2H | 2B2 | ---------------- | SPI3BUFH | 2F2 | 0000000000000000 |
| U1TXREG | 248 | --------xxxxxxxx | SPI1STATL | 2B4 | ---00--0001-1-00 | SPI3BRGL | 2F4 | ---xxxxxxxxxxxx |
| U1P1 | 24C | -------000000000 | SPI1STATH | 2B6 | --000000--000000 | SPI3BRGH | 2F6 | ---------------- |
| U1P2 | 24E | -------000000000 | SPI1BUFL | 2B8 | 0000000000000000 | SPI3IMSKL | 2F8 | ---00--0000-0-00 |
| U1P3 | 250 | 0000000000000000 | SPI1BUFH | 2BA | 0000000000000000 | SPI3IMSKH | 2FA | --0000000-000000 |
| U1P3H | 252 | --------00000000 | SPI1BRGL | 2BC | ---xxxxxxxxxxxx | SPI3URDTL | 2FC | 0000000000000000 |
| U1TXCHK | 254 | --------00000000 | SPI1BRGH | 2BE | ---------------- | SPI3URDTH | 2F3 | 0000000000000000 |
| U1RXCHK | 256 | --------00000000 | SPI1IMSKL | 2C0 | ---00--0000-0-00 | | | |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.


© 2017-2021 Microchip Technology Inc.

**TABLE 4-5: SFR BLOCK 300h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **High-Speed PWM** | | | PG1TRIGA | 354 | 0000000000000000 | PG3CLPCIH | 3AA | 0000-00000000000 |
| PCLKCON | 300 | 00-----0--00--00 | PG1TRIGB | 356 | 0000000000000000 | PG3FFPCIL | 3AC | 0000000000000000 |
| FSCL | 302 | 0000000000000000 | PG1TRIGC | 358 | 0000000000000000 | PG3FFPCIH | 3AE | 0000-00000000000 |
| FSMINPER | 304 | 0000000000000000 | PG1DTL | 35A | --00000000000000 | PG3SPCIL | 3B0 | 0000000000000000 |
| MPHASE | 306 | 0000000000000000 | PG1DTH | 35C | --00000000000000 | PG3SPCIH | 3B2 | 0000-00000000000 |
| MDC | 308 | 0000000000000000 | PG1CAP | 35E | 0000000000000000 | PG3LEBL | 3B4 | 0000000000000000 |
| MPER | 30A | 0000000000000000 | PG2CONL | 360 | -----0000--00000 | PG3LEBH | 3B6 | -----000----0000 |
| LFSR | 30C | 0000000000000000 | PG2CONH | 362 | 000-000000--0000 | PG3PHASE | 3B8 | 0000000000000000 |
| CMBTRIGL | 30E | --------00000000 | PG2STAT | 364 | 0000000000000000 | PG3DC | 3BA | 0000000000000000 |
| CMBTRIGH | 310 | --------00000000 | PG2IOCONL | 366 | 0000000000000000 | PG3DCA | 3BC | --------00000000 |
| LOGCONA | 312 | 000000000000-000 | PG2IOCONH | 368 | 0000---0--000000 | PG3PER | 3BE | 0000000000000000 |
| LOGCONB | 314 | 000000000000-000 | PG2EVTL | 36A | 00000000---00000 | PG3TRIGA | 3C0 | 0000000000000000 |
| LOGCONC | 316 | 000000000000-000 | PG2EVTH | 36C | 0000--0000000000 | PG3TRIGB | 3C2 | 0000000000000000 |
| LOGCOND | 318 | 000000000000-000 | PG2FPCIL | 36E | 0000000000000000 | PG3TRIGC | 3C4 | 0000000000000000 |
| LOGCONE | 31A | 000000000000-000 | PG2FPCIH | 370 | 0000-00000000000 | PG3DTL | 3C6 | --00000000000000 |
| LOGCONF | 31C | 000000000000-000 | PG2CLPCIL | 372 | 0000000000000000 | PG3DTH | 3C8 | --00000000000000 |
| PWMEVTA | 31E | 0000----0000-000 | PG2CLPCIH | 374 | 0000-00000000000 | PG3CAP | 3CA | 0000000000000000 |
| PWMEVTB | 320 | 0000----0000-000 | PG2FFPCIL | 376 | 0000000000000000 | PG4CONL | 3CC | -----0000--00000 |
| PWMEVTC | 322 | 0000----0000-000 | PG2FFPCIH | 378 | 0000-00000000000 | PG4CONH | 3CE | 000-000000--0000 |
| PWMEVTD | 324 | 0000----0000-000 | PG2SPCIL | 37A | 0000000000000000 | PG4STAT | 3D0 | 0000000000000000 |
| PWMEVTE | 326 | 0000----0000-000 | PG2SPCIH | 37C | 0000-00000000000 | PG4IOCONL | 3D2 | 0000000000000000 |
| PWMEVTF | 328 | 0000----0000-000 | PG2LEBL | 37E | 0000000000000000 | PG4IOCONH | 3D4 | 0000---0--000000 |
| PG1CONL | 32A | -----0000--00000 | PG2LEBH | 380 | -----000----0000 | PG4EVTL | 3D6 | 00000000---00000 |
| PG1CONH | 32C | 000-000000--0000 | PG2PHASE | 382 | 0000000000000000 | PG4EVTH | 3D8 | 0000--0000000000 |
| PG1STAT | 32E | 0000000000000000 | PG2DC | 384 | 0000000000000000 | PG4FPCIL | 3DA | 0000000000000000 |
| PG1IOCONL | 330 | 0000000000000000 | PG2DCA | 386 | --------00000000 | PG4FPCIH | 3DC | 0000-00000000000 |
| PG1IOCONH | 332 | 0000---0--000000 | PG2PER | 388 | 0000000000000000 | PG4CLPCIL | 3DE | 0000000000000000 |
| PG1EVTL | 334 | 00000000---00000 | PG2TRIGA | 38A | 0000000000000000 | PG4CLPCIH | 3E0 | 0000-00000000000 |
| PG1EVTH | 336 | 0000--0000000000 | PG2TRIGB | 38C | 0000000000000000 | PG4FFPCIL | 3E2 | 0000000000000000 |
| PG1FPCIL | 338 | 0000000000000000 | PG2TRIGC | 38E | 0000000000000000 | PG4FFPCIH | 3E4 | 0000-00000000000 |
| PG1FPCIH | 33A | 0000-00000000000 | PG2DTL | 390 | --00000000000000 | PG4SPCIL | 3E6 | 0000000000000000 |
| PG1CLPCIL | 33C | 0000000000000000 | PG2DTH | 392 | --00000000000000 | PG4SPCIH | 3E8 | 0000-00000000000 |
| PG1CLPCIH | 33E | 0000-00000000000 | PG2CAP | 394 | 0000000000000000 | PG4LEBL | 3EA | 0000000000000000 |
| PG1FFPCIL | 340 | 0000000000000000 | PG3CONL | 396 | -----0000--00000 | PG4LEBH | 3EC | -----000----0000 |
| PG1FFPCIH | 342 | 0000-00000000000 | PG3CONH | 398 | 000-000000--0000 | PG4PHASE | 3EE | 0000000000000000 |
| PG1SPCIL | 344 | 0000000000000000 | PG3STAT | 39A | 0000000000000000 | PG4DC | 3F0 | 0000000000000000 |
| PG1SPCIH | 346 | 0000-00000000000 | PG3IOCONL | 39C | 0000000000000000 | PG4DCA | 3F2 | --------00000000 |
| PG1LEBL | 348 | 0000000000000000 | PG3IOCONH | 39E | 0000---0--000000 | PG4PER | 3F4 | 0000000000000000 |
| PG1LEBH | 34A | -----000----0000 | PG3EVTL | 3A0 | 00000000---00000 | PG4TRIGA | 3F6 | 0000000000000000 |
| PG1PHASE | 34C | 0000000000000000 | PG3EVTH | 3A2 | 0000--0000000000 | PG4TRIGB | 3F8 | 0000000000000000 |
| PG1DC | 34E | 0000000000000000 | PG3FPCIL | 3A4 | 0000000000000000 | PG4TRIGC | 3FA | 0000000000000000 |
| PG1DCA | 350 | --------00000000 | PG3FPCIH | 3A6 | 0000-00000000000 | PG4DTL | 3FC | --00000000000000 |
| PG1PER | 352 | 0000000000000000 | PG3CLPCIL | 3A8 | 0000000000000000 | PG4DTH | 3FE | --00000000000000 |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.

**TABLE 4-6: SFR BLOCK 400h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **High-Speed PWM (Continued)** | | | PG6FPCIH | 448 | 0000-00000000000 | PG7DC | 492 | 0000000000000000 |
| PG4CAP | 400 | 0000000000000000 | PG6CLPCIL | 44A | 0000000000000000 | PG7DCA | 494 | --------00000000 |
| PG5CONL | 402 | -----0000--00000 | PG6CLPCIH | 44C | 0000-00000000000 | PG7PER | 496 | 0000000000000000 |
| PG5CONH | 404 | 000-000000--0000 | PG6FFPCIL | 44E | 0000000000000000 | PG7TRIGA | 498 | 0000000000000000 |
| PG5STAT | 406 | 0000000000000000 | PG6FFPCIH | 450 | 0000-00000000000 | PG7TRIGB | 49A | 0000000000000000 |
| PG5IOCONL | 408 | 0000000000000000 | PG6SPCIL | 452 | 0000000000000000 | PG7TRIGC | 49C | 0000000000000000 |
| PG5IOCONH | 40A | 0000---0--000000 | PG6SPCIH | 454 | 0000-00000000000 | PG7DTL | 49E | --00000000000000 |
| PG5EVTL | 40C | 00000000---00000 | PG6LEBL | 456 | 0000000000000000 | PG7DTH | 4A0 | --00000000000000 |
| PG5EVTH | 40E | 0000--0000000000 | PG6LEBH | 458 | -----000----0000 | PG7CAP | 4A2 | 0000000000000000 |
| PG5FPCIL | 410 | 0000000000000000 | PG6PHASE | 45A | 0000000000000000 | PG8CONL | 4A4 | -----0000--00000 |
| PG5FPCIH | 412 | 0000-00000000000 | PG6DC | 45C | 0000000000000000 | PG8CONH | 4A6 | 000-000000--0000 |
| PG5CLPCIL | 414 | 0000000000000000 | PG6DCA | 45E | --------00000000 | PG8STAT | 4A8 | 0000000000000000 |
| PG5CLPCIH | 416 | 0000-00000000000 | PG6PER | 460 | 0000000000000000 | PG8IOCONL | 4AA | 0000000000000000 |
| PG5FFPCIL | 418 | 0000000000000000 | PG6TRIGA | 462 | 0000000000000000 | PG8IOCONH | 4AC | 0000---0--000000 |
| PG5FFPCIH | 41A | 0000-00000000000 | PG6TRIGB | 464 | 0000000000000000 | PG8EVTL | 4AE | 00000000---00000 |
| PG5SPCIL | 41C | 0000000000000000 | PG6TRIGC | 466 | 0000000000000000 | PG8EVTH | 4B0 | 0000--0000000000 |
| PG5SPCIH | 41E | 0000-00000000000 | PG6DTL | 468 | --00000000000000 | PG8FPCIL | 4B2 | 0000000000000000 |
| PG5LEBL | 420 | 0000000000000000 | PG6DTH | 46A | --00000000000000 | PG8FPCIH | 4B4 | 0000-00000000000 |
| PG5LEBH | 422 | -----000----0000 | PG6CAP | 46C | 0000000000000000 | PG8CLPCIL | 4B6 | 0000000000000000 |
| PG5PHASE | 424 | 0000000000000000 | PG7CONL | 46E | -----0000--00000 | PG8CLPCIH | 4B8 | 0000-00000000000 |
| PG5DC | 426 | 0000000000000000 | PG7CONH | 470 | 000-000000--0000 | PG8FFPCIL | 4BA | 0000000000000000 |
| PG5DCA | 428 | --------00000000 | PG7STAT | 472 | 0000000000000000 | PG8FFPCIH | 4BC | 0000-00000000000 |
| PG5PER | 42A | 0000000000000000 | PG7IOCONL | 474 | 0000000000000000 | PG8SPCIL | 4BE | 0000000000000000 |
| PG5TRIGA | 42C | 0000000000000000 | PG7IOCONH | 476 | 0000---0--000000 | PG8SPCIH | 4C0 | 0000-00000000000 |
| PG5TRIGB | 42E | 0000000000000000 | PG7EVTL | 478 | 00000000---00000 | PG8LEBL | 4C2 | 0000000000000000 |
| PG5TRIGC | 430 | 0000000000000000 | PG7EVTH | 47A | 0000--0000000000 | PG8LEBH | 4C4 | -----000----0000 |
| PG5DTL | 432 | --00000000000000 | PG7FPCIL | 47C | 0000000000000000 | PG8PHASE | 4C6 | 0000000000000000 |
| PG5DTH | 434 | --00000000000000 | PG7FPCIH | 47E | 0000-00000000000 | PG8DC | 4C8 | 0000000000000000 |
| PG5CAP | 436 | 0000000000000000 | PG7CLPCIL | 480 | 0000000000000000 | PG8DCA | 4CA | --------00000000 |
| PG6CONL | 438 | -----0000--00000 | PG7CLPCIH | 482 | 0000-00000000000 | PG8PER | 4CC | 0000000000000000 |
| PG6CONH | 43A | 000-000000--0000 | PG7FFPCIL | 484 | 0000000000000000 | PG8TRIGA | 4CE | 0000000000000000 |
| PG6STAT | 43C | 0000000000000000 | PG7FFPCIH | 486 | 0000-00000000000 | PG8TRIGB | 4D0 | 0000000000000000 |
| PG6IOCONL | 43E | 0000000000000000 | PG7SPCIL | 488 | 0000000000000000 | PG8TRIGC | 4D2 | 0000000000000000 |
| PG6IOCONH | 440 | 0000---0--000000 | PG7SPCIH | 48A | 0000-00000000000 | PG8DTL | 4D4 | --00000000000000 |
| PG6EVTL | 442 | 00000000---00000 | PG7LEBL | 48C | 0000000000000000 | PG8DTH | 4D6 | --00000000000000 |
| PG6EVTH | 444 | 0000--0000000000 | PG7LEBH | 48E | -----000----0000 | PG8CAP | 4D8 | 0000000000000000 |
| PG6FPCIL | 446 | 0000000000000000 | PG7PHASE | 490 | 0000000000000000 | | | |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.


© 2017-2021 Microchip Technology Inc.

**TABLE 4-7: SFR BLOCK 500h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **CAN** | | | C1TSCONL | 5D4 | ------0000000000 | C1RXOVIFH | 5EA | 0000000000000000 |
| C1CONL | 5C0 | --00011101100000 | C1TSCONH | 5D6 | ------------000 | C1TXATIFL | 5EC | 0000000000000000 |
| C1CONH | 5C2 | 0000010010011000 | C1VECL | 5D8 | ---00000-1000000 | C1TXATIFH | 5EE | 0000000000000000 |
| C1NBTCFGL | 5C4 | 00001111-0001111 | C1VECH | 5DA | 11000000-1000000 | C1TXREQL | 5F0 | 0000000000000000 |
| C1NBTCFGH | 5C6 | 0000000000111110 | C1INTL | 5DC | 000000-----00000 | C1TXREQH | 5F2 | 0000000000000000 |
| C1DBTCFGL | 5C8 | ----0011----0011 | C1INTH | 5DE | 000000-----00000 | C1TRECL | 5F4 | 0000000000000000 |
| C1DBTCFGH | 5CA | 00000000---01110 | C1RXIFL | 5E0 | 0000000000000000 | C1TRECH | 5F6 | ----------100000 |
| C1TDCL | 5CC | 00010000--000000 | C1RXIFH | 5E2 | 0000000000000000 | C1BDIAG0L | 5F8 | 0000000000000000 |
| C1TDCH | 5CE | ------00------10 | C1TXIFL | 5E4 | 000000000000000- | C1BDIAG0H | 5FA | 0000000000000000 |
| C1TBCL | 5D0 | 0000000000000000 | C1TXIFH | 5E6 | 0000000000000000 | C1BDIAG1L | 5FC | 0000000000000000 |
| C1TBCH | 5D2 | 0000000000000000 | C1RXOVIFL | 5E8 | 000000000000000- | C1BDIAG1H | 5FE | 00000-000-000000 |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.

**TABLE 4-8: SFR BLOCK 600h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **CAN (Continued)** | | | C1FIFOSTA6 | 65C | ---0000000000000 | C1FLTOBJ6L | 6B0 | 0000000000000000 |
| C1TEFCONL | 600 | -----1-0--0-0000 | C1FIFOUA6L | 660 | xxxxxxxxxxxxxxxx | C1FLTOBJ6H | 6B2 | 0000000000000000 |
| C1TEFCONH | 602 | ---00000-------- | C1FIFOUA6H | 662 | xxxxxxxxxxxxxxxx | C1MASK6L | 6B4 | 0000000000000000 |
| C1TEFSTA | 604 | ------------0000 | C1FIFOCON7L | 664 | -----100x0000000 | C1MASK6H | 6B6 | 0000000000000000 |
| C1TEFUAL | 608 | xxxxxxxxxxxxxxxx | C1FIFOCON7H | 666 | 00000000-1100000 | C1FLTOBJ7L | 7B8 | 0000000000000000 |
| C1TEFUAH | 60A | xxxxxxxxxxxxxxxx | C1FIFOSTA7 | 668 | ---0000000000000 | C1FLTOBJ7H | 6BA | 0000000000000000 |
| C1FIFOBAL | 60C | 0000000000000000 | C1FIFOUA7L | 66C | xxxxxxxxxxxxxxxx | C1MASK7L | 6BC | 0000000000000000 |
| C1FIFOBAH | 60E | 0000000000000000 | C1FIFOUA7H | 66E | xxxxxxxxxxxxxxxx | C1MASK7H | 6BE | 0000000000000000 |
| C1TXQCONL | 610 | -----100x0000000 | C1FLTCON0L | 670 | ---000000--00000 | C1FLTOBJ8L | 6C0 | 0000000000000000 |
| C1TXQCONH | 612 | 00000000-1100000 | C1FLTCON0H | 672 | ---000000--00000 | C1FLTOBJ8H | 6C2 | 0000000000000000 |
| C1TXQSTA | 614 | ---000000000-0-0 | C1FLTCON1L | 674 | ---000000--00000 | C1MASK8L | 6C4 | 0000000000000000 |
| C1TXQUAL | 618 | xxxxxxxxxxxxxxxx | C1FLTCON1H | 676 | ---000000--00000 | C1MASK8H | 6C6 | 0000000000000000 |
| C1TXQUAH | 61A | xxxxxxxxxxxxxxxx | C1FLTCON2L | 678 | ---000000--00000 | C1FLTOBJ9L | 6C8 | 0000000000000000 |
| C1FIFOCON1L | 61C | -----100x0000000 | C1FLTCON2H | 67A | ---000000--00000 | C1FLTOBJ9H | 6CA | 0000000000000000 |
| C1FIFOCON1H | 61E | 00000000-1100000 | C1FLTCON3L | 67C | ---000000--00000 | C1MASK9L | 6CC | 0000000000000000 |
| C1FIFOSTA1 | 620 | ---0000000000000 | C1FLTCON3H | 67E | ---000000--00000 | C1MASK9H | 6CE | 0000000000000000 |
| C1FIFOUA1L | 624 | xxxxxxxxxxxxxxxx | C1FLTOBJ0L | 680 | 0000000000000000 | C1FLTOBJ10L | 6D0 | 0000000000000000 |
| C1FIFOUA1H | 626 | xxxxxxxxxxxxxxxx | C1FLTOBJ0H | 682 | 0000000000000000 | C1FLTOBJ10H | 6D2 | 0000000000000000 |
| C1FIFOCON2L | 628 | -----100x0000000 | C1MASK0L | 684 | 0000000000000000 | C1MASK10L | 6D4 | 0000000000000000 |
| C1FIFOCON2H | 62A | 00000000-1100000 | C1MASK0H | 686 | 0000000000000000 | C1MASK10H | 6D6 | 0000000000000000 |
| C1FIFOSTA2 | 62C | ---0000000000000 | C1FLTOBJ1L | 688 | 0000000000000000 | C1FLTOBJ11L | 6D8 | 0000000000000000 |
| C1FIFOUA2L | 630 | xxxxxxxxxxxxxxxx | C1FLTOBJ1H | 68A | 0000000000000000 | C1FLTOBJ11H | 6DA | 0000000000000000 |
| C1FIFOUA2H | 632 | xxxxxxxxxxxxxxxx | C1MASK1L | 68C | 0000000000000000 | C1MASK11L | 6DC | 0000000000000000 |
| C1FIFOCON3L | 634 | -----100x0000000 | C1MASK1H | 68E | 0000000000000000 | C1MASK11H | 6DE | 0000000000000000 |
| C1FIFOCON3H | 636 | 00000000-1100000 | C1FLTOBJ2L | 690 | 0000000000000000 | C1FLTOBJ12L | 6E0 | 0000000000000000 |
| C1FIFOSTA3 | 638 | ---0000000000000 | C1FLTOBJ2H | 692 | 0000000000000000 | C1FLTOBJ12H | 6E2 | 0000000000000000 |
| C1FIFOUA3L | 63C | xxxxxxxxxxxxxxxx | C1MASK2L | 694 | 0000000000000000 | C1MASK12L | 6E4 | 0000000000000000 |
| C1FIFOUA3H | 63E | xxxxxxxxxxxxxxxx | C1MASK2H | 696 | 0000000000000000 | C1MASK12H | 6E6 | 0000000000000000 |
| C1FIFOCON4L | 640 | -----100x0000000 | C1FLTOBJ3L | 698 | 0000000000000000 | C1FLTOBJ13L | 6E8 | 0000000000000000 |
| C1FIFOCON4H | 642 | 00000000-1100000 | C1FLTOBJ3H | 69A | 0000000000000000 | C1FLTOBJ13H | 6EA | 0000000000000000 |
| C1FIFOSTA4 | 644 | ---0000000000000 | C1MASK3L | 69C | 0000000000000000 | C1MASK13L | 6EC | 0000000000000000 |
| C1FIFOUA4L | 648 | xxxxxxxxxxxxxxxx | C1MASK3H | 69C | 0000000000000000 | C1MASK13H | 6EE | 0000000000000000 |
| C1FIFOUA4H | 64A | xxxxxxxxxxxxxxxx | C1FLTOBJ4L | 6A0 | 0000000000000000 | C1FLTOBJ14L | 6F0 | 0000000000000000 |
| C1FIFOCON5L | 64C | -----100x0000000 | C1FLTOBJ4H | 6A2 | 0000000000000000 | C1FLTOBJ14H | 6F2 | 0000000000000000 |
| C1FIFOCON5H | 64E | 00000000-1100000 | C1MASK4L | 6A4 | 0000000000000000 | C1MASK14L | 6F4 | 0000000000000000 |
| C1FIFOSTA5 | 650 | ---0000000000000 | C1MASK4H | 6A6 | 0000000000000000 | C1MASK14H | 6F6 | 0000000000000000 |
| C1FIFOUA5L | 654 | xxxxxxxxxxxxxxxx | C1FLTOBJ5L | 6A8 | 0000000000000000 | C1FLTOBJ15L | 6F8 | 0000000000000000 |
| C1FIFOUA5H | 656 | xxxxxxxxxxxxxxxx | C1FLTOBJ5H | 6AA | 0000000000000000 | C1FLTOBJ15H | 6FA | 0000000000000000 |
| C1FIFOCON6L | 658 | -----100x0000000 | C1MASK5L | 6AC | 0000000000000000 | C1MASK15L | 6FC | 0000000000000000 |
| C1FIFOCON6H | 65A | 00000000-1100000 | C1MASK5H | 6AE | 0000000000000000 | C1MASK15H | 6FE | 0000000000000000 |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.


© 2017-2021 Microchip Technology Inc.

**TABLE 4-9: SFR BLOCK 800h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **Interrupts** | | | IPC3 | 846 | -100-100-100-100 | IPC35 | 886 | -100-100-------- |
| IFS0 | 800 | 0000000000-00000 | IPC4 | 848 | -100-100-100-100 | IPC36 | 888 | ----------100 |
| IFS1 | 802 | 000000000-000000 | IPC5 | 84A | -100-----100-100 | IPC37 | 88A | -----100-100---- |
| IFS2 | 804 | 00000-00-0000--- | IPC6 | 84C | -100-100-100-100 | IPC38 | 88C | ---------100-100 |
| IFS3 | 806 | 00000000-0-00000 | IPC7 | 84E | -100-100-100-100 | IPC40 | 890 | ---------100-100 |
| IFS4 | 808 | 0000000000000-00 | IPC8 | 850 | -100-100-------- | IPC42 | 894 | -100-100-100-100 |
| IFS5 | 80A | 000000000000000- | IPC9 | 852 | -----100-100-100 | IPC43 | 896 | -100-100-100-100 |
| IFS6 | 80C | 0000000000000000 | IPC10 | 854 | -100-----100-100 | IPC44 | 898 | -100-100-100-100 |
| IFS7 | 80E | 0000000000000000 | IPC11 | 856 | -100-100-100-100 | IPC45 | 89A | -----100-100-100 |
| IFS8 | 810 | 00----------0 | IPC12 | 858 | -100-100-100-100 | IPC47 | 89E | -100-100-100---- |
| IFS9 | 812 | ------00-00----0 | IPC13 | 85A | -----100-----100 | IPC48 | 8A0 | -100-100-100-100 |
| IFS10 | 814 | 00000000------00 | IPC14 | 85C | -100-100-100-100 | INTCON1 | 8C0 | 0000000000-0000- |
| IFS11 | 816 | 000------0000000 | IPC15 | 85E | -100-100-100---- | INTCON2 | 8C2 | 100----0----0000 |
| IFS12 | 818 | ----------0000 | IPC16 | 860 | -100-----100-100 | INTCON3 | 8C4 | 0-----00---0---0 |
| IEC0 | 820 | 0000000000-00000 | IPC17 | 862 | -100-100-100-100 | INTCON4 | 8C6 | --------------00 |
| IEC1 | 822 | 000000000-000000 | IPC18 | 864 | -100-100-100-100 | INTTREG | 8C8 | 000-0000-0000000 |
| IEC2 | 824 | 00000-00-0000--- | IPC19 | 866 | -100-100-100-100 | **Flash** | | |
| IEC3 | 826 | 00000000-0-00000 | IPC20 | 868 | -100-100-100---- | NVMCON | 8D0 | 00000000----0000 |
| IEC4 | 828 | 0000000000000-00 | IPC21 | 86A | -100-100-100-100 | NVMADR | 8D2 | 0000000000000000 |
| IEC5 | 82A | 000000000000000- | IPC22 | 86C | -100-100-100-100 | NVMADRU | 8D4 | --------00000000 |
| IEC6 | 82C | 0000000000000000 | IPC23 | 86E | -100-100-100-100 | NVMKEY | 8D6 | --------00000000 |
| IEC7 | 82E | 0000000000000000 | IPC24 | 870 | -100-100-100-100 | NVMSRCADRL | 8D8 | 0000000000000000 |
| IEC8 | 830 | 0--------------0 | IPC25 | 872 | -100-100-100-100 | NVMSRCADRH | 8DA | --------00000000 |
| IEC9 | 832 | ------00-00----0 | IPC26 | 874 | -100-100-100-100 | **CBG** | | |
| IEC10 | 834 | 00000000------00 | IPC27 | 876 | -100-100-100-100 | AMPCON1L | 8DC | ----------000 |
| IEC11 | 836 | 000------0000000 | IPC28 | 878 | -100-100-100-100 | AMPCON1H | 8DE | ----------000 |
| IEC12 | 838 | ----------0000 | IPC29 | 87A | -100-100-100-100 | BIASCON | 8F0 | ----------0000 |
| IPC0 | 840 | -100-100-100-100 | IPC30 | 87C | -100-100-100-100 | IBIASCON0L | 8F4 | --000000--000000 |
| IPC1 | 842 | -100-100-----100 | IPC31 | 87E | -100-100-100-100 | IBIASCON0H | 8F6 | --000000--000000 |
| IPC2 | 844 | -100-100-100-100 | IPC32 | 880 | ----------100 | | | |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.

**TABLE 4-10: SFR BLOCK 900h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **PTG** | | | CCP1CON2L | 954 | 00-0----00000000 | CCP3TMRH | 9AA | 0000000000000000 |
| PTGCST | 900 | --00-00000x---00 | CCP1CON2H | 956 | -------100-00000 | CCP3PRL | 9AC | 1111111111111111 |
| PTGCON | 902 | 000000000000-000 | CCP1CON3H | 95A | 0000------0-00-- | CCP3PRH | 9AE | 1111111111111111 |
| PTGBTE | 904 | xxxxxxxxxxxxxxxx | CCP1STATL | 95C | -----0--00xx0000 | CCP3RAL | 9B0 | 0000000000000000 |
| PTGBTEH | 906 | 0000000000000000 | CCP1TMRL | 960 | 0000000000000000 | CCP3RBL | 9B4 | 0000000000000000 |
| PTGHOLD | 908 | 0000000000000000 | CCP1TMRH | 962 | 0000000000000000 | CCP3BUFL | 9B8 | 0000000000000000 |
| PTGT0LIM | 90C | 0000000000000000 | CCP1PRL | 964 | 1111111111111111 | CCP3BUFH | 9BA | 0000000000000000 |
| PTGT1LIM | 910 | 0000000000000000 | CCP1PRH | 966 | 1111111111111111 | CCP4CON1L | 9BC | --00000000000000 |
| PTGSDLIM | 914 | 0000000000000000 | CCP1RAL | 968 | 0000000000000000 | CCP4CON1H | 9BE | 00--000000000000 |
| PTGC0LIM | 918 | 0000000000000000 | CCP1RBL | 96C | 0000000000000000 | CCP4CON2L | 9C0 | 00-0----00000000 |
| PTGC1LIM | 91C | 0000000000000000 | CCP1BUFL | 970 | 0000000000000000 | CCP4CON2H | 9C2 | -------100-00000 |
| PTGADJ | 920 | 0000000000000000 | CCP1BUFH | 972 | 0000000000000000 | CCP4CON3H | 9C6 | 0000------0-00-- |
| PTGL0 | 924 | 0000000000000000 | CCP2CON1L | 974 | --00000000000000 | CCP4STATL | 9C8 | -----0--00xx0000 |
| PTGQPTR | 928 | ----------00000 | CCP2CON1H | 976 | 00--000000000000 | CCP4TMRL | 9CC | 0000000000000000 |
| PTGQUE0 | 930 | xxxxxxxxxxxxxxxx | CCP2CON2L | 978 | 00-0----00000000 | CCP4TMRH | 9CE | 0000000000000000 |
| PTGQUE1 | 932 | xxxxxxxxxxxxxxxx | CCP2CON2H | 97A | 0------100-00000 | CCP4PRL | 9D0 | 1111111111111111 |
| PTGQUE2 | 934 | xxxxxxxxxxxxxxxx | CCP2CON3H | 97E | 0000------0-00-- | CCP4PRH | 9D2 | 1111111111111111 |
| PTGQUE3 | 936 | xxxxxxxxxxxxxxxx | CCP2STATL | 980 | -----0--00xx0000 | CCP4RAL | 9D4 | 0000000000000000 |
| PTGQUE4 | 938 | xxxxxxxxxxxxxxxx | CCP2TMRL | 984 | 0000000000000000 | CCP4RBL | 9D8 | 0000000000000000 |
| PTGQUE5 | 93A | xxxxxxxxxxxxxxxx | CCP2TMRH | 986 | 0000000000000000 | CCP4BUFL | 9DC | 0000000000000000 |
| PTGQUE6 | 93C | xxxxxxxxxxxxxxxx | CCP2PRL | 988 | 1111111111111111 | CCP4BUFH | 9DE | 0000000000000000 |
| PTGQUE7 | 93E | xxxxxxxxxxxxxxxx | CCP2PRH | 98A | 1111111111111111 | CCP5CON1L | 9E0 | --00000000000000 |
| PTGQUE8 | 940 | xxxxxxxxxxxxxxxx | CCP2RAL | 98C | 0000000000000000 | CCP5CON1H | 9E2 | 00--000000000000 |
| PTGQUE9 | 942 | xxxxxxxxxxxxxxxx | CCP2RBL | 990 | 0000000000000000 | CCP5CON2L | 9E4 | 00-0----00000000 |
| PTGQUE10 | 944 | xxxxxxxxxxxxxxxx | CCP2BUFL | 994 | 0000000000000000 | CCP5CON2H | 9E6 | -------100-00000 |
| PTGQUE11 | 946 | xxxxxxxxxxxxxxxx | CCP2BUFH | 996 | 0000000000000000 | CCP5CON3H | 9EA | 0000------0-00-- |
| PTGQUE12 | 948 | xxxxxxxxxxxxxxxx | CCP3CON1L | 998 | --00000000000000 | CCP5STATL | 9EC | -----0--00xx0000 |
| PTGQUE13 | 94A | xxxxxxxxxxxxxxxx | CCP3CON1H | 99A | 00--000000000000 | CCP5TMRL | 9F0 | 0000000000000000 |
| PTGQUE14 | 94C | xxxxxxxxxxxxxxxx | CCP3CON2L | 99C | 00-0----00000000 | CCP5TMRH | 9F2 | 0000000000000000 |
| PTGQUE15 | 94E | xxxxxxxxxxxxxxxx | CCP3CON2H | 99E | -------100-00000 | CCP5PRL | 9F4 | 1111111111111111 |
| **CCP** | | | CCP3CON3H | 9A2 | 0000------0-00-- | CCP5PRH | 9F6 | 1111111111111111 |
| CCP1CON1L | 950 | --00000000000000 | CCP3STATL | 9A4 | -----0--00xx0000 | CCP5RAL | 9F8 | 0000000000000000 |
| CCP1CON1H | 952 | 00--000000000000 | CCP3TMRL | 9A8 | 0000000000000000 | CCP5RBL | 9FC | 0000000000000000 |
| CCP1CON2L | 954 | 00-0----00000000 | | | | | | |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.


© 2017-2021 Microchip Technology Inc.

**TABLE 4-11: SFR BLOCK A00h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **CCP (Continued)** | | | CCP7BUFL | A48 | 0000000000000000 | CCP9BUFL | A90 | 0000000000000000 |
| CCP5BUFL | A00 | 0000000000000000 | CCP7BUFH | A4A | 0000000000000000 | CCP9BUFH | A92 | 0000000000000000 |
| CCP5BUFH | A02 | 0000000000000000 | CCP8CON1L | A4C | --00000000000000 | **DMA** | | |
| CCP6CON1L | A04 | --00000000000000 | CCP8CON1H | A4E | 00--000000000000 | DMACON | ABC | --0----------0 |
| CCP6CON1H | A06 | 00--000000000000 | CCP8CON2L | A50 | 00-0----00000000 | DMABUF | ABE | 0000000000000000 |
| CCP6CON2L | A08 | 00-0----00000000 | CCP8CON2H | A52 | 0------100-00000 | DMAL | AC0 | 0000000000000000 |
| CCP6CON2H | A0A | -------100-00000 | CCP8CON3H | A56 | 0000------0-00-- | DMAH | AC2 | 0000000000000000 |
| CCP6CON3H | A0E | 0000------0-00-- | CCP8STATL | A58 | -----0--00xx0000 | DMACH0 | AC4 | -----00000000000 |
| CCP6STATL | A10 | -----0--00xx0000 | CCP8TMRL | A5C | 0000000000000000 | DMAINT0 | AC6 | --00000000000--0 |
| CCP6TMRL | A14 | 0000000000000000 | CCP8TMRH | A5E | 0000000000000000 | DMASRC0 | AC8 | 0000000000000000 |
| CCP6TMRH | A16 | 0000000000000000 | CCP8PRL | A60 | 1111111111111111 | DMADST0 | ACA | 0000000000000000 |
| CCP6PRL | A18 | 1111111111111111 | CCP8PRH | A62 | 1111111111111111 | DMACNT0 | ACC | 0000000000000001 |
| CCP6PRH | A1A | 1111111111111111 | CCP8RAL | A64 | 0000000000000000 | DMACH1 | ACE | -----00000000000 |
| CCP6RAL | A1C | 0000000000000000 | CCP8RBL | A68 | 0000000000000000 | DMAINT1 | AD0 | --00000000000--0 |
| CCP6RBL | A20 | 0000000000000000 | CCP8BUFL | A6C | 0000000000000000 | DMASRC1 | AD2 | 0000000000000000 |
| CCP6BUFL | A24 | 0000000000000000 | CCP8BUFH | A6E | 0000000000000000 | DMADST1 | AD4 | 0000000000000000 |
| CCP6BUFH | A26 | 0000000000000000 | CCP9CON1L | A70 | --00000000000000 | DMACNT1 | AD6 | 0000000000000001 |
| CCP7CON1L | A28 | --00000000000000 | CCP9CON1H | A72 | 00--000000000000 | DMACH2 | AD8 | -----00000000000 |
| CCP7CON1H | A2A | 00--000000000000 | CCP9CON2L | A74 | 00-0----00000000 | DMAINT2 | ADA | --00000000000--0 |
| CCP7CON2L | A2C | 00-0----00000000 | CCP9CON2H | A76 | --00000100-00000 | DMASRC2 | ADC | 0000000000000000 |
| CCP7CON2H | A2E | -------100-00000 | CCP9CON3L | A78 | ----------000000 | DMADST2 | ADE | 0000000000000000 |
| CCP7CON3H | A32 | 0000------0-00-- | CCP9CON3H | A7A | 0000-000--000000 | DMACNT2 | AE0 | 0000000000000001 |
| CCP7STATL | A34 | -----0--00xx0000 | CCP9STATL | A7C | -----0--00xx0000 | DMACH3 | AE2 | -----00000000000 |
| CCP7TMRL | A38 | 0000000000000000 | CCP9TMRL | A80 | 0000000000000000 | DMAINT3 | AE4 | --00000000000--0 |
| CCP7TMRH | A3A | 0000000000000000 | CCP9TMRH | A82 | 0000000000000000 | DMASRC3 | AE6 | 0000000000000000 |
| CCP7PRL | A3C | 1111111111111111 | CCP9PRL | A84 | 1111111111111111 | DMADST3 | AE8 | 0000000000000000 |
| CCP7PRH | A3E | 1111111111111111 | CCP9PRH | A86 | 1111111111111111 | DMACNT3 | AEA | 0000000000000001 |
| CCP7RAL | A40 | 0000000000000000 | CCP9RAL | A88 | 0000000000000000 | | | |
| CCP7RBL | A44 | 0000000000000000 | CCP9RBL | A8C | 0000000000000000 | | | |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.

**TABLE 4-12: SFR BLOCK B00h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **ADC** | | | ADCMP1LO | B44 | 0000000000000000 | ADTRIG2H | B8A | 0000000000000000 |
| ADCON1L | B00 | 000-00000----000 | ADCMP1HI | B46 | 0000000000000000 | ADTRIG3L | B8C | 0000000000000000 |
| ADCON1H | B02 | --------011----- | ADCMP2ENL | B48 | 0000000000000000 | ADTRIG3H | B8E | 0000000000000000 |
| ADCON2L | B04 | 00-0000000000000 | ADCMP2ENH | B4A | ------0000000000 | ADTRIG4L | B90 | 0000000000000000 |
| ADCON2H | B06 | 00-0000000000000 | ADCMP2LO | B4C | 0000000000000000 | ADTRIG4H | B92 | 0000000000000000 |
| ADCON3L | B08 | 0000000000000000 | ADCMP2HI | B4E | 0000000000000000 | ADTRIG5L | B94 | 0000000000000000 |
| ADCON3H | B0A | 000000000-----xx | ADCMP3ENL | B50 | 0000000000000000 | ADTRIG5H | B96 | 0000000000000000 |
| ADCON4L | B0C | ------000-----xx | ADCMP3ENH | B52 | ------0000000000 | ADTRIG6L | B98 | 0000000000000000 |
| ADCON4H | B0E | 00----------0000 | ADCMP3LO | B54 | 0000000000000000 | ADCMP0CON | BA0 | 0000000000000000 |
| ADMOD0L | B10 | 0000000000000000 | ADCMP3HI | B56 | 0000000000000000 | ADCMP1CON | BA4 | 0000000000000000 |
| ADMOD0H | B12 | 0000000000000000 | ADFL0DAT | B68 | 0000000000000000 | ADCMP2CON | BA8 | 0000000000000000 |
| ADMOD1L | B14 | 0000000000000000 | ADFL0CON | B6A | xxx0000000000000 | ADCMP3CON | BAC | 0000000000000000 |
| ADMOD1H | B16 | ------------0000 | ADFL1DAT | B6C | 0000000000000000 | ADLVLTRGL | BD0 | 0000000000000000 |
| ADIEL | B20 | xxxxxxxxxxxxxxxx | ADFL1CON | B6E | xxx0000000000000 | ADLVLTRGH | BD2 | ------xxxxxxxxxx |
| ADIEH | B22 | ------xxxxxxxxxx | ADFL2DAT | B70 | 0000000000000000 | ADCORE0L | BD4 | 0000000000000000 |
| ADSTATL | B30 | 0000000000000000 | ADFL2CON | B72 | xxx0000000000000 | ADCORE0H | BD6 | 0000001100000000 |
| ADSTATH | B32 | ------0000000000 | ADFL3DAT | B74 | 0000000000000000 | ADCORE1L | BD8 | 0000000000000000 |
| ADCMP0ENL | B38 | 0000000000000000 | ADFL3CON | B76 | xxx0000000000000 | ADCORE1H | BDA | 0000001100000000 |
| ADCMP0ENH | B3A | ------0000000000 | ADTRIG0L | B80 | 0000000000000000 | ADEIEL | BF0 | xxxxxxxxxxxxxxxx |
| ADCMP0LO | B3C | 0000000000000000 | ADTRIG0H | B82 | 0000000000000000 | ADEIEH | BF2 | ------xxxxxxxxxx |
| ADCMP0HI | B3E | 0000000000000000 | ADTRIG1L | B84 | 0000000000000000 | ADEISTATL | BF8 | xxxxxxxxxxxxxxxx |
| ADCMP1ENL | B40 | 0000000000000000 | ADTRIG1H | B86 | 0000000000000000 | ADEISTATH | BFA | ------xxxxxxxxxx |
| ADCMP1ENH | B42 | ------0000000000 | ADTRIG2L | B88 | 0000000000000000 | | | |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.


© 2017-2021 Microchip Technology Inc.

**TABLE 4-13: SFR BLOCK C00h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **ADC (Continued)** | | | ADCBUF16 | C2C | 0000000000000000 | SLP1CONH | C92 | ----000--------- |
| ADCON5L | C00 | --------0------- | ADCBUF17 | C2E | 0000000000000000 | SLP1DAT | C94 | 0000000000000000 |
| ADCON5H | C02 | ----xxxx0------- | ADCBUF18 | C30 | 0000000000000000 | DAC2CONL | C98 | 000--000x0000000 |
| ADCBUF0 | C0C | 0000000000000000 | ADCBUF19 | C32 | 0000000000000000 | DAC2CONH | C9A | ------0000000000 |
| ADCBUF1 | C0E | 0000000000000000 | ADCBUF20 | C34 | 0000000000000000 | DAC2DATL | C9C | 0000000000000000 |
| ADCBUF2 | C10 | 0000000000000000 | ADCBUF21 | C36 | 0000000000000000 | DAC2DATH | C9E | 0000000000000000 |
| ADCBUF3 | C12 | 0000000000000000 | ADCBUF22 | C38 | 0000000000000000 | SLP2CONL | CA0 | 0000000000000000 |
| ADCBUF4 | C14 | 0000000000000000 | ADCBUF23 | C3A | 0000000000000000 | SLP2CONH | CA2 | ----000--------- |
| ADCBUF5 | C16 | 0000000000000000 | ADCBUF24 | C3C | 0000000000000000 | SLP2DAT | CA4 | 0000000000000000 |
| ADCBUF6 | C18 | 0000000000000000 | ADCBUF25 | C3E | 0000000000000000 | DAC3CONL | CA8 | 000--000x0000000 |
| ADCBUF7 | C1A | 0000000000000000 | **DAC** | | | DAC3CONH | CAA | ------0000000000 |
| ADCBUF8 | C1C | 0000000000000000 | DACCTRL1L | C80 | --0-----0000-000 | DAC3DATL | CAC | 0000000000000000 |
| ADCBUF9 | C1E | 0000000000000000 | DACCTRL2L | C84 | ------0001010101 | DAC3DATH | CAE | 0000000000000000 |
| ADCBUF10 | C20 | 0000000000000000 | DACCTRL2H | C86 | ------0010001010 | SLP3CONL | CB0 | 0000000000000000 |
| ADCBUF11 | C22 | 0000000000000000 | DAC1CONL | C88 | 000--000x0000000 | SLP3CONH | CB2 | ----000--------- |
| ADCBUF12 | C24 | 0000000000000000 | DAC1CONH | C8A | ------0000000000 | SLP3DAT | CB4 | 0000000000000000 |
| ADCBUF13 | C26 | 0000000000000000 | DAC1DATL | C8C | 0000000000000000 | VREGCON | CFC | ----------000000 |
| ADCBUF14 | C28 | 0000000000000000 | DAC1DATH | C8E | 0000000000000000 | | | |
| ADCBUF15 | C2A | 0000000000000000 | SLP1CONL | C90 | 0000000000000000 | | | |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.

**TABLE 4-14: SFR BLOCK D00h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **PPS** | | | RPINR21 | D2E | 1111111111111111 | RPOR4 | D88 | --000000--000000 |
| RPCON | D00 | ----0---------- | RPINR22 | D30 | 1111111111111111 | RPOR5 | D8A | --000000--000000 |
| RPINR0 | D04 | 11111111-------- | RPINR23 | D32 | --------11111111 | RPOR6 | D8C | --000000--000000 |
| RPINR1 | D06 | 1111111111111111 | RPINR26 | D38 | --------11111111 | RPOR7 | D8E | --000000--000000 |
| RPINR2 | D08 | 11111111-------- | RPINR27 | D3A | 1111111111111111 | RPOR8 | D90 | --000000--000000 |
| RPINR3 | D0A | 1111111111111111 | RPINR29 | D3E | 1111111111111111 | RPOR9 | D92 | --000000--000000 |
| RPINR4 | D0C | 1111111111111111 | RPINR30 | D40 | --------11111111 | RPOR10 | D94 | --000000--000000 |
| RPINR5 | D0E | 1111111111111111 | RPINR32 | D44 | 11111111-------- | RPOR11 | D96 | --000000--000000 |
| RPINR6 | D10 | 1111111111111111 | RPINR33 | D46 | --------11111111 | RPOR12 | D98 | --000000--000000 |
| RPINR7 | D12 | 1111111111111111 | RPINR37 | D4E | 1111111111111111 | RPOR13 | D9A | --000000--000000 |
| RPINR8 | D14 | 1111111111111111 | RPINR38 | D50 | --------11111111 | RPOR14 | D9C | --000000--000000 |
| RPINR9 | D16 | 1111111111111111 | RPINR42 | D58 | 1111111111111111 | RPOR15 | D9E | --000000--000000 |
| RPINR10 | D18 | 1111111111111111 | RPINR43 | D5A | 1111111111111111 | RPOR16 | DA0 | --000000--000000 |
| RPINR11 | D1A | 1111111111111111 | RPINR44 | D5C | 1111111111111111 | RPOR17 | DA2 | --000000--000000 |
| RPINR12 | D1C | 1111111111111111 | RPINR45 | D5E | 1111111111111111 | RPOR18 | DA4 | --000000--000000 |
| RPINR13 | D1E | 1111111111111111 | RPINR46 | D60 | 1111111111111111 | RPOR19 | DA6 | --000000--000000 |
| RPINR14 | D20 | 1111111111111111 | RPINR47 | D62 | 1111111111111111 | RPOR20 | DA8 | --000000--000000 |
| RPINR15 | D22 | 1111111111111111 | RPINR48 | D64 | 1111111111111111 | RPOR21 | DAA | --000000--000000 |
| RPINR16 | D24 | 1111111111111111 | RPINR49 | D66 | --------11111111 | RPOR22 | DAC | --000000--000000 |
| RPINR17 | D26 | 1111111111111111 | RPOR0 | D80 | --000000--000000 | RPOR23 | DAE | --000000--000000 |
| RPINR18 | D28 | 1111111111111111 | RPOR1 | D82 | --000000--000000 | RPOR24 | DB0 | --000000--000000 |
| RPINR19 | D2A | 1111111111111111 | RPOR2 | D84 | --000000--000000 | RPOR25 | DB2 | --000000--000000 |
| RPINR20 | D2C | 1111111111111111 | RPOR3 | D86 | --000000--000000 | RPOR26 | DB4 | --000000--000000 |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.


© 2017-2021 Microchip Technology Inc.

**TABLE 4-15: SFR BLOCK E00h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **I/O Ports** | | | CNEN0B | E2C | 0000000000000000 | CNPUD | E5E | 0000000000000000 |
| ANSELA | E00 | ----------11111 | CNSTATB | E2E | 0000000000000000 | CNPDD | E60 | 0000000000000000 |
| TRISA | E02 | ----------11111 | CNEN1B | E30 | 0000000000000000 | CNCOND | E62 | ----0---------- |
| PORTA | E04 | ----------xxxxx | CNFB | E32 | 0000000000000000 | CNEN0D | E64 | 0000000000000000 |
| LATA | E06 | ----------xxxxx | ANSELC | E38 | --------11--1111 | CNSTATD | E66 | 0000000000000000 |
| ODCA | E08 | ----------00000 | TRISC | E3A | 1111111111111111 | CNEN1D | E68 | 0000000000000000 |
| CNPUA | E0A | ----------00000 | PORTC | E3C | xxxxxxxxxxxxxxxx | CNFD | E6A | 0000000000000000 |
| CNPDA | E0C | ----------00000 | LATC | E3E | xxxxxxxxxxxxxxxx | ANSELE | E70 | ------------1111 |
| CNCONA | E0E | ----0---------- | ODCC | E40 | 0000000000000000 | TRISE | E72 | 1111111111111111 |
| CNEN0A | E10 | ----------00000 | CNPUC | E42 | 0000000000000000 | PORTE | E74 | xxxxxxxxxxxxxxxx |
| CNSTATA | E12 | ----------00000 | CNPDC | E44 | 0000000000000000 | LATE | E76 | xxxxxxxxxxxxxxxx |
| CNEN1A | E14 | ----------00000 | CNCONC | E46 | ----0---------- | ODCE | E78 | 0000000000000000 |
| CNFA | E16 | ----------00000 | CNEN0C | E48 | 0000000000000000 | CNPUE | E7A | 0000000000000000 |
| ANSELB | E1C | ------111--11111 | CNSTATC | E4A | 0000000000000000 | CNPDE | E7C | 0000000000000000 |
| TRISB | E1E | 1111111111111111 | CNEN1C | E4C | 0000000000000000 | CNCONE | E7E | ----0---------- |
| PORTB | E20 | xxxxxxxxxxxxxxxx | CNFC | E4E | 0000000000000000 | CNEN0E | E80 | 0000000000000000 |
| LATB | E22 | xxxxxxxxxxxxxxxx | ANSELD | E54 | --1-11---------- | CNSTATE | E82 | 0000000000000000 |
| ODCB | E24 | 0000000000000000 | TRISD | E56 | 1111111111111111 | CNEN1E | E84 | 0000000000000000 |
| CNPUB | E26 | 0000000000000000 | PORTD | E58 | xxxxxxxxxxxxxxxx | CNFE | E86 | 0000000000000000 |
| CNPDB | E28 | 0000000000000000 | LATD | E5A | xxxxxxxxxxxxxxxx | **Memory BIST** | | |
| CNCONB | E2A | ----0---------- | ODCD | E5C | 0000000000000000 | MBISTCON | EFC | -------00--0---1 |

**Legend:** x = unknown or indeterminate value; "-" = unimplemented bits. Address values are in hexadecimal. Reset values are in binary.

**TABLE 4-16: SFR BLOCK F00h**

| Register | Address | All Resets | Register | Address | All Resets | Register | Address | All Resets |
|---|---|---|---|---|---|---|---|---|
| **UART3** | | | I2C3TRN | F70 | --------11111111 | WDTCONH | FB6 | 0000000000000000 |
| U3MODE | F00 | --000-0000000000 | I2C3RCV | F74 | --------00000000 | **REFO** | | |
| U3MODEH | F02 | 00---00000000000 | **Reset and Oscillator** | | | REFOCONL | FB8 | --000-00----0000 |
| U3STA | F04 | 0000000010000000 | RCON | F80 | xx----x01x0xxxxx | REFOCONH | FBA | 0000000000000000 |
| U3STAH | F06 | 0000-00000101110 | OSCCON | F84 | 0000-yyy0-0-0--0 | REFOTRIMH | FBE | 000000000------- |
| U3BRG | F08 | 0000000000000000 | CLKDIV | F86 | 00110000--000001 | **Processor** | | |
| U3BRGH | F0A | ------------0000 | PLLFBD | F88 | ----000010010110 | PCTRAPL | FC0 | xxxxxxxxxxxxxxxx |
| U3RXREG | F0C | --------xxxxxxxx | PLLDIV | F8A | ------00-001-001 | PCTRAPH | FC2 | --------xxxxxxxx |
| U3TXREG | F10 | --------xxxxxxxx | OSCTUN | F8C | ----------000000 | FEXL | FC4 | xxxxxxxxxxxxxxxx |
| U3P1 | F14 | -------000000000 | ACLKCON1 | F8E | 00-----0--000001 | FEXH | FC6 | --------xxxxxxxx |
| U3P2 | F16 | -------000000000 | APLLFBD1 | F90 | ----000010010110 | FEX2L | FC8 | xxxxxxxxxxxxxxxx |
| U3P3 | F18 | 0000000000000000 | APLLDIV1 | F92 | ------00-001-001 | FEX2H | FCA | --------xxxxxxxx |
| U3P3H | F1A | --------00000000 | CANCLKCON | F9A | 0---0000-0000000 | VISI | FCC | xxxxxxxxxxxxxxxx |
| U3TXCHK | F1C | --------00000000 | DCOTUN | F9C | --000000--000000 | DPCL | FCE | xxxxxxxxxxxxxxxx |
| U3RXCHK | F1E | --------00000000 | DCOCON | F9E | --0-xxxx-------- | DPCH | FD0 | --------xxxxxxxx |
| U3SCCON | F20 | ----------00000- | **PMD** | | | APPO | FD2 | xxxxxxxxxxxxxxxx |
| U3SCINT | F22 | --00-000--00-000 | PMD1 | FA4 | ----000-00000-00 | APPI | FD4 | xxxxxxxxxxxxxxxx |
| U3INT | F24 | --------00---0-- | PMD2 | FA6 | -------000000000 | APPS | FD6 | ----------xxxxx |
| **I2C3** | | | PMD3 | FA8 | -------00-0-000- | STROUTL | FD8 | xxxxxxxxxxxxxxxx |
| I2C3CONL | F5C | --01000000000000 | PMD4 | FAA | ------------0--- | STROUTH | FDA | xxxxxxxxxxxxxxxx |
| I2C3CONH | F5E | ---------0000000 | PMD6 | FAE | ----0000-------- | STROVCNT | FDC | xxxxxxxxxxxxxxxx |
| I2C3 STAT | F60 | 000--00000000000 | PMD7 | FB0 | -----000----0--- | JDATAL | FFA | 0000000000000000 |
| I2C3ADD | F64 | ------0000000000 | PMD8 | FB2 | --000--0--00000- | JDATAH | FFC | 0000000000000000 |
| I2C3MSK | F68 | ------0000000000 | **WDT** | | | | | |
| I2C3BRG | F6C | 0000000000000000 | WDTCONL | FB4 | ---0000000000000 | | | |

**Legend:** x = unknown or indeterminate value; "-" =unimplemented bits; y = value set by Configuration bits. Address values are in hexadecimal. Reset values are in binary.


© 2017-2021 Microchip Technology Inc.

### 4.5.1 PAGED MEMORY SCHEME

The dsPIC33CK256MP508 architecture extends the available Data Space through a paging scheme, which allows the available Data Space to be accessed using MOV instructions in a linear fashion for pre- and post-modified Effective Addresses (EAs). The upper half of the base Data Space address is used in conjunction with the Data Space Read Page (DSRPAG) register to form the Program Space Visibility (PSV) address.

The Data Space Read Page (DSRPAG) register is located in the SFR space. Construction of the PSV address is shown in Figure 4-11. When DSRPAG[9] = 1 and the base address bit, EA[15] = 1, the DSRPAG[8:0] bits are concatenated onto EA[14:0] to form the 24-bit PSV read address.

The paged memory scheme provides access to multiple 32-Kbyte windows in the PSV memory. The Data Space Read Page (DSRPAG) register, in combination with the upper half of the Data Space address, can provide up to 8 Mbytes of PSV address space. The paged data memory space is shown in Figure 4-12.

The Program Space (PS) can be accessed with a DSRPAG of 0x200 or greater. Only reads from PS are supported using the DSRPAG.

**FIGURE 4-11: PROGRAM SPACE VISIBILITY (PSV) READ ADDRESS GENERATION**

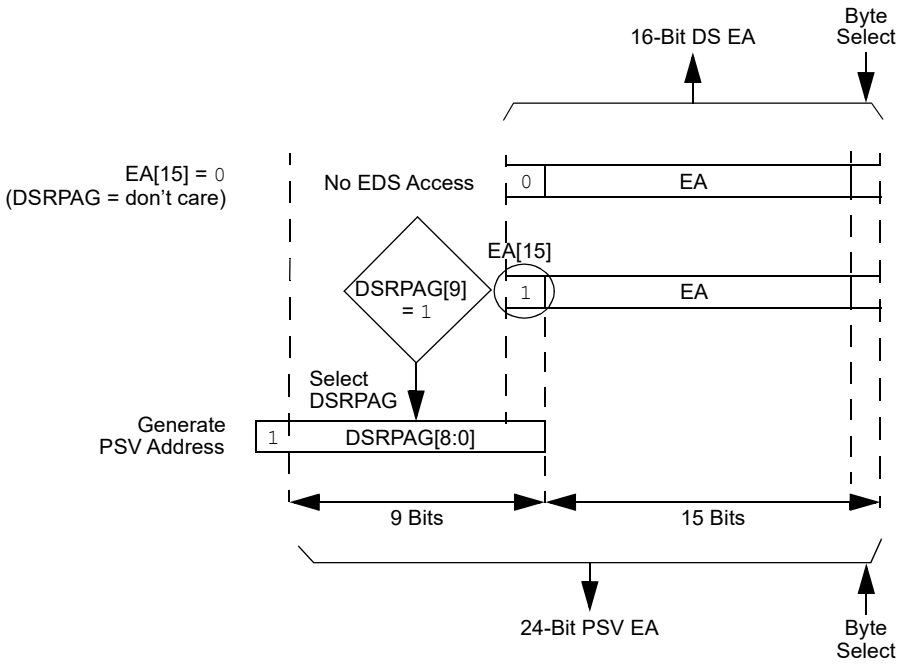


**Note:** DS read access when DSRPAG = 0x000 will force an address error trap.

**FIGURE 4-12: PAGED DATA MEMORY SPACE**

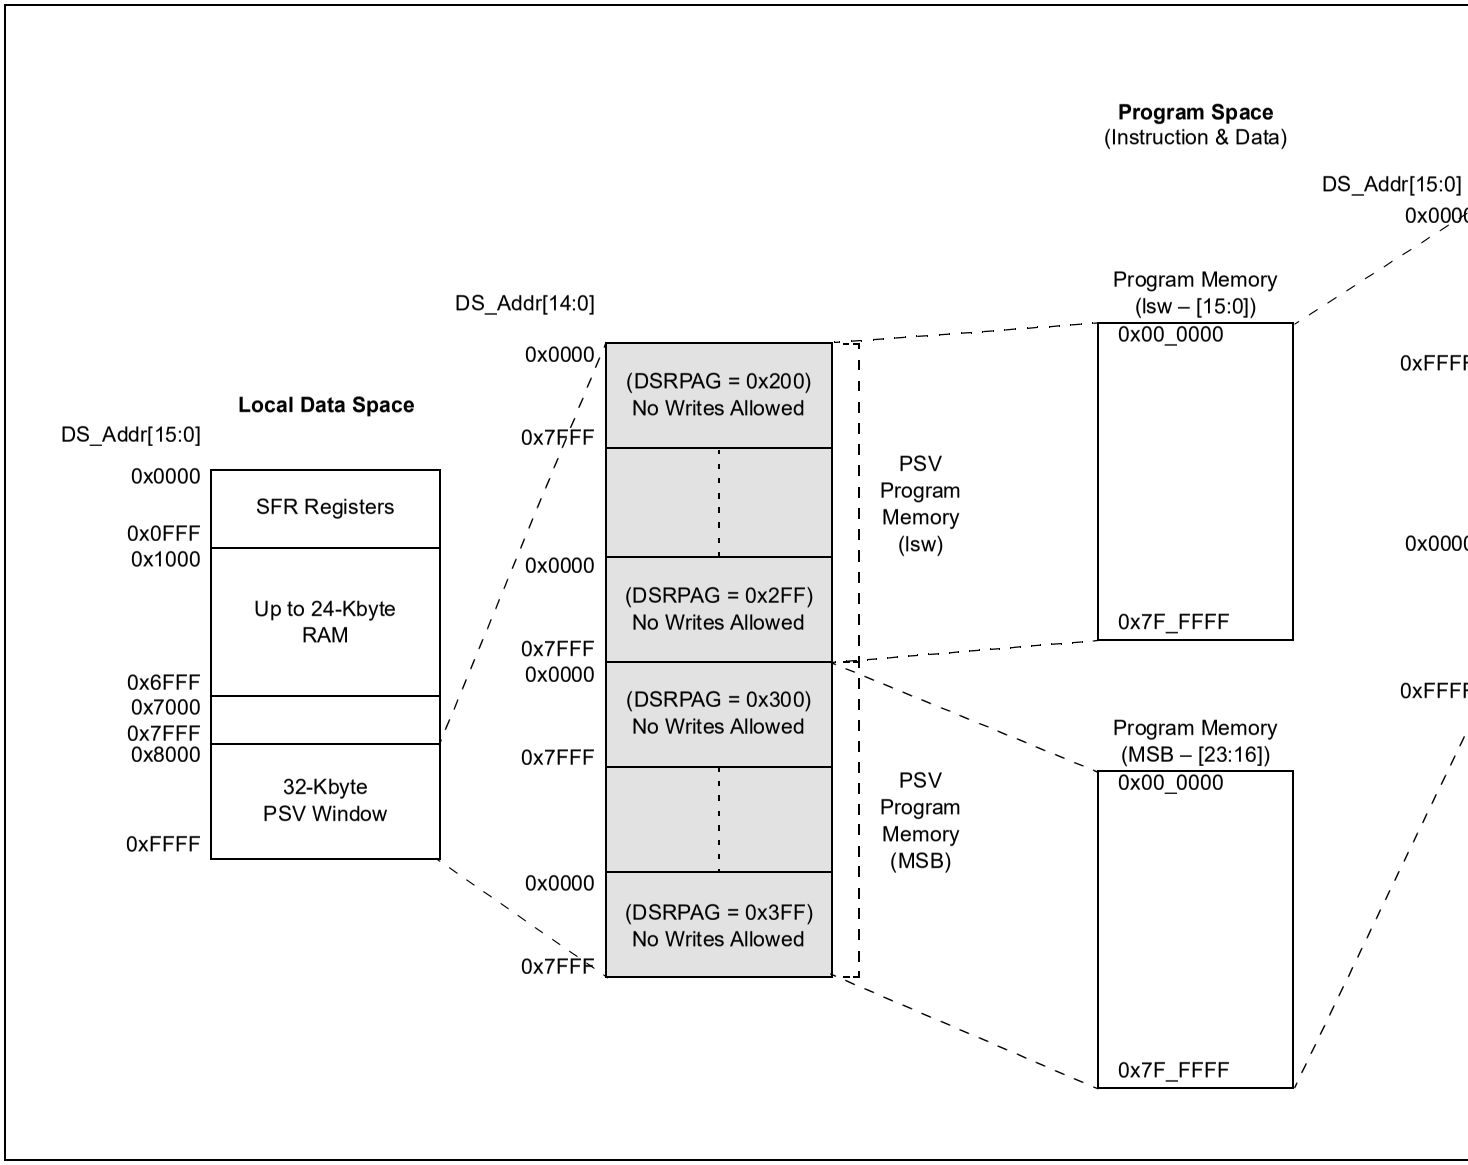


© 2017-2021 Microchip Technology Inc.

When a PSV page overflow or underflow occurs, EA[15] is cleared as a result of the register indirect EA calculation. An overflow or underflow of the EA in the PSV pages can occur at the page boundaries when:

- The initial address, prior to modification, addresses the PSV page
- The EA calculation uses Pre- or Post-Modified Register Indirect Addressing; however, this does not include Register Offset Addressing

In general, when an overflow is detected, the DSRPAG register is incremented and the EA[15] bit is set to keep the base address within the PSV window. When an underflow is detected, the DSRPAG register is decremented and the EA[15] bit is set to keep the base address within the PSV window. This creates a linear PSV address space, but only when using Register Indirect Addressing modes.

Exceptions to the operation described above arise when entering and exiting the boundaries of Page 0 and PSV spaces. Table 4-17 lists the effects of overflow and underflow scenarios at different boundaries.

In the following cases, when overflow or underflow occurs, the EA[15] bit is set and the DSRPAG is not modified; therefore, the EA will wrap to the beginning of the current page:

- Register Indirect with Register Offset Addressing
- Modulo Addressing
- Bit-Reversed Addressing

**TABLE 4-17: OVERFLOW AND UNDERFLOW SCENARIOS AT PAGE 0 AND PSV SPACE BOUNDARIES(2,3,4)**

| O/U, R/W | Operation | Before | | | After | | |
|---|---|---|---|---|---|---|---|
| | | DSRPAG | DS EA[15] | Page Description | DSRPAG | DS EA[15] | Page Description |
| O, Read | [++Wn] or [Wn++] | DSRPAG = 0x2FF | 1 | PSV: Last lsw page | DSRPAG = 0x300 | 1 | PSV: First MSB page |
| O, Read | | DSRPAG = 0x3FF | 1 | PSV: Last MSB page | DSRPAG = 0x3FF | 0 | See **Note 1** |
| U, Read | [--Wn] or [Wn--] | DSRPAG = 0x001 | 1 | PSV page | DSRPAG = 0x001 | 0 | See **Note 1** |
| U, Read | | DSRPAG = 0x200 | 1 | PSV: First lsw page | DSRPAG = 0x200 | 0 | See **Note 1** |
| U, Read | | DSRPAG = 0x300 | 1 | PSV: First MSB page | DSRPAG = 0x2FF | 1 | PSV: Last lsw page |

**Legend:** O = Overflow, U = Underflow, R = Read, W = Write

**Note 1:** The Register Indirect Addressing now addresses a location in the base Data Space (0x0000-0x8000).

**2:** An EDS access, with DSRPAG = 0x000, will generate an address error trap.

**3:** Only reads from PS are supported using DSRPAG.

**4:** Pseudolinear Addressing is not supported for large offsets.

#### 4.5.1.1 Extended X Data Space

The lower portion of the base address space range, between 0x0000 and 0x7FFF, is always accessible, regardless of the contents of the Data Space Read Page register. It is indirectly addressable through the register indirect instructions. It can be regarded as being located in the default EDS Page 0 (i.e., EDS address range of 0x000000 to 0x007FFF with the base address bit, EA[15] = 0, for this address range). However, Page 0 cannot be accessed through the upper 32 Kbytes, 0x8000 to 0xFFFF, of base Data Space in combination with DSRPAG = 0x00. Consequently, DSRPAG is initialized to 0x001 at Reset.

**Note 1:** DSRPAG should not be used to access Page 0. An EDS access with DSRPAG set to 0x000 will generate an address error trap.

**2:** Clearing the DSRPAG in software has no effect.

The remaining PSV pages are only accessible using the DSRPAG register in combination with the upper 32 Kbytes, 0x8000 to 0xFFFF, of the base address, where the base address bit, EA[15] = 1.

#### 4.5.1.2 Software Stack

The W15 register serves as a dedicated Software Stack Pointer (SSP), and is automatically modified by exception processing, subroutine calls and returns; however, W15 can be referenced by any instruction in the same manner as all other W registers. This simplifies reading, writing and manipulating the Stack Pointer (for example, creating stack frames).

**Note:** To protect against misaligned stack accesses, W15[0] is fixed to '0' by the hardware.

W15 is initialized to 0x1000 during all Resets. This address ensures that the SSP points to valid RAM in all dsPIC33CK256MP508 devices and permits stack availability for non-maskable trap exceptions. These can occur before the SSP is initialized by the user software. You can reprogram the SSP during initialization to any location within Data Space.

The Software Stack Pointer always points to the first available free word and fills the software stack, working from lower toward higher addresses. Figure 4-13 illustrates how it pre-decrements for a stack pop (read) and post-increments for a stack push (writes).

When the PC is pushed onto the stack, PC[15:0] are pushed onto the first available stack word, then PC[22:16] are pushed into the second available stack location. For a PC push during any CALL instruction, the MSB of the PC is zero-extended before the push, as shown in Figure 4-13. During exception processing, the MSB of the PC is concatenated with the lower eight bits of the CPU STATUS Register, SR. This allows the contents of SRL to be preserved automatically during interrupt processing.

**Note 1:** To maintain system Stack Pointer (W15) coherency, W15 is never subject to (EDS) paging, and is therefore, restricted to an address range of 0x0000 to 0xFFFF. The same applies to the W14 when used as a Stack Frame Pointer (SFA = 1).

**2:** As the stack can be placed in, and can access X and Y spaces, care must be taken regarding its use, particularly with regard to local automatic variables in a C development environment

**FIGURE 4-13: CALL STACK FRAME**

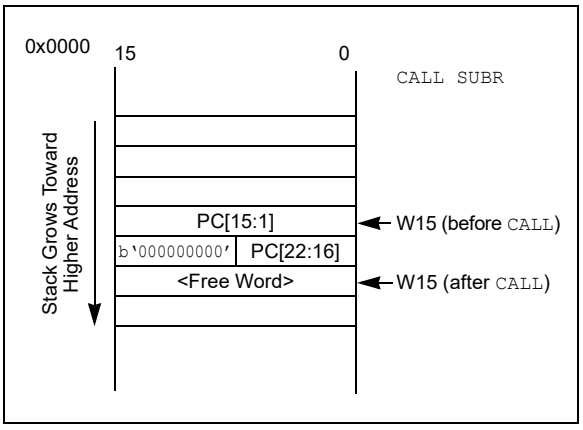



© 2017-2021 Microchip Technology Inc.

### 4.5.2 INSTRUCTION ADDRESSING MODES

The addressing modes shown in Table 4-18 form the basis of the addressing modes optimized to support the specific features of individual instructions. The addressing modes provided in the MAC class of instructions differ from those in the other instruction types.

#### 4.5.2.1 File Register Instructions

Most file register instructions use a 13-bit address field (f) to directly address data present in the first 8192 bytes of data memory (Near Data Space). Most file register instructions employ a Working register, W0, which is denoted as WREG in these instructions. The destination is typically either the same file register or WREG (with the exception of the MUL instruction), which writes the result to a register or register pair. The MOV instruction allows additional flexibility and can access the entire Data Space.

#### 4.5.2.2 MCU Instructions

The three-operand MCU instructions are of the form:

```
Operand 3 = Operand 1 <function> Operand 2
```

where Operand 1 is always a Working register (that is, the addressing mode can only be Register Direct), which is referred to as Wb. Operand 2 can be a W register fetched from data memory or a 5-bit literal. The result location can either be a W register or a data memory location. The following addressing modes are supported by MCU instructions:

- Register Direct
- Register Indirect
- Register Indirect Post-Modified
- Register Indirect Pre-Modified
- 5-Bit or 10-Bit Literal

**Note:** Not all instructions support all the addressing modes given above. Individual instructions can support different subsets of these addressing modes.

**TABLE 4-18: FUNDAMENTAL ADDRESSING MODES SUPPORTED**

| Addressing Mode | Description |
|---|---|
| File Register Direct | The address of the file register is specified explicitly. |
| Register Direct | The contents of a register are accessed directly. |
| Register Indirect | The contents of Wn form the Effective Address (EA). |
| Register Indirect Post-Modified | The contents of Wn form the EA. Wn is post-modified (incremented or decremented) by a constant value. |
| Register Indirect Pre-Modified | Wn is pre-modified (incremented or decremented) by a signed constant value to form the EA. |
| Register Indirect with Register Offset (Register Indexed) | The sum of Wn and Wb forms the EA. |
| Register Indirect with Literal Offset | The sum of Wn and a literal forms the EA. |

#### 4.5.2.3 Move and Accumulator Instructions

Move instructions, and the DSP accumulator class of instructions, provide a greater degree of addressing flexibility than other instructions. In addition to the addressing modes supported by most MCU instructions, move and accumulator instructions also support Register Indirect with Register Offset Addressing mode, also referred to as Register Indexed mode.

**Note:** For the MOV instructions, the addressing mode specified in the instruction can differ for the source and destination EA. However, the 4-bit Wb (Register Offset) field is shared by both source and destination (but typically only used by one).

In summary, the following addressing modes are supported by move and accumulator instructions:

- Register Direct
- Register Indirect
- Register Indirect Post-Modified
- Register Indirect Pre-Modified
- Register Indirect with Register Offset (Indexed)
- Register Indirect with Literal Offset
- 8-Bit Literal
- 16-Bit Literal

**Note:** Not all instructions support all the addressing modes given above. Individual instructions may support different subsets of these addressing modes.

#### 4.5.2.4 MAC Instructions

The dual source operand DSP instructions (CLR, ED, EDAC, MAC, MPY, MPY.N, MOVSAC and MSC), also referred to as MAC instructions, use a simplified set of addressing modes to allow the user application to effectively manipulate the Data Pointers through register indirect tables.

The two-source operand prefetch registers must be members of the set {W8, W9, W10, W11}. For data reads, W8 and W9 are always directed to the X RAGU, and W10 and W11 are always directed to the Y AGU. The Effective Addresses generated (before and after modification) must therefore, be valid addresses within X Data Space for W8 and W9, and Y Data Space for W10 and W11.

**Note:** Register Indirect with Register Offset Addressing mode is available only for W9 (in X space) and W11 (in Y space).

In summary, the following addressing modes are supported by the MAC class of instructions:

- Register Indirect
- Register Indirect Post-Modified by 2
- Register Indirect Post-Modified by 4
- Register Indirect Post-Modified by 6
- Register Indirect with Register Offset (Indexed)

#### 4.5.2.5 Other Instructions

Besides the addressing modes outlined previously, some instructions use literal constants of various sizes. For example, BRA (branch) instructions use 16-bit signed literals to specify the branch destination directly, whereas the DISI instruction uses a 14-bit unsigned literal field. In some instructions, such as ULNK, the source of an operand or result is implied by the opcode itself. Certain operations, such as a NOP, do not have any operands.


© 2017-2021 Microchip Technology Inc.

### 4.5.3 MODULO ADDRESSING

Modulo Addressing mode is a method of providing an automated means to support circular data buffers using hardware. The objective is to remove the need for software to perform data address boundary checks when executing tightly looped code, as is typical in many DSP algorithms.

Modulo Addressing can operate in either Data or Program Space (since the Data Pointer mechanism is essentially the same for both). One circular buffer can be supported in each of the X (which also provides the pointers into Program Space) and Y Data Spaces. Modulo Addressing can operate on any W Register Pointer. However, it is not advisable to use W14 or W15 for Modulo Addressing since these two registers are used as the Stack Frame Pointer and Stack Pointer, respectively.

In general, any particular circular buffer can be configured to operate in only one direction, as there are certain restrictions on the buffer start address (for incrementing buffers) or end address (for decrementing buffers), based upon the direction of the buffer.

The only exception to the usage restrictions is for buffers that have a power-of-two length. As these buffers satisfy the start and end address criteria, they can operate in a Bidirectional mode (that is, address boundary checks are performed on both the lower and upper address boundaries).

#### 4.5.3.1 Start and End Address

The Modulo Addressing scheme requires that a starting and ending address be specified and loaded into the 16-bit Modulo Buffer Address registers: XMODSRT, XMODEND, YMODSRT and YMODEND (see Table 4-2).

| **Note:** | Y space Modulo Addressing EA calculations assume word-sized data (LSb of every EA is always clear). |
|---|---|

The length of a circular buffer is not directly specified. It is determined by the difference between the corresponding start and end addresses. The maximum possible length of the circular buffer is 32K words (64 Kbytes).

#### 4.5.3.2 W Address Register Selection

The Modulo and Bit-Reversed Addressing Control register, MODCON[15:0], contains enable flags, as well as a W register field to specify the W Address registers. The XWM and YWM fields select the registers that operate with Modulo Addressing:

- If XWM = `1111`, X RAGU and X WAGU Modulo Addressing is disabled
- If YWM = `1111`, Y AGU Modulo Addressing is disabled

The X Address Space Pointer W (XWM) register, to which Modulo Addressing is to be applied, is stored in MODCON[3:0] (see Table 4.2). Modulo Addressing is enabled for X Data Space when XWM is set to any value other than '`1111`' and the XMODEN bit is set (MODCON[15]).

The Y Address Space Pointer W (YWM) register, to which Modulo Addressing is to be applied, is stored in MODCON[7:4]. Modulo Addressing is enabled for Y Data Space when YWM is set to any value other than '`1111`' and the YMODEN bit (MODCON[14]) is set.

**FIGURE 4-14: MODULO ADDRESSING OPERATION EXAMPLE**

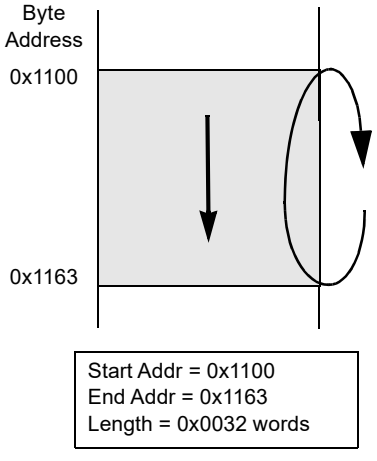


```
MOV     #0x1100, W0
MOV     W0, XMODSRT     ;set modulo start address
MOV     #0x1163, W0
MOV     W0, MODEND      ;set modulo end address
MOV     #0x8001, W0
MOV     W0, MODCON      ;enable W1, X AGU for modulo

MOV     #0x0000, W0     ;W0 holds buffer fill value

MOV     #0x1110, W1     ;point W1 to buffer

DO      AGAIN, #0x31    ;fill the 50 buffer locations
MOV     W0, [W1++]      ;fill the next location
AGAIN:  INC W0, W0      ;increment the fill value
```

#### 4.5.3.3 Modulo Addressing Applicability

Modulo Addressing can be applied to the Effective Address (EA) calculation associated with any W register. Address boundaries check for addresses equal to:

- The upper boundary addresses for incrementing buffers
- The lower boundary addresses for decrementing buffers

It is important to realize that the address boundaries check for addresses less than, or greater than, the upper (for incrementing buffers) and lower (for decrementing buffers) boundary addresses (not just equal to). Address changes can, therefore, jump beyond boundaries and still be adjusted correctly.

| | |
|---|---|
| **Note:** | The modulo corrected Effective Address is written back to the register only when Pre-Modify or Post-Modify Addressing mode is used to compute the Effective Address. When an address offset (such as [W7 + W2]) is used, Modulo Addressing correction is performed, but the contents of the register remain unchanged. |

### 4.5.4 BIT-REVERSED ADDRESSING

Bit-Reversed Addressing mode is intended to simplify data reordering for radix-2 FFT algorithms. It is supported by the X AGU for data writes only.

The modifier, which can be a constant value or register contents, is regarded as having its bit order reversed. The address source and destination are kept in normal order. Thus, the only operand requiring reversal is the modifier.

#### 4.5.4.1 Bit-Reversed Addressing Implementation

Bit-Reversed Addressing mode is enabled in any of these situations:

- BWMx bits (W register selection) in the MODCON register are any value other than '1111' (the stack cannot be accessed using Bit-Reversed Addressing)
- The BREN bit is set in the XBREV register
- The addressing mode used is Register Indirect with Pre-Increment or Post-Increment

If the length of a bit-reversed buffer is $M = 2^N$ bytes, the last 'N' bits of the data buffer start address must be zeros.

XB[14:0] is the Bit-Reversed Addressing modifier, or 'pivot point', which is typically a constant. In the case of an FFT computation, its value is equal to half of the FFT data buffer size.

| | |
|---|---|
| **Note:** | All bit-reversed EA calculations assume word-sized data (LSb of every EA is always clear). The XB value is scaled accordingly to generate compatible (byte) addresses. |

When enabled, Bit-Reversed Addressing is executed only for Register Indirect with Pre-Increment or Post-Increment Addressing and word-sized data writes. It does not function for any other addressing mode or for byte-sized data and normal addresses are generated instead. When Bit-Reversed Addressing is active, the W Address Pointer is always added to the address modifier (XB) and the offset associated with the Register Indirect Addressing mode is ignored. In addition, as word-sized data are a requirement, the LSb of the EA is ignored (and always clear).

| | |
|---|---|
| **Note:** | Modulo Addressing and Bit-Reversed Addressing can be enabled simultaneously using the same W register, but Bit-Reversed Addressing operation will always take precedence for data writes when enabled. |

If Bit-Reversed Addressing has already been enabled by setting the BREN (XBREV[15]) bit, a write to the XBREV register should not be immediately followed by an indirect read operation using the W register that has been designated as the Bit-Reversed Pointer.


© 2017-2021 Microchip Technology Inc.

**FIGURE 4-15: BIT-REVERSED ADDRESSING EXAMPLE**

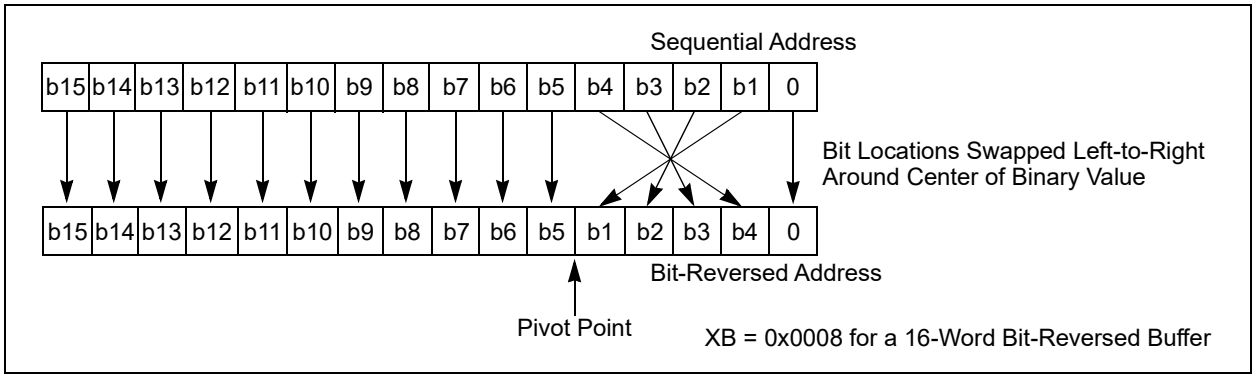


**TABLE 4-19: BIT-REVERSED ADDRESSING SEQUENCE (16-ENTRY)**

| Normal Address | | | | | Bit-Reversed Address | | | | |
|---|---|---|---|---|---|---|---|---|---|
| **A3** | **A2** | **A1** | **A0** | **Decimal** | **A3** | **A2** | **A1** | **A0** | **Decimal** |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 0 | 8 |
| 0 | 0 | 1 | 0 | 2 | 0 | 1 | 0 | 0 | 4 |
| 0 | 0 | 1 | 1 | 3 | 1 | 1 | 0 | 0 | 12 |
| 0 | 1 | 0 | 0 | 4 | 0 | 0 | 1 | 0 | 2 |
| 0 | 1 | 0 | 1 | 5 | 1 | 0 | 1 | 0 | 10 |
| 0 | 1 | 1 | 0 | 6 | 0 | 1 | 1 | 0 | 6 |
| 0 | 1 | 1 | 1 | 7 | 1 | 1 | 1 | 0 | 14 |
| 1 | 0 | 0 | 0 | 8 | 0 | 0 | 0 | 1 | 1 |
| 1 | 0 | 0 | 1 | 9 | 1 | 0 | 0 | 1 | 9 |
| 1 | 0 | 1 | 0 | 10 | 0 | 1 | 0 | 1 | 5 |
| 1 | 0 | 1 | 1 | 11 | 1 | 1 | 0 | 1 | 13 |
| 1 | 1 | 0 | 0 | 12 | 0 | 0 | 1 | 1 | 3 |
| 1 | 1 | 0 | 1 | 13 | 1 | 0 | 1 | 1 | 11 |
| 1 | 1 | 1 | 0 | 14 | 0 | 1 | 1 | 1 | 7 |
| 1 | 1 | 1 | 1 | 15 | 1 | 1 | 1 | 1 | 15 |

### 4.5.5 INTERFACING PROGRAM AND DATA MEMORY SPACES

The dsPIC33CK256MP508 family architecture uses a 24-bit wide Program Space (PS) and a 16-bit wide Data Space (DS). The architecture is also a modified Harvard scheme, meaning that data can also be present in the Program Space. To use these data successfully, they must be accessed in a way that preserves the alignment of information in both spaces.

Aside from normal execution, the architecture of the dsPIC33CK256MP508 family devices provides two methods by which Program Space can be accessed during operation:

- Using table instructions to access individual bytes or words anywhere in the Program Space
- Remapping a portion of the Program Space into the Data Space (Program Space Visibility)

Table instructions allow an application to read or write to small areas of the program memory. This capability makes the method ideal for accessing data tables that need to be updated periodically. It also allows access to all bytes of the program word. The remapping method allows an application to access a large block of data on a read-only basis, which is ideal for look-ups from a large table of static data. The application can only access the least significant word of the program word.

**TABLE 4-20: PROGRAM SPACE ADDRESS CONSTRUCTION**

| Access Type | Access Space | Program Space Address | | | | |
|---|---|---|---|---|---|---|
| | | [23] | [22:16] | [15] | [14:1] | [0] |
| Instruction Access (Code Execution) | User | 0 | PC[22:1] | | | 0 |
| | | 0xxx xxxx xxxx xxxx xxxx xxx0 | | | | |
| TBLRD/TBLWT (Byte/Word Read/Write) | User | TBLPAG[7:0] | | Data EA[15:0] | | |
| | | 0xxx xxxx | | xxxx xxxx xxxx xxxx | | |
| | Configuration | TBLPAG[7:0] | | Data EA[15:0] | | |
| | | 1xxx xxxx | | xxxx xxxx xxxx xxxx | | |

**FIGURE 4-16: DATA ACCESS FROM PROGRAM SPACE ADDRESS GENERATION**

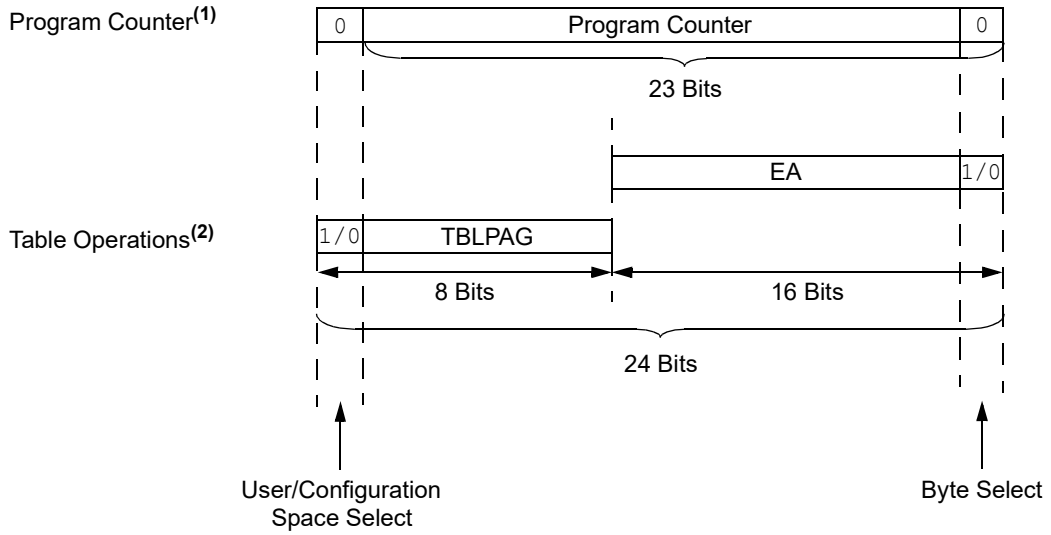


**Note 1:** The Least Significant bit (LSb) of Program Space addresses is always fixed as '0' to maintain word alignment of data in the Program and Data Spaces.

**2:** Table operations are not required to be word-aligned. Table Read operations are permitted in the configuration memory space.


© 2017-2021 Microchip Technology Inc.

#### 4.5.5.1 Data Access from Program Memory Using Table Instructions

The TBLRDL and TBLWTL instructions offer a direct method of reading or writing the lower word of any address within the Program Space without going through Data Space. The TBLRDH and TBLWTH instructions are the only method to read or write the upper eight bits of a Program Space word as data.

The PC is incremented by two for each successive 24-bit program word. This allows program memory addresses to directly map to Data Space addresses. Program memory can thus be regarded as two 16-bit wide word address spaces, residing side by side, each with the same address range. TBLRDL and TBLWTL access the space that contains the least significant data word. TBLRDH and TBLWTH access the space that contains the upper data byte.

Two table instructions are provided to move byte or word-sized (16-bit) data to and from Program Space. Both function as either byte or word operations.

- TBLRDL (Table Read Low):
  - In Word mode, this instruction maps the lower word of the Program Space location (P[15:0]) to a data address (D[15:0])
  - In Byte mode, either the upper or lower byte of the lower program word is mapped to the lower byte of a data address. The upper byte is selected when Byte Select is '1'; the lower byte is selected when it is '0'.
- TBLRDH (Table Read High):
  - In Word mode, this instruction maps the entire upper word of a program address (P[23:16]) to a data address. The 'phantom' byte (D[15:8]) is always '0'.
  - In Byte mode, this instruction maps the upper or lower byte of the program word to D[7:0] of the data address in the TBLRDL instruction. The data are always '0' when the upper 'phantom' byte is selected (Byte Select = 1).

In a similar fashion, two table instructions, TBLWTH and TBLWTL, are used to write individual bytes or words to a Program Space address. The details of their operation are explained in **Section 5.0 "Flash Program Memory"**.

For all table operations, the area of program memory space to be accessed is determined by the Table Page register (TBLPAG). TBLPAG covers the entire program memory space of the device, including user application and configuration spaces. When TBLPAG[7] = 0, the table page is located in the user memory space. When TBLPAG[7] = 1, the page is located in configuration space.

**FIGURE 4-17: ACCESSING PROGRAM MEMORY WITH TABLE INSTRUCTIONS**

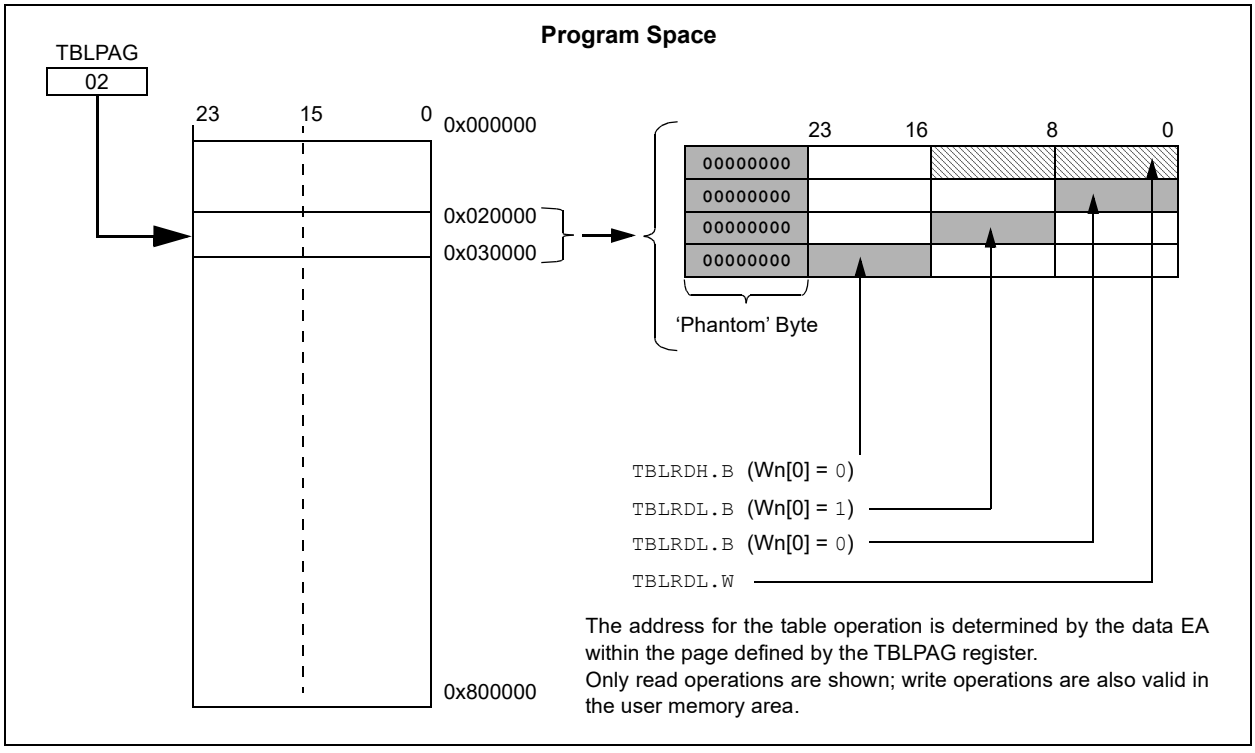

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 5.0 FLASH PROGRAM MEMORY

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Dual Partition Flash Program Memory"** (www.microchip.com/DS70005156) in the *"dsPIC33/PIC24 Family Reference Manual"*).

**2:** Some registers and associated bits described in this section may not be available on all devices.

The dsPIC33CK256MP508 family devices contain internal Flash program memory for storing and executing application code. The memory is readable, writable and erasable during normal operation over the entire VDD range.

Flash memory can be programmed in three ways:

- In-Circuit Serial Programming™ (ICSP™) programming capability
- Enhanced In-Circuit Serial Programming (Enhanced ICSP)
- Run-Time Self-Programming (RTSP)

ICSP allows for a dsPIC33CK256MP508 family device to be serially programmed while in the end application circuit. This is done with a Programming Clock and Programming Data (PGCx/PGDx) line, and three other lines for power (VDD), ground (VSS) and Master Clear (MCLR). This allows customers to manufacture boards with unprogrammed devices and then program the device just before shipping the product. This also allows the most recent firmware or a custom firmware to be programmed.

Enhanced In-Circuit Serial Programming uses an on-board bootloader, known as the Program Executive, to manage the programming process. Using an SPI data frame format, the Program Executive can erase, program and verify program memory. For more information on Enhanced ICSP, see the device programming specification.

RTSP is accomplished using `TBLRD` (Table Read) and `TBLWT` (Table Write) instructions. With RTSP, the user application can write program memory data, two instruction words or a row at a time, and erase a program memory page.

### 5.1 Table Instructions and Flash Programming

Regardless of the method used, all programming of Flash memory is done with the Table Read and Table Write instructions. These allow direct read and write access to the program memory space from the data memory while the device is in normal operating mode. The 24-bit target address in the program memory is formed using bits[7:0] of the TBLPAG register and the Effective Address (EA) from a W register, specified in the table instruction, as shown in Figure 5-1. The `TBLRDL` and `TBLWTL` instructions are used to read or write to bits[15:0] of program memory. `TBLRDL` and `TBLWTL` can access program memory in both Word and Byte modes. The `TBLRDH` and `TBLWTH` instructions are used to read or write to bits[23:16] of program memory. `TBLRDH` and `TBLWTH` can also access program memory in Word or Byte mode.

**FIGURE 5-1: ADDRESSING FOR TABLE REGISTERS**

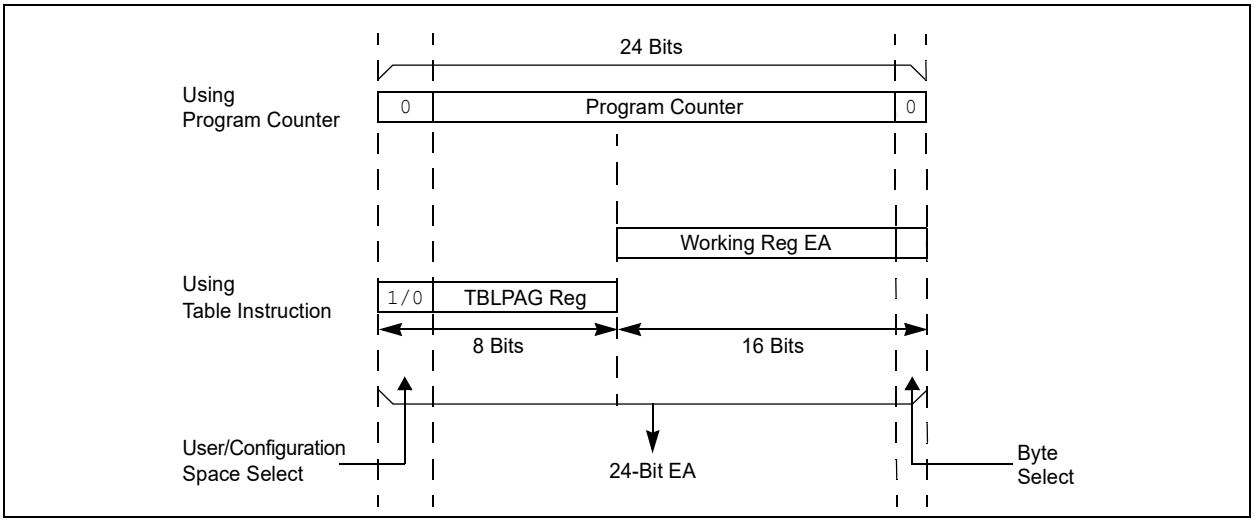

## 5.2 RTSP Operation

The dsPIC33CK256MP508 family Flash program memory array is organized into rows of 128 instructions or 384 bytes. RTSP allows the user application to erase a single page (eight rows or 1024 instructions) of memory at a time and to program one row at a time. It is possible to program two instructions at a time as well.

The page erase and single row write blocks are edge-aligned, from the beginning of program memory, on boundaries of 3072 bytes and 384 bytes, respectively. Table 33-18 in **Section 33.0 "Electrical Characteristics"** lists the typical erase and programming times.

Row programming is performed by loading 384 bytes into data memory and then loading the address of the first byte in that row into the NVMSRCADRL/H register. Once the write has been initiated, the device will automatically load the write latches, and increment the NVMSRCADRL/H and the NVMADR(U) registers until all bytes have been programmed. The RPDF bit (NVMCON[9]) selects the format of the stored data in RAM to be either compressed or uncompressed. See Figure 5-2 for data formatting. Compressed data help to reduce the amount of required RAM by using the upper byte of the second word for the MSB of the second instruction.

The basic sequence for RTSP word programming is to use the `TBLWTL` and `TBLWTH` instructions to load two of the 24-bit instructions into the write latches found in configuration memory space. Refer to Figure 4-1 through Figure 4-5 for write latch addresses. Programming is performed by unlocking and setting the control bits in the NVMCON register as follows:

1. Write 0x55 to NVMKEY.
2. Write 0xAA to NVMKEY.
3. Set the WR bit (NVMCON[15]) as a single operation.

All erase and program operations may optionally use the NVM interrupt to signal the successful completion of the operation. For example, when performing Flash write operations on the Inactive Partition in Dual Partition mode, where the CPU remains running, it is necessary to wait for the NVM interrupt before programming the next block of Flash program memory.

**Note:** MPLAB® XC16 provides a built-in C language function for unlocking and modifying the NVMCON register:

```
__builtin_write_NVM()
```

For more information, see the *"MPLAB® XC16 C Compiler User's Guide"* (DS50002071).

**FIGURE 5-2: UNCOMPRESSED/ COMPRESSED FORMAT**

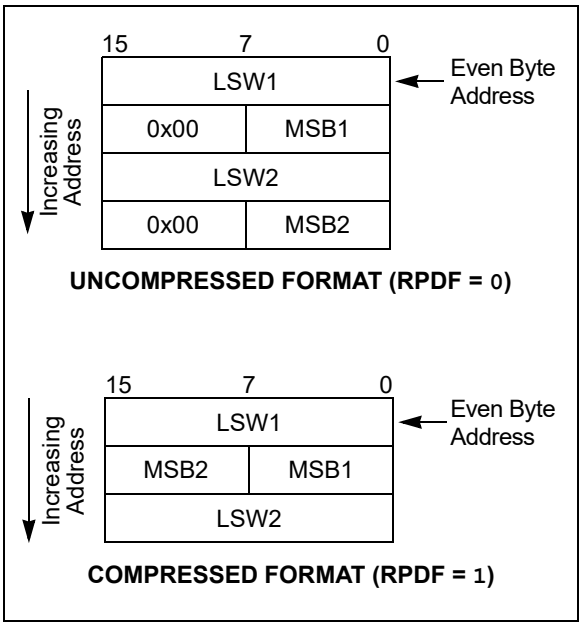



© 2017-2021 Microchip Technology Inc.

## 5.3 Programming Operations

A complete programming sequence is necessary for programming or erasing the internal Flash in RTSP mode. The processor stalls (waits) until the programming operation is finished. Setting the WR bit (NVMCON[15]) starts the operation and the WR bit is automatically cleared when the operation is finished.

### 5.3.1 PROGRAMMING ALGORITHM FOR FLASH PROGRAM MEMORY

Programmers can program two adjacent words (24 bits x 2) of Program Flash Memory at a time on every other word address boundary (0x000002, 0x000006, 0x00000A, etc.). To do this, it is necessary to erase the page that contains the desired address of the location the user wants to change. For protection against accidental operations, the write initiate sequence for NVMKEY must be used to allow any erase or program operation to proceed. After the programming command has been executed, the user application must wait for the programming time until programming is complete. The two instructions following the start of the programming sequence should be NOPs. Refer to Example 5-1 for Flash read and write operations.

**EXAMPLE 5-1: FLASH WRITE/READ**

```
////////Flash write ////////////////////////
//Sample code for writing 0x123456 to address locations 0x10000 / 10002
NVMCON = 0x4001;
TBLPAG = 0xFA;                    // write latch upper address
NVMADR = 0x0000;                  // set target write address of general segment
NVMADRU = 0x0001;
__builtin_tblwtl(0, 0x3456);      // load write latches
__builtin_tblwth (0,0x12);

__builtin_tblwtl(2, 0x3456);      // load write latches
__builtin_tblwth (2,0x12);

asm   volatile ("disi #5");
__builtin_write_NVM();
while (_WR == 1 ) ;
////////////Flash Read///////////////
//Sample code to read the Flash content of address 0x10000
// readDataL/ readDataH variables need to defined
TBLPAG = 0x0001;
readDataL = __builtin_tblrdl(0x0000);
readDataH = __builtin_tblrdh(0x0000);
```

### 5.3.2 ERROR CORRECTING CODE (ECC)

In order to improve program memory performance and durability, these devices include Error Correcting Code (ECC) functionality as an integral part of the Flash memory controller. ECC can determine the presence of single bit errors in program data, including which bit is in error, and correct the data automatically without user intervention. ECC cannot be disabled.

When data are written to program memory, ECC generates a 7-bit Hamming code parity value for every two (24-bit) instruction words. The data are stored in blocks of 48 data bits and 7 parity bits; parity data are not memory-mapped and are inaccessible. When the data are read back, the ECC calculates the parity on them and compares them to the previously stored parity value. If a parity mismatch occurs, there are two possible outcomes:

- Single bit error has occurred and has been automatically corrected on read-back.
- Double-bit error has occurred and the read data are not changed.

Single bit error occurrence can be identified by the state of the ECCSBEIF (IFS0[13]) bit. An interrupt can be generated when the corresponding interrupt enable bit is set, ECCSBEIE (IEC0[13]). The ECCSTATL register contains the parity information for single bit errors. The SECOUT[7:0] bits field contains the expected calculated SEC parity and the SECIN[7:0] bits contain the actual value from a Flash read operation. The SECSYNDx bits (ECCSTATH[7:0]) indicate the bit position of the single bit error within the 48-bit pair of instruction words. When no error is present, SECINx equals SECOUTx and SECSYNDx is zero. The ECCSTATL and ECCSTATH registers will only update and be valid when an error has occurred, or when including fault injection is enabled and an ECCADDR match occurs.

Double-bit errors result in a generic hard trap. The ECCDBE bit (INTCON4[1]) will be set to identify the source of the hard trap. If no Interrupt Service Routine is implemented for the hard trap, a device Reset will also occur. The ECCSTATH register contains double-bit error status information. The DEDOUT bit is the expected calculated DED parity and DEDIN bit is the actual value from a Flash read operation. When no error is present, DEDIN equals DEDOUT.

### 5.3.3 ECC FAULT INJECTION

To test Fault handling, an EEC error can be generated. Both single and double-bit errors can be generated in both the read and write data paths. Read path Fault injection first reads the Flash data and then modifies them prior to entering the ECC logic. Write path Fault injection modifies the actual data prior to them being written into the target Flash and will cause an EEC error on a subsequent Flash read. The following procedure is used to inject a Fault:

1. Load the Flash target address into the ECCADDR register.
2. Select 1st Fault bit determined by FLT1PTRx (ECCCONH[7:0]). The target bit is inverted to create the Fault.
3. If a double Fault is desired, select the 2nd Fault bit determined by FLT2PTRx (ECCCONH[15:8]); otherwise, set to all '1's.
4. Write 0x55 to NVMKEY.
5. Write 0xAA to NVMKEY.
6. Set the FLTINJ bit (ECCCONL[0]) in a single operation to enable the ECC Fault injection logic.
7. Perform a read or write to the Flash target address.


© 2017-2021 Microchip Technology Inc.

## 5.4 Flash OTP by ICSP™ Write Inhibit

ICSP Write Inhibit is an access restriction feature that, when activated, restricts all of Flash memory. Once activated, ICSP Write Inhibit permanently prevents ICSP Flash programming and erase operations, and cannot be deactivated. This feature is intended to prevent alteration of Flash memory contents, with behavior similar to One-Time-Programmable (OTP) devices.

RTSP, including erase and programming operations, is not restricted when ICSP Write Inhibit is activated; however, code to perform these actions must be programmed into the device before ICSP Write Inhibit is activated. This allows for a bootloader-type application to alter Flash contents with ICSP Write Inhibit activated.

Entry into ICSP and Enhanced ICSP modes is not affected by ICSP Write Inhibit. In these modes, it will continue to be possible to read configuration memory space and any user memory space regions which are not code protected. With ICSP writes inhibited, an attempt to set WR (NVMCON[15]) = 1 will maintain WR = 0, and instead, set WRERR (NVMCON[13]) = 1. All Enhanced ICSP erase and programming commands will have no effect with self-checked programming commands returning a FAIL response opcode (PASS if the destination already exactly matched the requested programming data).

Once ICSP Write Inhibit is activated, it is not possible for a device executing in Debug mode to erase/write Flash, nor can a debug tool switch the device to Production mode. ICSP Write Inhibit should therefore only be activated on devices programmed for production.

### 5.4.1 ACTIVATING ICSP™ WRITE INHIBIT

**Caution:** It is not possible to deactivate ICSP Write Inhibit.

ICSP Write Inhibit is activated by executing a pair of NVMCON double-word programming commands to save two 16-bit activation values in the configuration memory space. The target NVM addresses and values required for activation are shown in Table 5-1. Once both addresses contain their activation values, ICSP Write Inhibit will take permanent effect on the next device Reset. Neither address can be reset, erased or otherwise modified, through any means, after being successfully programmed, even if one of the addresses has not been programmed.

Only the lower 16 data bits stored at the activation addresses are evaluated; the upper 8 bits and second 24-bit word written by the double-word programming (NVMOP[3:0]) should be written as '0's. The addresses can be programmed in any order and also during separate ICSP/Enhanced ICSP/RTSP sessions, but any attempt to program an incorrect 16-bit value or use a row programming operation to program the values will be aborted without altering the existing data.

**TABLE 5-1: ICSP™ WRITE INHIBIT ACTIVATION ADDRESSES AND DATA**

| | Configuration Memory Address | ICSP™ Write Inhibit Activation Value |
|---|---|---|
| Write Lock 1 | 0x801034 | 0x006D63 |
| Write Lock 2 | 0x801038 | 0x006870 |

## 5.5 Dual Partition Flash Configuration

For dsPIC33CK256MP508 devices operating in Dual Partition Flash Program Memory modes, the Inactive Partition can be erased and programmed without stalling the processor. The same programming algorithms are used for programming and erasing the Flash in the Inactive Partition, as described in **Section 5.2 "RTSP Operation"**. On top of the page erase option, the entire Flash memory of the Inactive Partition can be erased by configuring the NVMOP[3:0] bits in the NVMCON register.

| | |
|---|---|
| **Note 1:** | The application software to be loaded into the Inactive Partition will have the address of the Active Partition. The bootloader firmware will need to offset the address by 0x400000 in order to write to the Inactive Partition. |

### 5.5.1 FLASH PARTITION SWAPPING

The Boot Sequence Number is used for determining the Active Partition at start-up and is encoded within the FBTSEQ Configuration register bits. Unlike most Configuration registers, which only utilize the lower 16 bits of the program memory, FBTSEQ is a 24-bit Configuration Word. The Boot Sequence Number (BSEQ) is a 12-bit value and is stored in FBTSEQ twice. The true value is stored in bits, FBTSEQ[11:0], and its complement is stored in bits, FBTSEQ[23:12]. At device Reset, the sequence numbers are read and the partition with the lowest sequence number becomes the Active Partition. If one of the Boot Sequence Numbers is invalid, the device will select the partition with the valid Boot Sequence Number, or default to Partition 1 if both sequence numbers are invalid. See **Section 30.0 "Special Features"** for more information.

The `BOOTSWP` instruction provides an alternative means of swapping the Active and Inactive Partitions (soft swap) without the need for a device Reset. The `BOOTSWP` must always be followed by a `GOTO` instruction. The `BOOTSWP` instruction swaps the Active and Inactive Partitions, and the PC vectors to the location specified by the `GOTO` instruction in the newly Active Partition.

It is important to note that interrupts should temporarily be disabled while performing the soft swap sequence and that after the partition swap, all peripherals and interrupts which were enabled remain enabled. Additionally, the RAM and stack will maintain state after the switch. As a result, it is recommended that applications using soft swaps jump to a routine that will reinitialize the device in order to ensure the firmware runs as expected. The Configuration registers will have no effect during a soft swap.

For robustness of operation, in order to execute the `BOOTSWP` instruction, it is necessary to execute the NVM unlocking sequence as follows:

1. Write 0x55 to NVMKEY.
2. Write 0xAA to NVMKEY.
3. Execute the `BOOTSWP` instruction.

If the unlocking sequence is not performed, the `BOOTSWP` instruction will be executed as a forced `NOP` and a `GOTO` instruction, following the `BOOTSWP` instruction, will be executed, causing the PC to jump to that location in the current operating partition.

The SFTSWP and P2ACTIV bits in the NVMCON register are used to determine a successful swap of the Active and Inactive Partitions, as well as which partition is active. After the `BOOTSWP` and `GOTO` instructions, the SFTSWP bit should be polled to verify the partition swap has occurred and then cleared for the next panel swap event.

### 5.5.2 DUAL PARTITION MODES

While operating in Dual Partition mode, the dsPIC33CK256MP508 family devices have the option for both partitions to have their own defined security segments, as shown in Figure 30-3. Alternatively, the device can operate in Protected Dual Partition mode, where Partition 1 becomes permanently erase/write-protected. Protected Dual Partition mode allows for a "Factory Default" mode, which provides a fail-safe backup image to be stored in Partition 1.

dsPIC33CK256MP508 family devices can also operate in Privileged Dual Partition mode, where additional security protections are implemented to allow for protection of intellectual property when multiple parties have software within the device. In Privileged Dual Partition mode, both partitions place additional restrictions on the FBSLIM register. These prevent changes to the size of the Boot Segment and General Segment, ensuring that neither segment will be altered.


© 2017-2021 Microchip Technology Inc.

**FIGURE 5-3: RELATIONSHIP BETWEEN PARTITIONS 1/2 AND ACTIVE/INACTIVE PARTITIONS**

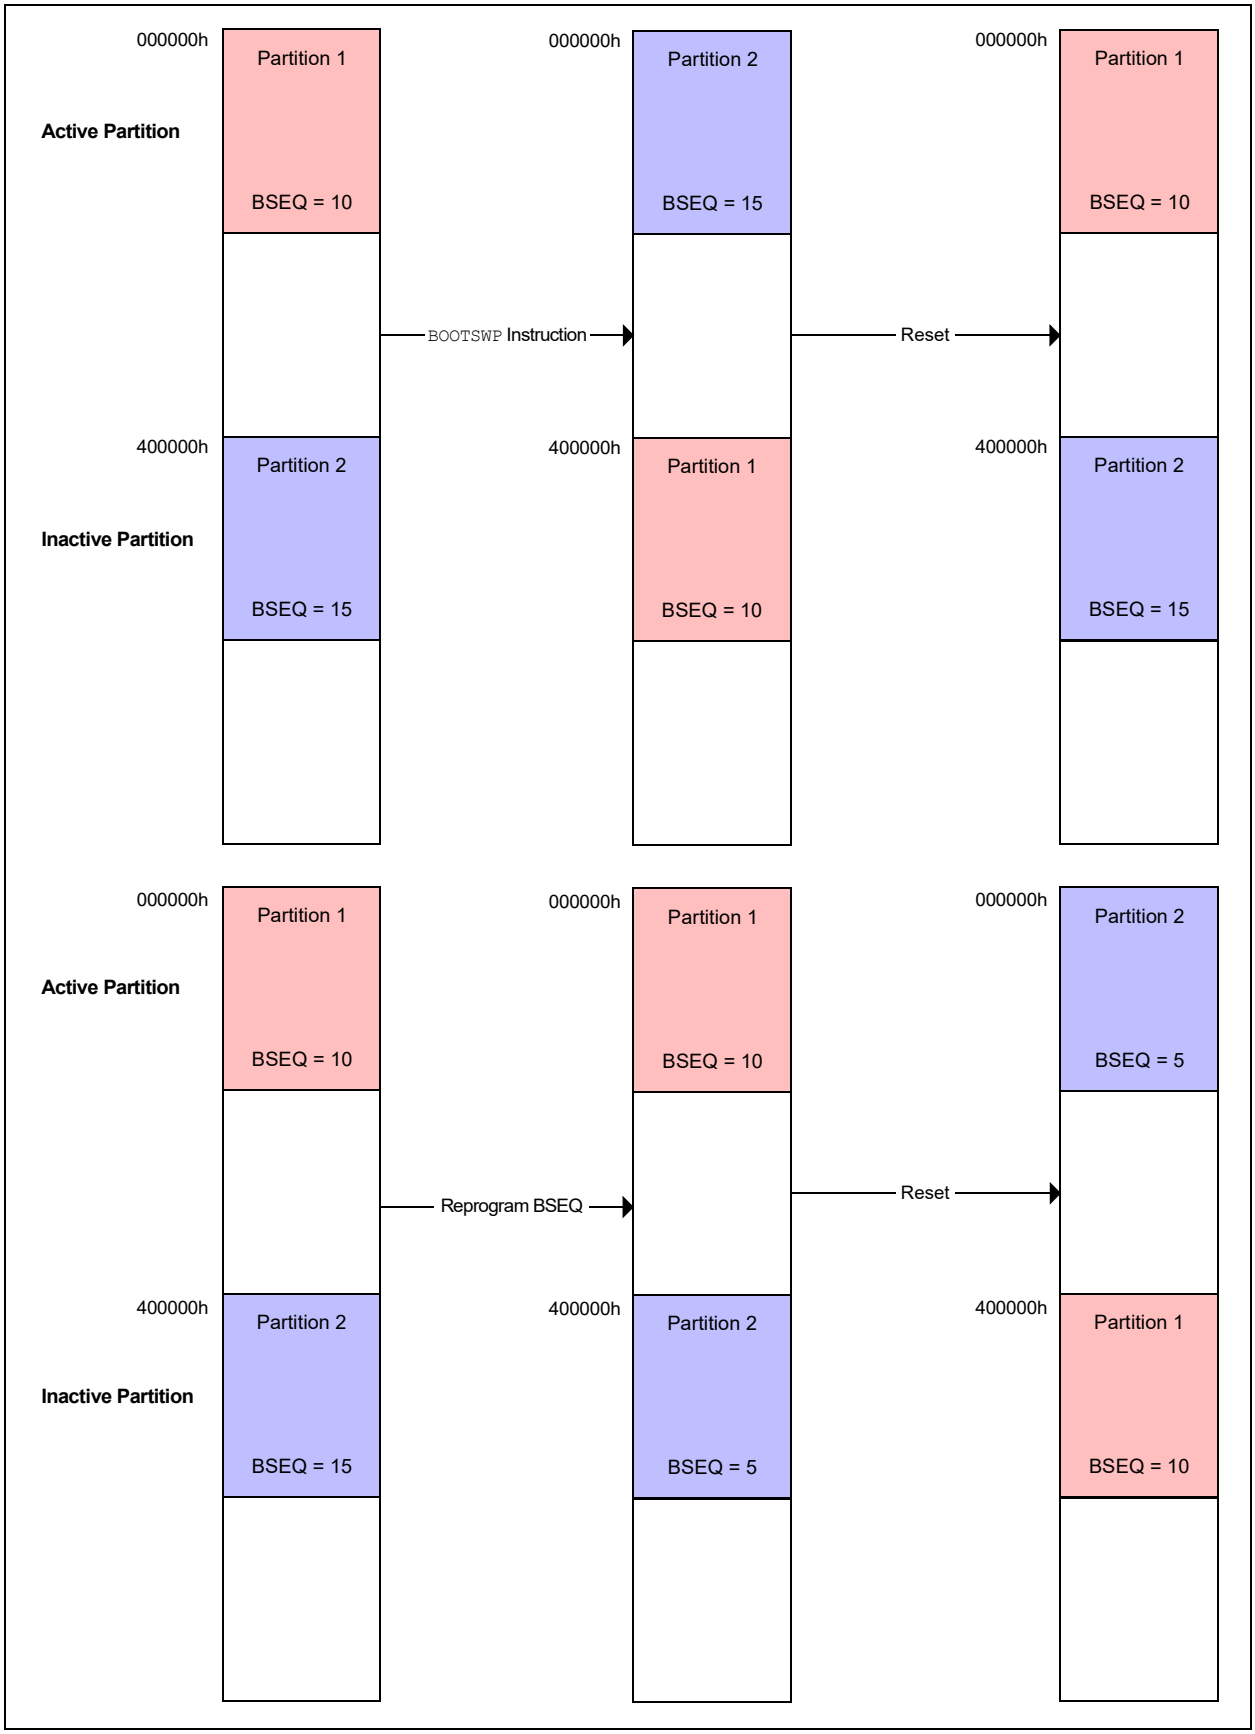

### 5.5.3 PROGRAM FLASH MEMORY CONTROL REGISTERS

Five SFRs are used to write and erase the Program Flash Memory: NVMCON, NVMKEY, NVMADR, NVMADRU and NVMSRCADRL/H.

The NVMCON register (Register 5-1) selects the operation to be performed (page erase, word/row program, Inactive Partition erase) and initiates the program or erase cycle.

NVMKEY (Register 5-4) is a write-only register that is used for write protection. To start a programming or erase sequence, the user application must consecutively write 0x55 and 0xAA to the NVMKEY register.

There are two NVM Address registers: NVMADRU and NVMADR. These two registers, when concatenated, form the 24-bit Effective Address (EA) of the selected word/row for programming operations, or the selected page for erase operations. The NVMADRU register is used to hold the upper eight bits of the EA, while the NVMADR register is used to hold the lower 16 bits of the EA.

For row programming operation, data to be written to Program Flash Memory are written into data memory space (RAM) at an address defined by the NVMSRCADRL/H register (location of first element in row programming data).


© 2017-2021 Microchip Technology Inc.

**REGISTER 5-1: NVMCON: NONVOLATILE MEMORY (NVM) CONTROL REGISTER**

| R/SO-0(1) | R/W-0(1) | R/C-0(1) | R/W-0 | R/C-0 | R-0 | R/W-0 | R/C-0 |
|---|---|---|---|---|---|---|---|
| WR | WREN | WRERR | NVMSIDL(2) | SFTSWP | P2ACTIV | RPDF | URERR |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0(1) | R/W-0(1) | R/W-0(1) | R/W-0(1) |
|---|---|---|---|---|---|---|---|
| — | — | — | — | NVMOP3(3,4) | NVMOP2(3,4) | NVMOP1(3,4) | NVMOP0(3,4) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | SO = Settable Only bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **WR:** Write Control bit(1)
- 1 = Initiates a Flash memory program or erase operation; the operation is self-timed and the bit is cleared by hardware once the operation is complete
- 0 = Program or erase operation is complete and inactive

bit 14 **WREN:** Write Enable bit(1)
- 1 = Enables Flash program/erase operations
- 0 = Inhibits Flash program/erase operations

bit 13 **WRERR:** Write Sequence Error Flag bit(1)
- 1 = An improper program or erase sequence attempt, or termination has occurred (bit is set automatically on any set attempt of the WR bit)
- 0 = The program or erase operation completed normally

bit 12 **NVMSIDL:** NVM Stop in Idle Control bit(2)
- 1 = Flash voltage regulator goes into Standby mode during Idle mode
- 0 = Flash voltage regulator is active during Idle mode

bit 11 **SFTSWP:** Partition Soft Swap Status bit
- 1 = Partitions have been successfully swapped using the BOOTSWP instruction (soft swap)
- 0 = Awaiting successful partition swap using the BOOTSWP instruction or a device Reset will determine the Active Partition based on the FBTSEQ register

bit 10 **P2ACTIV:** Partition 2 Active Status bit
- 1 = Partition 2 Flash is mapped into the active region
- 0 = Partition 1 Flash is mapped into the active region

bit 9 **RPDF:** Row Programming Data Format bit
- 1 = Row data to be stored in RAM are in compressed format
- 0 = Row data to be stored in RAM are in uncompressed format

bit 8 **URERR:** Row Programming Data Underrun Error bit
- 1 = Indicates row programming operation has been terminated
- 0 = No data underrun error is detected

bit 7-4 **Unimplemented:** Read as '0'

**Note 1:** These bits can only be reset on a POR.

**2:** If this bit is set, there will be minimal power savings (IIDLE), and upon exiting Idle mode, there is a delay (TVREG) before Flash memory becomes operational.

**3:** All other combinations of NVMOP[3:0] are unimplemented.

**4:** Execution of the PWRSAV instruction is ignored while any of the NVM operations are in progress.

**5:** Two adjacent words on a 4-word boundary are programmed during execution of this operation.

**REGISTER 5-1: NVMCON: NONVOLATILE MEMORY (NVM) CONTROL REGISTER (CONTINUED)**

bit 3-0 **NVMOP[3:0]:** NVM Operation Select bits(1,3,4)

1111 = Reserved
1110 = User memory bulk erase operation
1101 = Reserved
1100 = Reserved
1011 = Reserved
1010 = Reserved
1001 = Reserved
1000 = Boot mode (FBOOT) double-word program operation
0111 = Reserved
0101 = Reserved
0100 = Inactive Partition memory erase operation
0011 = Memory page erase operation
0010 = Memory row program operation
0001 = Memory double-word operation(5)
0000 = Reserved

**Note 1:** These bits can only be reset on a POR.

**2:** If this bit is set, there will be minimal power savings ($I_{IDLE}$), and upon exiting Idle mode, there is a delay ($T_{VREG}$) before Flash memory becomes operational.

**3:** All other combinations of NVMOP[3:0] are unimplemented.

**4:** Execution of the PWRSAV instruction is ignored while any of the NVM operations are in progress.

**5:** Two adjacent words on a 4-word boundary are programmed during execution of this operation.


© 2017-2021 Microchip Technology Inc.

**REGISTER 5-2: NVMADR: NONVOLATILE MEMORY LOWER ADDRESS REGISTER**

| R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
|---|---|---|---|---|---|---|---|
| NVMADR[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
|---|---|---|---|---|---|---|---|
| NVMADR[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **NVMADR[15:0]:** Nonvolatile Memory Lower Write Address bits
Selects the lower 16 bits of the location to program or erase in Program Flash Memory. This register may be read or written to by the user application.

**REGISTER 5-3: NVMADRU: NONVOLATILE MEMORY UPPER ADDRESS REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
|---|---|---|---|---|---|---|---|
| NVMADRU[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **NVMADRU[23:16]:** Nonvolatile Memory Upper Write Address bits
Selects the upper eight bits of the location to program or erase in Program Flash Memory. This register may be read or written to by the user application.

**REGISTER 5-4: NVMKEY: NONVOLATILE MEMORY KEY REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| W-0 | W-0 | W-0 | W-0 | W-0 | W-0 | W-0 | W-0 |
|---|---|---|---|---|---|---|---|
| NVMKEY[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as ‘0’

bit 7-0 **NVMKEY[7:0]:** NVM Key Register bits (write-only)


© 2017-2021 Microchip Technology Inc.

**REGISTER 5-5: NVMSRCADRL: NVM SOURCE DATA ADDRESS REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| NVMSRCADR[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| NVMSRCADR[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **NVMSRCADR[15:0]:** NVM Source Data Address bits
The RAM address of the data to be programmed into Flash when the NVMOP[3:0] bits are set to row programming.

**REGISTER 5-6: NVMSRCADRH: NVM SOURCE DATA ADDRESS REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| NVMSRCADR[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **NVMSRCADR[23:16]:** NVM Source Data Address bits
The RAM address of the data to be programmed into Flash when the NVMOP[3:0] bits are set to row programming.

### 5.5.4 ECC CONTROL REGISTERS

**REGISTER 5-7: ECCCONL: ECC FAULT INJECTION CONFIGURATION REGISTER LOW**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | FLTINJ |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-1 **Unimplemented:** Read as '0'

bit 0 **FLTINJ:** Fault Injection Sequence Enable bit
1 = Enabled
0 = Disabled

**REGISTER 5-8: ECCCONH: ECC FAULT INJECTION CONFIGURATION REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FLT2PTR[7:0] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FLT1PTR[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **FLT2PTR[7:0]:** ECC Fault Injection Bit Pointer 2 bits
11111111-00111000 = No Fault injection occurs
00110111 = Fault injection (bit inversion) occurs on bit 55 of ECC bit order
•
•
•
00000001 = Fault injection (bit inversion) occurs on bit 1 of ECC bit order
00000000 = Fault injection (bit inversion) occurs on bit 0 of ECC bit order

bit 0 **FLT1PTR[7:0]:** ECC Fault Injection Bit Pointer 1 bits
11111111-00111000 = No Fault injection occurs
00110111 = Fault injection occurs on bit 55 of ECC bit order
•
•
•
00000001 = Fault injection occurs on bit 1 of ECC bit order
00000000 = Fault injection occurs on bit 0 of ECC bit order


© 2017-2021 Microchip Technology Inc.

**REGISTER 5-9: ECCADDRL: ECC FAULT INJECT ADDRESS COMPARE REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ECCADDR[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ECCADDR[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **ECCADDR[15:0]:** ECC Fault Injection NVM Address Match Compare bits

**REGISTER 5-10: ECCADDRH: ECC FAULT INJECT ADDRESS COMPARE REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ECCADDR[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **ECCADDR[23:16]:** ECC Fault Injection NVM Address Match Compare bits

**REGISTER 5-11: ECCSTATL: ECC SYSTEM STATUS DISPLAY REGISTER LOW**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| SECOUT[7:0] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| SECIN[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **SECOUT[7:0]:** Calculated Single Error Correction Parity Value bits

bit 7-0 **SECIN[7:0]:** Read Single Error Correction Parity Value bits
SECIN[7:0] bits are the actual parity value of a Flash read operation.

**REGISTER 5-12: ECCSTATH: ECC SYSTEM STATUS DISPLAY REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | DEDOUT | DEDIN |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| SECSYND[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9 **DEDOUT:** Calculated Dual Bit Error Detection Parity bit

bit 8 **DEDIN:** Read Dual Bit Error Detection Parity bit
DEDIN is the actual parity value of a Flash read operation.

bit 7-0 **SECSYND[7:0]:** Calculated ECC Syndrome Value bits
Indicates the bit location that contains the error.


© 2017-2021 Microchip Technology Inc.

## 6.0 RESETS

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Reset"** (www.microchip.com/DS70602) in the *"dsPIC33/PIC24 Family Reference Manual"*.

**2:** Some registers and associated bits described in this section may not be available on all devices.

The Reset module combines all Reset sources and controls the device Master Reset Signal, $\overline{SYSRST}$. The following is a list of device Reset sources:

- POR: Power-on Reset
- BOR: Brown-out Reset
- $\overline{MCLR}$: Master Clear Pin Reset
- SWR: RESET Instruction
- WDTO: Watchdog Timer Time-out Reset
- CM: Configuration Mismatch Reset
- TRAPR: Trap Conflict Reset
- IOPUWR: Illegal Condition Device Reset
  - Illegal Opcode Reset
  - Uninitialized W Register Reset
  - Security Reset

A simplified block diagram of the Reset module is shown in Figure 6-1.

Any active source of Reset will make the $\overline{SYSRST}$ signal active. On system Reset, some of the registers associated with the CPU and peripherals are forced to a known Reset state, and some are unaffected.

**Note:** Refer to the specific peripheral section or **Section 4.0 "Memory Organization"** of this data sheet for register Reset states.

All types of device Reset set a corresponding status bit in the RCON register to indicate the type of Reset (see Register 6-1).

A POR clears all the bits, except for the BOR and POR bits (RCON[1:0]) that are set. The user application can set or clear any bit, at any time, during code execution. The RCON bits only serve as status bits. Setting a particular Reset status bit in software does not cause a device Reset to occur.

The RCON register also has other bits associated with the Watchdog Timer and device power-saving states. The function of these bits is discussed in other sections of this data sheet.

**Note:** The status bits in the RCON register should be cleared after they are read so that the next RCON register value after a device Reset is meaningful.

For all Resets, the default clock source is determined by the FNOSC[2:0] bits in the FOSCSEL Configuration register. The value of the FNOSCx bits is loaded into the NOSC[2:0] (OSCCON[10:8]) bits on Reset, which in turn, initializes the system clock.

**FIGURE 6-1: RESET SYSTEM BLOCK DIAGRAM**

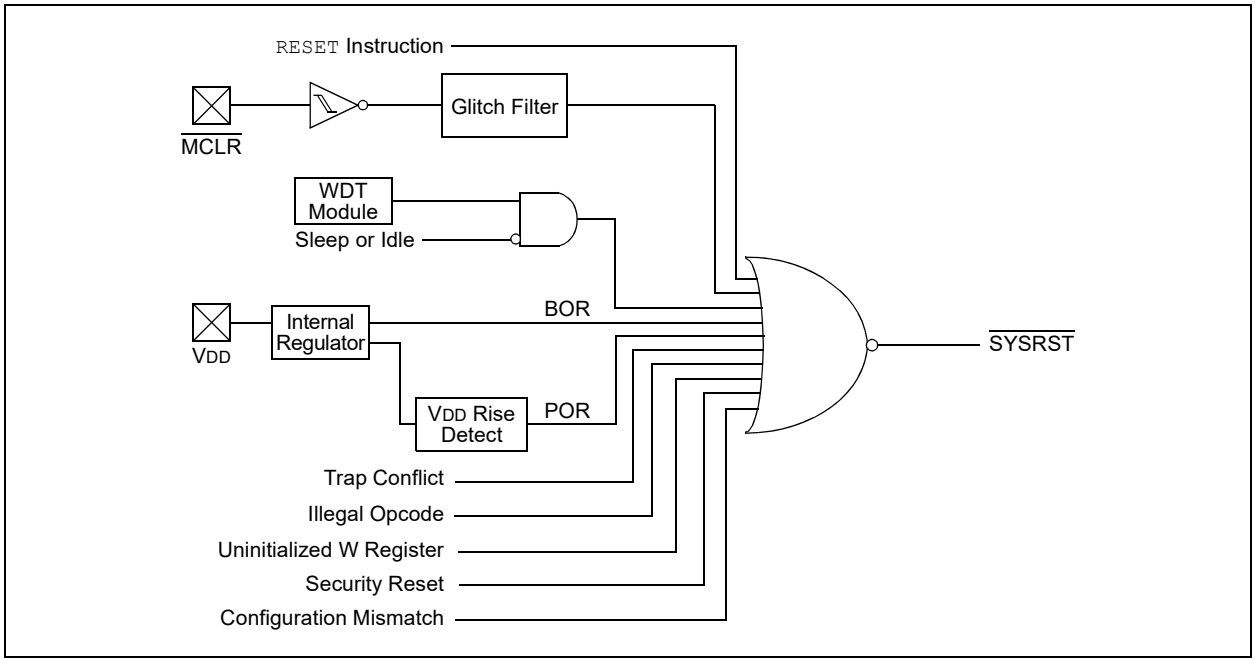

## 6.1 Reset Resources

Many useful resources are provided on the main product page of the Microchip website for the devices listed in this data sheet. This product page contains the latest updates and additional information.

### 6.1.1 KEY RESOURCES

- **"Reset"** (DS70602) in the *"dsPIC33/PIC24 Family Reference Manual"*
- Code Samples
- Application Notes
- Software Libraries
- Webinars
- All Related *"dsPIC33/PIC24 Family Reference Manual"* Sections
- Development Tools


© 2017-2021 Microchip Technology Inc.

**REGISTER 6-1: RCON: RESET CONTROL REGISTER(1)**

| R/W-0 | R/W-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TRAPR | IOPUWR | — | — | — | — | CM | VREGS |
| bit 15 | | | | | | | bit 8 |

| R/W-1 | R/W-0 | r-0 | R/W-0 | R/W-0 | R/W-0 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| EXTR | SWR | — | WDTO | SLEEP | IDLE | BOR | POR |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **TRAPR:** Trap Reset Flag bit
1 = A Trap Conflict Reset has occurred
0 = A Trap Conflict Reset has not occurred

bit 14 **IOPUWR:** Illegal Opcode or Uninitialized W Register Access Reset Flag bit
1 = An illegal opcode detection, an illegal address mode or Uninitialized W register used as an Address Pointer caused a Reset
0 = An illegal opcode or Uninitialized W Register Reset has not occurred

bit 13-10 **Unimplemented:** Read as '0'

bit 9 **CM:** Configuration Mismatch Flag bit
1 = A Configuration Mismatch Reset has occurred.
0 = A Configuration Mismatch Reset has not occurred

bit 8 **VREGS:** Voltage Regulator Standby During Sleep bit
1 = Voltage regulator is active during Sleep
0 = Voltage regulator goes into Standby mode during Sleep

bit 7 **EXTR:** External Reset ($\overline{MCLR}$) Pin bit
1 = A Master Clear (pin) Reset has occurred
0 = A Master Clear (pin) Reset has not occurred

bit 6 **SWR:** Software RESET (Instruction) Flag bit
1 = A RESET instruction has been executed
0 = A RESET instruction has not been executed

bit 5 **Reserved:** Read as '0'

bit 4 **WDTO:** Watchdog Timer Time-out Flag bit
1 = WDT time-out has occurred
0 = WDT time-out has not occurred

bit 3 **SLEEP:** Wake-up from Sleep Flag bit
1 = Device has been in Sleep mode
0 = Device has not been in Sleep mode

bit 2 **IDLE:** Wake-up from Idle Flag bit
1 = Device has been in Idle mode
0 = Device has not been in Idle mode

bit 1 **BOR:** Brown-out Reset Flag bit
1 = A Brown-out Reset has occurred
0 = A Brown-out Reset has not occurred

bit 0 **POR:** Power-on Reset Flag bit
1 = A Power-on Reset has occurred
0 = A Power-on Reset has not occurred

**Note 1:** All of the Reset status bits can be set or cleared in software. Setting one of these bits in software does not cause a device Reset.

**NOTES:**


© 2017-2021 Microchip Technology Inc.

# 7.0 INTERRUPT CONTROLLER

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Interrupts"** (www.microchip.com/DS70000600) in the *"dsPIC33/PIC24 Family Reference Manual"*.

**2:** Some registers and associated bits described in this section may not be available on all devices.

The dsPIC33CK256MP508 family interrupt controller reduces the numerous peripheral interrupt request signals to a single interrupt request signal to the dsPIC33CK256MP508 family CPU.

The interrupt controller has the following features:

- Six Processor Exceptions and Software Traps
- Seven User-Selectable Priority Levels
- Interrupt Vector Table (IVT) with a Unique Vector for each Interrupt or Exception Source
- Fixed Priority within a Specified User Priority Level
- Fixed Interrupt Entry and Return Latencies
- Alternate Interrupt Vector Table (AIVT) for Debug Support

## 7.1 Interrupt Vector Table

The dsPIC33CK256MP508 family Interrupt Vector Table (IVT), shown in Figure 7-1, resides in program memory, starting at location, 000004h. The IVT contains six non-maskable trap vectors and up to 246 sources of interrupts. In general, each interrupt source has its own vector. Each interrupt vector contains a 24-bit wide address. The value programmed into each interrupt vector location is the starting address of the associated Interrupt Service Routine (ISR).

Interrupt vectors are prioritized in terms of their natural priority. This priority is linked to their position in the vector table. Lower addresses generally have a higher natural priority. For example, the interrupt associated with Vector 0 takes priority over interrupts at any other vector address.

### 7.1.1 ALTERNATE INTERRUPT VECTOR TABLE

The Alternate Interrupt Vector Table (AIVT), shown in Figure 7-2, is available only when the Boot Segment (BS) is defined and the AIVT has been enabled. To enable the Alternate Interrupt Vector Table, the Configuration bit, AIVTDIS in the FSEC register, must be programmed and the AIVTEN bit must be set (INTCON2[8] = 1). When the AIVT is enabled, all interrupt and exception processes use the alternate vectors instead of the default vectors. The AIVT begins at the start of the last page of the Boot Segment, defined by BSLIM[12:0]. The second half of the page is no longer usable space. The Boot Segment must be at least two pages to enable the AIVT.

**Note:** Although the Boot Segment must be enabled in order to enable the AIVT, application code does not need to be present inside of the Boot Segment. The AIVT (and IVT) will inherit the Boot Segment code protection.

The AIVT supports debugging by providing a means to switch between an application and a support environment without requiring the interrupt vectors to be reprogrammed. This feature also enables switching between applications for evaluation of different software algorithms at run time.

## 7.2 Reset Sequence

A device Reset is not a true exception because the interrupt controller is not involved in the Reset process. The dsPIC33CK256MP508 family devices clear their registers in response to a Reset, which forces the PC to zero. The device then begins program execution at location, 0x000000. A GOTO instruction at the Reset address can redirect program execution to the appropriate start-up routine.

**Note:** Any unimplemented or unused vector locations in the IVT should be programmed with the address of a default interrupt handler routine that contains a RESET instruction.

**FIGURE 7-1: dsPIC33CK256MP508 FAMILY INTERRUPT VECTOR TABLE**

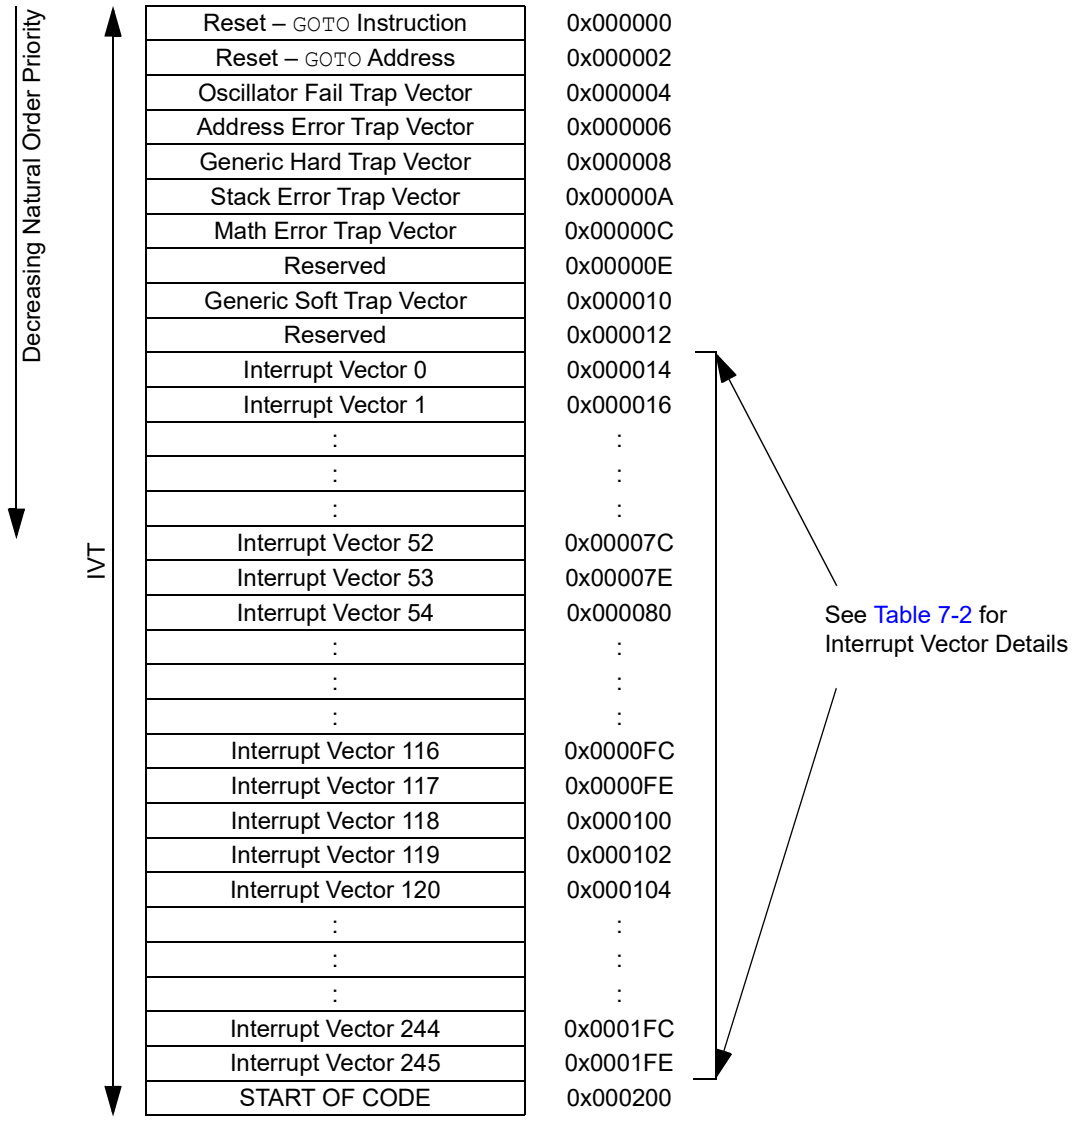


**Note:** In Dual Partition modes, each partition has a dedicated Interrupt Vector Table.


© 2017-2021 Microchip Technology Inc.

**FIGURE 7-2: dsPIC33CK256MP508 ALTERNATE INTERRUPT VECTOR TABLE(2)**

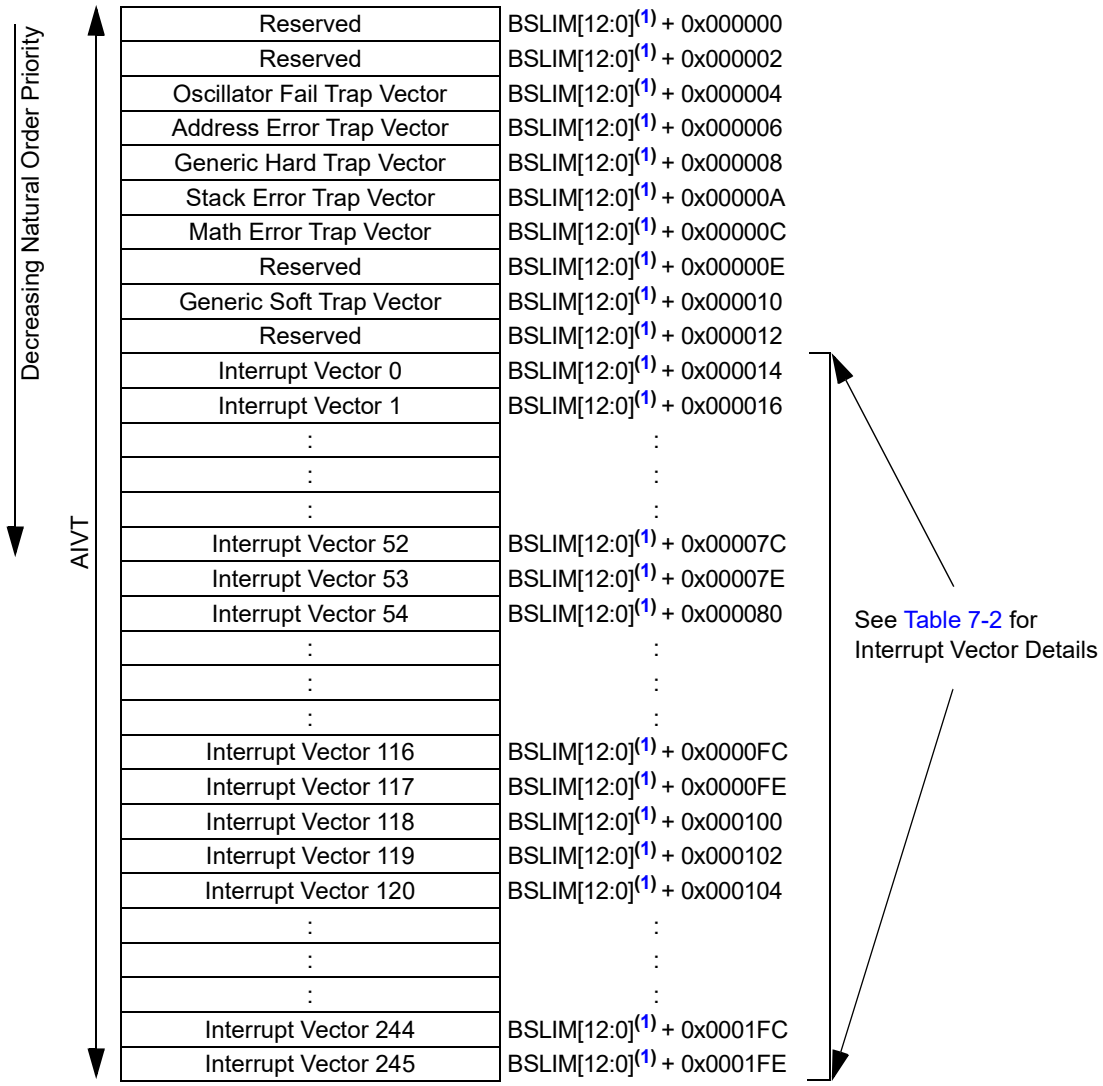


**Note 1:** The address depends on the size of the Boot Segment defined by BSLIM[12:0]: [(BSLIM[12:0] – 1) x 0x800] + Offset.

**2:** In Dual Partition modes, each partition has a dedicated Alternate Interrupt Vector Table (if enabled).

**TABLE 7-1: TRAP VECTOR DETAILS**

| Trap Description | MPLAB® XC16 Trap ISR Name | Vector # | IVT Address | Trap Bit Location | | | Priority |
|---|---|---|---|---|---|---|---|
| | | | | Interrupt Flag | Type | Enable | |
| Oscillator Failure | _OscillatorFail | 0 | 0x000004 | INTCON1[1] | — | — | 15 |
| Address Error | _AddressError | 1 | 0x000006 | INTCON1[3] | — | — | 14 |
| ECC Double-Bit Error | _HardTrapError | 2 | 0x000008 | INTCON4[1] | — | — | 13 |
| Software Generated Trap | _HardTrapError | 2 | 0x000008 | INTCON4[0] | — | INTCON2[13] | 13 |
| Stack Error | _StackError | 3 | 0x00000A | INTCON1[2] | — | — | 12 |
| Overflow Accumulator A | _MathError | 4 | 0x00000C | INTCON1[4] | INTCON1[14] | INTCON1[10] | 11 |
| Overflow Accumulator B | _MathError | 4 | 0x00000C | INTCON1[4] | INTCON1[13] | INTCON1[9] | 11 |
| Catastrophic Overflow Accumulator A | _MathError | 4 | 0x00000C | INTCON1[4] | INTCON1[12] | INTCON1[8] | 11 |
| Catastrophic Overflow Accumulator B | _MathError | 4 | 0x00000C | INTCON1[4] | INTCON1[11] | INTCON1[8] | 11 |
| Shift Accumulator Error | _MathError | 4 | 0x00000C | INTCON1[4] | INTCON1[7] | INTCON1[8] | 11 |
| Divide-by-Zero Error | _MathError | 4 | 0x00000C | INTCON1[4] | INTCON1[6] | INTCON1[8] | 11 |
| Reserved | Reserved | 5 | 0x00000E | — | — | — | — |
| DMT Software Error | _SoftTrapError | 6 | 0x000010 | INTCON3[15] | — | — | 9 |
| CAN Address Error | _SoftTrapError | 6 | 0x000010 | INTCON3[9] | — | — | 9 |
| NVM Address Error | _SoftTrapError | 6 | 0x000010 | INTCON3[8] | — | — | 9 |
| DO Stack Overflow | _SoftTrapError | 6 | 0x000010 | INTCON3[4] | — | — | 9 |
| APLL Loss of Lock | _SoftTrapError | 6 | 0x000010 | INTCON3[0] | — | — | 9 |
| Reserved | Reserved | 7 | 0x000012 | — | — | — | — |


© 2017-2021 Microchip Technology Inc.

**TABLE 7-2: INTERRUPT VECTOR DETAILS**

| Interrupt Source | MPLAB® XC16 ISR Name | Vector # | IRQ # | IVT Address | Interrupt Bit Location | | |
|---|---|---|---|---|---|---|---|
| | | | | | Flag | Enable | Priority |
| External Interrupt 0 | _INT0Interrupt | 8 | 0 | 0x000014 | IFS0[0] | IEC0[0] | IPC0[2:0] |
| Timer1 | _T1Interrupt | 9 | 1 | 0x000016 | IFS0[1] | IEC0[1] | IPC0[6:4] |
| Change Notice Interrupt A | _CNAInterrupt | 10 | 2 | 0x000018 | IFS0[2] | IEC0[2] | IPC0[10:8] |
| Change Notice Interrupt B | _CNBInterrupt | 11 | 3 | 0x00001A | IFS0[3] | IEC0[3] | IPC0[14:12] |
| DMA Channel 0 | _DMA0Interrupt | 12 | 4 | 0x00001C | IFS0[4] | IEC0[4] | IPC1[2:0] |
| Reserved | Reserved | 13 | 5 | 0x00001E | — | — | — |
| Input Capture/Output Compare 1 | _CCP1Interrupt | 14 | 6 | 0x000020 | IFS0[6] | IEC0[6] | IPC1[10:8] |
| CCP1 Timer | _CCT1Interrupt | 15 | 7 | 0x000022 | IFS0[7] | IEC0[7] | IPC1[14:12] |
| DMA Channel 1 | _DMA1Interrupt | 16 | 8 | 0x000024 | IFS0[8] | IEC0[8] | IPC2[2:0] |
| SPI1 Receiver | _SPI1RXInterrupt | 17 | 9 | 0x000026 | IFS0[9] | IEC0[9] | IPC2[6:4] |
| SPI1 Transmitter | _SPI1TXInterrupt | 18 | 10 | 0x000028 | IFS0[10] | IEC0[10] | IPC2[10:8] |
| UART1 Receiver | _U1RXInterrupt | 19 | 11 | 0x00002A | IFS0[11] | IEC0[11] | IPC2[14:12] |
| UART1 Transmitter | _U1TXInterrupt | 20 | 12 | 0x00002C | IFS0[12] | IEC0[12] | IPC3[2:0] |
| ECC Single Bit Error | _ECCSBEInterrupt | 21 | 13 | 0x00002E | IFS0[13] | IEC0[13] | IPC3[6:4] |
| NVM Write Complete | _NVMInterrupt | 22 | 14 | 0x000030 | IFS0[14] | IEC0[14] | IPC3[10:8] |
| External Interrupt 1 | _INT1Interrupt | 23 | 15 | 0x000032 | IFS0[15] | IEC0[15] | IPC3[14:12] |
| I2C1 Client Event | _SI2C1Interrupt | 24 | 16 | 0x000034 | IFS1[0] | IEC1[0] | IPC4[2:0] |
| I2C1 Host Event | _MI2C1Interrupt | 25 | 17 | 0x000036 | IFS1[1] | IEC1[1] | IPC4[6:4] |
| DMA Channel 2 | _DMA2Interrupt | 26 | 18 | 0x000038 | IFS1[2] | IEC1[2] | IPC4[10:8] |
| Change Notice Interrupt C(2) | _CNCInterrupt | 27 | 19 | 0x00003A | IFS1[3] | IEC1[3] | IPC4[14:12] |
| External Interrupt 2 | _INT2Interrupt | 28 | 20 | 0x00003C | IFS1[4] | IEC1[4] | IPC5[2:0] |
| DMA Channel 3 | _DMA3Interrupt | 29 | 21 | 0x00003E | IFS1[5] | IEC1[5] | IPC5[6:4] |
| Reserved | Reserved | 30 | 22 | 0x000040 | — | — | — |
| Input Capture/Output Compare 2 | _CCP2Interrupt | 31 | 23 | 0x000042 | IFS1[7] | IEC1[7] | IPC5[14:12] |
| CCP2 Timer | _CCT2Interrupt | 32 | 24 | 0x000044 | IFS1[8] | IEC1[8] | IPC6[2:0] |
| CAN1 Combined Error(3) | _CAN1Interrupt | 33 | 25 | 0x000046 | IFS1[9] | IEC1[9] | IPC6[6:4] |
| External Interrupt 3 | _INT3Interrupt | 34 | 26 | 0x000048 | IFS1[10] | IEC1[10] | IPC6[10:8] |
| UART2 Receiver | _U2RXInterrupt | 35 | 27 | 0x00004A | IFS1[11] | IEC1[11] | IPC6[14:12] |
| UART2 Transmitter | _U2TXInterrupt | 36 | 28 | 0x00004C | IFS1[12] | IEC1[12] | IPC7[2:0] |
| SPI2 Receiver | _SPI2RXInterrupt | 37 | 29 | 0x00004E | IFS1[13] | IEC1[13] | IPC7[6:4] |
| SPI2 Transmitter | _SPI2TXInterrupt | 38 | 30 | 0x000050 | IFS1[14] | IEC1[14] | IPC7[10:8] |
| CAN1 RX Data Ready(3) | _C1RXInterrupt | 39 | 31 | 0x000052 | IFS1[15] | IEC1[15] | IPC7[14:12] |
| Reserved | Reserved | 40-42 | 32-34 | 0x000054-0x000058 | — | — | — |
| Input Capture/Output Compare 3 | _CCP3Interrupt | 43 | 35 | 0x00005A | IFS2[3] | IEC2[3] | IPC8[14:12] |
| CCP3 Timer | _CCT3Interrupt | 44 | 36 | 0x00005C | IFS2[4] | IEC2[4] | IPC9[2:0] |
| I2C2 Client Event | _SI2C2Interrupt | 45 | 37 | 0x00005E | IFS2[5] | IEC2[5] | IPC9[6:4] |
| I2C2 Host Event | _MI2C2Interrupt | 46 | 38 | 0x000060 | IFS2[6] | IEC2[6] | IPC9[10:8] |
| Reserved | Reserved | 47 | 39 | 0x000062 | — | — | — |
| Input Capture/Output Compare 4 | _CCP4Interrupt | 48 | 40 | 0x000064 | IFS2[8] | IEC2[8] | IPC10[2:0] |
| CCP4 Timer | _CCT4Interrupt | 49 | 41 | 0x000066 | IFS2[9] | IEC2[9] | IPC10[6:4] |
| Reserved | Reserved | 50 | 42 | 0x000068 | — | — | — |

**Note 1:** Availability is dependent on number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on device variants.

**2:** Availability is dependent on supported I/O ports. Refer to Table 8-1 for availability on device variants.

**3:** Availability is dependent on supported peripherals. Refer to Table 1 and Table 2.

**TABLE 7-2: INTERRUPT VECTOR DETAILS (CONTINUED)**

| Interrupt Source | MPLAB® XC16 ISR Name | Vector # | IRQ # | IVT Address | Interrupt Bit Location | | |
|---|---|---|---|---|---|---|---|
| | | | | | Flag | Enable | Priority |
| Input Capture/Output Compare 5 | _CCP5Interrupt | 51 | 43 | 0x00006A | IFS2[11] | IEC2[11] | IPC10[14:12] |
| CCP5 Timer | _CCT5Interrupt | 52 | 44 | 0x00006C | IFS2[12] | IEC2[12] | IPC11[2:0] |
| Deadman Timer | _DMTInterrupt | 53 | 45 | 0x00006E | IFS2[13] | IEC2[13] | IPC11[6:4] |
| Input Capture/Output Compare 6 | _CCP6Interrupt | 54 | 46 | 0x000070 | IFS2[14] | IEC2[14] | IPC11[10:8] |
| CCP6 Timer | _CCT6Interrupt | 55 | 47 | 0x000072 | IFS2[15] | IEC2[15] | IPC11[14:12] |
| QEI Position Counter Compare | _QEI1Interrupt | 56 | 48 | 0x000074 | IFS3[0] | IEC3[0] | IPC12[2:0] |
| UART1 Error | _U1EInterrupt | 57 | 49 | 0x000076 | IFS3[1] | IEC3[1] | IPC12[6:4] |
| UART2 Error | _U2EInterrupt | 58 | 50 | 0x000078 | IFS3[2] | IEC3[2] | IPC12[10:8] |
| CRC Generator | _CRCInterrupt | 59 | 51 | 0x00007A | IFS3[3] | IEC3[3] | IPC12[14:12] |
| CAN1 TX Data Request(3) | _C1TXInterrupt | 60 | 52 | 0x00007C | IFS3[4] | IEC3[4] | IPC13[2:0] |
| Reserved | Reserved | 61 | 53 | 0x00007E | — | — | — |
| QEI Position Counter Compare | _QEI2Interrupt | 62 | 54 | 0x000080 | IFS3[6] | IEC3[6] | IPC13[10:8] |
| Reserved | Reserved | 63 | 55 | 0x000082 | — | — | — |
| UART3 Error | _U3EInterrupt | 64 | 56 | 0x000084 | IFS3[8] | IEC3[8] | IPC14[2:0] |
| UART3 Receiver | _U3RXInterrupt | 65 | 57 | 0x000086 | IFS3[9] | IEC3[9] | IPC14[6:4] |
| UART3 Transmitter | _U3TXInterrupt | 66 | 58 | 0x000088 | IFS3[10] | IEC3[10] | IPC14[10:8] |
| SPI3 Receiver | _SPI3RXInterrupt | 67 | 59 | 0x00008A | IFS3[11] | IEC3[11] | IPC14[14:12] |
| SPI3 Transmitter | _SPI3TXInterrupt | 68 | 60 | 0x00008C | IFS3[12] | IEC3[12] | IPC15[2:0] |
| In-Circuit Debugger | _ICDInterrupt | 69 | 61 | 0x00008E | IFS3[13] | IEC3[13] | IPC15[6:4] |
| Reserved | Reserved | 70 | 62 | 0x000090 | — | — | — |
| PTG Step | _PTGSTEPInterrupt | 71 | 63 | 0x000092 | IFS3[15] | IEC3[15] | IPC15[14:12] |
| I2C1 Bus Collision | _I2C1BCInterrupt | 72 | 64 | 0x000094 | IFS4[0] | IEC4[0] | IPC16[2:0] |
| I2C2 Bus Collision | _I2C2BCInterrupt | 73 | 65 | 0x000096 | IFS4[1] | IEC4[1] | IPC16[6:4] |
| Reserved | Reserved | 74 | 66 | 0x000098 | — | — | — |
| PWM Generator 1 | _PWM1Interrupt | 75 | 67 | 0x00009A | IFS4[3] | IEC4[3] | IPC16[14:12] |
| PWM Generator 2 | _PWM2Interrupt | 76 | 68 | 0x00009C | IFS4[4] | IEC4[4] | IPC17[2:0] |
| PWM Generator 3 | _PWM3Interrupt | 77 | 69 | 0x00009E | IFS4[5] | IEC4[5] | IPC17[6:4] |
| PWM Generator 4 | _PWM4Interrupt | 78 | 70 | 0x0000A0 | IFS4[6] | IEC4[6] | IPC17[10:8] |
| PWM Generator 5 | _PWM5Interrupt | 79 | 71 | 0x0000A2 | IFS4[7] | IEC4[7] | IPC17[14:12] |
| PWM Generator 6 | _PWM6Interrupt | 80 | 72 | 0x0000A4 | IFS4[8] | IEC4[8] | IPC18[2:0] |
| PWM Generator 7 | _PWM7Interrupt | 81 | 73 | 0x0000A6 | IFS4[9] | IEC4[9] | IPC18[6:4] |
| PWM Generator 8 | _PWM8Interrupt | 82 | 74 | 0x0000A8 | IFS4[10] | IEC4[10] | IPC18[10:8] |
| Change Notice D(2) | _CNDInterrupt | 83 | 75 | 0x0000AA | IFS4[11] | IEC4[11] | IPC18[14:12] |
| Change Notice E(2) | _CNEInterrupt | 84 | 76 | 0x0000AC | IFS4[12] | IEC4[12] | IPC19[2:0] |
| Comparator 1 | _CMP1Interrupt | 85 | 77 | 0x0000AE | IFS4[13] | IEC4[13] | IPC19[6:4] |
| Comparator 2 | _CMP2Interrupt | 86 | 78 | 0x0000B0 | IFS4[14] | IEC4[14] | IPC19[10:8] |
| Comparator 3 | _CMP3Interrupt | 87 | 79 | 0x0000B2 | IFS4[15] | IEC4[15] | IPC19[14:12] |
| Reserved | Reserved | 88 | 80 | 0x0000B4 | — | — | — |
| PTG Watchdog Timer Time-out | _PTGWDTInterrupt | 89 | 81 | 0x0000B6 | IFS5[1] | IEC5[1] | IPC20[6:4] |
| PTG Trigger 0 | _PTG0Interrupt | 90 | 82 | 0x0000B8 | IFS5[2] | IEC5[2] | IPC20[10:8] |
| PTG Trigger 1 | _PTG1Interrupt | 91 | 83 | 0x0000BA | IFS5[3] | IEC5[3] | IPC20[14:12] |
| PTG Trigger 2 | _PTG2Interrupt | 92 | 84 | 0x0000BC | IFS5[4] | IEC5[4] | IPC21[2:0] |
| PTG Trigger 3 | _PTG3Interrupt | 93 | 85 | 0x0000BE | IFS5[5] | IEC5[6] | IPC21[6:4] |

**Note 1:** Availability is dependent on number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on device variants.

**2:** Availability is dependent on supported I/O ports. Refer to Table 8-1 for availability on device variants.

**3:** Availability is dependent on supported peripherals. Refer to Table 1 and Table 2.


© 2017-2021 Microchip Technology Inc.

**TABLE 7-2: INTERRUPT VECTOR DETAILS (CONTINUED)**

| Interrupt Source | MPLAB® XC16 ISR Name | Vector # | IRQ # | IVT Address | Interrupt Bit Location | | |
|---|---|---|---|---|---|---|---|
| | | | | | Flag | Enable | Priority |
| SENT1 TX/RX | _SENT1Interrupt | 94 | 86 | 0x0000C0 | IFS5[6] | IEC5[6] | IPC21[10:8] |
| SENT1 Error | _SENT1EInterrupt | 95 | 87 | 0x0000C2 | IFS5[7] | IEC5[7] | IPC21[14:12] |
| SENT2 TX/RX | _SENT2Interrupt | 96 | 88 | 0x0000C4 | IFS5[8] | IEC5[8] | IPC22[2:0] |
| SENT2 Error | _SENT2EInterrupt | 97 | 89 | 0x0000C6 | IFS5[9] | IEC5[9] | IPC22[6:4] |
| ADC Global Interrupt | _ADCInterrupt | 98 | 90 | 0x0000C8 | IFS5[10] | IEC5[10] | IPC22[10:8] |
| ADC AN0 Interrupt | _ADCAN0Interrupt | 99 | 91 | 0x0000CA | IFS5[11] | IEC5[11] | IPC22[14:12] |
| ADC AN1 Interrupt | _ADCAN1Interrupt | 100 | 92 | 0x0000CC | IFS5[12] | IEC5[12] | IPC23[2:0] |
| ADC AN2 Interrupt | _ADCAN2Interrupt | 101 | 93 | 0x0000CE | IFS5[13] | IEC5[13] | IPC23[6:4] |
| ADC AN3 Interrupt | _ADCAN3Interrupt | 102 | 94 | 0x0000D0 | IFS5[14] | IEC5[14] | IPC23[10:8] |
| ADC AN4 Interrupt | _ADCAN4Interrupt | 103 | 95 | 0x0000D2 | IFS5[15] | IEC5[15] | IPC23[14:12] |
| ADC AN5 Interrupt | _ADCAN5Interrupt | 104 | 96 | 0x0000D4 | IFS6[0] | IEC6[0] | IPC24[2:0] |
| ADC AN6 Interrupt | _ADCAN6Interrupt | 105 | 97 | 0x0000D6 | IFS6[1] | IEC6[1] | IPC24[6:4] |
| ADC AN7 Interrupt | _ADCAN7Interrupt | 106 | 98 | 0x0000D8 | IFS6[2] | IEC6[2] | IPC24[10:8] |
| ADC AN8 Interrupt | _ADCAN8Interrupt | 107 | 99 | 0x0000DA | IFS6[3] | IEC6[3] | IPC24[14:12] |
| ADC AN9 Interrupt | _ADCAN9Interrupt | 108 | 100 | 0x0000DC | IFS6[4] | IEC6[4] | IPC25[2:0] |
| ADC AN10 Interrupt | _ADCAN10Interrupt | 109 | 101 | 0x0000DE | IFS6[5] | IEC6[5] | IPC25[6:4] |
| ADC AN11 Interrupt | _ADCAN11Interrupt | 110 | 102 | 0x0000E0 | IFS6[6] | IEC6[6] | IPC25[10:8] |
| ADC AN12 Interrupt(1) | _ADCAN12Interrupt | 111 | 103 | 0x0000E2 | IFS6[7] | IEC6[7] | IPC25[14:12] |
| ADC AN13 Interrupt(1) | _ADCAN13Interrupt | 112 | 104 | 0x0000E4 | IFS6[8] | IEC6[8] | IPC26[2:0] |
| ADC AN14 Interrupt(1) | _ADCAN14Interrupt | 113 | 105 | 0x0000E6 | IFS6[9] | IEC6[9] | IPC26[6:4] |
| ADC AN15 Interrupt(1) | _ADCAN15Interrupt | 114 | 106 | 0x0000E8 | IFS6[10] | IEC6[10] | IPC26[10:8] |
| ADC AN16 Interrupt(1) | _ADCAN16Interrupt | 115 | 107 | 0x0000EA | IFS6[11] | IEC6[11] | IPC26[14:12] |
| ADC AN17 Interrupt(1) | _ADCAN17Interrupt | 116 | 108 | 0x0000EC | IFS6[12] | IEC6[12] | IPC27[2:0] |
| ADC AN18 Interrupt(1) | _ADCAN18Interrupt | 117 | 109 | 0x0000EE | IFS6[13] | IEC6[13] | IPC27[6:4] |
| ADC AN19 Interrupt(1) | _ADCAN19Interrupt | 118 | 110 | 0x0000F0 | IFS6[14] | IEC6[14] | IPC27[10:8] |
| ADC AN20 Interrupt(1) | _ADCAN20Interrupt | 119 | 111 | 0x0000F2 | IFS6[15] | IEC6[15] | IPC27[14:12] |
| ADC AN21 Interrupt(1) | _ADCAN21Interrupt | 120 | 112 | 0x0000F4 | IFS7[0] | IEC7[0] | IPC28[2:0] |
| ADC AN22 Interrupt(1) | _ADCAN22Interrupt | 121 | 113 | 0x0000F6 | IFS7[1] | IEC7[1] | IPC28[6:4] |
| ADC AN23 Interrupt(1) | _ADCAN23Interrupt | 122 | 114 | 0x0000F8 | IFS7[2] | IEC7[2] | IPC28[10:8] |
| ADC Fault | _ADFLTInterrupt | 123 | 115 | 0x0000FA | IFS7[3] | IEC7[3] | IPC28[14:12] |
| ADC Digital Comparator 0 | _ADCMP0Interrupt | 124 | 116 | 0x0000FC | IFS7[4] | IEC7[4] | IPC29[2:0] |
| ADC Digital Comparator 1 | _ADCMP1Interrupt | 125 | 117 | 0x0000FE | IFS7[5] | IEC7[5] | IPC29[6:4] |
| ADC Digital Comparator 2 | _ADCMP2Interrupt | 126 | 118 | 0x000100 | IFS7[6] | IEC7[6] | IPC29[10:8] |
| ADC Digital Comparator 3 | _ADCMP3Interrupt | 127 | 119 | 0x000102 | IFS7[7] | IEC7[7] | IPC29[14:12] |
| ADC Oversample Filter 0 | _ADFLTR0Interrupt | 128 | 120 | 0x000104 | IFS7[8] | IEC7[8] | IPC30[2:0] |
| ADC Oversample Filter 1 | _ADFLTR1Interrupt | 129 | 121 | 0x000106 | IFS7[9] | IEC7[9] | IPC30[6:4] |
| ADC Oversample Filter 2 | _ADFLTR2Interrupt | 130 | 122 | 0x000108 | IFS7[10] | IEC7[10] | IPC30[10:8] |
| ADC Oversample Filter 3 | _ADFLTR3Interrupt | 131 | 123 | 0x00010A | IFS7[11] | IEC7[11] | IPC30[14:12] |
| CLC1 Positive Edge | _CLC1PInterrupt | 132 | 124 | 0x00010C | IFS7[12] | IEC7[12] | IPC31[2:0] |
| CLC2 Positive Edge | _CLC2PInterrupt | 133 | 125 | 0x00010E | IFS7[13] | IEC7[13] | IPC31[6:4] |
| SPI1 Error | _SPI1GInterrupt | 134 | 126 | 0x000110 | IFS7[14] | IEC7[14] | IPC31[10:8] |
| SPI2 Error | _SPI2GInterrupt | 135 | 127 | 0x000112 | IFS7[15] | IEC7[15] | IPC31[14:12] |
| SPI3 Error | _SPI3GInterrupt | 136 | 128 | 0x000114 | IFS8[0] | IEC8[0] | IPC32[2:0] |

**Note 1:** Availability is dependent on number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on device variants.

**2:** Availability is dependent on supported I/O ports. Refer to Table 8-1 for availability on device variants.

**3:** Availability is dependent on supported peripherals. Refer to Table 1 and Table 2.

**TABLE 7-2: INTERRUPT VECTOR DETAILS (CONTINUED)**

| Interrupt Source | MPLAB® XC16 ISR Name | Vector # | IRQ # | IVT Address | Interrupt Bit Location | | |
|---|---|---|---|---|---|---|---|
| | | | | | Flag | Enable | Priority |
| Reserved | Reserved | 137-149 | 129-141 | 0x000116-0x00012E | — | — | — |
| I2C3 Client Event | _SI2C3Interrupt | 150 | 142 | 0x000130 | IFS8[14] | IEC8[14] | IPC35[10:8] |
| I2C3 Host Event | _MI2C3Interrupt | 151 | 143 | 0x000132 | IFS8[15] | IEC8[15] | IPC35[14:12] |
| I2C3 Bus Collision | _I2C3BCInterrupt | 152 | 144 | 0x000134 | IFS9[0] | IEC9[0] | IPC36[2:0] |
| Reserved | Reserved | 153-156 | 145-148 | 0x000136-0x00013C | — | — | — |
| Input Capture/Output Compare 7 | _CCP7Interrupt | 157 | 149 | 0x00013E | IFS9[5] | IEC9[5] | IPC37[6:4] |
| CCP7 Timer | _CCT7Interrupt | 158 | 150 | 0x000140 | IFS9[6] | IEC9[6] | IPC37[10:8] |
| Reserved | Reserved | 159 | 151 | 0x000142 | — | — | — |
| Input Capture/Output Compare 8 | _CCP8Interrupt | 160 | 152 | 0x000144 | IFS9[8] | IEC9[8] | IPC38[2:0] |
| CCP8 Timer | _CCT8Interrupt | 161 | 153 | 0x000146 | IFS9[9] | IEC9[9] | IPC38[6:4] |
| Reserved | Reserved | 162-176 | 154-168 | 0x000148-0x000164 | — | — | — |
| PWM Event A | _PEVTAInterrupt | 177 | 169 | 0x000166 | IFS10[9] | IEC10[9] | IPC42[6:4] |
| PWM Event B | _PEVTBInterrupt | 178 | 170 | 0x000168 | IFS10[10] | IEC10[10] | IPC42[10:8] |
| PWM Event C | _PEVTCInterrupt | 179 | 171 | 0x00016A | IFS10[11] | IEC10[11] | IPC42[14:12] |
| PWM Event D | _PEVTDInterrupt | 180 | 172 | 0x00016C | IFS10[12] | IEC10[12] | IPC43[2:0] |
| PWM Event E | _PEVTEInterrupt | 181 | 173 | 0x00016E | IFS10[13] | IEC10[13] | IPC43[6:4] |
| PWM Event F | _PEVTFInterrupt | 182 | 174 | 0x000170 | IFS10[14] | IEC10[14] | IPC43[10:8] |
| CLC3 Positive Edge | _CLC3PInterrupt | 183 | 175 | 0x000172 | IFS10[15] | IEC10[15] | IPC43[14:12] |
| CLC4 Positive Edge | _CLC4PInterrupt | 184 | 176 | 0x000174 | IFS11[0] | IEC11[0] | IPC44[2:0] |
| CLC1 Negative Edge | _CLC1NInterrupt | 185 | 177 | 0x000176 | IFS11[1] | IEC11[1] | IPC44[6:4] |
| CLC2 Negative Edge | _CLC2NInterrupt | 186 | 178 | 0x000178 | IFS11[2] | IEC11[2] | IPC44[10:8] |
| CLC3 Negative Edge | _CLC3NInterrupt | 187 | 179 | 0x00017A | IFS11[3] | IEC11[3] | IPC44[14:]12] |
| CLC4 Negative Edge | _CLC4NInterrupt | 188 | 180 | 0x00017C | IFS11[4] | IEC11[4] | IPC45[2:0] |
| Input Capture/Output Compare 9 | _CCP9Interrupt | 189 | 181 | 0x00017E | IFS11[5] | IEC11[5] | IPC45[6:4] |
| CCP9 Timer | _CCT9Interrupt | 190 | 182 | 0x000180 | IFS11[6] | IEC11[6] | IPC45[10:8] |
| Reserved | Reserved | 191-196 | 183-188 | 0x00182-0x0018C | — | — | — |
| UART1 Event | _U1EVTInterrupt | 197 | 189 | 0x00018E | IFS11[13] | IF2C11[13] | IPC47[6:4] |
| UART2 Event | _U2EVTInterrupt | 198 | 190 | 0x000190 | IFS11[14] | IF2C11[14] | IPC47[12:8] |
| UART3 Event | _U3EVTInterrupt | 199 | 191 | 0x000192 | IFS11[15] | IF2C11[15] | IPC47[14:12] |
| AN24 Done | _ADCAN24Interrupt | 200 | 192 | 0x000194 | IFS12[0] | IEC12[0] | IPC48[2:0] |
| AN25 Done | _ADCAN25Interrupt | 201 | 193 | 0x000196 | IFS12[1] | IEC12[1] | IPC48[6:4] |
| PMP Event(3) | _PMPInterrupt | 202 | 194 | 0x000198 | IFS12[2] | IEC12[2] | IPC48[10:8] |
| PMP Error Event(3) | _PMPEInterrupt | 203 | 195 | 0x00019A | IFS12[3] | IEC12[3] | IPC48[14:12] |

**Note 1:** Availability is dependent on number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on device variants.

**2:** Availability is dependent on supported I/O ports. Refer to Table 8-1 for availability on device variants.

**3:** Availability is dependent on supported peripherals. Refer to Table 1 and Table 2.


© 2017-2021 Microchip Technology Inc.

© 2017-2021 Microchip Technology Inc.

**TABLE 7-3: INTERRUPT FLAG REGISTERS**

| Register | Address | Bit 15 | Bit14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| IFS0 | 800h | INT1IF | NVMIF | ECCSBEIF | U1TXIF | U1RXIF | SPI1TXIF | SPI1RXIF | DMA1IF | CCT1IF | CCP1IF | — | DMA0IF | CNBIF |
| IFS1 | 802h | C1RXIF | SPI2TXIF | SPI2RXIF | U2TXIF | U2RXIF | INT3IF | C1IF | CCT2IF | CCP2IF | — | DMA3IF | INT2IF | CNCIF |
| IFS2 | 804h | CCT6IF | CCP6IF | DMTIF | CCT5IF | CCP5IF | — | CCT4IF | CCP4IF | — | MI2C2IF | SI2C2IF | CCT3IF | CCP3IF |
| IFS3 | 806h | PTGSTEPIF | — | ICDIF | SPI3TXIF | SPI3RXIF | U3TXIF | U3RXIF | U3EIF | — | QEI2IF | — | C1TXIF | CRCIF |
| IFS4 | 808h | CMP3IF | CMP2IF | CMP1IF | CNEIF | CNDIF | PWM8IF | PWM7IF | PWM6IF | PWM5IF | PWM4IF | PWM3IF | PWM2IF | PWM1IF |
| IFS5 | 80Ah | ADCAN4IF | ADCAN3IF | ADCAN2IF | ADCAN1IF | ADCAN0IF | ADCIF | SENT2EIF | SENT2IF | SENT1EIF | SENT1IF | PTG3IF | PTG2IF | PTG1IF |
| IFS6 | 80Ch | ADCAN20IF | ADCAN19IF | ADCAN18IF | ADCAN17IF | ADCAN16IF | ADCAN15IF | ADCAN14IF | ADCAN13IF | ADCAN12IF | ADCAN11IF | ADCAN10IF | ADCAN9IF | ADCAN8IF |
| IFS7 | 80Eh | SPI2GIF | SPI1GIF | CLC2PIF | CLC1PIF | ADFLTR3IF | ADFLTR2IF | ADFLTR1IF | ADFLTR0IF | ADCMP3IF | ADCMP2IF | ADCMP1IF | ADCMP0IF | ADFLTIF |
| IFS8 | 810h | MI2C3IF | SI2C3IF | — | — | — | — | — | — | — | — | — | — | — |
| IFS9 | 812h | — | — | — | — | — | — | CCT8IF | CCP8IF | — | CCT7IF | CCP7IF | — | — |
| IFS10 | 814h | CLC3PIF | PEVTFIF | PEVTEIF | PEVTDIF | PEVTCIF | PEVTBIF | PEVTAIF | — | — | — | — | — | — |
| IFS11 | 816h | U3EVTIF | U2EVTIF | U1EVTIF | — | — | — | — | — | — | CCT9IF | CCP9IF | CLC4NIF | CLC3NIF |
| IFS12 | 818h | — | — | — | — | — | — | — | — | — | — | — | — | PMPEIF |

**Legend:** — = Unimplemented.

**TABLE 7-4: INTERRUPT ENABLE REGISTERS**

| Register | Address | Bit 15 | Bit14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| IEC0 | 820h | INT1IE | NVMIE | ECCSBEIE | U1TXIE | U1RXIE | SPI1TXIE | SPI1RXIE | DMA1IE | CCT1IE | CCP1IE | — | DMA0IE | CNBIE |
| IEC1 | 822h | C1RXIE | SPI2TXIE | SPI2RXIE | U2TXIE | U2RXIE | INT3IE | C1IE | CCT2IE | CCP2IE | — | DMA3IE | INT2IE | CNCIE |
| IEC2 | 824h | CCT6IE | CCP6IE | DMTIE | CCT5IE | CCP5IE | — | CCT4IE | CCP4IE | — | MI2C2IE | SI2C2IE | CCT3IE | CCP3IE |
| IEC3 | 826h | PTGSTEPIE | — | ICDIE | SPI3TXIE | SPI3RXIE | U3TXIE | U3RXIE | U3EIE | — | QEI2IE | — | C1TXIE | CRCIE |
| IEC4 | 828h | CMP3IE | CMP2IE | CMP1IE | CNEIE | CNDIE | PWM8IE | PWM7IE | PWM6IE | PWM5IE | PWM4IE | PWM3IE | PWM2IE | PWM1IE |
| IEC5 | 82Ah | ADCAN4IE | ADCAN3IE | ADCAN2IE | ADCAN1IE | ADCAN0IE | ADCIE | SENT2EIE | SENT2IE | SENT1EIE | SENT1IE | PTG3IE | PTG2IE | PTG1IE |
| IEC6 | 82Ch | ADCAN20IE | ADCAN19IE | ADCAN18IE | ADCAN17IE | ADCAN16IE | ADCAN15IE | ADCAN14IE | ADCAN13IE | ADCAN12IE | ADCAN11IE | ADCAN10IE | ADCAN9IE | ADCAN8IE |
| IEC7 | 82Eh | SPI2GIE | SPI1GIE | CLC2PIE | CLC1PIE | ADFLTR3IE | ADFLTR2IE | ADFLTR1IE | ADFLTR0IE | ADCMP3IE | ADCMP2IE | ADCMP1IE | ADCMP0IE | ADFLTIE |
| IEC8 | 830h | MI2C3IE | SI2C3IE | — | — | — | — | — | — | — | — | — | — | — |
| IEC9 | 832h | — | — | — | — | — | — | CCT8IE | CCP8IE | — | CCT7IE | CCP7IE | — | — |
| IEC10 | 834h | CLC3PIE | PEVTFIE | PEVTEIE | PEVTDIE | PEVTCIE | PEVTBIE | PEVTAIE | — | — | — | — | — | — |
| IEC11 | 836h | U3EVTIE | U2EVTIE | U1EVTIE | — | — | — | — | — | — | CCT9IE | CCP9IE | CLC4NIE | CLC3NIE |
| IEC12 | 838h | — | — | — | — | — | — | — | — | — | — | — | — | PMPEIE |

**Legend:** — = Unimplemented.

**TABLE 7-5: INTERRUPT PRIORITY REGISTERS**

| Register | Address | Bit 15 | Bit14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| IPC0 | 840h | — | CNBIP2 | CNBIP1 | CNBIP0 | — | CNAIP2 | CNAIP1 | CNAIP0 | — | T1IP2 | T1IP1 | T1IP0 | — | IN |
| IPC1 | 842h | — | CCT1IP2 | CCT1IP1 | CCT1IP0 | — | CCP1IP2 | CCP1IP1 | CCP1IP0 | — | — | — | — | — | DM |
| IPC2 | 844h | — | U1RXIP2 | U1RXIP1 | U1RXIP0 | — | SPI1TXIP2 | SPI1TXIP1 | SPI1TXIP0 | — | SPI1RXIP2 | SPI1RXIP1 | SPI1RXIP0 | — | DM |
| IPC3 | 846h | — | INT1IP2 | INT1IP1 | INT1IP0 | — | NVMIP2 | NVMIP1 | NVMIP0 | — | ECCSBEIP2 | ECCSBEIP1 | ECCSBEIP0 | — | U1 |
| IPC4 | 848h | — | CNCIP2 | CNCIP1 | CNCIP0 | — | DMA2IP2 | DMA2IP1 | DMA2IP0 | — | MI2C1IP2 | MI2C1IP1 | MI2C1IP0 | — | SI2 |
| IPC5 | 84Ah | — | CCP2IP2 | CCP2IP1 | CCP2IP0 | — | — | — | — | — | DMA3IP2 | DMA3IP1 | DMA3IP20 | — | IN |
| IPC6 | 84Ch | — | U2RXIP2 | U2RXIP1 | U2RXIP0 | — | INT3IP2 | INT3IP1 | INT3IP0 | — | C1IP2 | C1IP1 | C1IP0 | — | C0 |
| IPC7 | 84Eh | — | C1RXIP2 | C1RXIP1 | C1RXIP0 | — | SPI2TXIP2 | SPI2TXIP1 | SPI2TXIP0 | — | SPI2RXIP2 | SPI2RXIP1 | SPI2RXIP0 | — | U2 |
| IPC8 | 850h | — | CCP3IP2 | CCP3IP1 | CCP3IP0 | — | — | — | — | — | — | — | — | — | |
| IPC9 | 852h | — | — | — | — | — | MI2C2IP2 | MI2C2IP1 | MI2C2IP0 | — | SI2C2IP2 | SI2C2IP1 | SI2C2IP0 | — | C0 |
| IPC10 | 854h | — | CCP5IP2 | CCP5IP1 | CCP5IP0 | — | — | — | — | — | CCT4IP2 | CCT4IP1 | CCT4IP0 | — | C0 |
| IPC11 | 856h | — | CCT6IP2 | CCT6IP1 | CCT6IP0 | — | CCP6IP2 | CCP6IP1 | CCP6IP0 | — | DMTIP2 | DMTIP1 | DMTIP0 | — | C0 |
| IPC12 | 858h | — | CRCIP2 | CRCIP1 | CRCIP0 | — | U2EIP2 | U2EIP1 | U2EIP0 | — | U1EIP2 | U1EIP1 | U1EIP0 | — | QI |
| IPC13 | 85Ah | — | — | — | — | — | QEI2IP2 | QEI2IP1 | QEI2IP0 | — | — | — | — | — | C1 |
| IPC14 | 85Ch | — | SPI3RXIP2 | SPI3RXIP1 | SPI3RXIP0 | — | U3TXIP2 | U3TXIP1 | U3TXIP0 | — | U3RXIP2 | U3RXIP1 | U3RXIP0 | — | U |
| IPC15 | 85Eh | — | PTGSTEPIP2 | PTGSTEPIP1 | PTGSTEPIP0 | — | — | — | — | — | ICDIP2 | ICDIP1 | ICDIP0 | — | SPI |
| IPC16 | 860h | — | PWM1IP2 | PWM1IP1 | PWM1IP0 | — | — | — | — | — | I2C2BCIP2 | I2C2BCIP1 | I2C2BCIP0 | — | I2C |
| IPC17 | 862h | — | PWM5IP2 | PWM5IP1 | PWM5IP0 | — | PWM4IP2 | PWM4IP1 | PWM4IP0 | — | PWM3IP2 | PWM3IP1 | PWM3IP0 | — | PW |
| IPC18 | 864h | — | CNDIP2 | CNDIP1 | CNDIP0 | — | PWM8IP2 | PWM8IP1 | PWM8IP0 | — | PWM7IP2 | PWM7IP1 | PWM7IP0 | — | PW |
| IPC19 | 866h | — | CMP3IP2 | CMP3IP1 | CMP3IP0 | — | CMP2IP2 | CMP2IP1 | CMP2IP0 | — | CMP1IP2 | CMP1IP1 | CMP1IP0 | — | CI |
| IPC20 | 868h | — | PTG1IP2 | PTG1IP1 | PTG1IP0 | — | PTG0IP2 | PTG0IP1 | PTG0IP0 | — | PTGWDTIP2 | PTGWDTIP1 | PTGWDTIP0 | — | |
| IPC21 | 86Ah | — | SENT1EIP2 | SENT1EIP1 | SENT1EIP0 | — | SENT1IP2 | SENT1IP1 | SENT1IP0 | — | PTG3IP2 | PTG3IP1 | PTG3IP0 | — | PT |
| IPC22 | 86Ch | — | ADCAN0IP2 | ADCAN0IP1 | ADCAN0IP0 | — | ADCIP2 | ADCIP1 | ADCIP0 | — | SENT2EIP2 | SENT2EIP1 | SENT2EIP0 | — | SE |
| IPC23 | 86Eh | — | ADCAN4IP2 | ADCAN4IP1 | ADCAN4IP0 | — | ADCAN3IP2 | ADCAN3IP1 | ADCAN3IP0 | — | ADCAN2IP2 | ADCAN2IP1 | ADCAN2IP0 | — | ADC |
| IPC24 | 870h | — | ADCAN8IP2 | ADCAN8IP1 | ADCAN8IP0 | — | ADCAN7IP2 | ADCAN7IP1 | ADCAN7IP0 | — | ADCAN6IP2 | ADCAN6IP1 | ADCAN6IP0 | — | ADC |
| IPC25 | 872h | — | ADCAN12IP2 | ADCAN12IP1 | ADCAN12IP0 | — | ADCAN11IP2 | ADCAN11IP1 | ADCAN11IP0 | — | ADCAN10IP2 | ADCAN10IP1 | ADCAN10IP0 | — | ADC |
| IPC26 | 874h | — | ADCAN16IP2 | ADCAN16IP2 | ADCAN16IP2 | — | ADCAN15IP2 | ADCAN15IP1 | ADCAN15IP0 | — | ADCAN14IP2 | ADCAN14IP1 | ADCAN14IP0 | — | ADC |
| IPC27 | 876h | — | ADCAN20IP2 | ADCAN20IP1 | ADCAN20IP0 | — | ADCAN19IP2 | ADCAN19IP1 | ADCAN19IP0 | — | ADCAN18IP2 | ADCAN18IP1 | ADCAN18IP0 | — | ADC |
| IPC28 | 878h | — | ADFLTIP2 | ADFLTIP1 | ADFLTIP0 | — | ADCAN23IP2 | ADCAN23IP1 | ADCAN22IP0 | — | ADCAN22IP2 | ADCAN22IP1 | ADCAN22IP0 | — | ADC |
| IPC29 | 87Ah | — | ADCMP3IP2 | ADCMP3IP1 | ADCMP3IP0 | — | ADCMP2IP2 | ADCMP2IP1 | ADCMP2IP0 | — | ADCMP1IP2 | ADCMP1IP1 | ADCMP1IP0 | — | ADC |
| IPC30 | 87Ch | — | ADFLTR3IP2 | ADFLTR3IP1 | ADFLTR3IP0 | — | ADFLTR2IP2 | ADFLTR2IP1 | ADFLTR2IP0 | — | ADFLTR1IP2 | ADFLTR1IP1 | ADFLTR1IP0 | — | ADF |
| IPC31 | 87Eh | — | SPI2GIP0 | SPI2GIP1 | SPI2GIP0 | — | SPI1GIP2 | SPI1GIP1 | SPI1GIP0 | — | CLC2PIP2 | CLC2PIP1 | CLC2PIP0 | — | CL |
| IPC32 | 880h | — | — | — | — | — | — | — | — | — | — | — | — | — | SP |
| IPC33 | 882h | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| IPC34 | 884h | — | — | — | — | — | — | — | — | — | — | — | — | — | |

**Legend:** — = Unimplemented.

© 2017-2021 Microchip Technology Inc.

© 2017-2021 Microchip Technology Inc.

**TABLE 7-5: INTERRUPT PRIORITY REGISTERS (CONTINUED)**

| Register | Address | Bit 15 | Bit14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| IPC35 | 886h | — | MI2C3IP2 | MI2C3IP1 | MI2C3IP1 | — | SI2C3IP2 | SI2C3IP1 | SI2C3IP0 | — | — | — | — | — | |
| IPC36 | 888h | — | — | — | — | — | — | — | — | — | — | — | — | — | I2C |
| IPC37 | 88Ah | — | — | — | — | — | CCT7IP2 | CCT7IP1 | CCT7IP0 | — | CCP7IP2 | CCP7IP1 | CCP7IP0 | — | |
| IPC38 | 88Ch | — | — | — | — | — | — | — | — | — | CCT8IP2 | CCT8IP1 | CCT8IP0 | — | CC |
| IPC39 | 88Eh | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| IPC40 | 890h | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| IPC41 | 892h | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| IPC42 | 894h | — | PEVTCIP2 | PEVTCIP1 | PEVTCIP0 | — | PEVTBIP2 | PEVTBIP1 | PEVTBIP0 | — | PEVTAIP2 | PEVTAIP1 | PEVTAIP0 | — | |
| IPC43 | 896h | — | CLC3PIP2 | CLC3PIP1 | CLC3PIP0 | — | PEVTFIP2 | PEVTFIP1 | PEVTFIP0 | — | PEVTEIP2 | PEVTEIP1 | PEVTEIP0 | — | PE |
| IPC44 | 898h | — | CLC3NIP2 | CLC3NIP1 | CLC3NIP0 | — | CLC2NIP2 | CLC2NIP1 | CLC2NIP0 | — | CLC1NIP2 | CLC1NIP1 | CLC1NIP0 | — | CL |
| IPC45 | 89Ah | — | — | — | — | — | CCT9IP2 | CCT9IP1 | CCT9IP0 | — | CCP9IP2 | CCP9IP1 | CCP9IP0 | — | CL |
| IPC46 | 89Ch | — | — | — | — | — | — | — | — | — | — | — | — | — | |
| IPC47 | 89Eh | — | U3EVTIP2 | U3EVTIP1 | U3EVTIP0 | — | U2EVTIP2 | U2EVTIP1 | U2EVTIP0 | — | U1EVTIP2 | U1EVTIP1 | U1EVTIP0 | — | |
| IPC48 | 900h | — | PMPEIP2 | PMPEIP1 | PMPEIP0 | — | PMPIP2 | PMPIP1 | PMPIP0 | — | ADCAN25IP2 | ADCAN25IP1 | ADCAN25IP0 | — | ADC |

**Legend:** — = Unimplemented.

## 7.3 Interrupt Resources

Many useful resources are provided on the main product page of the Microchip website for the devices listed in this data sheet. This product page contains the latest updates and additional information.

### 7.3.1 KEY RESOURCES

- **"Interrupts"** (DS70000600) in the *"dsPIC33/PIC24 Family Reference Manual"*
- Code Samples
- Application Notes
- Software Libraries
- Webinars
- All Related *"dsPIC33/PIC24 Family Reference Manual"* Sections
- Development Tools

## 7.4 Interrupt Control and Status Registers

The dsPIC33CK256MP508 family devices implement the following registers for the interrupt controller:

- INTCON1
- INTCON2
- INTCON3
- INTCON4
- INTTREG

### 7.4.1 INTCON1 THROUGH INTCON4

Global interrupt control functions are controlled from INTCON1, INTCON2, INTCON3 and INTCON4.

INTCON1 contains the Interrupt Nesting Disable bit (NSTDIS), as well as the control and status flags for the processor trap sources.

The INTCON2 register controls external interrupt request signal behavior, contains the Global Interrupt Enable bit (GIE) and the Alternate Interrupt Vector Table Enable bit (AIVTEN).

INTCON3 contains the status flags for the Auxiliary PLL and DO stack overflow status trap sources.

The INTCON4 register contains the Software Generated Hard Trap Status bit (SGHT).

### 7.4.2 IFSx

The IFSx registers maintain all of the interrupt request flags. Each source of interrupt has a status bit, which is set by the respective peripherals or external signal and is cleared via software.

### 7.4.3 IECx

The IECx registers maintain all of the interrupt enable bits. These control bits are used to individually enable interrupts from the peripherals or external signals.

### 7.4.4 IPCx

The IPCx registers are used to set the Interrupt Priority Level (IPL) for each source of interrupt. Each user interrupt source can be assigned to one of seven priority levels.

### 7.4.5 INTTREG

The INTTREG register contains the associated interrupt vector number and the new CPU Interrupt Priority Level, which are latched into the Vector Number (VECNUM[7:0]) and Interrupt Level bits (ILR[3:0]) fields in the INTTREG register. The new Interrupt Priority Level is the priority of the pending interrupt.

The interrupt sources are assigned to the IFSx, IECx and IPCx registers in the same sequence as they are listed in Table 7-2. For example, INT0 (External Interrupt 0) is shown as having Vector Number 8 and a natural order priority of 0. Thus, the INT0IF bit is found in IFS0[0], the INT0IE bit in IEC0[0] and the INT0IP[2:0] bits in the first position of IPC0 (IPC0[2:0]).

### 7.4.6 STATUS/CONTROL REGISTERS

Although these registers are not specifically part of the interrupt control hardware, two of the CPU Control registers contain bits that control interrupt functionality. For more information on these registers, refer to **"Enhanced CPU"** (DS70005158) in the *"dsPIC33/PIC24 Family Reference Manual"*.

- The CPU STATUS Register, SR, contains the IPL[2:0] bits (SR[7:5]). These bits indicate the current CPU Interrupt Priority Level. The user software can change the current CPU Interrupt Priority Level by writing to the IPLx bits.
- The CORCON register contains the IPL3 bit, which together with IPL[2:0], also indicates the current CPU priority level. IPL3 is a read-only bit so that trap events cannot be masked by the user software.

All Interrupt registers are described in Register 7-3 through Register 7-7 in the following pages.


© 2017-2021 Microchip Technology Inc.

**REGISTER 7-1: SR: CPU STATUS REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/C-0 | R/C-0 | R-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| OA | OB | SA | SB | OAB | SAB | DA | DC |
| bit 15 | | | | | | | bit 8 |

| R/W-0(3) | R/W-0(3) | R/W-0(3) | R-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| IPL2(2) | IPL1(2) | IPL0(2) | RA | N | OV | Z | C |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1'= Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 7-5 **IPL[2:0]:** CPU Interrupt Priority Level Status bits(2,3)
111 = CPU Interrupt Priority Level is 7 (15); user interrupts are disabled
110 = CPU Interrupt Priority Level is 6 (14)
101 = CPU Interrupt Priority Level is 5 (13)
100 = CPU Interrupt Priority Level is 4 (12)
011 = CPU Interrupt Priority Level is 3 (11)
010 = CPU Interrupt Priority Level is 2 (10)
001 = CPU Interrupt Priority Level is 1 (9)
000 = CPU Interrupt Priority Level is 0 (8)

**Note 1:** For complete register details, see Register 3-1.
**2:** The IPL[2:0] bits are concatenated with the IPL[3] bit (CORCON[3]) to form the CPU Interrupt Priority Level. The value in parentheses indicates the IPL, if IPL[3] = 1. User interrupts are disabled when IPL[3] = 1.
**3:** The IPL[2:0] Status bits are read-only when the NSTDIS bit (INTCON1[15]) = 1.

**REGISTER 7-2: CORCON: CORE CONTROL REGISTER(1)**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| VAR | — | US1 | US0 | EDT | DL2 | DL1 | DL0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-1 | R/W-0 | R/C-0 | R-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SATA | SATB | SATDW | ACCSAT | IPL3(2) | SFA | RND | IF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1'= Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **VAR:** Variable Exception Processing Latency Control bit
1 = Variable exception processing latency is enabled
0 = Fixed exception processing latency is enabled

bit 3 **IPL3:** CPU Interrupt Priority Level Status bit 3(2)
1 = CPU Interrupt Priority Level is greater than 7
0 = CPU Interrupt Priority Level is 7 or less

**Note 1:** For complete register details, see Register 3-2.
**2:** The IPL3 bit is concatenated with the IPL[2:0] bits (SR[7:5]) to form the CPU Interrupt Priority Level.


© 2017-2021 Microchip Technology Inc.

**REGISTER 7-3: INTCON1: INTERRUPT CONTROL REGISTER 1**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| NSTDIS | OVAERR | OVBERR | COVAERR | COVBERR | OVATE | OVBTE | COVTE |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 |
|---|---|---|---|---|---|---|---|
| SFTACERR | DIV0ERR | — | MATHERR | ADDRERR | STKERR | OSCFAIL | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **NSTDIS:** Interrupt Nesting Disable bit
1 = Interrupt nesting is disabled
0 = Interrupt nesting is enabled

bit 14 **OVAERR:** Accumulator A Overflow Trap Flag bit
1 = Trap was caused by an overflow of Accumulator A
0 = Trap was not caused by an overflow of Accumulator A

bit 13 **OVBERR:** Accumulator B Overflow Trap Flag bit
1 = Trap was caused by an overflow of Accumulator B
0 = Trap was not caused by an overflow of Accumulator B

bit 12 **COVAERR:** Accumulator A Catastrophic Overflow Trap Flag bit
1 = Trap was caused by a catastrophic overflow of Accumulator A
0 = Trap was not caused by a catastrophic overflow of Accumulator A

bit 11 **COVBERR:** Accumulator B Catastrophic Overflow Trap Flag bit
1 = Trap was caused by a catastrophic overflow of Accumulator B
0 = Trap was not caused by a catastrophic overflow of Accumulator B

bit 10 **OVATE:** Accumulator A Overflow Trap Enable bit
1 = Trap overflow of Accumulator A
0 = Trap is disabled

bit 9 **OVBTE:** Accumulator B Overflow Trap Enable bit
1 = Trap overflow of Accumulator B
0 = Trap is disabled

bit 8 **COVTE:** Catastrophic Overflow Trap Enable bit
1 = Trap catastrophic overflow of Accumulator A or B is enabled
0 = Trap is disabled

bit 7 **SFTACERR:** Shift Accumulator Error Status bit
1 = Math error trap was caused by an invalid accumulator shift
0 = Math error trap was not caused by an invalid accumulator shift

bit 6 **DIV0ERR:** Divide-by-Zero Error Status bit
1 = Math error trap was caused by a divide-by-zero
0 = Math error trap was not caused by a divide-by-zero

bit 5 **Unimplemented:** Read as '0'

bit 4 **MATHERR:** Math Error Status bit
1 = Math error trap has occurred
0 = Math error trap has not occurred

bit 3 **ADDRERR:** Address Error Trap Status bit
1 = Address error trap has occurred
0 = Address error trap has not occurred

**REGISTER 7-3: INTCON1: INTERRUPT CONTROL REGISTER 1 (CONTINUED)**

bit 2 **STKERR:** Stack Error Trap Status bit
1 = Stack error trap has occurred
0 = Stack error trap has not occurred

bit 1 **OSCFAIL:** Oscillator Failure Trap Status bit
1 = Oscillator failure trap has occurred
0 = Oscillator failure trap has not occurred

bit 0 **Unimplemented:** Read as '0'


© 2017-2021 Microchip Technology Inc.

**REGISTER 7-4: INTCON2: INTERRUPT CONTROL REGISTER 2**

| R/W-1 | R/W-0 | R/W-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| GIE | DISI | SWTRAP | — | — | — | — | AIVTEN |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | INT3EP | INT2EP | INT1EP | INT0EP |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **GIE:** Global Interrupt Enable bit
1 = Interrupts and associated IE bits are enabled
0 = Interrupts are disabled, but traps are still enabled

bit 14 **DISI:** DISI Instruction Status bit
1 = DISI instruction is active
0 = DISI instruction is not active

bit 13 **SWTRAP:** Software Trap Status bit
1 = Software trap is enabled
0 = Software trap is disabled

bit 12-9 **Unimplemented:** Read as '0'

bit 8 **AIVTEN:** Alternate Interrupt Vector Table Enable bit
1 = Uses Alternate Interrupt Vector Table
0 = Uses standard Interrupt Vector Table

bit 7-4 **Unimplemented:** Read as '0'

bit 3 **INT3EP:** External Interrupt 3 Edge Detect Polarity Select bit
1 = Interrupt on negative edge
0 = Interrupt on positive edge

bit 2 **INT2EP:** External Interrupt 2 Edge Detect Polarity Select bit
1 = Interrupt on negative edge
0 = Interrupt on positive edge

bit 1 **INT1EP:** External Interrupt 1 Edge Detect Polarity Select bit
1 = Interrupt on negative edge
0 = Interrupt on positive edge

bit 0 **INT0EP:** External Interrupt 0 Edge Detect Polarity Select bit
1 = Interrupt on negative edge
0 = Interrupt on positive edge

**REGISTER 7-5: INTCON3: INTERRUPT CONTROL REGISTER 3**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | CAN(1) | NAE |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | DAE | DOOVR | — | — | — | APLL |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9 **CAN:** CAN Address Error Soft Trap Status bit(1)
1 = CAN address error soft trap has occurred
0 = CAN address error soft trap has not occurred

bit 8 **NAE:** NVM Address Error Soft Trap Status bit
1 = NVM address error soft trap has occurred
0 = NVM address error soft trap has not occurred

bit 7-6 **Unimplemented:** Read as '0'

bit 5 **DAE:** DMA Address Error (Soft) Trap Status bit
1 = DMA address error trap has occurred
0 = Trap has not occurred

bit 4 **DOOVR:** DO Stack Overflow Soft Trap Status bit
1 = DO stack overflow soft trap has occurred
0 = DO stack overflow soft trap has not occurred

bit 3-1 **Unimplemented:** Read as '0'

bit 0 **APLL:** Auxiliary PLL Loss of Lock Soft Trap Status bit
1 = APLL lock soft trap has occurred
0 = APLL lock soft trap has not occurred

**Note 1:** The CAN peripheral is not available on all devices. Refer to Table 1 and Table 2 for availability.


© 2017-2021 Microchip Technology Inc.

**REGISTER 7-6: INTCON4: INTERRUPT CONTROL REGISTER 4**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | ECCDBE | SGHT |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-2 **Unimplemented:** Read as ‘0’

bit 1 **ECCDBE:** ECC Double-Bit Error Trap bit
1 = ECC double-bit error trap has occurred
0 = ECC double-bit error trap has not occurred

bit 0 **SGHT:** Software Generated Hard Trap Status bit
1 = Software generated hard trap has occurred
0 = Software generated hard trap has not occurred

**REGISTER 7-7: INTTREG: INTERRUPT CONTROL AND STATUS REGISTER**

| U-0 | U-0 | R-0 | U-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | — | VHOLD | — | ILR3 | ILR2 | ILR1 | ILR0 |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| VECNUM[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13 **VHOLD:** Vector Number Capture Enable bit
1 = VECNUM[7:0] bits read current value of vector number encoding tree (i.e., highest priority pending interrupt)
0 = Vector number latched into VECNUM[7:0] at Interrupt Acknowledge and retained until next IACK

bit 12 **Unimplemented:** Read as '0'

bit 11-8 **ILR[3:0]:** New CPU Interrupt Priority Level bits
1111 = CPU Interrupt Priority Level is 15
...
0001 = CPU Interrupt Priority Level is 1
0000 = CPU Interrupt Priority Level is 0

bit 7-0 **VECNUM[7:0]:** Vector Number of Pending Interrupt bits
11111111 = 255, Reserved; do not use
...
00001001 = 9, IC1 – Input Capture 1
00001000 = 8, INT0 – External Interrupt 0
00000111 = 7, Reserved; do not use
00000110 = 6, Generic soft trap
00000101 = 5, Reserved; do not use
00000100 = 4, Math error trap
00000011 = 3, Stack error trap
00000010 = 2, Generic hard trap
00000001 = 1, Address error trap
00000000 = 0, Oscillator fail trap


© 2017-2021 Microchip Technology Inc.

## 8.0 I/O PORTS

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"I/O Ports with Edge Detect"** (www.microchip.com/DS70005322) in the *"dsPIC33/PIC24 Family Reference Manual"*.

**2:** Some registers and associated bits described in this section may not be available on all devices.

Many of the device pins are shared among the peripherals and the Parallel I/O ports. All I/O input ports feature Schmitt Trigger inputs for improved noise immunity. The PORT registers are located in the SFR.

Some of the key features of the I/O ports are:

- Individual Output Pin Open-Drain Enable/Disable
- Individual Input Pin Weak Pull-up and Pull-Down
- Monitor Selective Inputs and Generate Interrupt when Change in Pin State is Detected
- Operation during Sleep and Idle modes

### 8.1 Parallel I/O (PIO) Ports

All port pins have 12 registers directly associated with their operation as digital I/Os. The Data Direction register (TRISx) determines whether the pin is an input or an output. If the data direction bit is a '1', then the pin is an input.

All port pins are defined as inputs after a Reset. Reads from the latch (LATx), read the latch. Writes to the latch, write the latch. Reads from the port (PORTx), read the port pins, while writes to the port pins, write the latch. Any bit and its associated data and control registers that are not valid for a particular device are disabled. This means the corresponding LATx and TRISx registers, and the port pin are read as zeros.

When a pin is shared with another peripheral or function that is defined as an input only, it is nevertheless regarded as a dedicated port because there is no other competing source of outputs. Table 8-1 shows the pin availability. Table 8-2 shows the 5V input tolerant pins across this device.

**TABLE 8-1: PIN AND ANSELx AVAILABILITY**

| Device | Rx15 | Rx14 | Rx13 | Rx12 | Rx11 | Rx10 | Rx9 | Rx8 | Rx7 | Rx6 | Rx5 | Rx4 | Rx3 | Rx2 | Rx1 | Rx0 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **PORTA** | | | | | | | | | | | | | | | | |
| dsPIC33XXXMP508/208 | — | — | — | — | — | — | — | — | — | — | — | X | X | X | X | X |
| dsPIC33XXXMP506/206 | — | — | — | — | — | — | — | — | — | — | — | X | X | X | X | X |
| dsPIC33XXXMP504/204 | — | — | — | — | — | — | — | — | — | — | — | X | X | X | X | X |
| dsPIC33XXXMP503/203 | — | — | — | — | — | — | — | — | — | — | — | X | X | X | X | X |
| dsPIC33XXXMP502/202 | — | — | — | — | — | — | — | — | — | — | — | X | X | X | X | X |
| ANSELA | — | — | — | — | — | — | — | — | — | — | — | X | X | X | X | X |
| **PORTB** | | | | | | | | | | | | | | | | |
| dsPIC33XXXMP508/208 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| dsPIC33XXXMP506/206 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| dsPIC33XXXMP504/204 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| dsPIC33XXXMP503/203 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| dsPIC33XXXMP502/202 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| ANSELB | — | — | — | — | — | — | X | X | X | — | — | X | X | X | X | X |
| **PORTC** | | | | | | | | | | | | | | | | |
| dsPIC33XXXMP508/208 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| dsPIC33XXXMP506/206 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| dsPIC33XXXMP504/204 | — | — | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| dsPIC33XXXMP503/203 | — | — | — | — | — | — | — | — | — | — | X | X | X | X | X | X |
| dsPIC33XXXMP502/202 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| ANSELC | — | — | — | — | — | — | — | — | X | X | — | — | X | X | X | X |
| **PORTD** | | | | | | | | | | | | | | | | |
| dsPIC33XXXMP508/208 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| dsPIC33XXXMP506/206 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| dsPIC33XXXMP504/204 | — | — | X | — | — | X | — | X | — | — | — | — | — | — | X | — |
| dsPIC33XXXMP503/203 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| dsPIC33XXXMP502/202 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| ANSELD | — | — | X | — | X | X | — | — | — | — | — | — | — | — | — | — |
| **PORTE** | | | | | | | | | | | | | | | | |
| dsPIC33XXXMP508/208 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| dsPIC33XXXMP506/206 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| dsPIC33XXXMP504/204 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| dsPIC33XXXMP503/203 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| dsPIC33XXXMP502/202 | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| ANSELE | — | — | — | — | — | — | — | — | — | — | — | X | X | X | X | X |

**TABLE 8-2: 5V INPUT TOLERANT PORTS**

| | | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| PORTA | — | — | — | — | — | — | — | — | — | — | — | RA4 | RA3 | RA2 | RA1 | RA0 |
| PORTB | RB15 | RB14 | RB13 | RB12 | RB11 | RB10 | RB9 | RB8 | RB7 | RB6 | RB5 | RB4 | RB3 | RB2 | RB1 | RB0 |
| PORTC | RC15 | RC14 | RC13 | RC12 | RC11 | RC10 | RC9 | RC8 | RC7 | RC6 | RC5 | RC4 | RC3 | RC2 | RC1 | RC0 |
| PORTD | RD15 | RD14 | RD13 | RD12 | RD11 | RD10 | RD9 | RD8 | RD7 | RD6 | RD5 | RD4 | RD3 | RD2 | RD1 | RD0 |
| PORTE | RE15 | RE14 | RE13 | RE12 | RE11 | RE10 | RE9 | RE8 | RE7 | RE6 | RE5 | RE4 | RE3 | RE2 | RE1 | RE0 |

**Legend:** **Shaded pins** are up to 5.5 VDC input tolerant.


© 2017-2021 Microchip Technology Inc.

**FIGURE 8-1: BLOCK DIAGRAM OF A TYPICAL SHARED PORT STRUCTURE**

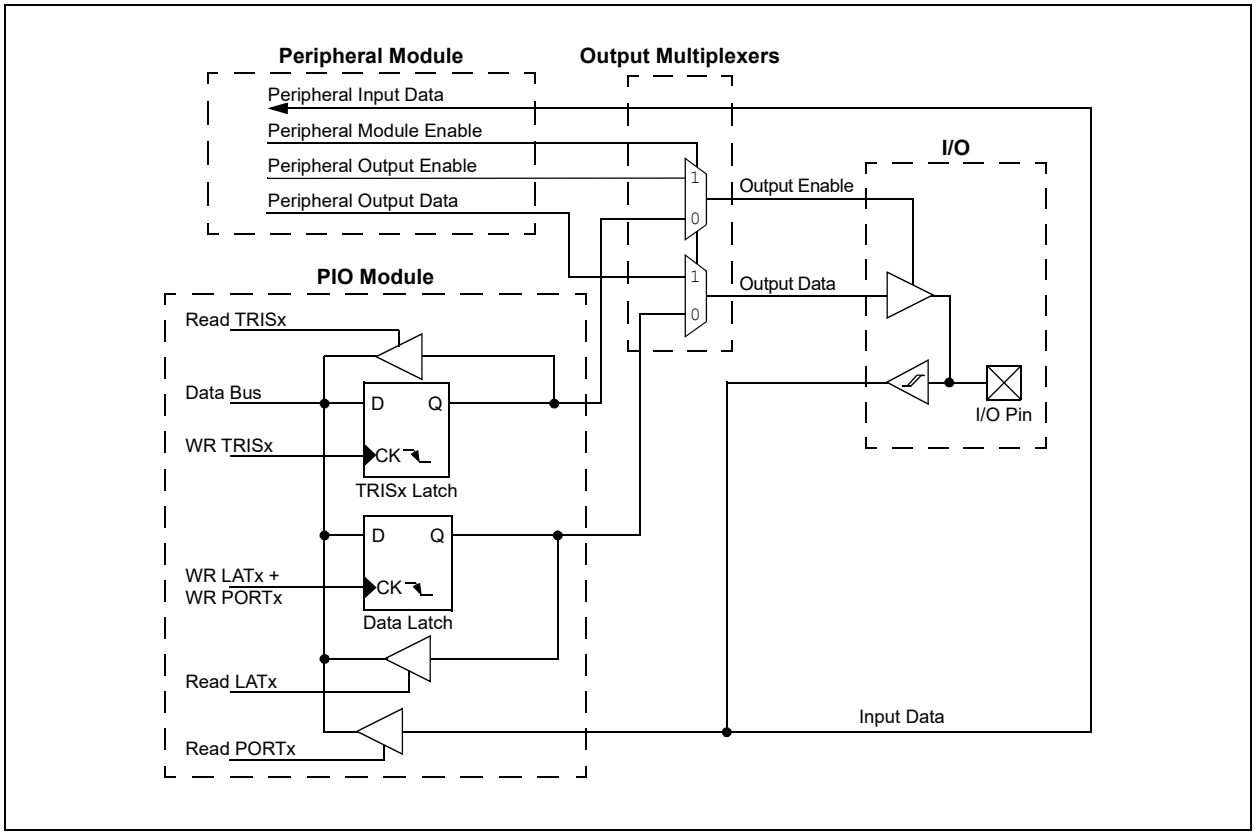

### 8.1.1 OPEN-DRAIN CONFIGURATION

In addition to the PORTx, LATx and TRISx registers for data control, port pins can also be individually configured for either digital or open-drain output. This is controlled by the Open-Drain Enable for PORTx register, ODCx, associated with each port. Setting any of the bits configures the corresponding pin to act as an open-drain output.

The open-drain feature allows the generation of outputs, other than VDD, by using external pull-up resistors. The maximum open-drain voltage allowed on any pin is the same as the maximum VIH specification for that particular pin.

## 8.2 Configuring Analog and Digital Port Pins

The ANSELx registers control the operation of the analog port pins. The port pins that are to function as analog inputs or outputs must have their corresponding ANSELx and TRISx bits set. In order to use port pins for I/O functionality with digital modules, such as timers, UARTs, etc., the corresponding ANSELx bit must be cleared.

The ANSELx registers have a default value of 0xFFFF; therefore, all pins that share analog functions are analog (not digital) by default.

Pins with analog functions affected by the ANSELx registers are listed with a buffer type of analog in the Pinout I/O Descriptions (see Table 1-1).

If the TRISx bit is cleared (output) while the ANSELx bit is set, the digital output level (VOH or VOL) is converted by an analog peripheral, such as the ADC module or comparator module.

When the PORTx register is read, all pins configured as analog input channels are read as cleared (a low level).

Pins configured as digital inputs do not convert an analog input. Analog levels on any pin, defined as a digital input (including the ANx pins), can cause the input buffer to consume current that exceeds the device specifications.

### 8.2.1 I/O PORT WRITE/READ TIMING

One instruction cycle is required between a port direction change or port write operation and a read operation of the same port. Typically, this instruction would be a NOP.

## 8.3 PORT Control Registers

The following registers are in the PORT module:

- Register 8-1: ANSELx (one per port)
- Register 8-2: TRISx (one per port)
- Register 8-3: PORTx (one per port)
- Register 8-4: LATx (one per port)
- Register 8-5: ODCx (one per port)
- Register 8-6: CNPUx (one per port)
- Register 8-7: CNPDx (one per port)
- Register 8-8: CNCONx (one per port – optional)
- Register 8-9: CNEN0x (one per port)
- Register 8-10: CNSTATx (one per port – optional)
- Register 8-11: CNEN1x (one per port)
- Register 8-12: CNFx (one per port)

**REGISTER 8-1: ANSELx: ANALOG SELECT FOR PORTx REGISTER**

| R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| ANSELx[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| ANSELx[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-0 **ANSELx[15:0]:** Analog Select for PORTx bits

1 = Analog input is enabled and digital input is disabled on the PORTx[n] pin
0 = Analog input is disabled and digital input is enabled on the PORTx[n] pin


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-2: TRISx: OUTPUT ENABLE FOR PORTx REGISTER**

| R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| TRISx[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| TRISx[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **TRISx[15:0]:** Output Enable for PORTx bits
1 = LATx[n] is not driven on the PORTx[n] pin
0 = LATx[n] is driven on the PORTx[n] pin

**REGISTER 8-3: PORTx: INPUT DATA FOR PORTx REGISTER**

| R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| PORTx[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| PORTx[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PORTx[15:0]:** PORTx Data Input Value bits

**REGISTER 8-4: LATx: OUTPUT DATA FOR PORTx REGISTER**

| R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
|---|---|---|---|---|---|---|---|
| LATx[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x | R/W-x |
|---|---|---|---|---|---|---|---|
| LATx[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **LATx[15:0]:** PORTx Data Output Value bits

**REGISTER 8-5: ODCx: OPEN-DRAIN ENABLE FOR PORTx REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ODCx[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ODCx[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **ODCx[15:0]:** PORTx Open-Drain Enable bits
1 = Open-drain is enabled on the PORTx pin
0 = Open-drain is disabled on the PORTx pin


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-6: CNPUx: CHANGE NOTIFICATION PULL-UP ENABLE FOR PORTx REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CNPUx[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CNPUx[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-0 **CNPUx[15:0]:** Change Notification Pull-up Enable for PORTx bits
1 = The pull-up for PORTx[n] is enabled – takes precedence over the pull-down selection
0 = The pull-up for PORTx[n] is disabled

**REGISTER 8-7: CNPDx: CHANGE NOTIFICATION PULL-DOWN ENABLE FOR PORTx REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CNPDx[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CNPDx[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-0 **CNPDx[15:0]:** Change Notification Pull-Down Enable for PORTx bits
1 = The pull-down for PORTx[n] is enabled (if the pull-up for PORTx[n] is not enabled)
0 = The pull-down for PORTx[n] is disabled

**REGISTER 8-8: CNCONx: CHANGE NOTIFICATION CONTROL FOR PORTx REGISTER**

| R/W-0 | U-0 | U-0 | U-0 | R/W-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| ON | — | — | — | CNSTYLE | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **ON:** Change Notification (CN) Control for PORTx On bit
1 = CN is enabled
0 = CN is disabled

bit 14-12 **Unimplemented:** Read as '0'

bit 11 **CNSTYLE:** Change Notification Style Selection bit
1 = Edge style (detects edge transitions, CNFx[15:0] bits are used for a Change Notification event)
0 = Mismatch style (detects change from last port read, CNSTATx[15:0] bits are used for a Change Notification event)

bit 10-0 **Unimplemented:** Read as '0'

**REGISTER 8-9: CNEN0x: CHANGE NOTIFICATION INTERRUPT ENABLE FOR PORTx REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CNEN0x[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CNEN0x[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **CNEN0x[15:0]:** Change Notification Interrupt Enable for PORTx bits
1 = Interrupt-on-change (from the last read value) is enabled for PORTx[n]
0 = Interrupt-on-change is disabled for PORTx[n]


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-10: CNSTATx: CHANGE NOTIFICATION STATUS FOR PORTx REGISTER**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| CNSTATx[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| CNSTATx[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **CNSTATx[15:0]:** Change Notification Status for PORTx bits
When CNSTYLE (CNCONx[11]) = 0:
1 = Change occurred on PORTx[n] since last read of PORTx[n]
0 = Change did not occur on PORTx[n] since last read of PORTx[n]

**REGISTER 8-11: CNEN1x: CHANGE NOTIFICATION EDGE SELECT FOR PORTx REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CNEN1x[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CNEN1x[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **CNEN1x[15:0]:** Change Notification Edge Select for PORTx bits

**REGISTER 8-12: CNFx: CHANGE NOTIFICATION INTERRUPT FLAG FOR PORTx REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CNFx[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CNFx[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **CNFx[15:0]:** Change Notification Interrupt Flag for PORTx bits
When CNSTYLE (CNCONx[11]) = 1:
1 = An enabled edge event occurred on the PORTx[n] pin
0 = An enabled edge event did not occur on the PORTx[n] pin


© 2017-2021 Microchip Technology Inc.

## 8.4 Input Change Notification (ICN)

The Input Change Notification function of the I/O ports allows the dsPIC33CK256MP508 family devices to generate interrupt requests to the processor in response to a Change-of-State (COS) on selected input pins. This feature can detect input Change-of-States, even in Sleep mode, when the clocks are disabled. Every I/O port pin can be selected (enabled) for generating an interrupt request on a Change-of-State. Five control registers are associated with the Change Notification (CN) functionality of each I/O port. To enable the Change Notification feature for the port, the ON bit (CNCONx[15]) must be set.

The CNEN0x and CNEN1x registers contain the CN interrupt enable control bits for each of the input pins. The setting of these bits enables a CN interrupt for the corresponding pins. Also, these bits, in combination with the CNSTYLE bit (CNCONx[11]), define a type of transition when the interrupt is generated. Possible CN event options are listed in Table 8-3.

**TABLE 8-3: CHANGE NOTIFICATION EVENT OPTIONS**

| CNSTYLE Bit (CNCONx[11]) | CNEN1x Bit | CNEN0x Bit | Change Notification Event Description |
|---|---|---|---|
| 0 | Does not matter | 0 | Disabled |
| 0 | Does not matter | 1 | Detects a mismatch between the last read state and the current state of the pin |
| 1 | 0 | 0 | Disabled |
| 1 | 0 | 1 | Detects a positive transition only (from '0' to '1') |
| 1 | 1 | 0 | Detects a negative transition only (from '1' to '0') |
| 1 | 1 | 1 | Detects both positive and negative transitions |

The CNSTATx register indicates whether a change occurred on the corresponding pin since the last read of the PORTx bit. In addition to the CNSTATx register, the CNFx register is implemented for each port. This register contains flags for Change Notification events. These flags are set if the valid transition edge, selected in the CNEN0x and CNEN1x registers, is detected. CNFx stores the occurrence of the event. CNFx bits must be cleared in software to get the next Change Notification interrupt. The CN interrupt is generated only for the I/Os configured as inputs (corresponding TRISx bits must be set).

**Note:** Pull-ups and pull-downs on Input Change Notification pins should always be disabled when the port pin is configured as a digital output.

## 8.5 Peripheral Pin Select (PPS)

A major challenge in general purpose devices is providing the largest possible set of peripheral features, while minimizing the conflict of features on I/O pins. The challenge is even greater on low pin count devices. In an application where more than one peripheral needs to be assigned to a single pin, inconvenient work arounds in application code, or a complete redesign, may be the only option.

Peripheral Pin Select configuration provides an alternative to these choices by enabling peripheral set selection and placement on a wide range of I/O pins. By increasing the pinout options available on a particular device, users can better tailor the device to their entire application, rather than trimming the application to fit the device.

The Peripheral Pin Select configuration feature operates over a fixed subset of digital I/O pins. Users may independently map the input and/or output of most digital peripherals to any one of these I/O pins. Hardware safeguards are included that prevent accidental or spurious changes to the peripheral mapping once it has been established.

### 8.5.1 AVAILABLE PINS

The number of available pins is dependent on the particular device and its pin count. Pins that support the Peripheral Pin Select feature include the label, "RPn", in their full pin designation, where "n" is the remappable pin number. "RP" is used to designate pins that support both remappable input and output functions.

### 8.5.2 AVAILABLE PERIPHERALS

The peripherals managed by the Peripheral Pin Select are all digital only peripherals. These include general serial communications (UART and SPI), general purpose timer clock inputs, timer-related peripherals (input capture and output compare) and interrupt-on-change inputs.

In comparison, some digital only peripheral modules are never included in the Peripheral Pin Select feature. This is because the peripheral's function requires special I/O circuitry on a specific port and cannot be easily connected to multiple pins. One example includes $I^2C$ modules. A similar requirement excludes all modules with analog inputs, such as the A/D Converter (ADC)

A key difference between remappable and non-remappable peripherals is that remappable peripherals are not associated with a default I/O pin. The peripheral must always be assigned to a specific I/O pin before it can be used. In contrast, non-remappable peripherals are always available on a default pin, assuming that the peripheral is active and not conflicting with another peripheral.

When a remappable peripheral is active on a given I/O pin, it takes priority over all other digital I/Os and digital communication peripherals associated with the pin. Priority is given regardless of the type of peripheral that is mapped. Remappable peripherals never take priority over any analog functions associated with the pin.

### 8.5.3 CONTROLLING CONFIGURATION CHANGES

Because peripheral mapping can be changed during run time, some restrictions on peripheral remapping are needed to prevent accidental configuration changes. The dsPIC33CK256MP508 devices have implemented the control register lock sequence.

#### 8.5.3.1 Control Register Lock

Under normal operation, writes to the RPINRx and RPORx registers are not allowed. Attempted writes will appear to execute normally, but the contents of the registers will remain unchanged. To change these registers, they must be unlocked in hardware. The register lock is controlled by the IOLOCK bit (RPCON[11]).

Setting IOLOCK prevents writes to the control registers; clearing IOLOCK allows writes. To set or clear IOLOCK, the NVMKEY unlock sequence must be executed:

1. Write 0x55 to NVMKEY.
2. Write 0xAA to NVMKEY.
3. Clear (or set) IOLOCK as a single operation.

IOLOCK remains in one state until changed. This allows all of the Peripheral Pin Selects to be configured with a single unlock sequence, followed by an update to all of the control registers. Then, IOLOCK can be set with a second lock sequence.

### 8.5.4 CONSIDERATIONS FOR PERIPHERAL PIN SELECTION

The ability to control Peripheral Pin Selection introduces several considerations into application design that most users would never think of otherwise. This is particularly true for several common peripherals, which are only available as remappable peripherals.

The main consideration is that the Peripheral Pin Selects are not available on default pins in the device's default (Reset) state. More specifically, because all RPINRx registers reset to '1's and RPORx registers reset to '0's, this means all PPS inputs are tied to Vss, while all PPS outputs are disconnected. This means that before any other application code is executed, the user must initialize the device with the proper peripheral configuration. Because the IOLOCK bit resets in the unlocked state, it is not necessary to execute the unlock sequence after the device has come out of Reset. For application safety, however, it is always better to set IOLOCK and lock the configuration after writing to the control registers.

The NVMKEY unlock sequence must be executed as an Assembly language routine. If the bulk of the application is written in C, or another high-level language, the unlock sequence should be performed by writing in-line assembly or by using the `__builtin_write_RPCON(value)` function provided by the compiler.

Choosing the configuration requires a review of all Peripheral Pin Selects and their pin assignments, particularly those that will not be used in the application. In all cases, unused pin-selectable peripherals should be disabled completely. Unused peripherals should have their inputs assigned to an unused RPn pin function. I/O pins with unused RPn functions should be configured with the null peripheral output.

**Note:** MPLAB® XC16 provides a built-in C language function for unlocking and modifying the RPCON register:

```
__builtin_write_RPCON(value);
```

For more information, see the *"MPLAB® XC16 C Compiler User's Guide"* (DS50002071).

### 8.5.5 INPUT MAPPING

The inputs of the Peripheral Pin Select options are mapped on the basis of the peripheral. That is, a control register associated with a peripheral dictates the pin it will be mapped to. The RPINRx registers are used to configure peripheral input mapping. Each register contains sets of 8-bit fields, with each set associated with one of the remappable peripherals. Programming a given peripheral's bit field with an appropriate 8-bit index value maps the RPn pin with the corresponding value, or internal signal, to that peripheral. See Table 8-4 for a list of available inputs.

For example, Figure 8-2 illustrates remappable pin selection for the U1RX input. Example 8-1 provides a configuration for bidirectional communication with flow control using UART1. The following input and output functions are used:

- Input Functions: U1RX, $\overline{\text{U1CTS}}$
- Output Functions: U1TX, $\overline{\text{U1RTS}}$


© 2017-2021 Microchip Technology Inc.

**EXAMPLE 8-1: CONFIGURING UART1 INPUT AND OUTPUT FUNCTIONS**

```
//
****************************************
// Unlock Registers
//****************************************
__builtin_write_RPCON(0x0000);
//****************************************
// Configure Input Functions (See Table 8-5)
// Assign U1Rx To Pin RP35
//*************************
_U1RXR = 35;
// Assign U1CTS To Pin RP36
//*************************
_U1CTSR = 36;
//****************************************
// Configure Output Functions (See Table 8-7)
//****************************************
// Assign U1Tx To Pin RP37
//*************************
_RP37R = 1;
//*************************
// Assign U1RTS To Pin RP38
//*************************
_RP38R = 2;
//****************************************
// Lock Registers
//****************************************
__builtin_write_RPCON(0x0800);
```

**FIGURE 8-2: REMAPPABLE INPUT FOR U1RX**

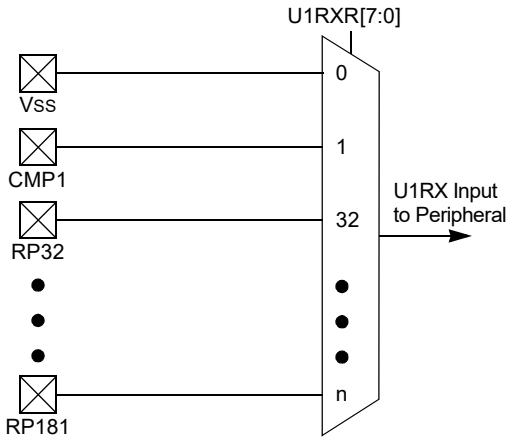


**Note:** For input only, Peripheral Pin Select functionality does not have priority over TRISx settings. Therefore, when configuring an RPn pin for input, the corresponding bit in the TRISx register must also be configured for input (set to '1'). Physical connection to a pin can be made through RP32 through RP71. There are internal signals and virtual pins that can be connected to an input. Table 8-4 shows the details of the input assignment.

**TABLE 8-4: REMAPPABLE PIN INPUTS**

| RPINRx[15:8] or RPINRx[7:0] | Function | Available on Ports |
|---|---|---|
| 0 | Vss | Internal |
| 1 | Comparator 1 | Internal |
| 2 | Comparator 2 | Internal |
| 3 | Comparator 3 | Internal |
| 4-5 | RP4-RP5 | Reserved |
| 6 | PTG Trigger 26 | Internal |
| 7 | PTG Trigger 27 | Internal |
| 8-10 | RP8-RP10 | Reserved |
| 11 | PWM Event Out C | Internal |
| 12 | PWM Event Out D | Internal |
| 13 | PWM Event Out E | Internal |
| 14-31 | RP14-RP31 | Reserved |
| 32 | RP32 | Port Pin RB0 |
| 33 | RP33 | Port Pin RB1 |
| 34 | RP34 | Port Pin RB2 |
| 35 | RP35 | Port Pin RB3 |
| 36 | RP36 | Port Pin RB4 |
| 37 | RP37 | Port Pin RB5 |
| 38 | RP38 | Port Pin RB6 |
| 39 | RP39 | Port Pin RB7 |
| 40 | RP40 | Port Pin RB8 |
| 41 | RP41 | Port Pin RB9 |
| 42 | RP42 | Port Pin RB10 |
| 43 | RP43 | Port Pin RB11 |
| 44 | RP44 | Port Pin RB12 |
| 45 | RP45 | Port Pin RB13 |
| 46 | RP46 | Port Pin RB14 |
| 47 | RP47 | Port Pin RB15 |
| 48 | RP48 | Port Pin RC0 |
| 49 | RP49 | Port Pin RC1 |
| 50 | RP50 | Port Pin RC2 |
| 51 | RP51 | Port Pin RC3 |
| 52 | RP52 | Port Pin RC4 |
| 53 | RP53 | Port Pin RC5 |
| 54 | RP54 | Port Pin RC6 |
| 55 | RP55 | Port Pin RC7 |
| 56 | RP56 | Port Pin RC8 |
| 57 | RP57 | Port Pin RC9 |
| 58 | RP58 | Port Pin RC10 |
| 59 | RP59 | Port Pin RC11 |
| 60 | RP60 | Port Pin RC12 |
| 61 | RP61 | Port Pin RC13 |
| 62 | RP62 | Port Pin RC14 |


© 2017-2021 Microchip Technology Inc.

**TABLE 8-4: REMAPPABLE PIN INPUTS (CONTINUED)**

| RPINRx[15:8] or RPINRx[7:0] | Function | Available on Ports |
|---|---|---|
| 63 | RP63 | Port Pin RC15 |
| 64 | RP64 | Port Pin RD0 |
| 65 | RP65 | Port Pin RD1 |
| 66 | RP66 | Port Pin RD2 |
| 67 | RP67 | Port Pin RD3 |
| 68 | RP68 | Port Pin RD4 |
| 69 | RP69 | Port Pin RD5 |
| 70 | RP70 | Port Pin RD6 |
| 71 | RP71 | Port Pin RD7 |
| 72 | RP72 | Port Pin RD8 |
| 73 | RP73 | Port Pin RD9 |
| 74 | RP74 | Port Pin RD10 |
| 75 | RP75 | Port Pin RD11 |
| 76 | RP76 | Port Pin RD12 |
| 77 | RP77 | Port Pin RD13 |
| 78 | RP78 | Port Pin RD14 |
| 79 | RP79 | Port Pin RD15 |
| 80-163 | RP80-RP163 | Reserved |
| 164 | DAC3 pwm_req_on | Internal |
| 165 | DAC3 pwm_req_off | Internal |
| 166 | DAC2 pwm_req_on | Internal |
| 167 | DAC2 pwm_req_off | Internal |
| 168 | DAC1 pwm_req_on | Internal |
| 169 | DAC1 pwm_req_off | Internal |
| 170-175 | RP170-RP175 | Reserved |
| 176 | RP176 | Virtual RPV0 |
| 177 | RP177 | Virtual RPV1 |
| 178 | RP178 | Virtual RPV2 |
| 179 | RP179 | Virtual RPV3 |
| 180 | RP180 | Virtual RPV4 |
| 181 | RP181 | Virtual RPV5 |

### 8.5.6 VIRTUAL CONNECTIONS

The dsPIC33CK256MP508 devices support six virtual RPn pins (RP176-RP181), which are identical in functionality to all other RPn pins, with the exception of pinouts. These six pins are internal to the devices and are not connected to a physical device pin.

These pins provide a simple way for inter-peripheral connection without utilizing a physical pin. For example, the output of the analog comparator can be connected to RP176 and the PWM Fault input can be configured for RP176 as well. This configuration allows the analog comparator to trigger PWM Faults without the use of an actual physical pin on the device.

**TABLE 8-5: SELECTABLE INPUT SOURCES (MAPS INPUT TO FUNCTION)**

| Input Name[1] | Function Name | Register | Register Bits |
|---|---|---|---|
| External Interrupt 1 | INT1 | RPINR0 | INT1R[7:0] |
| External Interrupt 2 | INT2 | RPINR1 | INT2R[7:0] |
| External Interrupt 3 | INT3 | RPINR1 | INT3R[7:0] |
| Timer1 External Clock | T1CK | RPINR2 | T1CK[7:0] |
| SCCP Timer1 | TCKI1 | RPINR3 | TCKI1R[7:0] |
| SCCP Capture 1 | ICM1 | RPINR3 | ICM1R[7:0] |
| SCCP Timer2 | TCKI2 | RPINR4 | TCKI2R[7:0] |
| SCCP Capture 2 | ICM2 | RPINR4 | ICM2R[7:0] |
| SCCP Timer3 | TCKI3 | RPINR5 | TCKI3R[7:0] |
| SCCP Capture 3 | ICM3 | RPINR5 | ICM3R[7:0] |
| SCCP Timer4 | TCKI4 | RPINR6 | TCKI4R[7:0] |
| SCCP Capture 4 | ICM4 | RPINR6 | ICM4R[7:0] |
| SCCP Timer5 | TCKI5 | RPINR7 | TCKI5R[7:0] |
| SCCP Capture 5 | ICM5 | RPINR7 | ICM5R[7:0] |
| SCCP Timer6 | TCKI6 | RPINR8 | TCKI6R[7:0] |
| SCCP Capture 6 | ICM6 | RPINR8 | ICM6R[7:0] |
| SCCP Timer7 | TCKI7 | RPINR9 | TCKI7R[7:0] |
| SCCP Capture 7 | ICM7 | RPINR9 | ICM7R[7:0] |
| SCCP Timer8 | TCKI8 | RPINR10 | TCKI8R[7:0] |
| SCCP Capture 8 | ICM8 | RPINR10 | ICM8R[7:0] |
| xCCP Fault A | OCFA | RPINR11 | OCFAR[7:0] |
| xCCP Fault B | OCFB | RPINR11 | OCFBR[7:0] |
| PWM PCI 8 | PCI8 | RPINR12 | PCI8R[7:0] |
| PWM PCI 9 | PCI9 | RPINR12 | PCI9R[7:0] |
| PWM PCI 10 | PCI10 | RPINR13 | PCI10R[7:0] |
| PWM PCI 11 | PCI11 | RPINR13 | PCI11R[7:0] |
| QEI1 Input A | QEIA1 | RPINR14 | QEIA1R[7:0] |
| QEI1 Input B | QEIB1 | RPINR14 | QEIB1R[7:0] |
| QEI1 Index 1 Input | QEINDX1 | RPINR15 | QEINDX1R[7:0] |
| QEI1 Home 1 Input | QEIHOM1 | RPINR15 | QEIHOM1R[7:0] |
| QEI2 Input A | QEIA2 | RPINR16 | QEIA2R[7:0] |
| QEI2 Input B | QEIB2 | RPINR16 | QEIB2R[7:0] |
| QEI2 Index 1 Input | QEINDX2 | RPINR17 | QEINDX2R[7:0] |
| QEI2 Home 1 Input | QEIHOM2 | RPINR17 | QEIHOM2R[7:0] |
| UART1 Receive | U1RX | RPINR18 | U1RXR[7:0] |
| UART1 Data-Set-Ready | $\overline{\text{U1DSR}}$ | RPINR18 | U1DSRR[7:0] |
| UART2 Receive | U2RX | RPINR19 | U2RXR[7:0] |
| UART2 Data-Set-Ready | $\overline{\text{U2DSR}}$ | RPINR19 | U2DSRR[7:0] |
| SPI1 Data Input | SDI1 | RPINR20 | SDI1R[7:0] |
| SPI1 Clock Input | SCK1IN | RPINR20 | SCK1R[7:0] |
| SPI1 Client Select | $\overline{\text{SS1}}$ | RPINR21 | SS1R[7:0] |
| Reference Clock Input | REFOI | RPINR21 | REFOIR[7:0] |
| SPI2 Data Input | SDI2 | RPINR22 | SDI2R[7:0] |

**Note 1:** Unless otherwise noted, all inputs use the Schmitt Trigger input buffers.


© 2017-2021 Microchip Technology Inc.

**TABLE 8-5: SELECTABLE INPUT SOURCES (MAPS INPUT TO FUNCTION) (CONTINUED)**

| Input Name[1] | Function Name | Register | Register Bits |
|---|---|---|---|
| SPI2 Clock Input | SCK2IN | RPINR22 | SCK2R[7:0] |
| SPI2 Client Select | $\overline{SS2}$ | RPINR23 | SS2R[7:0] |
| CAN1 Input | CAN1RX | RPINR26 | CAN1RXR[7:0] |
| UART3 Receive | U3RX | RPINR27 | U3RXR[7:0] |
| UART3 Data-Set-Ready | $\overline{U3DSR}$ | RPINR27 | U3DSRR[7:0] |
| SPI3 Data Input | SDI3 | RPINR29 | SDI3R[7:0] |
| SPI3 Clock Input | SCK3IN | RPINR29 | SCK3R[7:0] |
| SPI3 Client Select | $\overline{SS3}$ | RPINR30 | SS3R[7:0] |
| MCCP Timer9 | TCKI9 | RPINR32 | TCKI9R[7:0] |
| MCCP Capture 9 | ICM9 | RPINR33 | ICM9R[7:0] |
| xCCP Fault C | OCFC | RPINR37 | OCFCR[7:0] |
| PWM Input 17 | PCI17 | RPINR37 | PCI17R[7:0] |
| PWM Input 18 | PCI18 | RPINR38 | PCI18R[7:0] |
| PWM Input 12 | PCI12 | RPINR42 | PCI12R[7:0] |
| PWM Input 13 | PCI13 | RPINR42 | PCI13R[7:0] |
| PWM Input 14 | PCI14 | RPINR43 | PCI14R[7:0] |
| PWM Input 15 | PCI15 | RPINR43 | PCI15R[7:0] |
| PWM Input 16 | PCI16 | RPINR44 | PCI16R[7:0] |
| SENT1 Input | SENT1 | RPINR44 | SENT1R[7:0] |
| SENT2 Input | SENT2 | RPINR45 | SENT2R[7:0] |
| CLC Input A | CLCINA | RPINR45 | CLCINAR[7:0] |
| CLC Input B | CLCINB | RPINR46 | CLCINBR[7:0] |
| CLC Input C | CLCINC | RPINR46 | CLCINCR[7:0] |
| CLC Input D | CLCIND | RPINR47 | CLCINDR[7:0] |
| ADC Trigger Input (ADTRIG31) | ADCTRG | RPINR47 | ADCTRGR[7:0] |
| xCCP Fault D | OCFD | RPINR48 | OCFDR[7:0] |
| UART1 Clear-to-Send | $\overline{U1CTS}$ | RPINR48 | U1CTSR[7:0] |
| UART2 Clear-to-Send | $\overline{U2CTS}$ | RPINR49 | U2CTSR[7:0] |
| UART3 Clear-to-Send | $\overline{U3CTS}$ | RPINR49 | U3CTSR[7:0] |

**Note 1:** Unless otherwise noted, all inputs use the Schmitt Trigger input buffers.

### 8.5.7 OUTPUT MAPPING

In contrast to inputs, the outputs of the Peripheral Pin Select options are mapped on the basis of the pin. In this case, a control register associated with a particular pin dictates the peripheral output to be mapped. The RPORx registers are used to control output mapping. Each register contains sets of 6-bit fields, with each set associated with one RPn pin (see Register 8-54 through Register 8-80). The value of the bit field corresponds to one of the peripherals and that peripheral's output is mapped to the pin (see Table 8-7 and Figure 8-3).

A null output is associated with the output register Reset value of '0'. This is done to ensure that remappable outputs remain disconnected from all output pins by default.

**FIGURE 8-3: MULTIPLEXING REMAPPABLE OUTPUTS FOR RPn**

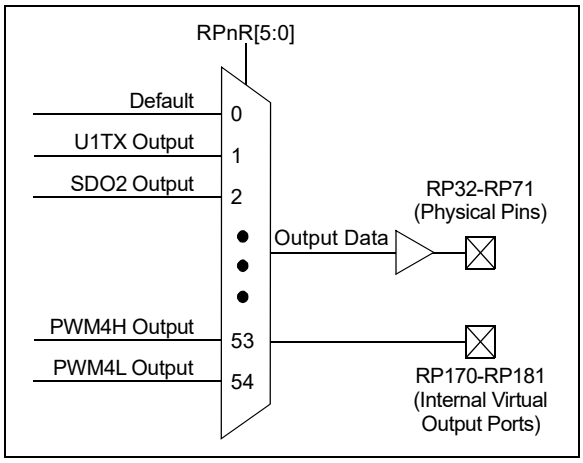


**Note 1:** There are six virtual output ports which are not connected to any I/O ports (RP176-RP181). These virtual ports can be accessed by RPOR20, RPOR21 and RPOR22.

### 8.5.8 MAPPING LIMITATIONS

The control schema of the peripheral select pins is not limited to a small range of fixed peripheral configurations. There are no mutual or hardware-enforced lockouts between any of the peripheral mapping SFRs. Literally, any combination of peripheral mappings, across any or all of the RPn pins, is possible. This includes both many-to-one and one-to-many mappings of peripheral inputs, and outputs to pins. While such mappings may be technically possible from a configuration point of view, they may not be supportable from an electrical point of view (see Table 8-6).


© 2017-2021 Microchip Technology Inc.

**TABLE 8-6: REMAPPABLE OUTPUT PIN REGISTERS**

| Register | RP Pin | I/O Port |
|---|---|---|
| RPOR0[5:0] | RP32 | Port Pin RB0 |
| RPOR0[13:8] | RP33 | Port Pin RB1 |
| RPOR1[5:0] | RP34 | Port Pin RB2 |
| RPOR1[13:8] | RP35 | Port Pin RB3 |
| RPOR2[5:0] | RP36 | Port Pin RB4 |
| RPOR2[13:8] | RP37 | Port Pin RB5 |
| RPOR3[5:0] | RP38 | Port Pin RB6 |
| RPOR3[13:8] | RP39 | Port Pin RB7 |
| RPOR4[5:0] | RP40 | Port Pin RB8 |
| RPOR4[13:8] | RP41 | Port Pin RB9 |
| RPOR5[5:0] | RP42 | Port Pin RB10 |
| RPOR5[13:8] | RP43 | Port Pin RB11 |
| RPOR6[5:0] | RP44 | Port Pin RB12 |
| RPOR6[13:8] | RP45 | Port Pin RB13 |
| RPOR7[5:0] | RP46 | Port Pin RB14 |
| RPOR7[13:8] | RP47 | Port Pin RB15 |
| RPOR8[5:0](1) | RP48 | Port Pin RC0 |
| RPOR8[13:8](1) | RP49 | Port Pin RC1 |
| RPOR9[5:0](1) | RP50 | Port Pin RC2 |
| RPOR9[13:8](1) | RP51 | Port Pin RC3 |
| RPOR10[5:0](1) | RP52 | Port Pin RC4 |
| RPOR10[13:8](1) | RP53 | Port Pin RC5 |
| RPOR11[5:0](1) | RP54 | Port Pin RC6 |
| RPOR11[13:8](1) | RP55 | Port Pin RC7 |
| RPOR12[5:0](1) | RP56 | Port Pin RC8 |
| RPOR12[13:8](1) | RP57 | Port Pin RC9 |
| RPOR13[5:0](1) | RP58 | Port Pin RC10 |
| RPOR13[13:8](1) | RP59 | Port Pin RC11 |
| RPOR14[5:0](1) | RP60 | Port Pin RC12 |
| RPOR14[13:8](1) | RP61 | Port Pin RC13 |
| RPOR15[5:0](1) | RP62 | Port Pin RC14 |
| RPOR15[13:8](1) | RP63 | Port Pin RC15 |
| RPOR16[5:0](1) | RP64 | Port Pin RD0 |
| RPOR16[13:8](1) | RP65 | Port Pin RD1 |
| RPOR17[5:0](1) | RP66 | Port Pin RD2 |
| RPOR17[13:8](1) | RP67 | Port Pin RD3 |
| RPOR18[5:0](1) | RP68 | Port Pin RD4 |
| RPOR18[13:8](1) | RP69 | Port Pin RD5 |
| RPOR19[5:0](1) | RP70 | Port Pin RD6 |
| RPOR19[13:8](1) | RP71 | Port Pin RD7 |
| RPOR20[5:0](1) | RP72 | Port Pin RD8 |
| RPOR20[13:8](1) | RP73 | Port Pin RD9 |
| RPOR21[5:0](1) | RP74 | Port Pin D10 |

**Note 1:** Availability is dependent on supported I/O ports. Refer to Table 8-1 for availability on device variants.

**TABLE 8-6: REMAPPABLE OUTPUT PIN REGISTERS (CONTINUED)**

| Register | RP Pin | I/O Port |
|---|---|---|
| RPOR21[13:8](1) | RP75 | Port Pin RD11 |
| RPOR22[5:0](1) | RP76 | Port Pin RD12 |
| RPOR22[13:8](1) | RP77 | Port Pin RD13 |
| RPOR23[5:0](1) | RP78 | Port Pin RD14 |
| RPOR23[13:8](1) | RP79 | Port Pin RD15 |
| | RP80-RP175 | Reserved |
| RPOR24[5:0] | RP176 | Virtual Pin RPV0 |
| RPOR24[13:8] | RP177 | Virtual Pin RPV1 |
| RPOR25[5:0] | RP178 | Virtual Pin RPV2 |
| RPOR25[13:8] | RP179 | Virtual Pin RPV3 |
| RPOR26[5:0] | RP180 | Virtual Pin RPV4 |
| RPOR26[13:8] | RP181 | Virtual Pin RPV5 |

**Note 1:** Availability is dependent on supported I/O ports. Refer to Table 8-1 for availability on device variants.


© 2017-2021 Microchip Technology Inc.

**TABLE 8-7: OUTPUT SELECTION FOR REMAPPABLE PINS (RPn)**

| Function | RPnR[5:0] | Output Name |
|---|---|---|
| Default PORT | 0 | RPn tied to Default Pin |
| U1TX | 1 | RPn tied to UART1 Transmit |
| $\overline{\text{U1RTS}}$ | 2 | RPn tied to UART1 Request-to-Send |
| U2TX | 3 | RPn tied to UART2 Transmit |
| $\overline{\text{U2RTS}}$ | 4 | RPn tied to UART2 Request-to-Send |
| SDO1 | 5 | RPn tied to SPI1 Data Output |
| SCK1 | 6 | RPn tied to SPI1 Clock Output |
| $\overline{\text{SS1}}$ | 7 | RPn tied to SPI1 Client Select |
| SDO2 | 8 | RPn tied to SPI2 Data Output |
| SCK2 | 9 | RPn tied to SPI2 Clock Output |
| $\overline{\text{SS2}}$ | 10 | RPn tied to SPI2 Client Select |
| SDO3 | 11 | RPn tied to SPI3 Data Output |
| SCK3 | 12 | RPn tied to SPI3 Clock Output |
| $\overline{\text{SS3}}$ | 13 | RPn tied to SPI3 Client Select |
| REFCLKO | 14 | RPn tied to Reference Clock Output |
| OCM1 | 15 | RPn tied to SCCP1 Output |
| OCM2 | 16 | RPn tied to SCCP2 Output |
| OCM3 | 17 | RPn tied to SCCP3 Output |
| OCM4 | 18 | RPn tied to SCCP4 Output |
| OCM5 | 19 | RPn tied to SCCP5 Output |
| OCM6 | 20 | RPn tied to SCCP6 Output |
| CAN1TX | 21 | RPn tied to CAN1 Transmit |
| CMP1 | 23 | RPn tied to Comparator 1 Output |
| CMP2 | 24 | RPn tied to Comparator 2 Output |
| CMP3 | 25 | RPn tied to Comparator 3 Output |
| U3TX | 27 | RPn tied to UART3 Transmit |
| $\overline{\text{U3RTS}}$ | 28 | RPn tied to UART3 Request-to-Send |
| PWM4H | 34 | RPn tied to PWM4H Output |
| PWM4L | 35 | RPn tied to PWM4L Output |
| PWMEA | 36 | RPn tied to PWM Event A Output |
| PWMEB | 37 | RPn tied to PWM Event B Output |
| QEICMP1 | 38 | RPn tied to QEI1 Comparator Output |
| QEICMP2 | 39 | RPn tied to QEI2 Comparator Output |
| CLC1OUT | 40 | RPn tied to CLC1 Output |
| CLC2OUT | 41 | RPn tied to CLC2 Output |
| OCM7 | 42 | RPn tied to SCCP7 Output |
| OCM8 | 43 | RPn tied to SCCP8 Output |
| PWMEC | 44 | RPn tied to PWM Event C Output |
| PWMED | 45 | RPn tied to PWM Event D Output |
| PTGTRG24 | 46 | PTG Trigger Output 24 |
| PTGTRG25 | 47 | PTG Trigger Output 25 |
| SENT1OUT | 48 | RPn tied to SENT1 Output |
| SENT2OUT | 49 | RPn tied to SENT2 Output |

**TABLE 8-7: OUTPUT SELECTION FOR REMAPPABLE PINS (RPn) (CONTINUED)**

| Function | RPnR[5:0] | Output Name |
|---|---|---|
| MCCP9A | 50 | RPn tied to MCCP9 Output A |
| MCCP9B | 51 | RPn tied to MCCP9 Output B |
| MCCP9C | 52 | RPn tied to MCCP9 Output C |
| MCCP9D | 53 | RPn tied to MCCP9 Output D |
| MCCP9E | 54 | RPn tied to MCCP9 Output E |
| MCCP9F | 55 | RPn tied to MCCP9 Output F |
| CLC3OUT | 59 | RPn tied to CLC4 Output |
| CLC4OUT | 60 | RPn tied to CLC4 Output |
| $\overline{\text{U1DTR}}$ | 61 | RPn tied to UART1 DTR |
| $\overline{\text{U2DTR}}$ | 62 | RPn tied to UART2 DTR |
| $\overline{\text{U3DTR}}$ | 63 | RPn tied to UART3 DTR |


© 2017-2021 Microchip Technology Inc.

### 8.5.9 I/O HELPFUL TIPS

1. In some cases, certain pins, as defined in Table 33-15 under “Injection Current”, have internal protection diodes to VDD and VSS. The term, “Injection Current”, is also referred to as “Clamp Current”. On designated pins, with sufficient external current-limiting precautions by the user, I/O pin input voltages are allowed to be greater or lesser than the data sheet absolute maximum ratings, with respect to the VSS and VDD supplies. Note that when the user application forward biases either of the high or low-side internal input clamp diodes, that the resulting current being injected into the device that is clamped internally by the VDD and VSS power rails, may affect the ADC accuracy by four to six counts.
2. I/O pins that are shared with any analog input pin (i.e., ANx) are always analog pins, by default, after any Reset. Consequently, configuring a pin as an analog input pin automatically disables the digital input pin buffer and any attempt to read the digital input level by reading PORTx or LATx will always return a ‘0’, regardless of the digital logic level on the pin. To use a pin as a digital I/O pin on a shared ANx pin, the user application needs to configure the Analog Select for PORTx registers in the I/O ports module (i.e., ANSELx) by setting the appropriate bit that corresponds to that I/O port pin to a ‘0’.

| **Note:** | Although it is not possible to use a digital input pin when its analog function is enabled, it is possible to use the digital I/O output function, TRISx = 0x0, while the analog function is also enabled. However, this is not recommended, particularly if the analog input is connected to an external analog voltage source, which would create signal contention between the analog signal and the output pin driver. |
|---|---|

3. Most I/O pins have multiple functions. Referring to the device pin diagrams in this data sheet, the priorities of the functions allocated to any pins are indicated by reading the pin name, from left-to-right. The left most function name takes precedence over any function to its right in the naming convention. For example: AN16/T2CK/T7CK/RC1; this indicates that AN16 is the highest priority in this example and will supersede all other functions to its right in the list. Those other functions to its right, even if enabled, would not work as long as any other function to its left was enabled. This rule applies to all of the functions listed for a given pin.
4. Each pin has an internal weak pull-up resistor and pull-down resistor that can be configured using the CNPUx and CNPDx registers, respectively. These resistors eliminate the need for external resistors in certain applications. The internal pull-up is up to ~(VDD – 0.8), not VDD. This value is still above the minimum VIH of CMOS and TTL devices.
5. When driving LEDs directly, the I/O pin can source or sink more current than what is specified in the VOH/IOH and VOL/IOL DC characteristics specification. The respective IOH and IOL current rating only applies to maintaining the corresponding output at or above the VOH, and at or below the VOL levels. However, for LEDs, unlike digital inputs of an externally connected device, they are not governed by the same minimum VIH/VIL levels. An I/O pin output can safely sink or source any current less than that listed in the Absolute Maximum Ratings in **Section 33.0 “Electrical Characteristics”** of this data sheet. For example:

   VOH = 2.4v @ IOH = -8 mA and VDD = 3.3V

   The maximum output current sourced by any 8 mA I/O pin = 12 mA.

   LED source current < 12 mA is technically permitted.

6. The Peripheral Pin Select (PPS) pin mapping rules are as follows:
   a) Only one “output” function can be active on a given pin at any time, regardless if it is a dedicated or remappable function (one pin, one output).
   b) It is possible to assign a “remappable output” function to multiple pins and externally short or tie them together for increased current drive.
   c) If any “dedicated output” function is enabled on a pin, it will take precedence over any remappable “output” function.
   d) If any “dedicated digital” (input or output) function is enabled on a pin, any number of “input” remappable functions can be mapped to the same pin.
   e) If any “dedicated analog” function(s) are enabled on a given pin, “digital input(s)” of any kind will all be disabled, although a single “digital output”, at the user’s cautionary discretion, can be enabled and active as long as there is no signal contention with an external analog input signal. For example, it is possible for the ADC to convert the digital output logic level, or to toggle a digital output on a comparator or ADC input, provided there is no external analog input, such as for a built-in self-test.
   f) Any number of “input” remappable functions can be mapped to the same pin(s) at the same time, including to any pin with a single output from either a dedicated or remappable “output”.
   g) The TRISx registers control *only* the digital I/O output buffer. Any other dedicated or remappable active “output” will automatically override the TRISx setting. The TRISx register *does not* control the digital logic “input” buffer. Remappable digital “inputs” do not automatically override TRISx settings, which means that the TRISx bit must be set to input for pins with only remappable input function(s) assigned.
   h) All analog pins are enabled by default after any Reset and the corresponding digital input buffer on the pin has been disabled. Only the Analog Select for PORTx (ANSELx) registers control the digital input buffer, *not* the TRISx register. The user must disable the analog function on a pin using the Analog Select for PORTx registers in order to use any “digital input(s)” on a corresponding pin, no exceptions.

### 8.5.10 I/O PORTS RESOURCES

Many useful resources are provided on the main product page of the Microchip website for the devices listed in this data sheet. This product page contains the latest updates and additional information.

#### 8.5.10.1 Key Resources

- **“I/O Ports with Edge Detect”** (DS70005322) in the *“dsPIC33/PIC24 Family Reference Manual”*
- Code Samples
- Application Notes
- Software Libraries
- Webinars
- All Related *“dsPIC33/PIC24 Family Reference Manual”* Sections
- Development Tools


© 2017-2021 Microchip Technology Inc.

© 2017-2021 Microchip Technology Inc.

**TABLE 8-8: PORTA REGISTER SUMMARY**

| Register | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | B |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ANSELA | — | — | — | — | — | — | — | — | — | — | — | | | ANSE |
| TRISA | — | — | — | — | — | — | — | — | — | — | — | | | TRIS |
| PORTA | — | — | — | — | — | — | — | — | — | — | — | | | RA |
| LATA | — | — | — | — | — | — | — | — | — | — | — | | | LAT |
| ODCA | — | — | — | — | — | — | — | — | — | — | — | | | ODC |
| CNPUA | — | — | — | — | — | — | — | — | — | — | — | | | CNPU |
| CNPDA | — | — | — | — | — | — | — | — | — | — | — | | | CNPD |
| CNCONA | ON | — | — | — | CNSTYLE | — | — | — | — | — | — | — | — | |
| CNEN0A | — | — | — | — | — | — | — | — | — | — | — | | | CNEN |
| CNSTATA | — | — | — | — | — | — | — | — | — | — | — | | | CNSTA |
| CNEN1A | — | — | — | — | — | — | — | — | — | — | — | | | CNEN |
| CNFA | — | — | — | — | — | — | — | — | — | — | — | | | CNF |

**TABLE 8-9: PORTB REGISTER SUMMARY**

| Register | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ANSELB | — | — | — | — | — | — | ANSELB[9:7] | | | — | — | | A |
| TRISB | TRISB[15:0] | | | | | | | | | | | | |
| PORTB | RB[15:0] | | | | | | | | | | | | |
| LATB | LATB[15:0] | | | | | | | | | | | | |
| ODCB | ODCB[15:0] | | | | | | | | | | | | |
| CNPUB | CNPUB[15:0] | | | | | | | | | | | | |
| CNPDB | CNPDB[15:0] | | | | | | | | | | | | |
| CNCONB | ON | — | — | — | CNSTYLE | — | — | — | — | — | — | — | — |
| CNEN0B | CNEN0[15:0] | | | | | | | | | | | | |
| CNSTATB | CNSTATB[15:0] | | | | | | | | | | | | |
| CNEN1B | CNEN1B[15:0] | | | | | | | | | | | | |
| CNFB | CNFB[15:0] | | | | | | | | | | | | |

**TABLE 8-10: PORTC REGISTER SUMMARY**

| Register | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ANSELC | — | — | — | — | — | — | — | — | ANSELC[7:6] | | — | — | |
| TRISC | TRISC[15:0] | | | | | | | | | | | | |
| PORTC | RC[15:0] | | | | | | | | | | | | |
| LATC | LATC[15:0] | | | | | | | | | | | | |
| ODCC | ODCC[15:0] | | | | | | | | | | | | |
| CNPUC | CNPUC[15:0] | | | | | | | | | | | | |
| CNPDC | CNPDC[15:0] | | | | | | | | | | | | |
| CNCONC | ON | — | — | — | CNSTYLE | — | — | — | — | — | — | — | — |
| CNEN0C | CNEN0C[15:0] | | | | | | | | | | | | |
| CNSTATC | CNSTATC[15:0] | | | | | | | | | | | | |
| CNEN1C | CNEN1C[15:0] | | | | | | | | | | | | |
| CNFC | CNFC[15:0] | | | | | | | | | | | | |

**TABLE 8-11: PORTD REGISTER SUMMARY**

| Register | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ANSELD | — | — | ANSELD[13] | — | ANSELD[11:10] | | — | — | — | — | — | — | — |
| TRISD | TRISD[15:0] | | | | | | | | | | | | |
| PORTD | RD[15:0] | | | | | | | | | | | | |
| LATD | LATD[15:0] | | | | | | | | | | | | |
| ODCD | ODCD[15:0] | | | | | | | | | | | | |
| CNPUD | CNPUD[15:0] | | | | | | | | | | | | |
| CNPDD | CNPDD[15:0] | | | | | | | | | | | | |
| CNCOND | ON | — | — | — | CNSTYLE | — | — | — | — | — | — | — | — |
| CNEN0D | CNEN0D[15:0] | | | | | | | | | | | | |
| CNSTATD | CNSTATD[15:0] | | | | | | | | | | | | |
| CNEN1D | CNEN1D[15:0] | | | | | | | | | | | | |
| CNFD | CNFD[15:0] | | | | | | | | | | | | |

© 2017-2021 Microchip Technology Inc.

© 2017-2021 Microchip Technology Inc.

**TABLE 8-12: PORTE REGISTER SUMMARY**

| Register | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ANSLE | — | — | — | — | — | — | — | — | — | — | — | — | — |
| TRISE | TRISE[15:0] | | | | | | | | | | | | |
| PORTE | RE[15:0] | | | | | | | | | | | | |
| LATE | LATE[15:0] | | | | | | | | | | | | |
| ODCE | ODCE[15:0] | | | | | | | | | | | | |
| CNPUE | CNPUE[15:0] | | | | | | | | | | | | |
| CNPDE | CNPDE[15:0] | | | | | | | | | | | | |
| CNCONE | ON | — | — | — | CNSTYLE | — | — | — | — | — | — | — | — |
| CNEN0E | CNEN0E[15:0] | | | | | | | | | | | | |
| CNSTATE | CNSTATE[15:0] | | | | | | | | | | | | |
| CNEN1E | CNEN1E[15:0] | | | | | | | | | | | | |
| CNFE | CNFE[15:0] | | | | | | | | | | | | |

### 8.5.11 PERIPHERAL PIN SELECT REGISTERS

**REGISTER 8-13: RPCON: PERIPHERAL REMAPPING CONFIGURATION REGISTER(1)**

| U-0 | U-0 | U-0 | U-0 | R/W-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | IOLOCK | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **Unimplemented:** Read as '0'

bit 11 **IOLOCK:** Peripheral Remapping Register Lock bit
1 = All Peripheral Remapping registers are locked and cannot be written
0 = All Peripheral Remapping registers are unlocked and can be written

bit 10-0 **Unimplemented:** Read as '0'

**Note 1:** Writing to this register needs an unlock sequence (see **Section 8.5.3 "Controlling Configuration Changes"**).

**REGISTER 8-14: RPINR0: PERIPHERAL PIN SELECT INPUT REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INT1R7 | INT1R6 | INT1R5 | INT1R4 | INT1R3 | INT1R2 | INT1R1 | INT1R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **INT1R[7:0]:** Assign External Interrupt 1 (INT1) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **Unimplemented:** Read as '0'


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-15: RPINR1: PERIPHERAL PIN SELECT INPUT REGISTER 1**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INT3R7 | INT3R6 | INT3R5 | INT3R4 | INT3R3 | INT3R2 | INT3R1 | INT3R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INT2R7 | INT2R6 | INT2R5 | INT2R4 | INT2R3 | INT2R2 | INT2R1 | INT2R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **INT3R[7:0]:** Assign External Interrupt 3 (INT3) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **INT2R[7:0]:** Assign External Interrupt 2 (INT2) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-16: RPINR2: PERIPHERAL PIN SELECT INPUT REGISTER 2**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| T1CKR7 | T1CKR6 | T1CKR5 | T1CKR4 | T1CKR3 | T1CKR2 | T1CKR1 | T1CKR0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **T1CKR[7:0]:** Assign Timer1 External Clock (T1CK) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **Unimplemented:** Read as '0'

**REGISTER 8-17: RPINR3: PERIPHERAL PIN SELECT INPUT REGISTER 3**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ICM1R7 | ICM1R6 | ICM1R5 | ICM1R4 | ICM1R3 | ICM1R2 | ICM1R1 | ICM1R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TCKI1R7 | TCKI1R6 | TCKI1R5 | TCKI1R4 | TCKI1R3 | TCKI1R2 | TCKI1R1 | TCKI1R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **ICM1R[7:0]:** Assign SCCP Capture 1 (ICM1) Input to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **TCKI1[7:0]:** Assign SCCP Timer1 (TCKI1) Input to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-18: RPINR4: PERIPHERAL PIN SELECT INPUT REGISTER 4**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ICM2R7 | ICM2R6 | ICM2R5 | ICM2R4 | ICM2R3 | ICM2R2 | ICM2R1 | ICM2R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TCKI2R7 | TCKI2R6 | TCKI2R5 | TCKI2R4 | TCKI2R3 | TCKI2R2 | TCKI2R1 | TCKI2R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **ICM2R[7:0]:** Assign SCCP Capture 2 (ICM2) Input to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **TCKI2R[7:0]:** Assign SCCP Timer2 (TCKI2) Input to the Corresponding RPn Pin bits
See Table 8-4.


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-19: RPINR5: PERIPHERAL PIN SELECT INPUT REGISTER 5**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ICM3R7 | ICM3R6 | ICM3R5 | ICM3R4 | ICM3R3 | ICM3R2 | ICM3R1 | ICM3R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TCKI3R7 | TCKI3R6 | TCKI3R5 | TCKI3R4 | TCKI3R3 | TCKI3R2 | TCKI3R1 | TCKI3R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **ICM3R[7:0]:** Assign SCCP Capture 3 (ICM3) Input to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **TCKI3R[7:0]:** Assign SCCP Timer3 (TCKI3) Input to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-20: RPINR6: PERIPHERAL PIN SELECT INPUT REGISTER 6**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ICM4R7 | ICM4R6 | ICM4R5 | ICM4R4 | ICM4R3 | ICM4R2 | ICM4R1 | ICM4R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TCKI4R7 | TCKI4R6 | TCKI4R5 | TCKI4R4 | TCKI4R3 | TCKI4R2 | TCKI4R1 | TCKI4R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **ICM4R[7:0]:** Assign SCCP Capture 4 (ICM4) Input to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **TCKI4R[7:0]:** Assign SCCP Timer4 (TCKI4) Input to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-21: RPINR7: PERIPHERAL PIN SELECT INPUT REGISTER 7**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ICM5R7 | ICM5R6 | ICM5R5 | ICM5R4 | ICM5R3 | ICM5R2 | ICM5R1 | ICM5R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TCKI5R7 | TCKI5R6 | TCKI5R5 | TCKI5R4 | TCKI5R3 | TCKI5R2 | TCKI5R1 | TCKI5R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **ICM5R[7:0]:** Assign SCCP Capture 5 (ICM5) Input to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **TCKI5R[7:0]:** Assign SCCP Timer5 (TCKI5) Input to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-22: RPINR8: PERIPHERAL PIN SELECT INPUT REGISTER 8**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ICM6R7 | ICM6R6 | ICM6R5 | ICM6R4 | ICM6R3 | ICM6R2 | ICM6R1 | ICM6R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TCKI6R7 | TCKI6R6 | TCKI6R5 | TCKI6R4 | TCKI6R3 | TCKI6R2 | TCKI6R1 | TCKI6R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **ICM6R[7:0]:** Assign SCCP Capture 6 (ICM6) Input to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **TCKI6R[7:0]:** Assign SCCP Timer6 (TCKI6) Input to the Corresponding RPn Pin bits
See Table 8-4.


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-23: RPINR9: PERIPHERAL PIN SELECT INPUT REGISTER 9**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ICM7R7 | ICM7R6 | ICM7R5 | ICM7R4 | ICM7R3 | ICM7R2 | ICM7R1 | ICM7R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TCKI7R7 | TCKI7R6 | TCKI7R5 | TCKI7R4 | TCKI7R3 | TCKI7R2 | TCKI7R1 | TCKI7R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **ICM7R[7:0]:** Assign SCCP Capture 7 (ICM7) Input to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **TCKI7R[7:0]:** Assign SCCP Timer7 (TCKI7) Input to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-24: RPINR10: PERIPHERAL PIN SELECT INPUT REGISTER 10**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ICM8R7 | ICM8R6 | ICM8R5 | ICM8R4 | ICM8R3 | ICM8R2 | ICM8R1 | ICM8R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TCKI8R7 | TCKI8R6 | TCKI8R5 | TCKI8R4 | TCKI8R3 | TCKI8R2 | TCKI8R1 | TCKI8R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **ICM8R[7:0]:** Assign SCCP Capture 8 (ICM8) Input to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **TCKI8R[7:0]:** Assign SCCP Timer8 (TCKI8) Input to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-25: RPINR11: PERIPHERAL PIN SELECT INPUT REGISTER 11**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| OCFBR7 | OCFBR6 | OCFBR5 | OCFBR4 | OCFBR3 | OCFBR2 | OCFBR1 | OCFBR0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| OCFAR7 | OCFAR6 | OCFAR5 | OCFAR4 | OCFAR3 | OCFAR2 | OCFAR1 | OCFAR0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **OCFBR[7:0]:** Assign SCCP Fault B (OCFB) Input to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **OCFAR[7:0]:** Assign SCCP Fault A (OCFA) Input to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-26: RPINR12: PERIPHERAL PIN SELECT INPUT REGISTER 12**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI9R7 | PCI9R6 | PCI9R5 | PCI9R4 | PCI9R3 | PCI9R2 | PCI9R1 | PCI9R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI8R7 | PCI8R6 | PCI8R5 | PCI8R4 | PCI8R3 | PCI8R2 | PCI8R1 | PCI8R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **PCI9R[7:0]:** Assign PWM Input 9 (PCI9) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **PCI8R[7:0]:** Assign PWM Input 8 (PCI8) to the Corresponding RPn Pin bits
See Table 8-4.


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-27: RPINR13: PERIPHERAL PIN SELECT INPUT REGISTER 13**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI11R7 | PCI11R6 | PCI11R5 | PCI11R4 | PCI11R3 | PCI11R2 | PCI11R1 | PCI11R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI10R7 | PCI10R6 | PCI10R5 | PCI10R4 | PCI10R3 | PCI10R2 | PCI10R1 | PCI10R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **PCI11R[7:0]:** Assign PWM Input 11 (PCI11) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **PCI10R[7:0]:** Assign PWM Input 10 (PCI10) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-28: RPINR14: PERIPHERAL PIN SELECT INPUT REGISTER 14**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIB1R7 | QEIB1R6 | QEIB1R5 | QEIB1R4 | QEIB1R3 | QEIB1R2 | QEIB1R1 | QEIB1R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIA1R7 | QEIA1R6 | QEIA1R5 | QEIA1R4 | QEIA1R3 | QEIA1R2 | QEIA1R1 | QEIA1R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **QEIB1R[7:0]:** Assign QEI1 Input B (QEIB1) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **QEIA1R[7:0]:** Assign QEI1 Input A (QEIA1) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-29: RPINR15: PERIPHERAL PIN SELECT INPUT REGISTER 15**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIHOM1R7 | QEIHOM1R6 | QEIHOM1R5 | QEIHOM1R4 | QEIHOM1R3 | QEIHOM1R2 | QEIHOM1R1 | QEIHOM1R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEINDX1R7 | QEINDX1R6 | QEINDX1R5 | QEINDX1R4 | QEINDX1R3 | QEINDX1R2 | QEINDX1R1 | QEINDX1R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **QEIHOM1R[7:0]:** Assign QEI Home 1 Input (QEIHOM1) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **QEINDX1R[7:0]:** Assign QEI Index 1 Input (QEINDX1) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-30: RPINR16: PERIPHERAL PIN SELECT INPUT REGISTER 16**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIB2R7 | QEIB2R6 | QEIB2R5 | QEIB2R4 | QEIB2R3 | QEIB2R2 | QEIB2R1 | QEIB2R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIA2R7 | QEIA2R6 | QEIA2R5 | QEIA2R4 | QEIA2R3 | QEIA2R2 | QEIA2R1 | QEIA2R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **QEIB2R[7:0]:** Assign QEI2 Input B (QEIB2) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **QEIA2R[7:0]:** Assign QEI2 Input A (QEIA2) to the Corresponding RPn Pin bits
See Table 8-4.


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-31: RPINR17: PERIPHERAL PIN SELECT INPUT REGISTER 17**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIHOM2R7 | QEIHOM2R6 | QEIHOM2R5 | QEIHOM2R4 | QEIHOM2R3 | QEIHOM2R2 | QEIHOM2R1 | QEIHOM2R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEINDX2R7 | QEINDX2R6 | QEINDX2R5 | QEINDX2R4 | QEINDX2R3 | QEINDX2R2 | QEINDX2R1 | QEINDX2R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **QEIHOM2R[7:0]:** Assign QEI Home 2 Input (QEIHOM2) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **QEINDX2R[7:0]:** Assign QEI Index 2 Input (QEINDX2) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-32: RPINR18: PERIPHERAL PIN SELECT INPUT REGISTER 18**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| U1DSRR7 | U1DSRR6 | U1DSRR5 | U1DSRR4 | U1DSRR3 | U1DSRR2 | U1DSRR1 | U1DSRR0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| U1RXR7 | U1RXR6 | U1RXR5 | U1RXR4 | U1RXR3 | U1RXR2 | U1RXR1 | U1RXR0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **U1DSRR[7:0]:** Assign UART1 Data-Set-Ready ($\overline{\text{U1DSR}}$) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **U1RXR[7:0]:** Assign UART1 Receive (U1RX) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-33: RPINR19: PERIPHERAL PIN SELECT INPUT REGISTER 19**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| U2DSRR7 | U2DSRR6 | U2DSRR5 | U2DSRR4 | U2DSRR3 | U2DSRR2 | U2DSRR1 | U2DSRR0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| U2RXR7 | U2RXR6 | U2RXR5 | U2RXR4 | U2RXR3 | U2RXR2 | U2RXR1 | U2RXR0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **U2DSRR[7:0]:** Assign UART2 Data-Set-Ready ($\overline{\text{U2DSR}}$) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **U2RXR[7:0]:** Assign UART2 Receive (U2RX) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-34: RPINR20: PERIPHERAL PIN SELECT INPUT REGISTER 20**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SCK1R7 | SCK1R6 | SCK1R5 | SCK1R4 | SCK1R3 | SCK1R2 | SCK1R1 | SCK1R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SDI1R7 | SDI1R6 | SDI1R5 | SDI1R4 | SDI1R3 | SDI1R2 | SDI1R1 | SDI1R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **SCK1R[7:0]:** Assign SPI1 Clock Input (SCK1IN) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **SDI1R[7:0]:** Assign SPI1 Data Input (SDI1) to the Corresponding RPn Pin bits
See Table 8-4.


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-35: RPINR21: PERIPHERAL PIN SELECT INPUT REGISTER 21**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| REFOIR7 | REFOIR6 | REFOIR5 | REFOIR4 | REFOIR3 | REFOIR2 | REFOIR1 | REFOIR0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SS1R7 | SS1R6 | SS1R5 | SS1R4 | SS1R3 | SS1R2 | SS1R1 | SS1R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **REFOIR[7:0]:** Assign Reference Clock Input (REFOI) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **SS1R[7:0]:** Assign SPI1 Client Select ($\overline{SS1}$) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-36: RPINR22: PERIPHERAL PIN SELECT INPUT REGISTER 22**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SCK2R7 | SCK2R6 | SCK2R5 | SCK2R4 | SCK2R3 | SCK2R2 | SCK2R1 | SCK2R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SDI2R7 | SDI2R6 | SDI2R5 | SDI2R4 | SDI2R3 | SDI2R2 | SDI2R1 | SDI2R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **SCK2R[7:0]:** Assign SPI2 Clock Input (SCK2IN) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **SDI2R[7:0]:** Assign SPI2 Data Input (SDI2) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-37: RPINR23: PERIPHERAL PIN SELECT INPUT REGISTER 23**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SS2R7 | SS2R6 | SS2R5 | SS2R4 | SS2R3 | SS2R2 | SS2R1 | SS2R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **SS2R[7:0]:** Assign SPI2 Client Select ($\overline{SS2}$) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-38: RPINR26: PERIPHERAL PIN SELECT INPUT REGISTER 26**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CAN1RXR7 | CAN1RXR6 | CAN1RXR5 | CAN1RXR4 | CAN1RXR3 | CAN1RXR2 | CAN1RXR1 | CAN1RXR0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **CAN1RXR[7:0]:** Assign CAN1 Input (CAN1RX) to the Corresponding RPn Pin bits
See Table 8-4.


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-39: RPINR27: PERIPHERAL PIN SELECT INPUT REGISTER 27**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| U3DSRR7 | U3DSRR6 | U3DSRR5 | U3DSRR4 | U3DSRR3 | U3DSRR2 | U3DSRR1 | U3DSRR0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| U3RXR7 | U3RXR6 | U3RXR5 | U3RXR4 | U3RXR3 | U3RXR2 | U3RXR1 | U3RXR0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **U3DSRR[7:0]:** Assign UART3 Data-Set-Ready ($\overline{\text{U3DSR}}$) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **U3RXR[7:0]:** Assign UART3 Receive (U3RX) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-40: RPINR29: PERIPHERAL PIN SELECT INPUT REGISTER 29**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SCK3R7 | SCK3R6 | SCK3R5 | SCK3R4 | SCK3R3 | SCK3R2 | SCK3R1 | SCK3R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SDI3R7 | SDI3R6 | SDI3R5 | SDI3R4 | SDI3R3 | SDI3R2 | SDI3R1 | SDI3R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **SCK3R[7:0]:** Assign SPI3 Clock Input (SCK3IN) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **SDI3R[7:0]:** Assign SPI3 Data Input (SDI3) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-41: RPINR30: PERIPHERAL PIN SELECT INPUT REGISTER 30**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SS3R7 | SS3R6 | SS3R5 | SS3R4 | SS3R3 | SS3R2 | SS3R1 | SS3R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **SS3R[7:0]:** Assign SPI3 Client Select ($\overline{SS2}$) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-42: RPINR32: PERIPHERAL PIN SELECT INPUT REGISTER 32**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TCKI9R7 | TCKI9R6 | TCKI9R5 | TCKI9R4 | TCKI9R3 | TCKI9R2 | TCKI9R1 | TCKI9R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **TCKI9R[7:0]:** Assign MCCP Timer9 Input (TCKI9) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **Unimplemented:** Read as '0'


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-43: RPINR33: PERIPHERAL PIN SELECT INPUT REGISTER 33**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ICM9R7 | ICM9R6 | ICM9R5 | ICM9R4 | ICM9R3 | ICM9R2 | ICM9R1 | ICM9R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as ‘0’

bit 7-0 **ICM9R[7:0]:** Assign MCCP Capture 9 Input (ICM9) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-44: RPINR37: PERIPHERAL PIN SELECT INPUT REGISTER 37**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI17R7 | PCI17R6 | PCI17R5 | PCI17R4 | PCI17R3 | PCI17R2 | PCI17R1 | PCI17R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| OCFCR7 | OCFCR6 | OCFCR5 | OCFCR4 | OCFCR3 | OCFCR2 | OCFCR1 | OCFCR0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-8 **PCI17R[7:0]:** Assign PWM Input 17 (PCI17) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **OCFCR[7:0]:** Assign xCCP Fault C (OCFC) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-45: RPINR38: PERIPHERAL PIN SELECT INPUT REGISTER 38**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI18R7 | PCI18R6 | PCI18R5 | PCI18R4 | PCI18R3 | PCI18R2 | PCI18R1 | PCI18R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **PCI17R[7:0]:** Assign PWM Input 17 (PCI17) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-46: RPINR42: PERIPHERAL PIN SELECT INPUT REGISTER 42**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI13R7 | PCI13R6 | PCI13R5 | PCI13R4 | PCI13R3 | PCI13R2 | PCI13R1 | PCI13R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI12R7 | PCI12R6 | PCI12R5 | PCI12R4 | PCI12R3 | PCI12R2 | PCI12R1 | PCI12R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **PCI13R[7:0]:** Assign PWM Input 13 (PCI13) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **PCI12R[7:0]:** Assign PWM Input 12 (PCI12) to the Corresponding RPn Pin bits
See Table 8-4.


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-47: RPINR43: PERIPHERAL PIN SELECT INPUT REGISTER 43**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI15R7 | PCI15R6 | PCI15R5 | PCI15R4 | PCI15R3 | PCI15R2 | PCI15R1 | PCI15R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI14R7 | PCI14R6 | PCI14R5 | PCI14R4 | PCI14R3 | PCI14R2 | PCI14R1 | PCI14R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **PCI15R[7:0]:** Assign PWM Input 15 (PCI15) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **PCI14R[7:0]:** Assign PWM Input 14 (PCI14) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-48: RPINR44: PERIPHERAL PIN SELECT INPUT REGISTER 44**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SENT1R7 | SENT1R6 | SENT1R5 | SENT1R4 | SENT1R3 | SENT1R2 | SENT1R1 | SENT1R0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCI16R7 | PCI16R6 | PCI16R5 | PCI16R4 | PCI16R3 | PCI16R2 | PCI16R1 | PCI16R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **SENT1R[7:0]:** Assign SENT1 Input (SENT1) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **PCI16[7:0]:** Assign PWM Input 16 (PCI16) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-49: RPINR45: PERIPHERAL PIN SELECT INPUT REGISTER 45**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CLCINAR7 | CLCINAR6 | CLCINAR5 | CLCINAR4 | CLCINAR3 | CLCINAR2 | CLCINAR1 | CLCINAR0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SENT2R7 | SENT2R6 | SENT2R5 | SENT2R4 | SENT2R3 | SENT2R2 | SENT2R1 | SENT2R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **CLCINAR[7:0]:** Assign CLC Input A (CLCINA) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **SENT2R[7:0]:** Assign SENT2 Input (SENT2) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-50: RPINR46: PERIPHERAL PIN SELECT INPUT REGISTER 46**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CLCINCR7 | CLCINCR6 | CLCINCR5 | CLCINCR4 | CLCINCR3 | CLCINCR2 | CLCINCR1 | CLCINCR0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CLCINBR7 | CLCINBR6 | CLCINBR5 | CLCINBR4 | CLCINBR3 | CLCINBR2 | CLCINBR1 | CLCINBR0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **CLCINCR[7:0]:** Assign CLC Input C (CLCINC) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **CLCINBR[7:0]:** Assign CLC Input B (CLCINB) to the Corresponding RPn Pin bits
See Table 8-4.


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-51: RPINR47: PERIPHERAL PIN SELECT INPUT REGISTER 47**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ADCTRGR7 | ADCTRGR6 | ADCTRGR5 | ADCTRGR4 | ADCTRGR3 | ADCTRGR2 | ADCTRGR1 | ADCTRGR0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CLCINDR7 | CLCINDR6 | CLCINDR5 | CLCINDR4 | CLCINDR3 | CLCINDR2 | CLCINDR1 | CLCINDR0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **ADCTRGR[7:0]:** Assign ADC Trigger Input (ADCTRG) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **CLCINDR[7:0]:** Assign CLC Input D (CLCIND) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-52: RPINR48: PERIPHERAL PIN SELECT INPUT REGISTER 48**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| U1CTSR7 | U1CTSR6 | U1CTSR5 | U1CTSR4 | U1CTSR3 | U1CTSR2 | U1CTSR1 | U1CTSR0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| OCFDR7 | OCFDR6 | OCFDR5 | OCFDR4 | OCFDR3 | OCFDR2 | OCFDR1 | OCFDR0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **U1CTSR[7:0]:** Assign UART1 Clear-to-Send ($\overline{\text{U1CTS}}$) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **OCFDR[7:0]:** Assign xCCP Fault D (OCFD) to the Corresponding RPn Pin bits
See Table 8-4.

**REGISTER 8-53: RPINR49: PERIPHERAL PIN SELECT INPUT REGISTER 49**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| U3CTSR7 | U3CTSR6 | U3CTSR5 | U3CTSR4 | U3CTSR3 | U3CTSR2 | U3CTSR1 | U3CTSR0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| U2CTSR7 | U2CTSR6 | U2CTSR5 | U2CTSR4 | U2CTSR3 | U2CTSR2 | U2CTSR1 | U2CTSR0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **U3CTSR[7:0]:** Assign UART3 Clear-to-Send ($\overline{\text{U3CTS}}$) to the Corresponding RPn Pin bits
See Table 8-4.

bit 7-0 **U2CTSR[7:0]:** Assign UART2 Clear-to-Send ($\overline{\text{U2CTS}}$) to the Corresponding RPn Pin bits
See Table 8-4.


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-54: RPOR0: PERIPHERAL PIN SELECT OUTPUT REGISTER 0**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP33R5 | RP33R4 | RP33R3 | RP33R2 | RP33R1 | RP33R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP32R5 | RP32R4 | RP32R3 | RP32R2 | RP32R1 | RP32R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP33R[5:0]:** Peripheral Output Function is Assigned to RP33 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP32R[5:0]:** Peripheral Output Function is Assigned to RP32 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-55: RPOR1: PERIPHERAL PIN SELECT OUTPUT REGISTER 1**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP35R5 | RP35R4 | RP35R3 | RP35R2 | RP35R1 | RP35R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP34R5 | RP34R4 | RP34R3 | RP34R2 | RP34R1 | RP34R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP35R[5:0]:** Peripheral Output Function is Assigned to RP35 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP34R[5:0]:** Peripheral Output Function is Assigned to RP34 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-56: RPOR2: PERIPHERAL PIN SELECT OUTPUT REGISTER 2**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP37R5 | RP37R4 | RP37R3 | RP37R2 | RP37R1 | RP37R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP36R5 | RP36R4 | RP36R3 | RP36R2 | RP36R1 | RP36R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP37R[5:0]:** Peripheral Output Function is Assigned to RP37 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP36R[5:0]:** Peripheral Output Function is Assigned to RP36 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-57: RPOR3: PERIPHERAL PIN SELECT OUTPUT REGISTER 3**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP39R5 | RP39R4 | RP39R3 | RP39R2 | RP39R1 | RP39R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP38R5 | RP38R5 | RP38R5 | RP38R5 | RP38R5 | RP38R5 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP39R[5:0]:** Peripheral Output Function is Assigned to RP39 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP38R[5:0]:** Peripheral Output Function is Assigned to RP38 Output Pin bits (see Table 8-7 for peripheral function numbers)


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-58: RPOR4: PERIPHERAL PIN SELECT OUTPUT REGISTER 4**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP41R5 | RP41R4 | RP41R3 | RP41R2 | RP41R1 | RP41R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP40R5 | RP40R4 | RP40R3 | RP40R2 | RP40R1 | RP40R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP41R[5:0]:** Peripheral Output Function is Assigned to RP41 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP40R[5:0]:** Peripheral Output Function is Assigned to RP40 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-59: RPOR5: PERIPHERAL PIN SELECT OUTPUT REGISTER 5**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP43R5 | RP43R4 | RP43R3 | RP43R2 | RP43R1 | RP43R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP42R5 | RP42R4 | RP42R3 | RP42R2 | RP42R1 | RP42R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP43R[5:0]:** Peripheral Output Function is Assigned to RP43 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP42R[5:0]:** Peripheral Output Function is Assigned to RP42 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-60: RPOR6: PERIPHERAL PIN SELECT OUTPUT REGISTER 6**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP45R5 | RP45R4 | RP45R3 | RP45R2 | RP45R1 | RP45R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP44R5 | RP44R4 | RP44R3 | RP44R2 | RP44R1 | RP44R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP45R[5:0]:** Peripheral Output Function is Assigned to RP45 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP44R[5:0]:** Peripheral Output Function is Assigned to RP44 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-61: RPOR7: PERIPHERAL PIN SELECT OUTPUT REGISTER 7**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP47R5 | RP47R4 | RP47R3 | RP47R2 | RP47R1 | RP47R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP46R5 | RP46R4 | RP46R3 | RP46R2 | RP46R1 | RP46R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP47R[5:0]:** Peripheral Output Function is Assigned to RP47 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP46R[5:0]:** Peripheral Output Function is Assigned to RP46 Output Pin bits (see Table 8-7 for peripheral function numbers)


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-62: RPOR8: PERIPHERAL PIN SELECT OUTPUT REGISTER 8**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP49R5 | RP49R4 | RP49R3 | RP49R2 | RP49R1 | RP49R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP48R5 | RP48R4 | RP48R3 | RP48R2 | RP48R1 | RP48R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP49R[5:0]:** Peripheral Output Function is Assigned to RP49 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP48R[5:0]:** Peripheral Output Function is Assigned to RP48 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-63: RPOR9: PERIPHERAL PIN SELECT OUTPUT REGISTER 9**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP51R5 | RP51R4 | RP51R3 | RP51R2 | RP51R1 | RP51R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP50R5 | RP50R4 | RP50R3 | RP50R2 | RP50R1 | RP50R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP51R[5:0]:** Peripheral Output Function is Assigned to RP51 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP50R[5:0]:** Peripheral Output Function is Assigned to RP50 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-64: RPOR10: PERIPHERAL PIN SELECT OUTPUT REGISTER 10**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP53R5 | RP53R4 | RP53R3 | RP53R2 | RP53R1 | RP53R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP52R5 | RP52R4 | RP52R3 | RP52R2 | RP52R1 | RP52R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP53[5:0]:** Peripheral Output Function is Assigned to RP53 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP52R[5:0]:** Peripheral Output Function is Assigned to RP52 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-65: RPOR11: PERIPHERAL PIN SELECT OUTPUT REGISTER 11**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP55R5 | RP55R4 | RP55R3 | RP55R2 | RP55R1 | RP55R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP54R5 | RP54R4 | RP54R3 | RP54R2 | RP54R1 | RP54R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP55R[5:0]:** Peripheral Output Function is Assigned to RP55 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP54R[5:0]:** Peripheral Output Function is Assigned to RP54 Output Pin bits (see Table 8-7 for peripheral function numbers)


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-66: RPOR12: PERIPHERAL PIN SELECT OUTPUT REGISTER 12**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP57R5 | RP57R4 | RP57R3 | RP57R2 | RP57R1 | RP57R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP56R5 | RP56R4 | RP56R3 | RP56R2 | RP56R1 | RP56R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP57R[5:0]:** Peripheral Output Function is Assigned to RP57 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP56R[5:0]:** Peripheral Output Function is Assigned to RP56 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-67: RPOR13: PERIPHERAL PIN SELECT OUTPUT REGISTER 13**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP59R5 | RP59R4 | RP59R3 | RP59R2 | RP59R1 | RP59R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP58R5 | RP58R4 | RP58R3 | RP58R2 | RP58R1 | RP58R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP59R[5:0]:** Peripheral Output Function is Assigned to RP59 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP58R[5:0]:** Peripheral Output Function is Assigned to RP58 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-68: RPOR14: PERIPHERAL PIN SELECT OUTPUT REGISTER 14**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP61R5 | RP61R4 | RP61R3 | RP61R2 | RP61R1 | RP61R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP60R5 | RP60R4 | RP60R3 | RP60R2 | RP60R1 | RP60R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP61R[5:0]:** Peripheral Output Function is Assigned to RP61 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP60R[5:0]:** Peripheral Output Function is Assigned to RP60 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-69: RPOR15: PERIPHERAL PIN SELECT OUTPUT REGISTER 15**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP63R5 | RP63R4 | RP63R3 | RP63R2 | RP63R1 | RP63R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP62R5 | RP62R4 | RP62R3 | RP62R2 | RP62R1 | RP62R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP63R[5:0]:** Peripheral Output Function is Assigned to RP63 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP62R[5:0]:** Peripheral Output Function is Assigned to RP62 Output Pin bits (see Table 8-7 for peripheral function numbers)


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-70: RPOR16: PERIPHERAL PIN SELECT OUTPUT REGISTER 16**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP65R5 | RP65R4 | RP65R3 | RP65R2 | RP65R1 | RP65R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP64R5 | RP64R4 | RP64R3 | RP64R2 | RP64R1 | RP64R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP65R[5:0]:** Peripheral Output Function is Assigned to RP65 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP64R[5:0]:** Peripheral Output Function is Assigned to RP64 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-71: RPOR17: PERIPHERAL PIN SELECT OUTPUT REGISTER 17**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP67R5 | RP67R4 | RP67R3 | RP67R2 | RP67R1 | RP67R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP66R5 | RP66R4 | RP66R3 | RP66R2 | RP66R1 | RP66R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP67R[5:0]:** Peripheral Output Function is Assigned to RP67 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP66R[5:0]:** Peripheral Output Function is Assigned to RP66 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-72: RPOR18: PERIPHERAL PIN SELECT OUTPUT REGISTER 18**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP69R5 | RP69R4 | RP69R3 | RP69R2 | RP69R1 | RP69R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP68R5 | RP68R4 | RP68R3 | RP68R2 | RP68R1 | RP68R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP69R[5:0]:** Peripheral Output Function is Assigned to RP69 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP68R[5:0]:** Peripheral Output Function is Assigned to RP68 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-73: RPOR19: PERIPHERAL PIN SELECT OUTPUT REGISTER 19**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP71R5 | RP71R4 | RP71R3 | RP71R2 | RP71R1 | RP71R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP70R5 | RP70R4 | RP70R3 | RP70R2 | RP70R1 | RP70R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP71R[5:0]:** Peripheral Output Function is Assigned to RP71 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP70R[5:0]:** Peripheral Output Function is Assigned to RP70 Output Pin bits (see Table 8-7 for peripheral function numbers)


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-74: RPOR20: PERIPHERAL PIN SELECT OUTPUT REGISTER 20**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP73R5 | RP73R4 | RP73R3 | RP73R2 | RP73R1 | RP73R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP72R5 | RP72R4 | RP72R3 | RP72R2 | RP72R1 | RP72R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP73R[5:0]:** Peripheral Output Function is Assigned to RP73 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP72R[5:0]:** Peripheral Output Function is Assigned to RP72 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-75: RPOR21: PERIPHERAL PIN SELECT OUTPUT REGISTER 21**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP75R5 | RP75R4 | RP75R3 | RP75R2 | RP75R1 | RP75R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP74R5 | RP74R4 | RP74R3 | RP74R2 | RP74R1 | RP74R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP75R[5:0]:** Peripheral Output Function is Assigned to RP75 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP74R[5:0]:** Peripheral Output Function is Assigned to RP74 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-76: RPOR22: PERIPHERAL PIN SELECT OUTPUT REGISTER 22**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP77R5 | RP77R4 | RP77R3 | RP77R2 | RP77R1 | RP77R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP76R5 | RP76R4 | RP76R3 | RP76R2 | RP76R1 | RP76R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP77R[5:0]:** Peripheral Output Function is Assigned to RP77 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP76R[5:0]:** Peripheral Output Function is Assigned to RP76 Output Pin bits (see Table 8-7 for peripheral function numbers)

**REGISTER 8-77: RPOR23: PERIPHERAL PIN SELECT OUTPUT REGISTER 23**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP79R5 | RP79R4 | RP79R3 | RP79R2 | RP79R1 | RP79R0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP78R5 | RP78R4 | RP78R3 | RP78R2 | RP78R1 | RP78R0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP79R[5:0]:** Peripheral Output Function is Assigned to RP79 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP78R[5:0]:** Peripheral Output Function is Assigned to RP78 Output Pin bits (see Table 8-7 for peripheral function numbers)


© 2017-2021 Microchip Technology Inc.

**REGISTER 8-78: RPOR24: PERIPHERAL PIN SELECT OUTPUT REGISTER 24**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP177R5(1) | RP177R4(1) | RP177R3(1) | RP177R2(1) | RP177R1(1) | RP177R0(1) |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP176R5(1) | RP176R4(1) | RP176R3(1) | RP176R2(1) | RP176R1(1) | RP176R0(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP177R[5:0]:** Peripheral Output Function is Assigned to RP177 Output Pin bits(1)
(see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP176R[5:0]:** Peripheral Output Function is Assigned to RP176 Output Pin bits(1)
(see Table 8-7 for peripheral function numbers)

**Note 1:** These are virtual output ports.

**REGISTER 8-79: RPOR25: PERIPHERAL PIN SELECT OUTPUT REGISTER 25**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP179R5(1) | RP179R4(1) | RP179R3(1) | RP179R2(1) | RP179R1(1) | RP179R0(1) |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP178R5(1) | RP178R4(1) | RP178R3(1) | RP178R2(1) | RP178R1(1) | RP178R0(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP179R[5:0]:** Peripheral Output Function is Assigned to RP179 Output Pin bits(1)
(see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP178R[5:0]:** Peripheral Output Function is Assigned to RP178 Output Pin bits(1)
(see Table 8-7 for peripheral function numbers)

**Note 1:** These are virtual output ports.

**REGISTER 8-80: RPOR26: PERIPHERAL PIN SELECT OUTPUT REGISTER 26**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP181R5(1) | RP181R4(1) | RP181R3(1) | RP181R2(1) | RP181R1(1) | RP181R0(1) |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RP180R5(1) | RP180R4(1) | RP180R3(1) | RP180R2(1) | RP180R1(1) | RP180R0(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RP181R[5:0]:** Peripheral Output Function is Assigned to RP181 Output Pin bits (see Table 8-7 for peripheral function numbers)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **RP180R[5:0]:** Peripheral Output Function is Assigned to RP180 Output Pin bits (see Table 8-7 for peripheral function numbers)

**Note 1:** These are virtual output ports.


© 2017-2021 Microchip Technology Inc.

© 2017-2021 Microchip Technology Inc.

**TABLE 8-13: PPS INPUT CONTROL REGISTERS**

| Register | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| RPCON | — | — | — | — | IOLOCK | — | — | — | — | — | — | — | — |
| RPINR0 | INT1R7 | INT1R6 | INT1R5 | INT1R4 | INT1R3 | INT1R2 | INT1R1 | INT1R0 | — | — | — | — | — |
| RPINR1 | INT3R7 | INT3R6 | INT3R5 | INT3R4 | INT3R3 | INT3R2 | INT3R1 | INT3R0 | INT2R7 | INT2R6 | INT2R5 | INT2R4 | INT2R3 |
| RPINR2 | T1CKR7 | T1CKR6 | T1CKR5 | T1CKR4 | T1CKR3 | T1CKR2 | T1CKR1 | T1CKR0 | — | — | — | — | — |
| RPINR3 | ICM1R7 | ICM1R6 | ICM1R5 | ICM1R4 | ICM1R3 | ICM1R2 | ICM1R1 | ICM1R0 | TCKI1R7 | TCKI1R6 | TCKI1R5 | TCKI1R4 | TCKI1R3 |
| RPINR4 | ICM2R7 | ICM2R6 | ICM2R5 | ICM2R4 | ICM2R3 | ICM2R2 | ICM2R1 | ICM2R0 | TCKI2R7 | TCKI2R6 | TCKI2R5 | TCKI2R4 | TCKI2R3 |
| RPINR5 | ICM3R7 | ICM3R6 | ICM3R5 | ICM3R4 | ICM3R3 | ICM3R2 | ICM3R1 | ICM3R0 | TCKI3R7 | TCKI3R6 | TCKI3R5 | TCKI3R4 | TCKI3R3 |
| RPINR6 | ICM4R7 | ICM4R6 | ICM4R5 | ICM4R4 | ICM4R3 | ICM4R2 | ICM4R1 | ICM4R0 | TCKI4R7 | TCKI4R | TCKI4R5 | TCKI4R4 | TCKI4R3 |
| RPINR7 | ICM5R7 | ICM5R6 | ICM5R5 | ICM5R4 | ICM5R3 | ICM5R2 | ICM5R1 | ICM5R0 | TCKI5R7 | TCKI5R6 | TCKI5R5 | TCKI5R4 | TCKI5R3 |
| RPINR8 | ICM6R7 | ICM6R6 | ICM6R5 | ICM6R4 | ICM6R3 | ICM6R2 | ICM6R1 | ICM6R0 | TCKI6R7 | TCKI6R6 | TCKI6R5 | TCKI6R4 | TCKI6R3 |
| RPINR9 | ICM7R7 | ICM7R6 | ICM7R5 | ICM7R4 | ICM7R3 | ICM7R2 | ICM7R1 | ICM7R0 | TCKI7R7 | TCKI7R6 | TCKI7R5 | TCKI7R4 | TCKI7R3 |
| RPINR10 | ICM8R7 | ICM8R6 | ICM8R5 | ICM8R4 | ICM8R3 | ICM8R2 | ICM8R1 | ICM8R0 | TCKI8R7 | TCKI8R6 | TCKI8R5 | TCKI8R4 | TCKI8R3 |
| RPINR11 | OCFBR7 | OCFBR6 | OCFBR5 | OCFBR4 | OCFBR3 | OCFBR2 | OCFBR1 | OCFBR0 | OCFAR7 | OCFAR6 | OCFAR5 | OCFAR4 | OCFAR3 |
| RPINR12 | PCI9R7 | PCI9R6 | PCI9R5 | PCI9R4 | PCI9R3 | PCI9R2 | PCI9R1 | PCI9R0 | PCI8R7 | PCI8R6 | PCI8R5 | PCI8R4 | PCI8R3 |
| RPINR13 | PCI11R7 | PCI11R6 | PCI11R5 | PCI11R4 | PCI11R3 | PCI11R2 | PCI11R1 | PCI11R0 | PCI10R7 | PCI10R6 | PCI10R5 | PCI10R4 | PCI10R3 |
| RPINR14 | QEIB1R7 | QEIB1R6 | QEIB1R5 | QEIB1R4 | QEIB1R3 | QEIB1R2 | QEIB1R1 | QEIB1R0 | QEIA1R7 | QEIA1R6 | QEIA1R5 | QEIA1R4 | QEIA1R3 |
| RPINR15 | QEIHOM1R7 | QEIHOM1R6 | QEIHOM1R5 | QEIHOM1R4 | QEIHOM1R3 | QEIHOM1R2 | QEIHOM1R1 | QEIHOM1R0 | QEINDX1R7 | QEINDX1R6 | QEINDX1R5 | QEINDX1R4 | QEINDX1R3 |
| RPINR16 | QEIB2R7 | QEIB2R6 | QEIB2R5 | QEIB2R4 | QEIB2R3 | QEIB2R2 | QEIB2R1 | QEIB2R0 | QEIA2R7 | QEIA2R6 | QEIA2R5 | QEIA2R4 | QEIA2R3 |
| RPINR17 | QEIHOM2R7 | QEIHOM2R6 | QEIHOM2R5 | QEIHOM2R4 | QEIHOM2R3 | QEIHOM2R2 | QEIHOM2R1 | QEIHOM2R0 | QEINDX2R7 | QEINDX2R6 | QEINDX2R5 | QEINDX2R4 | QEINDX2R3 |
| RPINR18 | U1DSRR7 | U1DSRR6 | U1DSRR5 | U1DSRR4 | U1DSRR3 | U1DSRR2 | U1DSRR1 | U1DSRR0 | U1RXR7 | U1RXR6 | U1RXR5 | U1RXR4 | U1RXR3 |
| RPINR19 | U2DSRR7 | U2DSRR6 | U2DSRR5 | U2DSRR4 | U2DSRR3 | U2DSRR2 | U2DSRR1 | U2DSRR0 | U2RXR7 | U2RXR6 | U2RXR5 | U2RXR4 | U2RXR3 |
| RPINR20 | SCK1R7 | SCK1R6 | SCK1R5 | SCK1R4 | SCK1R3 | SCK1R2 | SCK1R1 | SCK1R0 | SDI1R7 | SDI1R6 | SDI1R5 | SDI1R4 | SDI1R3 |
| RPINR21 | REFOIR7 | REFOIR6 | REFOIR5 | REFOIR4 | REFOIR3 | REFOIR2 | REFOIR1 | REFOIR0 | SS1R7 | SS1R6 | SS1R5 | SS1R4 | SS1R3 |
| RPINR22 | SCK2R7 | SCK2R6 | SCK2R5 | SCK2R4 | SCK2R3 | SCK2R2 | SCK2R1 | SCK2R0 | SDI2R7 | SDI2R6 | SDI2R5 | SDI2R4 | SDI2R3 |
| RPINR23 | — | — | — | — | — | — | — | — | SS2R7 | SS2R6 | SS2R5 | SS2R4 | SS2R3 |
| RPINR26 | — | — | — | — | — | — | — | — | CAN1RXR7 | CAN1RXR6 | CAN1RXR5 | CAN1RXR4 | CAN1RXR3 |
| RPINR27 | U3DSRR7 | U3DSRR6 | U3DSRR5 | U3DSRR4 | U3DSRR3 | U3DSRR2 | U3DSRR1 | U3DSRR0 | U3RXR7 | U3RXR6 | U3RXR5 | U3RXR4 | U3RXR3 |
| RPINR29 | SCK3R7 | SCK3R6 | SCK3R5 | SCK3R4 | SCK3R3 | SCK3R2 | SCK3R1 | SCK3R0 | SDI3R7 | SDI3R6 | SDI3R5 | SDI3R4 | SDI3R3 |
| RPINR30 | — | — | — | — | — | — | — | — | SS3R7 | SS3R6 | SS3R5 | SS3R4 | SS3R3 |
| RPINR32 | TCKI9R7 | TCKI9R6 | TCKI9R5 | TCKI9R4 | TCKI9R3 | TCKI9R2 | TCKI9R1 | TCKI9R0 | — | — | — | — | — |
| RPINR33 | — | — | — | — | — | — | — | — | ICM9R7 | ICM9R6 | ICM9R5 | ICM9R4 | ICM9R3 |
| RPINR37 | PCI17R7 | PCI17R6 | PCI17R5 | PCI17R4 | PCI17R3 | PCI17R2 | PCI17R1 | PCI17R0 | OCFCR7 | OCFCR6 | OCFCR5 | OCFCR4 | OCFCR3 |
| RPINR38 | — | — | — | — | — | — | — | — | PCI18R7 | PCI18R6 | PCI18R5 | PCI18R4 | PCI18R3 |
| RPINR42 | PCI13R7 | PCI13R6 | PCI13R5 | PCI13R4 | PCI13R3 | PCI13R2 | PCI13R1 | PCI13R0 | PCI12R7 | PCI12R6 | PCI12R5 | PCI12R4 | PCI12R3 |
| RPINR43 | PCI15R7 | PCI15R6 | PCI15R5 | PCI15R4 | PCI15R3 | PCI15R2 | PCI15R1 | PCI15R0 | PCI14R7 | PCI14R6 | PCI14R5 | PCI14R4 | PCI14R3 |
| RPINR44 | SENT1R7 | SENT1R6 | SENT1R5 | SENT1R4 | SENT1R3 | SENT1R2 | SENT1R1 | SENT1R0 | PCI16R7 | PCI16R6 | PCI16R5 | PCI16R4 | PCI16R3 |
| RPINR45 | CLCINAR7 | CLCINAR6 | CLCINAR5 | CLCINAR4 | CLCINAR3 | CLCINAR2 | CLCINAR1 | CLCINAR0 | SENT2R7 | SENT2R6 | SENT2R5 | SENT2R4 | SENT2R3 |
| RPINR46 | CLCINCR7 | CLCINCR6 | CLCINCR5 | CLCINCR4 | CLCINCR3 | CLCINCR2 | CLCINCR1 | CLCINCR0 | CLCINBR7 | CLCINBR6 | CLCINBR5 | CLCINBR4 | CLCINBR3 |
| RPINR47 | ADCTRGR7 | ADCTRGR6 | ADCTRGR5 | ADCTRGR4 | ADCTRGR3 | ADCTRGR2 | ADCTRGR1 | ADCTRGR0 | CLCINDR7 | CLCINDR6 | CLCINDR5 | CLCINDR4 | CLCINDR3 |
| RPINR48 | U1CTSR7 | U1CTSR6 | U1CTSR5 | U1CTSR4 | U1CTSR3 | U1CTSR2 | U1CTSR1 | U1CTSR0 | OCFDR7 | OCFDR6 | OCFDR5 | OCFDR4 | OCFDR3 |
| RPINR49 | U3CTSR7 | U3CTSR6 | U3CTSR5 | U3CTSR4 | U3CTSR3 | U3CTSR2 | U3CTSR1 | U3CTSR0 | U2CTSR7 | U2CTSR6 | U2CTSR5 | U2CTSR4 | U2CTSR3 |

**TABLE 8-14: PPS OUTPUT CONTROL REGISTERS**

| Register | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| RPOR0 | — | — | RP33R5 | RP33R4 | RP33R3 | RP33R2 | RP33R1 | RP33R0 | — | — | RP32R5 | RP32R4 | RP32R3 | F |
| RPOR1 | — | — | RP35R5 | RP35R4 | RP35R3 | RP35R2 | RP35R1 | RP35R0 | — | — | RP34R5 | RP34R4 | RP34R3 | F |
| RPOR2 | — | — | RP37R5 | RP37R4 | RP37R3 | RP37R2 | RP37R1 | RP37R0 | — | — | RP36R5 | RP36R4 | RP36R3 | F |
| RPOR3 | — | — | RP39R5 | RP39R4 | RP39R3 | RP39R2 | RP39R1 | RP39R0 | — | — | RP38R5 | RP38R4 | RP38R3 | F |
| RPOR4 | — | — | RP41R5 | RP41R4 | RP41R3 | RP41R2 | RP41R1 | RP41R0 | — | — | RP40R5 | RP40R4 | RP40R3 | F |
| RPOR5 | — | — | RP43R5 | RP43R4 | RP43R3 | RP43R2 | RP43R1 | RP43R0 | — | — | RP42R5 | RP42R4 | RP42R3 | F |
| RPOR6 | — | — | RP45R5 | RP45R4 | RP45R3 | RP45R2 | RP45R1 | RP45R0 | — | — | RP44R5 | RP44R4 | RP44R3 | F |
| RPOR7 | — | — | RP47R5 | RP47R4 | RP47R3 | RP47R2 | RP47R1 | RP47R0 | — | — | RP46R5 | RP46R4 | RP46R3 | F |
| RPOR8(1) | — | — | RP49R5 | RP49R4 | RP49R3 | RP49R2 | RP49R1 | RP49R0 | — | — | RP48R5 | RP48R4 | RP48R3 | F |
| RPOR9(1) | — | — | RP51R5 | RP51R4 | RP51R3 | RP51R2 | RP51R1 | RP51R0 | — | — | RP50R5 | RP50R4 | RP50R3 | F |
| RPOR10(1) | — | — | RP53R5 | RP53R4 | RP53R3 | RP53R2 | RP53R1 | RP53R0 | — | — | RP52R5 | RP52R4 | RP52R3 | F |
| RPOR11(1) | — | — | RP55R5 | RP55R4 | RP55R3 | RP55R2 | RP55R1 | RP55R0 | — | — | RP54R5 | RP54R4 | RP54R3 | F |
| RPOR12(1) | — | — | RP57R5 | RP57R4 | RP57R3 | RP57R2 | RP57R1 | RP57R0 | — | — | RP56R5 | RP56R4 | RP56R3 | F |
| RPOR13(1) | — | — | RP59R5 | RP59R4 | RP59R3 | RP59R2 | RP59R1 | RP59R0 | — | — | RP58R5 | RP58R4 | RP58R3 | F |
| RPOR14(1) | — | — | RP61R5 | RP61R4 | RP61R3 | RP61R2 | RP61R1 | RP61R0 | — | — | RP60R5 | RP60R4 | RP60R3 | F |
| RPOR15(1) | — | — | RP63R5 | RP63R4 | RP63R3 | RP63R2 | RP63R1 | RP63R0 | — | — | RP62R5 | RP62R4 | RP62R3 | F |
| RPOR16(1) | — | — | RP65R5 | RP65R4 | RP65R3 | RP65R2 | RP65R1 | RP65R0 | — | — | RP64R5 | RP64R4 | RP64R3 | F |
| RPOR17(1) | — | — | RP67R5 | RP67R4 | RP67R3 | RP67R2 | RP67R1 | RP67R0 | — | — | RP66R5 | RP66R4 | RP66R3 | F |
| RPOR18(1) | — | — | RP69R5 | RP69R4 | RP69R3 | RP69R2 | RP69R1 | RP69R0 | — | — | RP68R5 | RP68R4 | RP68R3 | F |
| RPOR19(1) | — | — | RP71R5 | RP71R4 | RP71R3 | RP71R2 | RP71R1 | RP71R0 | — | — | RP70R5 | RP70R4 | RP70R3 | F |
| RPOR20(1) | — | — | RP73R5 | RP73R4 | RP73R3 | RP73R2 | RP73R1 | RP73R0 | — | — | RP72R5 | RP72R4 | RP72R3 | F |
| RPOR21(1) | — | — | RP75R5 | RP75R4 | RP75R3 | RP75R2 | RP75R1 | RP75R0 | — | — | RP74R5 | RP74R4 | RP74R3 | F |
| RPOR22(1) | — | — | RP77R5 | RP77R4 | RP77R3 | RP77R2 | RP77R1 | RP77R0 | — | — | RP76R5 | RP76R4 | RP76R3 | F |
| RPOR23(1) | — | — | RP79R5 | RP79R4 | RP79R3 | RP79R2 | RP79R1 | RP79R0 | — | — | RP78R5 | RP78R4 | RP78R3 | F |
| RPOR24 | — | — | RP177R5 | RP177R4 | RP177R3 | RP177R2 | RP177R1 | RP177R0 | — | — | RP176R5 | RP176R4 | RP176R3 | R |
| RPOR25 | — | — | RP179R5 | RP179R4 | RP179R3 | RP179R2 | RP179R1 | RP179R0 | — | — | RP178R5 | RP178R4 | RP178R3 | R |
| RPOR26 | — | — | RP181R5 | RP181R4 | RP181R3 | RP181R2 | RP181R1 | RP181R0 | — | — | RP180R5 | RP180R4 | RP180R3 | R |

**Note 1:** Availability is dependent on supported I/O ports. Refer to Table 8-1 and Table 8-6 for availability on device variants.

© 2017-2021 Microchip Technology Inc.

## 9.0 OSCILLATOR WITH HIGH-FREQUENCY PLL

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Oscillator Module with High-Speed PLL"** (www.microchip.com/DS70005255) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The dsPIC33CK256MP508 family oscillator with high-frequency PLL includes these characteristics:

- On-Chip Phase-Locked Loop (PLL) to Boost Internal Operating Frequency on Select Internal and External Oscillator Sources
- Auxiliary PLL (APLL) Clock Generator to Boost Operating Frequency for Peripherals
- Doze mode for System Power Savings
- Scalable Reference Clock Output (REFCLKO)
- On-the-Fly Clock Switching between Various Clock Sources
- Fail-Safe Clock Monitoring (FSCM) that Detects Clock Failure and Permits Safe Application Recovery or Shutdown

A block diagram of the dsPIC33CK256MP508 oscillator system is shown in Figure 9-1.

**FIGURE 9-1: dsPIC33CK256MP508 CORE CLOCK SOURCES BLOCK DIAGRAM**

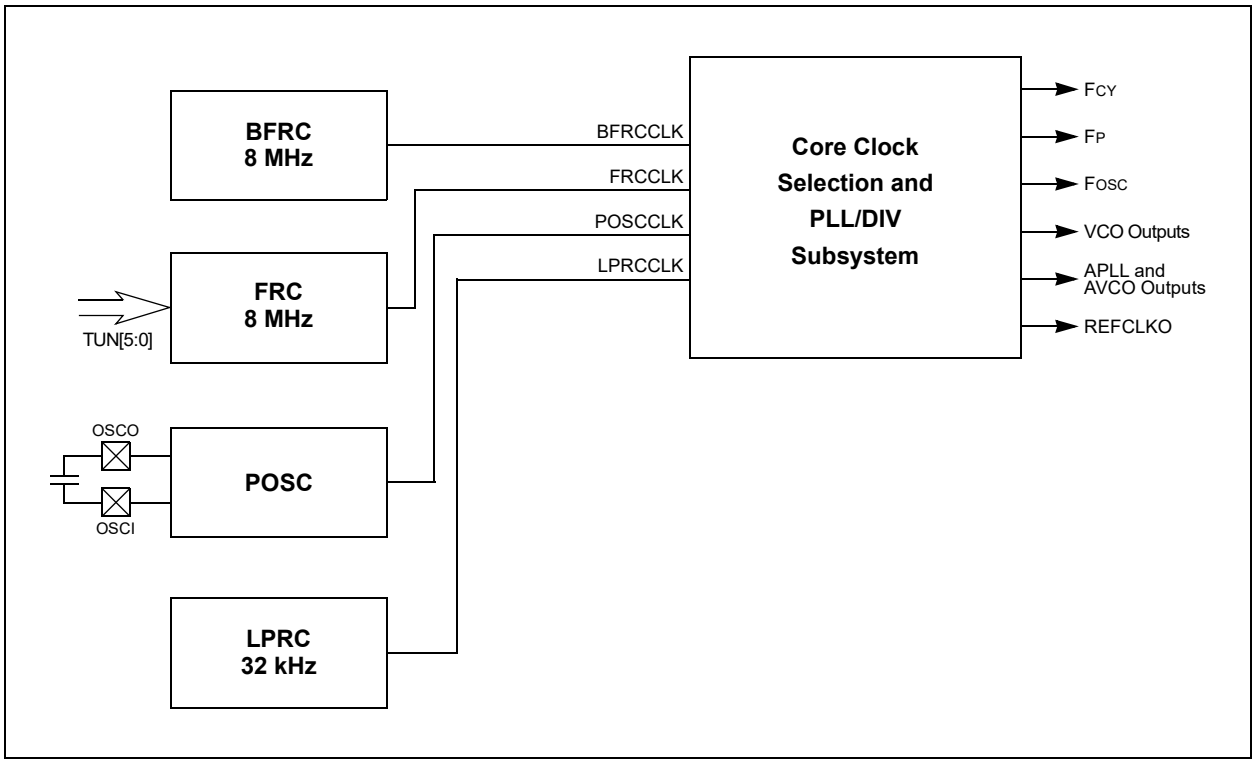

**FIGURE 9-2: dsPIC33CK256MP508 CORE OSCILLATOR SUBSYSTEM**

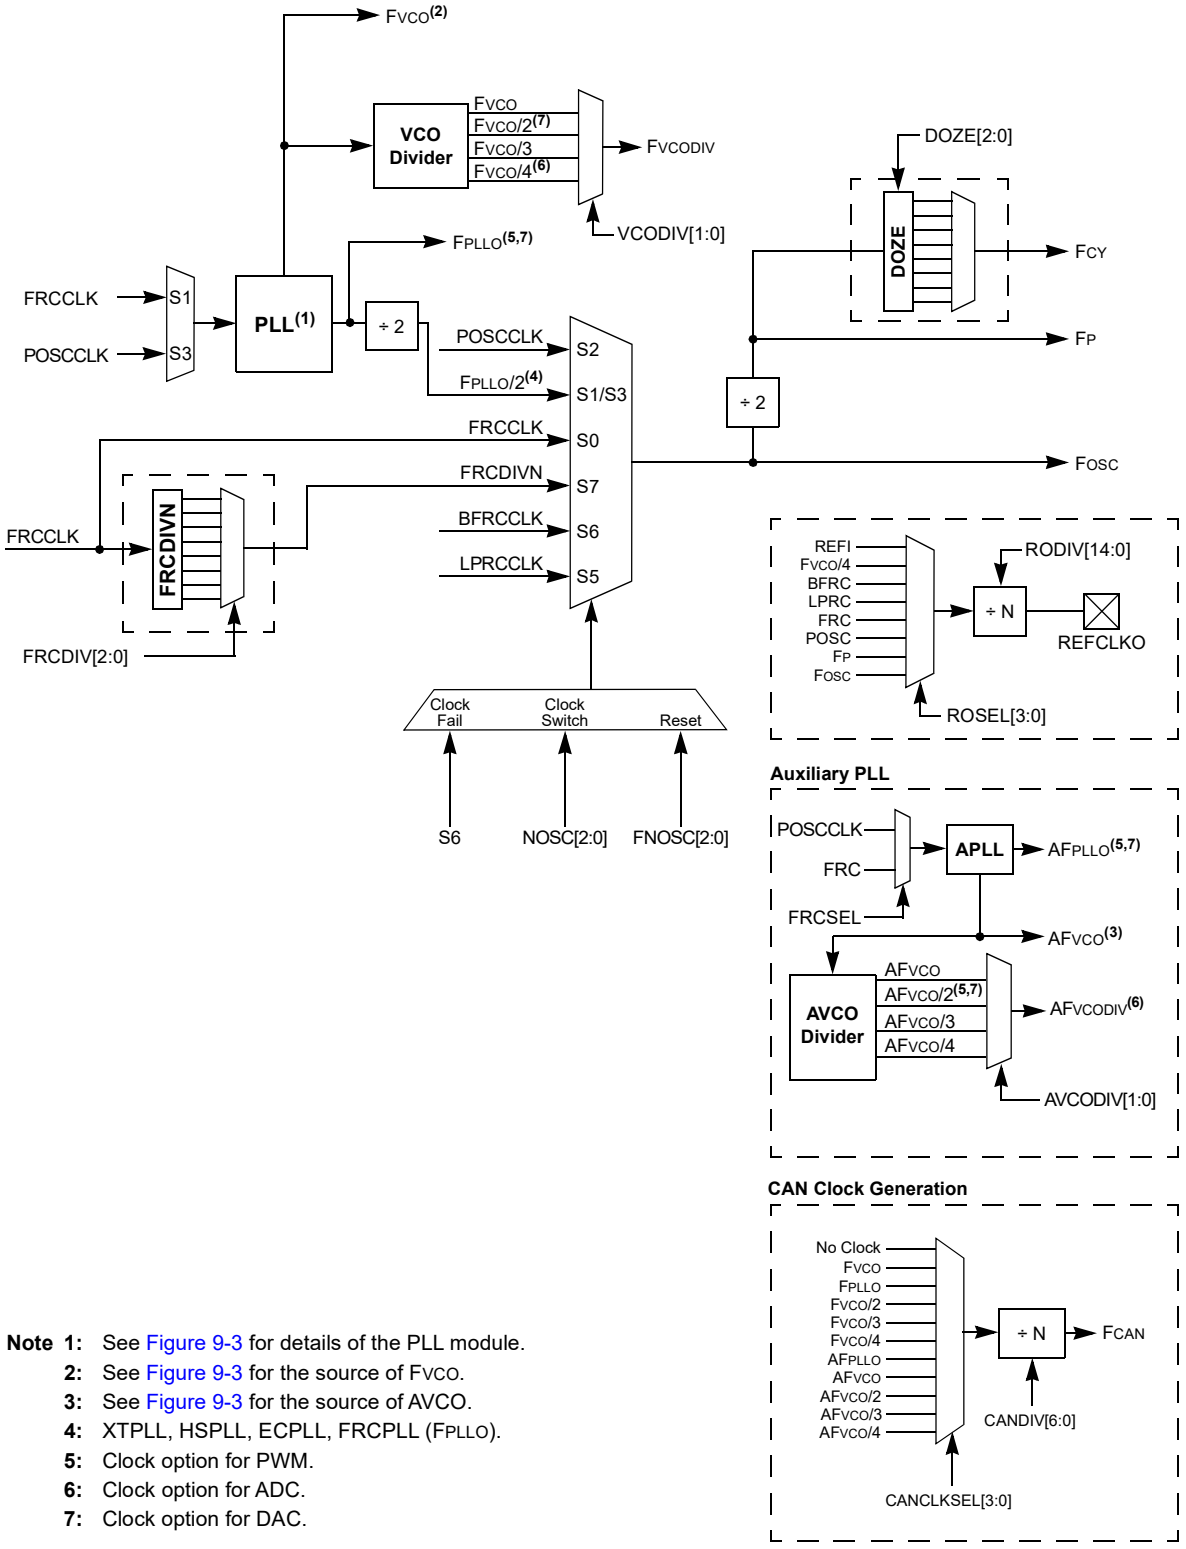


**Note 1:** See Figure 9-3 for details of the PLL module.
**2:** See Figure 9-3 for the source of FVCO.
**3:** See Figure 9-3 for the source of AVCO.
**4:** XTPLL, HSPLL, ECPLL, FRCPLL (FPLLO).
**5:** Clock option for PWM.
**6:** Clock option for ADC.
**7:** Clock option for DAC.


© 2017-2021 Microchip Technology Inc.

## 9.1 Primary PLL

The Primary Oscillator and internal FRC Oscillator sources can optionally use an on-chip PLL to obtain higher operating speeds. Figure 9-3 illustrates a block diagram of the PLL module.

For PLL operation, the following requirements must be met at all times without exception:

- The PLL Input Frequency (FPLLI) must be in the range of 8 MHz to 64 MHz
- The PFD Input Frequency (FPFD) must be in the range of 8 MHz to (FVCO/16) MHz

The VCO Output Frequency (FVCO) must be in the range of 400 MHz to 1600 MHz.

**FIGURE 9-3: PLL AND VCO DETAIL**

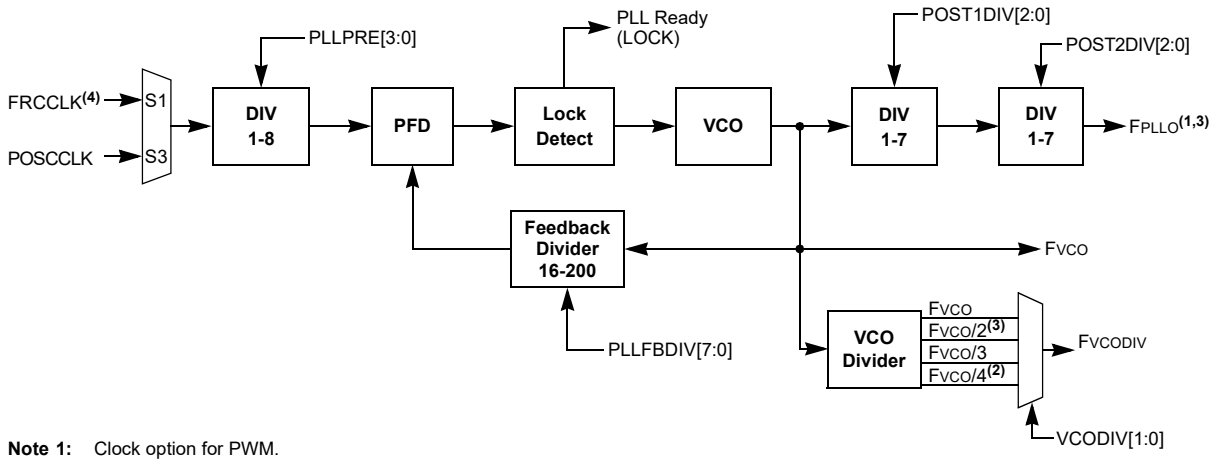


**Note 1:** Clock option for PWM.
**2:** Clock option for ADC.
**3:** Clock option for DAC.
**4:** PLL source is always FRC unless FNOSC is the Primary Oscillator with PLL.

Equation 9-1 provides the relationship between the PLL Input Frequency (FPLLI) and VCO Output Frequency (FVCO).

**EQUATION 9-1: FVCO CALCULATION**

$$FVCO = FPLLI \times \left(\frac{M}{N1}\right) = FPLLI \times \left(\frac{PLLFBDIV[7:0]}{PLLPRE[3:0]}\right)$$

Equation 9-2 provides the relationship between the PLL Input Frequency (FPLLI) and PLL Output Frequency (FPLLO).

**EQUATION 9-2: FPLLO CALCULATION**

$$FPLLO = FPLLI \times \left(\frac{M}{N1 \times N2 \times N3}\right) = FPLLI \times \left(\frac{PLLFBDIV[7:0]}{PLLPRE[3:0] \times POST1DIV[2:0] \times POST2DIV[2:0]}\right)$$

Where:

$M$ = $PLLFBDIV$[7:0]
$N1$ = $PLLPRE$[3:0]
$N2$ = $POST1DIV$[2:0]
$N3$ = $POST2DIV$[2:0]

**Note:** The PLL Phase Detector Input Divider Select (PLLPREx) bits and the PLL Feedback Divider (PLLFBDIVx) bits should not be changed when operating in PLL mode. Therefore, the user must start in either a non-PLL mode or clock switch to a non-PLL mode (e.g., internal FRC Oscillator) to make any necessary changes and then clock switch to the desired PLL mode.

It is not permitted to directly clock switch from one PLL clock source to a different PLL clock source. The user would need to transition between PLL clock sources with a clock switch to a non-PLL clock source.

**EXAMPLE 9-1: CODE EXAMPLE FOR USING PRIMARY PLL WITH 8 MHz INTERNAL FRC**

```
//code example for 50 MIPS system clock using 8MHz FRC
// Select FRC on POR
#pragma config FNOSC = FRC        // Oscillator Source Selection (Internal Fast RC (FRC))
#pragma config IESO = OFF
// Enable Clock Switching
#pragma config FCKSM = CSECMD
int     main()
{
// Configure PLL prescaler, both PLL postscalers, and PLL feedback divider
CLKDIVbits.PLLPRE = 1;            // N1=1
PLLFBDbits.PLLFBDIV = 125;        // M = 125
PLLDIVbits.POST1DIV = 5;          // N2=5
PLLDIVbits.POST2DIV = 1;          // N3=1
// Initiate Clock Switch to FRC with PLL (NOSC=0b001)
__builtin_write_OSCCONH(0x01);
__builtin_write_OSCCONL(OSCCON | 0x01);
// Wait for Clock switch to occur
while   (OSCCONbits.OSWEN!= 0);
}
```


© 2017-2021 Microchip Technology Inc.

## 9.2 Auxiliary PLL

The dsPIC33CK256MP508 device family implements an Auxiliary PLL (APLL) module, which is used to generate various peripheral clock sources independent of the system clock. Figure 9-4 shows a block diagram of the APLL module.

For APLL operation, the following requirements must be met at all times without exception:

- The APLL Input Frequency ($AF_{PLLI}$) must be in the range of 8 MHz to 64 MHz
- The APFD Input Frequency ($AF_{PFD}$) must be in the range of 8 MHz to ($AF_{VCO}$/16) MHz
- The AVCO Output Frequency ($AF_{VCO}$) must be in the range of 400 MHz to 1600 MHz

**FIGURE 9-4: APLL AND VCO DETAIL**

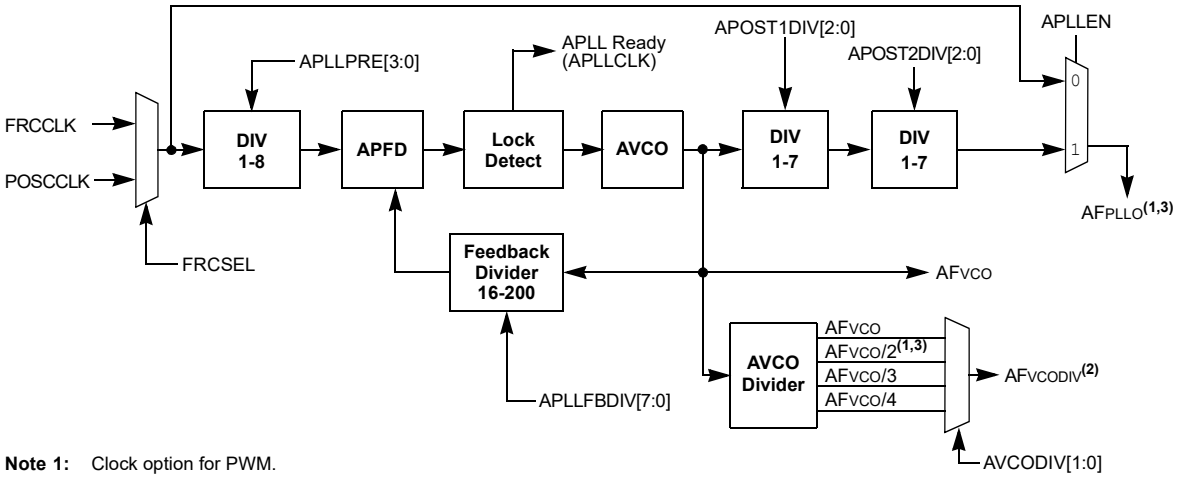


**Note 1:** Clock option for PWM.
**2:** Clock option for ADC.
**3:** Clock option for DAC.

Equation 9-3 provides the relationship between the APLL Input Frequency (AFPLLI) and the AVCO Output Frequency (AFVCO).

**EQUATION 9-3: AFVCO CALCULATION**

$$AFVCO = AFPLLI \times \left(\frac{M}{N1}\right) = AFPLLI \times \left(\frac{APLLFBDIV[7:0]}{APLLPRE[3:0]}\right)$$

Equation 9-4 provides the relationship between the APLL Input Frequency (AFPLLI) and APLL Output Frequency (AFPLLO).

**EQUATION 9-4: AFPLLO CALCULATION**

$$AFPLLO = AFPLLI \times \left(\frac{M}{N1 \times N2 \times N3}\right) = AFPLLI \times \left(\frac{APLLFBDIV[7:0]}{APLLPRE[3:0] \times APOST1DIV[2:0] \times APOST2DIV[2:0]}\right)$$

Where:

$M$ = $APLLFBDIV$[7:0]
$N1$ = $APLLPRE$[3:0]
$N2$ = $APOST1DIV$[2:0]
$N3$ = $APOST2DIV$[2:0]

**EXAMPLE 9-2: CODE EXAMPLE FOR USING AUXILIARY PLL WITH THE INTERNAL FRC OSCILLATOR**

```
//code example for AFVCO = 1 GHz and AFPLLO = 500 MHz using 8 MHz internal FRC
// Configure the source clock for the APLL
ACLKCON1bits.FRCSEL = 1;              // Select internal FRC as the clock source
// Configure the APLL prescaler, APLL feedback divider, and both APLL postscalers.
ACLKCON1bits.APLLPRE = 1;             // N1 = 1
APLLFBD1bits.APLLFBDIV = 125;         // M = 125
APLLDIV1bits.APOST1DIV = 2;           // N2 = 2
APLLDIV1bits.APOST2DIV = 1;           // N3 = 1
// Enable APLL
ACLKCON1bits.APLLEN = 1;
```

**Note:** Even with the APLLEN bit set, another peripheral must generate a clock request before the APLL will start.


© 2017-2021 Microchip Technology Inc.

## 9.3 CPU Clocking

The dsPIC33CK256MP508 devices can be configured to use any of the following clock configurations:

- Primary Oscillator (POSC) on the OSCI and OSCO pins
- Internal Fast RC Oscillator (FRC) with optional clock divider
- Internal Low-Power RC Oscillator (LPRC)
- Primary Oscillator with PLL (ECPLL, HSPLL, XTPLL)
- Internal Fast RC Oscillator with PLL (FRCPLL)
- Backup Internal Fast RC Oscillator (BFRC)

The system clock source is divided by two to produce the internal instruction cycle clock. In this document, the instruction cycle clock is denoted by FCY. The timing diagram in Figure 9-5 illustrates the relationship between the system clock (FOSC), the instruction cycle clock (FCY) and the Program Counter (PC).

The internal instruction cycle clock (FCY) can be output on the OSCO I/O pin if the Primary Oscillator mode (POSCMD[1:0]) is not configured as HS/XT. For more information, see **Section 9.0 “Oscillator with High-Frequency PLL”**.

**FIGURE 9-5: CLOCK AND INSTRUCTION CYCLE TIMING**

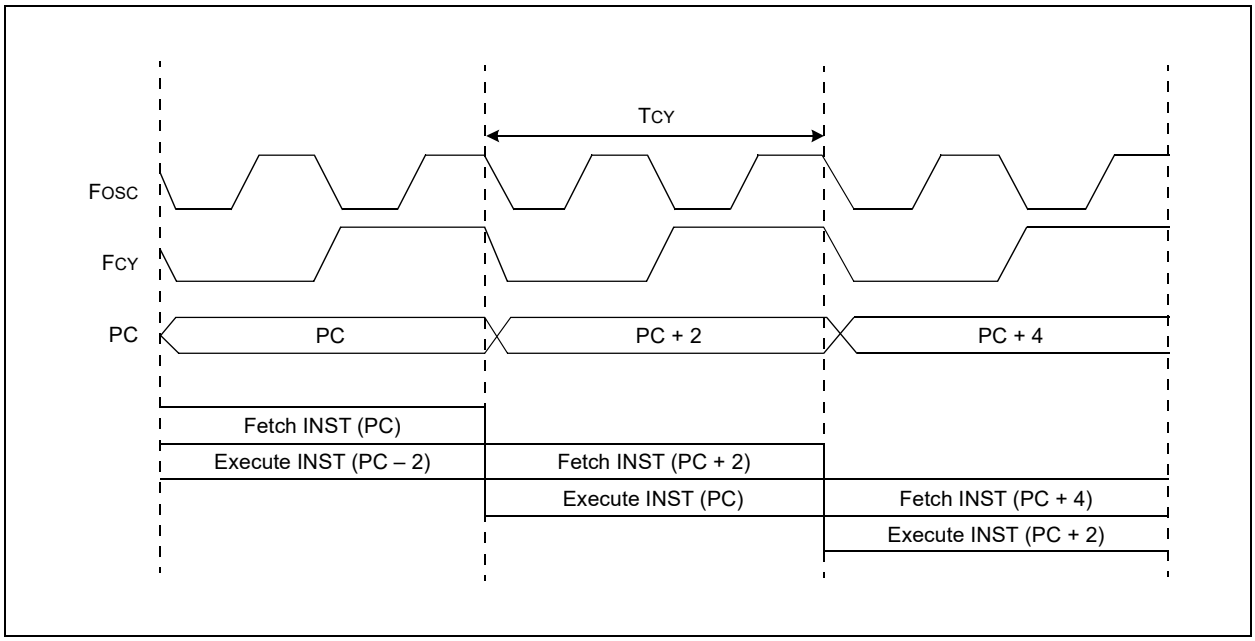

## 9.4 Primary Oscillator (POSC)

The dsPIC33CK256MP508 family devices feature a Primary Oscillator (POSC) and it is available on the OSCI and OSCO pins. This connection enables an external crystal (or ceramic resonator) to provide the clock to the device. The Primary Oscillator provides three modes of operation:

- Medium Speed Oscillator (XT Mode):
  The XT mode is a Medium Gain, Medium Frequency mode used to work with crystal frequencies of 3.5 MHz to 10 MHz.
- High-Speed Oscillator (HS Mode):
  The HS mode is a High-Gain, High-Frequency mode used to work with crystal frequencies of 10 MHz to 32 MHz.
- External Clock Source Operation (EC Mode):
  If the on-chip oscillator is not used, the EC mode allows the internal oscillator to be bypassed. The device clocks are generated from an external source (0 MHz to up to 64 MHz) and input on the OSCI pin.

Example 9-3 illustrates code for using the PLL (50 MIPS) with the Primary Oscillator.

**EXAMPLE 9-3: CODE EXAMPLE FOR USING PLL (50 MIPS) WITH PRIMARY OSCILLATOR (POSC)**

```
//code example for 50 MIPS system clock using POSC with 10 MHz external crystal

// Select FRC on POR
#pragma config  FNOSC = FRC           // Oscillator Source Selection (Internal Fast RC (FRC))
#pragma config IESO = OFF
/// Enable Clock Switching and Configure POSC in XT mode
#pragma config POSCMD = XT
#pragma config FCKSM = CSECMD

int     main()
{
        // Configure PLL prescaler, both PLL postscalers, and PLL feedback divider
        CLKDIVbits.PLLPRE = 1;         // N1=1
        PLLFBDbits.PLLFBDIV = 100;     // M = 100
        PLLDIVbits.POST1DIV = 5;       // N2=5
        PLLDIVbits.POST2DIV = 1;       // N3=1

        // Initiate Clock Switch to Primary Oscillator with PLL (NOSC=0b011)
        __builtin_write_OSCCONH(0x03);
        __builtin_write_OSCCONL(OSCCON | 0x01);

        // Wait for Clock switch to occur
        while (OSCCONbits.OSWEN!= 0);

        // Wait for PLL to lock
        while (OSCCONbits.LOCK!= 1);
}
```


© 2017-2021 Microchip Technology Inc.

## 9.5 Internal Fast RC (FRC) Oscillator

The dsPIC33CK256MP508 family devices contain one instance of the internal Fast RC (FRC) Oscillator and it provides a nominal 8 MHz clock without requiring an external crystal or ceramic resonator, which results in system cost savings for applications that do not require a precise clock reference.

The application software can tune the frequency of the oscillator using the FRC Oscillator Tuning bits (TUN[5:0]) in the FRC Oscillator Tuning register (OSCTUN[5:0]).

## 9.6 Low-Power RC (LPRC) Oscillator

The dsPIC33CK256MP508 family devices contain one instance of the Low-Power RC (LPRC) Oscillator which provides a nominal clock frequency of 32 kHz, and is the clock source for the Watchdog Timer (WDT) and Fail-Safe Clock Monitor (FSCM) circuits in the clock subsystem. The LPRC Oscillator is shut off in Sleep mode.

The LPRC Oscillator remains enabled under these conditions:

- The FSCM is enabled
- The WDT is enabled
- The LPRC Oscillator is selected as the system clock

## 9.7 Backup Internal Fast RC (BFRC) Oscillator

The oscillator block provides a stable reference clock source for the Fail-Safe Clock Monitor (FSCM). When FSCM is enabled in the FCKSM[1:0] Configuration bits (FOSC[7:6]), it constantly monitors the main clock source against a reference signal from the 8 MHz Backup Internal Fast RC (BFRC) Oscillator. In case of a clock failure, the Fail-Safe Clock Monitor switches the clock to the BFRC Oscillator, allowing for continued low-speed operation or a safe application shutdown.

## 9.8 Reference Clock Output

In addition to the CLKO output (FOSC/2), the dsPIC33CK256MP508 family devices can be configured to provide a reference clock output signal to a port pin. This feature is available in all oscillator configurations and allows the user to select a greater range of clock sub-multiples to drive external devices in the application. CLKO is enabled by Configuration bit, OSCIOFNC, and is independent of the REFCLKO reference clock. REFCLKO is mappable to any I/O pin that has mapped output capability. Refer to Table 8-7 for more information. The Reference Clock Output module block diagram is shown in Figure 9-6.

**FIGURE 9-6: REFERENCE CLOCK GENERATOR**

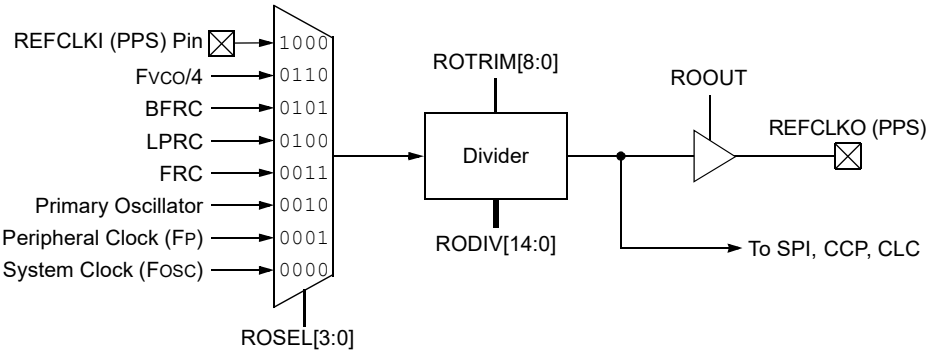

This reference clock output is controlled by the REFOCONL and REFOCONH registers. Setting the ROEN bit (REFOCONL[15]) makes the clock signal available on the REFCLKO pin. The RODIV[14:0] bits (REFOCONH[14:0]) and ROTRIM[8:0] bits (REFOTRIM[15:7]) enable the selection of different clock divider options. The formula for determining the final frequency output is shown in Equation 9-5. The ROSWEN bit (REFOCONL[9]) indicates that the clock divider has been successfully switched. In order to switch the REFCLKO divider, the user should ensure that this bit reads as '0'. Write the updated values to the RODIV[14:0] or ROTRIM[8:0] bits, set the ROSWEN bit and then wait until it is cleared before assuming that the REFCLKO clock is valid.

**EQUATION 9-5: CALCULATING FREQUENCY OUTPUT**

$$FREFOUT = \frac{FREFIN}{2 \bullet (RODIV[14:0] + ROTRIM[8:0]/512)}$$

Where: $FREFOUT$ = Output Frequency
$FREFIN$ = Input Frequency
When $RODIV[14:0]$ = 0, the output clock is the same as the input clock.

The ROSEL[3:0] bits (REFOCONL[3:0]) determine which clock source is used for the reference clock output. The ROSLP bit (REFOCONL[11]) determines if the reference source is available on REFCLKO when the device is in Sleep mode.

To use the reference clock output in Sleep mode, both the ROSLP bit must be set and the clock selected by the ROSEL[3:0] bits must be enabled for operation during Sleep mode, if possible. Clearing the ROSEL[3:0] bits allows the reference output frequency to change, as the system clock changes, during any clock switches. The ROOUT bit enables/disables the reference clock output on the REFCLKO pin.

The ROACTIV bit (REFOCONL[8]) indicates that the module is active; it can be cleared by disabling the module (setting ROEN to '0'). The user must not change the reference clock source, or adjust the divider when the ROACTIV bit indicates that the module is active. To avoid glitches, the user should not disable the module until the ROACTIV bit is '1'.


© 2017-2021 Microchip Technology Inc.

## 9.9 Oscillator Configuration

The oscillator system has both Configuration registers and SFRs to configure, control and monitor the system. The FOSCSEL and FOSC Configuration registers (Register 30-4 and Register 30-5, respectively) are used for initial setup.

Table 9-1 lists the configuration settings that select the device's oscillator source and operating mode at a Power-on Reset (POR).

**TABLE 9-1: CONFIGURATION BIT VALUES FOR CLOCK SELECTION**

| Oscillator Source | Oscillator Mode | FNOSC[2:0] Value | POSCMD[1:0] Value | Notes |
|---|---|---|---|---|
| S0 | Fast RC Oscillator (FRC) | 000 | xx | 1 |
| S1 | Fast RC Oscillator with PLL (FRCPLL) | 001 | xx | 1 |
| S2 | Primary Oscillator (EC) | 010 | 00 | 1 |
| S2 | Primary Oscillator (XT) | 010 | 01 | |
| S2 | Primary Oscillator (HS) | 010 | 10 | |
| S3 | Primary Oscillator with PLL (ECPLL) | 011 | 00 | 1 |
| S3 | Primary Oscillator with PLL (XTPLL) | 011 | 01 | |
| S3 | Primary Oscillator with PLL (HSPLL) | 011 | 10 | |
| S4 | Reserved | 100 | xx | |
| S5 | Low-Power RC Oscillator (LPRC) | 101 | xx | 1 |
| S6 | Backup FRC (BFRC) | 110 | xx | 1 |
| S7 | Fast RC Oscillator with ÷ N Divider (FRCDIVN) | 111 | xx | 1, 2 |

**Note 1:** The OSCO pin function is determined by the OSCIOFNC Configuration bit.

**2:** This is the default oscillator mode for an unprogrammed (erased) device.

## 9.10 OSCCON Unlock Sequence

The OSCCON register is protected against unintended writes through a lock mechanism. The upper and lower bytes of OSCCON have their own unlock sequence, and both must be used when writing to both bytes of the register.

Before OSCCON can be written to, the following unlock sequence must be used:

1. Execute the unlock sequence for the OSCCON high byte.
   In two back-to-back instructions:
   - Write 0x78 to OSCCON[15:8]
   - Write 0x9A to OSCCON[15:8]
2. In the instruction immediately following the unlock sequence, the OSCCON[10:8] bits can be modified.
3. Execute the unlock sequence for the OSCCON low byte.
   In two back-to-back instructions:
   - Write 0x46 to OSCCON[7:0]
   - Write 0x57 to OSCCON[7:0]
4. In the instruction immediately following the unlock sequence, the OSCCON[7:0] bits can be modified.

**Note:** MPLAB® XC16 provides built-in C language function for unlocking the OSCCON register:

```
__builtin_write_OSCCONH(value)
__builtin_write_OSCCONL(OSCCON | value)
```

For more information, see the *"MPLAB® XC16 C Compiler User's Guide"* (DS50002071).

## 9.11 Oscillator Control Registers

**REGISTER 9-1: OSCCON: OSCILLATOR CONTROL REGISTER(1)**

| U-0 | R-0 | R-0 | R-0 | U-0 | R/W-y | R/W-y | R/W-y |
|---|---|---|---|---|---|---|---|
| — | COSC2 | COSC1 | COSC0 | — | NOSC2(2) | NOSC1(2) | NOSC0(2) |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | R-0 | U-0 | R/W-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CLKLOCK | — | LOCK | — | CF(3) | — | — | OSWEN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | y = Value set from Configuration bits on POR | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **COSC[2:0]:** Current Oscillator Selection bits (read-only)
111 = Fast RC Oscillator (FRC) with Divide-by-n (FRCDIVN)
110 = Backup FRC (BFRC)
101 = Low-Power RC Oscillator (LPRC)
100 = Reserved – default to FRC
011 = Primary Oscillator (XT, HS, EC) with PLL (XTPLL, HSPLL, ECPLL)
010 = Primary Oscillator (XT, HS, EC)
001 = Fast RC Oscillator (FRC) with PLL (FRCPLL)
000 = Fast RC Oscillator (FRC)

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **NOSC[2:0]:** New Oscillator Selection bits(2)
111 = Fast RC Oscillator (FRC) with Divide-by-n (FRCDIVN)
110 = Backup FRC (BFRC)
101 = Low-Power RC Oscillator (LPRC)
100 = Reserved – default to FRC
011 = Primary Oscillator (XT, HS, EC) with PLL (XTPLL, HSPLL, ECPLL)
010 = Primary Oscillator (XT, HS, EC)
001 = Fast RC Oscillator (FRC) with PLL (FRCPLL)
000 = Fast RC Oscillator (FRC)

bit 7 **CLKLOCK:** Clock Lock Enable bit
1 = If (FCKSM0 = 1), then clock and PLL configurations are locked; if (FCKSM0 = 0), then clock and PLL configurations may be modified
0 = Clock and PLL selections are not locked, configurations may be modified

bit 6 **Unimplemented:** Read as '0'

bit 5 **LOCK:** PLL Lock Status bit (read-only)
1 = Indicates that PLL is in lock or PLL start-up timer is satisfied
0 = Indicates that PLL is out of lock, start-up timer is in progress or PLL is disabled

bit 4 **Unimplemented:** Read as '0'

**Note 1:** Writes to this register require an unlock sequence (see **Section 9.10 "OSCCON Unlock Sequence"**).

**2:** Direct clock switches between any Primary Oscillator mode with PLL and FRCPLL mode are not permitted. This applies to clock switches in either direction. In these instances, the application must switch to FRC mode as a transitional clock source between the two PLL modes.

**3:** This bit should only be cleared in software. Setting the bit in software (= 1) will have the same effect as an actual oscillator failure and will trigger an oscillator failure trap.


© 2017-2021 Microchip Technology Inc.

**REGISTER 9-1: OSCCON: OSCILLATOR CONTROL REGISTER(1) (CONTINUED)**

bit 3 **CF:** Clock Fail Detect bit(3)
1 = FSCM has detected a clock failure
0 = FSCM has not detected a clock failure

bit 2-1 **Unimplemented:** Read as '0'

bit 0 **OSWEN:** Oscillator Switch Enable bit
1 = Requests oscillator switch to the selection specified by the NOSC[2:0] bits
0 = Oscillator switch is complete

**Note 1:** Writes to this register require an unlock sequence (see **Section 9.10 "OSCCON Unlock Sequence"**).

**2:** Direct clock switches between any Primary Oscillator mode with PLL and FRCPLL mode are not permitted. This applies to clock switches in either direction. In these instances, the application must switch to FRC mode as a transitional clock source between the two PLL modes.

**3:** This bit should only be cleared in software. Setting the bit in software (= 1) will have the same effect as an actual oscillator failure and will trigger an oscillator failure trap.

**REGISTER 9-2: CLKDIV: CLOCK DIVIDER REGISTER**

| R/W-0 | R/W-0 | R/W-1 | R/W-1 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ROI | DOZE2(1) | DOZE1(1) | DOZE0(1) | DOZEN(2,3) | FRCDIV2 | FRCDIV1 | FRCDIV0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | r-0 | r-0 | R/W-0 | R/W-0 | R/W-0 | R/W-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | PLLPRE[3:0](4) | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **ROI:** Recover on Interrupt bit
1 = Interrupts will clear the DOZEN bit and the processor clock, and the peripheral clock ratio is set to 1:1
0 = Interrupts have no effect on the DOZEN bit

bit 14-12 **DOZE[2:0]:** Processor Clock Reduction Select bits(1)
111 = FP divided by 128
110 = FP divided by 64
101 = FP divided by 32
100 = FP divided by 16
011 = FP divided by 8 (default)
010 = FP divided by 4
001 = FP divided by 2
000 = FP divided by 1

bit 11 **DOZEN:** Doze Mode Enable bit(2,3)
1 = DOZE[2:0] field specifies the ratio between the peripheral clocks and the processor clocks
0 = Processor clock and peripheral clock ratio is forced to 1:1

bit 10-8 **FRCDIV[2:0]:** Internal Fast RC Oscillator Postscaler bits
111 = FRC divided by 256
110 = FRC divided by 64
101 = FRC divided by 32
100 = FRC divided by 16
011 = FRC divided by 8
010 = FRC divided by 4
001 = FRC divided by 2
000 = FRC divided by 1 (default)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-4 **Reserved:** Read as '0'

**Note 1:** The DOZE[2:0] bits can only be written to when the DOZEN bit is clear. If DOZEN = 1, any writes to DOZE[2:0] are ignored.
**2:** This bit is cleared when the ROI bit is set and an interrupt occurs.
**3:** The DOZEN bit cannot be set if DOZE[2:0] = 000. If DOZE[2:0] = 000, any attempt by user software to set the DOZEN bit is ignored.
**4:** PLLPRE[3:0] may be updated while the PLL is operating, but the VCO may overshoot.


© 2017-2021 Microchip Technology Inc.

**REGISTER 9-2: CLKDIV: CLOCK DIVIDER REGISTER (CONTINUED)**

bit 3-0 **PLLPRE[3:0]:** PLL Phase Detector Input Divider Select bits (also denoted as 'N1', PLL prescaler)(4)
11111 = Reserved
...
1001 = Reserved
1000 = Input divided by 8
0111 = Input divided by 7
0110 = Input divided by 6
0101 = Input divided by 5
0100 = Input divided by 4
0011 = Input divided by 3
0010 = Input divided by 2
0001 = Input divided by 1 (power-on default selection)
0000 = Reserved

**Note 1:** The DOZE[2:0] bits can only be written to when the DOZEN bit is clear. If DOZEN = 1, any writes to DOZE[2:0] are ignored.

**2:** This bit is cleared when the ROI bit is set and an interrupt occurs.

**3:** The DOZEN bit cannot be set if DOZE[2:0] = 000. If DOZE[2:0] = 000, any attempt by user software to set the DOZEN bit is ignored.

**4:** PLLPRE[3:0] may be updated while the PLL is operating, but the VCO may overshoot.

**REGISTER 9-3: PLLFBD: PLL FEEDBACK DIVIDER REGISTER**

| U-0 | U-0 | U-0 | U-0 | r-0 | r-0 | r-0 | r-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-1 | R/W-0 | R/W-0 | R/W-1 | R/W-0 | R/W-1 | R/W-1 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PLLFBDIV[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **Unimplemented:** Read as '0'

bit 11-8 **Reserved:** Maintain as '0'

bit 7-0 **PLLFBDIV[7:0]:** PLL Feedback Divider bits (also denoted as 'M', PLL multiplier)

11111111 = Reserved
...
11001000 = 200 Maximum(1)
...
10010110 = 150 (default)
...
00010000 = 16 Minimum(1)
...
00000010 = Reserved
00000001 = Reserved
00000000 = Reserved

**Note 1:** The allowed range is 16-200 (decimal). The rest of the values are reserved and should be avoided. The power on the default feedback divider is 150 (decimal) with an 8 MHz FRC input clock. The VCO frequency is 1.2 GHz.


© 2017-2021 Microchip Technology Inc.

**REGISTER 9-4: OSCTUN: FRC OSCILLATOR TUNING REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | TUN[5:0] | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-6 **Unimplemented:** Read as '0'

bit 5-0 **TUN[5:0]:** FRC Oscillator Tuning bits

011111 = Maximum frequency deviation of 1.45% (MHz)
011110 = Center frequency + 1.40% (MHz)
. . .
000001 = Center frequency + 0.047% (MHz)
000000 = Center frequency (8.00 MHz nominal)
111111 = Center frequency – 0.047% (MHz)
. . .
100001 = Center frequency – 1.45% (MHz)
100000 = Minimum frequency deviation of -1.50% (MHz)

**REGISTER 9-5: PLLDIV: PLL OUTPUT DIVIDER REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | VCODIV[1:0] | |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-1 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-1 |
|---|---|---|---|---|---|---|---|
| — | POST1DIV[2:0](1,2) | | | — | POST2DIV[2:0](1,2) | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-8 **VCODIV[1:0]:** PLL VCO Output Divider Select bits
11 = FVCO
10 = FVCO/2
01 = FVCO/3
00 = FVCO/4

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **POST1DIV[2:0]:** PLL Output Divider #1 Ratio bits(1,2)
POST1DIV[2:0] can have a valid value, from 1 to 7 (POST1DIVx value should be greater than or equal to the POST2DIVx value). The POST1DIVx divider is designed to operate at higher clock rates than the POST2DIVx divider.

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **POST2DIV[2:0]:** PLL Output Divider #2 Ratio bits(1,2)
POST2DIV[2:0] can have a valid value, from 1 to 7 (POST2DIVx value should be less than or equal to the POST1DIVx value). The POST1DIVx divider is designed to operate at higher clock rates than the POST2DIVx divider.

**Note 1:** The POST1DIVx and POST2DIVx divider values must not be changed while the PLL is operating.
**2:** The default values for POST1DIVx and POST2DIVx are 4 and 1, respectively, yielding a 150 MHz system source clock.


© 2017-2021 Microchip Technology Inc.

**REGISTER 9-6: ACLKCON1: AUXILIARY CLOCK CONTROL REGISTER**

| R/W-0 | R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| APLLEN(1) | APLLCK | — | — | — | — | — | FRCSEL |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | r-0 | r-0 | R/W-0 | R/W-0 | R/W-0 | R/W-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | APLLPRE[3:0] | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **APLLEN:** Auxiliary PLL Enable/Bypass Select bit(1)
1 = AFPLLO is connected to the APLL post-divider output (bypass disabled)
0 = AFPLLO is connected to the APLL input clock (bypass enabled)

bit 14 **APLLCK:** APLL Phase-Locked State Status bit
1 = Auxiliary PLL is in lock
0 = Auxiliary PLL is not in lock

bit 13-9 **Unimplemented:** Read as '0'

bit 8 **FRCSEL:** FRC Clock Source Select bit
1 = FRC is the clock source for APLL
0 = Primary Oscillator is the clock source for APLL

bit 7-6 **Unimplemented:** Read as '0'

bit 5-4 **Reserved:** Maintain as '0'

bit 3-0 **APLLPRE[3:0]:** Auxiliary PLL Phase Detector Input Divider bits
1111 = Reserved
...
1001 = Reserved
1000 = Input divided by 8
0111 = Input divided by 7
0110 = Input divided by 6
0101 = Input divided by 5
0100 = Input divided by 4
0011 = Input divided by 3
0010 = Input divided by 2
0001 = Input divided by 1 (power-on default selection)
0000 = Reserved

**Note 1:** Even with the APLLEN bit set, another peripheral must generate a clock request before the APLL will start.

**REGISTER 9-7: APLLFBD1: APLL FEEDBACK DIVIDER REGISTER**

| U-0 | U-0 | U-0 | U-0 | r-0 | r-0 | r-0 | r-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-1 | R/W-0 | R/W-0 | R/W-1 | R/W-0 | R/W-1 | R/W-1 | R/W-0 |
|---|---|---|---|---|---|---|---|
| APLLFBDIV[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **Unimplemented:** Read as '0'

bit 11-8 **Reserved:** Maintain as '0'

bit 7-0 **APLLFBDIV[7:0]:** APLL Feedback Divider bits

11111111 = Reserved
...
11001000 = 200 maximum(1)
...
10010110 = 150 (default)
...
00010000 = 16 minimum(1)
...
00000010 = Reserved
00000001 = Reserved
00000000 = Reserved

**Note 1:** The allowed range is 16-200 (decimal). The rest of the values are reserved and should be avoided. The power-on default feedback divider is 150 (decimal) with an 8 MHz FRC input clock; the VCO frequency is 1.2 GHz.


© 2017-2021 Microchip Technology Inc.

**REGISTER 9-8: APLLDIV1: APLL OUTPUT DIVIDER REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | AVCODIV[1:0] | |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-1 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-1 |
|---|---|---|---|---|---|---|---|
| — | APOST1DIV[2:0](1,2) | | | — | APOST2DIV[2:0](1,2) | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-8 **AVCODIV[1:0]:** APLL VCO Output Divider Select bits
11 = AFVCO
10 = AFVCO/2
01 = AFVCO/3
00 = AFVCO/4

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **APOST1DIV[2:0]:** APLL Output Divider #1 Ratio bits(1,2)
APOST1DIV[2:0] can have a valid value, from 1 to 7 (the APOST1DIVx value should be greater than or equal to the APOST2DIVx value). The APOST1DIVx divider is designed to operate at higher clock rates than the APOST2DIVx divider.

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **APOST2DIV[2:0]:** APLL Output Divider #2 Ratio bits(1,2)
APOST2DIV[2:0] can have a valid value, from 1 to 7 (the APOST2DIVx value should be less than or equal to the APOST1DIVx value). The APOST1DIVx divider is designed to operate at higher clock rates than the APOST2DIVx divider.

**Note 1:** The APOST1DIVx and APOST2DIVx values must not be changed while the PLL is operating.
**2:** The default values for APOST1DIVx and APOST2DIVx are 4 and 1, respectively, yielding a 150 MHz system source clock.

**REGISTER 9-9: CANCLKCON: CAN CLOCK CONTROL REGISTER**

| R/W-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CANCLKEN | — | — | — | CANCLKSEL[3:0](1) | | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | CANCLKDIV[6:0](2,3) | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **CANCLKEN:** Enables the CAN Clock Generator bit
1 = CAN clock generation circuitry is enabled
0 = CAN clock generation circuitry is disabled

bit 14-12 **Unimplemented:** Read as '0'

bit 11-8 **CANCLKSEL[3:0]:** CAN Clock Source Select bits(1)
1011-1111 = Reserved (no clock selected)
1010 = AFVCO/4
1001 = AFVCO/3
1000 = AFVCO/2
0111 = AFVCO
0110 = AFPLLO
0101 = FVCO/4
0100 = FVCO/3
0011 = FVCO/2
0010 = FPLLO
0001 = FVCO
0000 = 0 (no clock selected)

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **CANCLKDIV[6:0]:** CAN Clock Divider Select bits(2,3)
1111111 = Divide-by-128
. . .
0000010 = Divide-by-3
0000001 = Divide-by-2
0000000 = Divide-by-1

**Note 1:** The user must ensure the input clock source is 640 MHz or less. Operation with input reference frequency above 640 MHz will result in unpredictable behavior.

**2:** The CANCLKDIVx divider value must not be changed during CAN module operation.

**3:** The user must ensure the maximum clock output frequency of the divider is 80 MHz or less.


© 2017-2021 Microchip Technology Inc.

**REGISTER 9-10: REFOCONL: REFERENCE CLOCK CONTROL LOW REGISTER**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | HC/R/W-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| ROEN | — | ROSIDL | ROOUT | ROSLP | — | ROSWEN | ROACTIV |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | ROSEL[3:0] | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HC = Hardware Clearable bit | HSC = Hardware Settable/Clearable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **ROEN:** Reference Clock Enable bit
1 = Reference Oscillator is enabled on the REFCLKO pin
0 = Reference Oscillator is disabled

bit 14 **Unimplemented:** Read as '0'

bit 13 **ROSIDL:** Reference Clock Stop in Idle bit
1 = Reference Oscillator is disabled in Idle mode
0 = Reference Oscillator continues to run in Idle mode

bit 12 **ROOUT:** Reference Clock Output Enable bit
1 = Reference clock external output is enabled and available on the REFCLKO pin
0 = Reference clock external output is disabled

bit 11 **ROSLP:** Reference Clock Stop in Sleep bit
1 = Reference Oscillator continues to run in Sleep modes
0 = Reference Oscillator is disabled in Sleep modes

bit 10 **Unimplemented:** Read as '0'

bit 9 **ROSWEN:** Reference Clock Switch Request and Status bit
1 = Clock divider change (requested by changes to RODIVx) is requested or is in progress (set in software, cleared by hardware upon completion)
0 = Clock divider change has completed or is not pending

bit 8 **ROACTIV:** Reference Clock Status bit
1 = Reference clock is active; do not change clock source
0 = Reference clock is stopped; clock source and configuration may be safely changed

bit 7-4 **Unimplemented:** Read as '0'

bit 3-0 **ROSEL[3:0]:** Reference Clock Source Select bits
1111 = Reserved
... = Reserved
1000 = Reserved
0111 = REFI pin
0110 = FVCO/4
0101 = BFRC
0100 = LPRC
0011 = FRC
0010 = Primary Oscillator
0001 = Peripheral clock (FP)
0000 = System clock (FOSC)

**REGISTER 9-11: REFOCONH: REFERENCE CLOCK CONTROL HIGH REGISTER**

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | RODIV[14:8] | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| RODIV[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14-0 **RODIV[14:0]:** Reference Clock Integer Divider Select bits

Divider for the selected input clock source is two times the selected value.

111 1111 1111 1111 = Base clock value divided by 65,534 (2 * 7FFFh)
111 1111 1111 1110 = Base clock value divided by 65,532 (2 * 7FFEh)
111 1111 1111 1101 = Base clock value divided by 65,530 (2 * 7FFDh)
. . .
000 0000 0000 0010 = Base clock value divided by 4 (2 * 2)
000 0000 0000 0001 = Base clock value divided by 2 (2 * 1)
000 0000 0000 0000 = Base clock value


© 2017-2021 Microchip Technology Inc.

**REGISTER 9-12: REFOTRIMH: REFERENCE OSCILLATOR TRIM REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ROTRIM[8:1] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| ROTRIM0 | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-7 **ROTRIM[8:0]:** REFO Trim bits

These bits provide a fractional additive to the RODIV[14:0] value for the 1/2 period of the REFO clock.

000000000 = 0/512 (0.0 divisor added to the RODIV[14:0] value)
000000001 = 1/512 (0.001953125 divisor added to the RODIV[14:0] value)
000000010 = 2/512 (0.00390625 divisor added to the RODIV[14:0] value)
. . .
100000000 = 256/512 (0.5000 divisor added to the RODIV[14:0] value)
. . .
111111110 = 510/512 (0.99609375 divisor added to the RODIV[14:0] value)
111111111 = 511/512 (0.998046875 divisor added to the RODIV[14:0] value)

bit 6-0 **Unimplemented:** Read as ‘0’

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 10.0 DIRECT MEMORY ACCESS (DMA) CONTROLLER

**Note 1:** This data sheet summarizes the features of this group of dsPIC33 devices. It is not intended to be a comprehensive reference source. For more information, refer to **"Direct Memory Access Controller (DMA)"** (www.microchip.com/DS30009742) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The Direct Memory Access (DMA) Controller is designed to service high data throughput peripherals operating on the SFR bus, allowing them to access data memory directly and alleviating the need for CPU-intensive management. By allowing these data-intensive peripherals to share their own data path, the main data bus is also deloaded, resulting in additional power savings.

The DMA Controller functions both as a peripheral and a direct extension of the CPU. It is located on the microcontroller data bus, between the CPU and DMA-enabled peripherals, with direct access to SRAM. This partitions the SFR bus into two buses, allowing the DMA Controller access to the DMA-capable peripherals located on the new DMA SFR bus. The controller serves as an Initiator device on the DMA SFR bus, controlling data flow from DMA-capable peripherals.

The controller also monitors CPU instruction processing directly, allowing it to be aware of when the CPU requires access to peripherals on the DMA bus and automatically relinquishing control to the CPU as needed. This increases the effective bandwidth for handling data without DMA operations, causing a processor Stall. This makes the controller essentially transparent to the user.

The DMA Controller has these features:

- Four Independently Programmable Channels
- Concurrent Operation with the CPU (no DMA caused Wait states)
- DMA Bus Arbitration
- Five Programmable Address modes
- Four Programmable Transfer modes
- Four Flexible Internal Data Transfer modes
- Byte or Word Support for Data Transfer
- 16-Bit Source and Destination Address Register for each Channel, Dynamically Updated and Reloadable
- 16-Bit Transaction Count Register, Dynamically Updated and Reloadable
- Upper and Lower Address Limit Registers
- Counter Half-Full Level Interrupt
- Software Triggered Transfer
- Null Write mode for Symmetric Buffer Operations

A simplified block diagram of the DMA Controller is shown if Figure 10-1.

**FIGURE 10-1: DMA FUNCTIONAL BLOCK DIAGRAM**

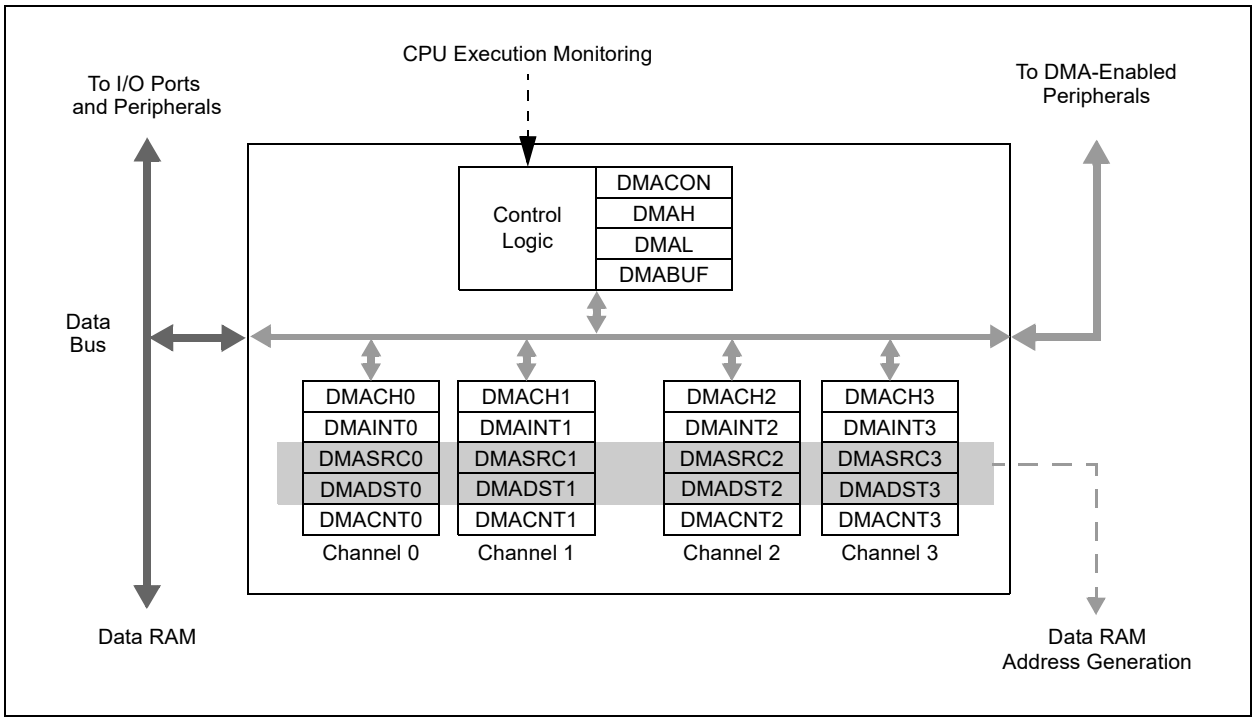



© 2017-2021 Microchip Technology Inc.

## 10.1 Summary of DMA Operations

The DMA Controller is capable of moving data between addresses according to a number of different parameters. Each of these parameters can be independently configured for any transaction. In addition, any or all of the DMA channels can independently perform a different transaction at the same time. Transactions are classified by these parameters:

- Source and destination (SFRs and data RAM)
- Data size (byte or word)
- Trigger source
- Transfer mode (One-Shot, Repeated or Continuous)
- Addressing modes (Fixed Address or Address Blocks with or without Address Increment/Decrement)

In addition, the DMA Controller provides channel priority arbitration for all channels.

### 10.1.1 SOURCE AND DESTINATION

Using the DMA Controller, data may be moved between any two addresses in the Data Space. The SFR space (0000h to 0FFFh) or the data RAM space (1000h to 4FFFh) can serve as either the source or the destination. Data can be moved between these areas in either direction or between addresses in either area. The four different combinations are shown in Figure 10-2.

If it is necessary to protect areas of data RAM, the DMA Controller allows the user to set upper and lower address boundaries for operations in the Data Space above the SFR space. The boundaries are set by the DMAH and DMAL Limit registers. If a DMA channel attempts an operation outside of the address boundaries, the transaction is terminated and an interrupt is generated.

### 10.1.2 DATA SIZE

The DMA Controller can handle both 8-bit and 16-bit transactions. Size is user-selectable using the SIZE bit (DMACHn[1]). By default, each channel is configured for word-size transactions. When byte-size transactions are chosen, the LSB of the source and/or destination address determines if the data represent the upper or lower byte of the data RAM location.

### 10.1.3 TRIGGER SOURCE

The DMA Controller can use 82 of the device's interrupt sources to initiate a transaction. The DMA trigger sources occur in reverse order from their natural interrupt priority and are shown in Table 10-1.

Since the source and destination addresses for any transaction can be programmed independently of the trigger source, the DMA Controller can use any trigger to perform an operation on any peripheral. This also allows DMA channels to be cascaded to perform more complex transfer operations.

### 10.1.4 TRANSFER MODE

The DMA Controller supports four types of data transfers, based on the volume of data to be moved for each trigger.

- One-Shot: A single transaction occurs for each trigger.
- Continuous: A series of back-to-back transactions occur for each trigger; the number of transactions is determined by the DMACNTn transaction counter.
- Repeated One-Shot: A single transaction is performed repeatedly, once per trigger, until the DMA channel is disabled.
- Repeated Continuous: A series of transactions are performed repeatedly, one cycle per trigger, until the DMA channel is disabled.

All transfer modes allow the option to have the source and destination addresses, and counter value, automatically reloaded after the completion of a transaction.

### 10.1.5 ADDRESSING MODES

The DMA Controller also supports transfers between single addresses or address ranges. The four basic options are:

- Fixed-to-Fixed: Between two constant addresses
- Fixed-to-Block: From a constant source address to a range of destination addresses
- Block-to-Fixed: From a range of source addresses to a single, constant destination address
- Block-to-Block: From a range of source addresses to a range of destination addresses

The option to select auto-increment or auto-decrement of source and/or destination addresses is available for Block Addressing modes.

In addition to the four basic modes, the DMA Controller also supports Peripheral Indirect Addressing (PIA) mode, where the source or destination address is generated jointly by the DMA Controller and a PIA-capable peripheral. When enabled, the DMA channel provides a base source and/or destination address, while the peripheral provides a fixed range offset address.

**FIGURE 10-2: TYPES OF DMA DATA TRANSFERS**

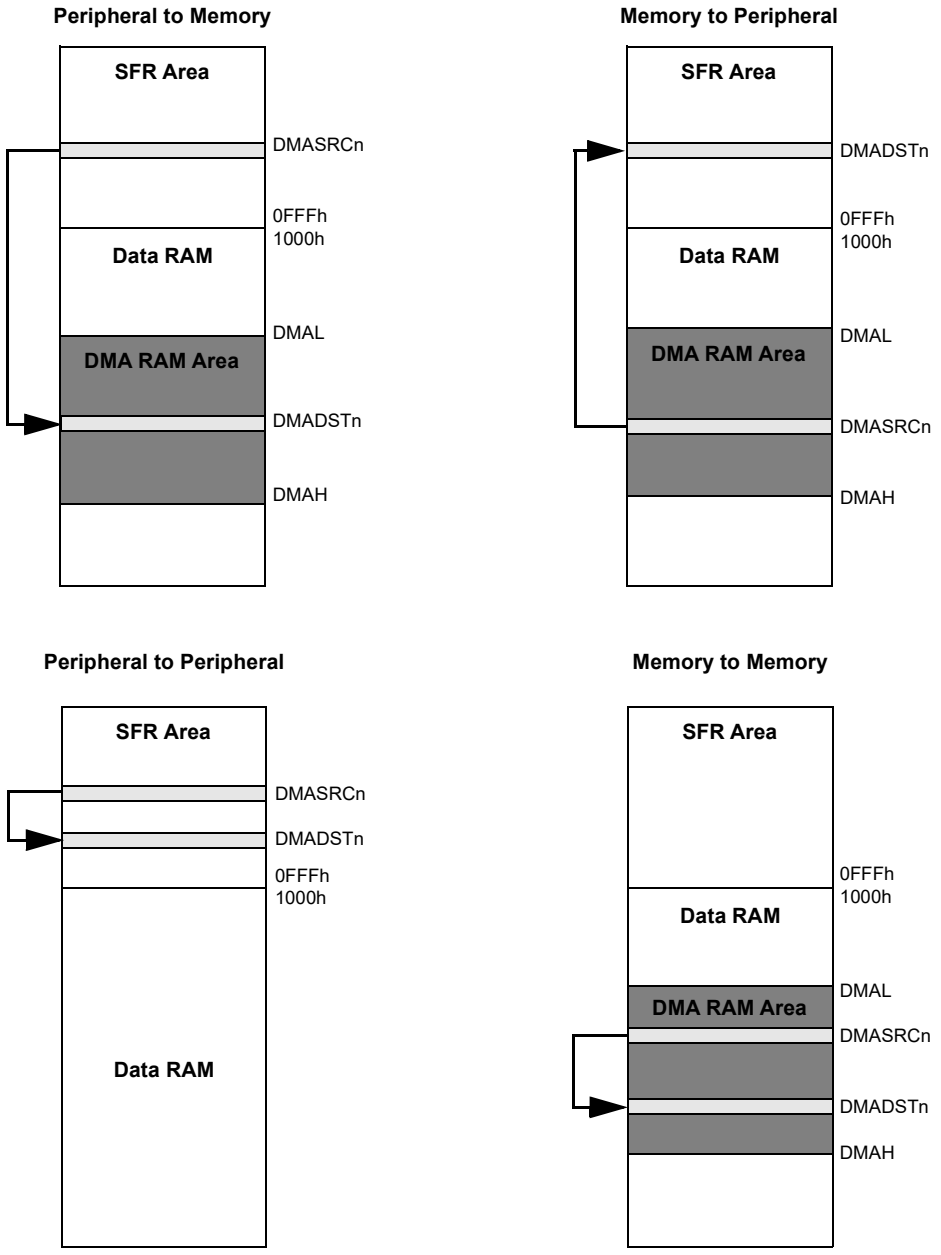


**Note:** Relative sizes of memory areas are not shown to scale.


© 2017-2021 Microchip Technology Inc.

#### 10.1.6 CHANNEL PRIORITY

Each DMA channel functions independently of the others, but also competes with the others for access to the data and DMA buses. When access collisions occur, the DMA Controller arbitrates between the channels using a user-selectable priority scheme. Two schemes are available:

- Round Robin: When two or more channels collide, the lower numbered channel receives priority on the first collision. On subsequent collisions, the higher numbered channels each receive priority based on their channel number.
- Fixed: When two or more channels collide, the lowest numbered channel always receives priority, regardless of past history; however, any channel being actively processed is not available for an immediate retrigger. If a higher priority channel is continually requesting service, it will be scheduled for service after the next lower priority channel with a pending request.

## 10.2 Typical Setup

To set up a DMA channel for a basic data transfer:

1. Enable the DMA Controller (DMAEN = 1) and select an appropriate channel priority scheme by setting or clearing PRSSEL.
2. Program DMAH and DMAL with appropriate upper and lower address boundaries for data RAM operations.
3. Select the DMA channel to be used and disable its operation (CHEN = 0).
4. Program the appropriate source and destination addresses for the transaction into the channel's DMASRCn and DMADSTn registers. For PIA mode addressing, use the base address value.
5. Program the DMACNTn register for the number of triggers per transfer (One-Shot or Continuous modes) or the number of words (bytes) to be transferred (Repeated modes).
6. Set or clear the SIZE bit to select the data size.
7. Program the TRMODE[1:0] bits to select the Data Transfer mode.
8. Program the SAMODE[1:0] and DAMODE[1:0] bits to select the addressing mode.
9. Enable the DMA channel by setting CHEN.
10. Enable the trigger source interrupt.

## 10.3 Peripheral Module Disable

The channels of the DMA Controller can be individually powered down using the Peripheral Module Disable (PMD) registers.

## 10.4 Registers

The DMA Controller uses a number of registers to control its operation. The number of registers depends on the number of channels implemented for a particular device.

There are always four module-level registers (one control and three buffer/address):

- DMACON: DMA Engine Control Register (Register 10-1)
- DMAH and DMAL: DMA High and Low Address Limit Registers
- DMABUF: DMA Transfer Data Buffer

Each of the DMA channels implements five registers (two control and three buffer/address):

- DMACHn: DMA Channel n Control Register (Register 10-2)
- DMAINTn: DMA Channel n Interrupt Register (Register 10-3)
- DMASRCn: DMA Data Source Address for Channel n Register
- DMADSTn: DMA Data Destination Address for Channel n Register
- DMACNTn: DMA Transaction Counter for Channel n Register

For dsPIC33CK256MP508 devices, there are a total of 34 registers.

**REGISTER 10-1: DMACON: DMA ENGINE CONTROL REGISTER**

| R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| DMAEN | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | PRSSEL |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **DMAEN:** DMA Module Enable bit
1 = Enables module
0 = Disables module and terminates all active DMA operation(s)

bit 14-1 **Unimplemented:** Read as '0'

bit 0 **PRSSEL:** Channel Priority Scheme Selection bit
1 = Round robin scheme
0 = Fixed priority scheme


© 2017-2021 Microchip Technology Inc.

**REGISTER 10-2: DMACHn: DMA CHANNEL n CONTROL REGISTER**

| U-0 | U-0 | U-0 | r-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | NULLW | RELOAD(1) | CHREQ(3) |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SAMODE1 | SAMODE0 | DAMODE1 | DAMODE0 | TRMODE1 | TRMODE0 | SIZE | CHEN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **Unimplemented:** Read as '0'

bit 12 **Reserved:** Maintain as '0'

bit 11 **Unimplemented:** Read as '0'

bit 10 **NULLW:** Null Write Mode bit
1 = A dummy write is initiated to DMASRCn for every write to DMADSTn
0 = No dummy write is initiated

bit 9 **RELOAD:** Address and Count Reload bit(1)
1 = DMASRCn, DMADSTn and DMACNTn registers are reloaded to their previous values upon the start of the next operation
0 = DMASRCn, DMADSTn and DMACNTn are not reloaded on the start of the next operation(2)

bit 8 **CHREQ:** DMA Channel Software Request bit(3)
1 = A DMA request is initiated by software; automatically cleared upon completion of a DMA transfer
0 = No DMA request is pending

bit 7-6 **SAMODE[1:0]:** Source Address Mode Selection bits
11 = DMASRCn is used in Peripheral Indirect Addressing and remains unchanged
10 = DMASRCn is decremented based on the SIZE bit after a transfer completion
01 = DMASRCn is incremented based on the SIZE bit after a transfer completion
00 = DMASRCn remains unchanged after a transfer completion

bit 5-4 **DAMODE[1:0]:** Destination Address Mode Selection bits
11 = DMADSTn is used in Peripheral Indirect Addressing and remains unchanged
10 = DMADSTn is decremented based on the SIZE bit after a transfer completion
01 = DMADSTn is incremented based on the SIZE bit after a transfer completion
00 = DMADSTn remains unchanged after a transfer completion

bit 3-2 **TRMODE[1:0]:** Transfer Mode Selection bits
11 = Repeated Continuous
10 = Continuous
01 = Repeated One-Shot
00 = One-Shot

bit 1 **SIZE:** Data Size Selection bit
1 = Byte (8-bit)
0 = Word (16-bit)

bit 0 **CHEN:** DMA Channel Enable bit
1 = The corresponding channel is enabled
0 = The corresponding channel is disabled

**Note 1:** Only the original DMACNTn is required to be stored to recover the original DMASRCn and DMADSTn values.
**2:** DMACNTn will always be reloaded in Repeated mode transfers, regardless of the state of the RELOAD bit.
**3:** The number of transfers executed while CHREQ is set depends on the configuration of TRMODE[1:0].

**REGISTER 10-3: DMAINTn: DMA CHANNEL n INTERRUPT REGISTER**

| R-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DBUFWF(1) | CHSEL6 | CHSEL5 | CHSEL4 | CHSEL3 | CHSEL2 | CHSEL1 | CHSEL0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| HIGHIF(1,2) | LOWIF(1,2) | DONEIF(1) | HALFIF(1) | OVRUNIF(1) | — | — | HALFEN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **DBUFWF:** DMA Buffered Data Write Flag bit(1)
- 1 = The content of the DMA buffer has not been written to the location specified in DMADSTn or DMASRCn in Null Write mode
- 0 = The content of the DMA buffer has been written to the location specified in DMADSTn or DMASRCn in Null Write mode

bit 14-8 **CHSEL[6:0]:** DMA Channel Trigger Selection bits

See Table 10-1 for a complete list.

bit 7 **HIGHIF:** DMA High Address Limit Interrupt Flag bit(1,2)
- 1 = The DMA channel has attempted to access an address higher than DMAH or the upper limit of the data RAM space
- 0 = The DMA channel has not invoked the high address limit interrupt

bit 6 **LOWIF:** DMA Low Address Limit Interrupt Flag bit(1,2)
- 1 = The DMA channel has attempted to access the DMA SFR address lower than DMAL, but above the SFR range (07FFh)
- 0 = The DMA channel has not invoked the low address limit interrupt

bit 5 **DONEIF:** DMA Complete Operation Interrupt Flag bit(1)

If CHEN = 1:
- 1 = The previous DMA session has ended with completion
- 0 = The current DMA session has not yet completed

If CHEN = 0:
- 1 = The previous DMA session has ended with completion
- 0 = The previous DMA session has ended without completion

bit 4 **HALFIF:** DMA 50% Watermark Level Interrupt Flag bit(1)
- 1 = DMACNTn has reached the halfway point to 0000h
- 0 = DMACNTn has not reached the halfway point

bit 3 **OVRUNIF:** DMA Channel Overrun Flag bit(1)
- 1 = The DMA channel is triggered while it is still completing the operation based on the previous trigger
- 0 = The overrun condition has not occurred

bit 2-1 **Unimplemented:** Read as '0'

bit 0 **HALFEN:** Halfway Completion Watermark bit
- 1 = Interrupts are invoked when DMACNTn has reached its halfway point and at completion
- 0 = An interrupt is invoked only at the completion of the transfer

**Note 1:** Setting these flags in software does not generate an interrupt.

**2:** Testing for address limit violations (DMASRCn or DMADSTn is either greater than DMAH or less than DMAL) is NOT done before the actual access.


© 2017-2021 Microchip Technology Inc.

**TABLE 10-1: DMA CHANNEL TRIGGER SOURCES**

| CHSEL[6:0] | Trigger (Interrupt) | CHSEL[6:0] | Trigger (Interrupt) | CHSEL[6:0] | Trigger (Interrupt) |
|---|---|---|---|---|---|
| 00h | INT0 – External Interrupt 0 | 23h | PWM Generator 8 | 44h | CLC1 Positive Edge Interrupt |
| 01h | SCCP1 Interrupt | 24h | PWM Event C | 45h | CLC2 Positive Edge Interrupt |
| 02h | SPI1 Receiver | 25h | SENT1 TX/RX | 46h | SPI1 – Fault Interrupt |
| 03h | SPI1 Transmitter | 26h | SENT2 TX/RX | 47h | SPI2 – Fault Interrupt |
| 04h | UART1 Receiver | 27h | ADC1 Group Convert Done | 48h | (Reserved, do not use) |
| 05h | UART1 Transmitter | 28h | ADC Done AN0 | . . . | |
| 06h | ECC Single Bit Error | 29h | ADC Done AN1 | 56h | |
| 07h | NVM Write Complete | 2Ah | ADC Done AN2 | 57h | PWM Event D |
| 08h | INT1 – External Interrupt 1 | 2Bh | ADC Done AN3 | 58h | PWM Event E |
| 09h | SI2C1 – I2C1 Client Event | 2Ch | ADC Done AN4 | 59h | PWM Event F |
| 0Ah | MI2C1 – I2C1 Host Event | 2Dh | ADC Done AN5 | 5Ah | (Reserved, do not use) |
| 0Bh | INT2 – External Interrupt 2 | 2Eh | ADC Done AN6 | 5Bh | (Reserved, do not use) |
| 0Ch | SCCP2 Interrupt | 2Fh | ADC Done AN7 | 5Ch | SCCP7 Interrupt |
| 0Dh | INT3 – External Interrupt 3 | 30h | ADC Done AN8 | 5Dh | SCCP8 Interrupt |
| 0Eh | UART2 Receiver | 31h | ADC Done AN9 | 5Eh | (Reserved, do not use) |
| 0Fh | UART2 Transmitter | 32h | ADC Done AN10 | 5Fh | (Reserved, do not use) |
| 10h | SPI2 Receiver | 33h | ADC Done AN11 | 60h | CLC3 Positive Edge Interrupt |
| 11h | SPI2 Transmitter | 34h | ADC Done AN12 | 61h | CLC4 Positive Edge Interrupt |
| 12h | SCCP3 Interrupt | 35h | ADC Done AN13 | 62h | SPI3 Receiver |
| 13h | SI2C2 – I2C2 Client Event | 36h | ADC Done AN14 | 63h | SPI3 Transmitter |
| 14h | MI2C2 – I2C1 Host Event | 37h | ADC Done AN15 | 64h | SI2C3 – I2C3 Client Event |
| 15h | SCCP4 Interrupt | 38h | ADC Done AN16 | 65h | MI2C3 – I2C3 Host Event |
| 16h | SCCP5 Interrupt | 39h | ADC Done AN17 | 66h | SPI3 Fault |
| 17h | SCCP6 Interrupt | 3Ah | ADC Done AN18 | 67h | MCCP9 |
| 18h | CRC Generator Interrupt | 3Bh | ADC Done AN19 | 68h | UART3 Receiver |
| 19h | PWM Event A | 3Ch | ADC Done AN20 | 69h | UART3 Transmitter |
| 1Ah | (Reserved, do not use) | 3Dh | ADC Done AN21 | 6Ah | ADC Done AN24 |
| 1Bh | PWM Event B | 3Eh | ADC Done AN22 | 6Bh | ADC Done AN25 |
| 1Ch | PWM Generator 1 | 3Fh | ADC Done AN23 | 6Ch | PMP Event |
| 1Dh | PWM Generator 2 | 40h | AD1FLTR1 – Oversample Filter 1 | 6Dh | PMP Error Event |
| 1Eh | PWM Generator 3 | 41h | AD1FLTR2 – Oversample Filter 2 | 6Eh | (Reserved, do not use) |
| 1Fh | PWM Generator 4 | 42h | AD1FLTR3 – Oversample Filter 3 | . . . | |
| 20h | PWM Generator 5 | 43h | AD1FLTR4 – Oversample Filter 4 | 7Fh | |
| 21h | PWM Generator 6 | | | | |
| 22h | PWM Generator 7 | | | | |

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 11.0 CONTROLLER AREA NETWORK (CAN FD) MODULE

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. For more information, refer to **"CAN Flexible Data-Rate (FD) Protocol Module"** (www.microchip.com/DS70005340) in the *"dsPIC33/PIC24 Family Reference Manual"*.

**2:** Not all device variants include the CAN FD peripheral. Refer to Table 1 and Table 2 for availability.

### 11.1 Features

The CAN FD module has the following features:

**General**

- Nominal (Arbitration) Bit Rate up to 1 Mbps
- Data Bit Rate up to 8 Mbps
- CAN FD Controller modes:
  - Mixed CAN 2.0B and CAN FD mode
  - CAN 2.0B mode
- Conforms to ISO 11898-1:2015

**Message FIFOs**

- Seven FIFOs, Configurable as Transmit or Receive FIFOs
- One Transmit Queue (TXQ)
- Transmit Event FIFO (TEF) with 32-Bit Timestamp

**Message Transmission**

- Message Transmission Prioritization:
  - Based on priority bit field, and/or
  - Message with lowest ID gets transmitted first using the TXQ
- Programmable Automatic Retransmission Attempts: Unlimited, Three Attempts or Disabled

**Message Reception**

- 16 Flexible Filter and Mask Objects.
- Each Object can be Configured to Filter either:
  - Standard ID + first 18 data bits or
  - Extended ID
- 32-Bit Timestamp.
- The CAN FD Bit Stream Processor (BSP) Implements the Medium Access Control of the CAN FD Protocol Described in ISO 11898-1:2015. It serializes and deserializes the bit stream, encodes and decodes the CAN FD frames, manages the medium access, Acknowledges frames, and detects and signals errors.
- The TX Handler Prioritizes the Messages that are Requested for Transmission by the Transmit FIFOs. It uses the RAM interface to fetch the transmit data from RAM and provides them to the BSP for transmission.
- The BSP provides Received Messages to the RX Handler. The RX handler uses acceptance filters to filter out messages that shall be stored in the Receive FIFOs. It uses the RAM interface to store received data into RAM.
- Each FIFO can be Configured either as a Transmit or Receive FIFO. The FIFO control keeps track of the FIFO head and tail, and calculates the user address. In a TX FIFO, the user address points to the address in RAM where the data for the next transmit message shall be stored. In an RX FIFO, the user address points to the address in RAM where the data of the next receive message shall be read. The user notifies the FIFO that a message was written to or read from RAM by incrementing the head/tail of the FIFO.
- The Transmit Queue (TXQ) is a Special Transmit FIFO that Transmits the Messages based on the ID of the Messages Stored in the Queue.
- The Transmit Event FIFO (TEF) Stores the Message IDs of the Transmitted Messages.
- A Free-Running Time Base Counter is used to Timestamp Received Messages. Messages in the TEF can also be timestamped.
- The CAN FD Controller module Generates Interrupts when New Messages are Received or when Messages were Transmitted Successfully.

Figure 11-1 shows the CAN FD system block diagram.

**FIGURE 11-1: CAN FD MODULE BLOCK DIAGRAM**

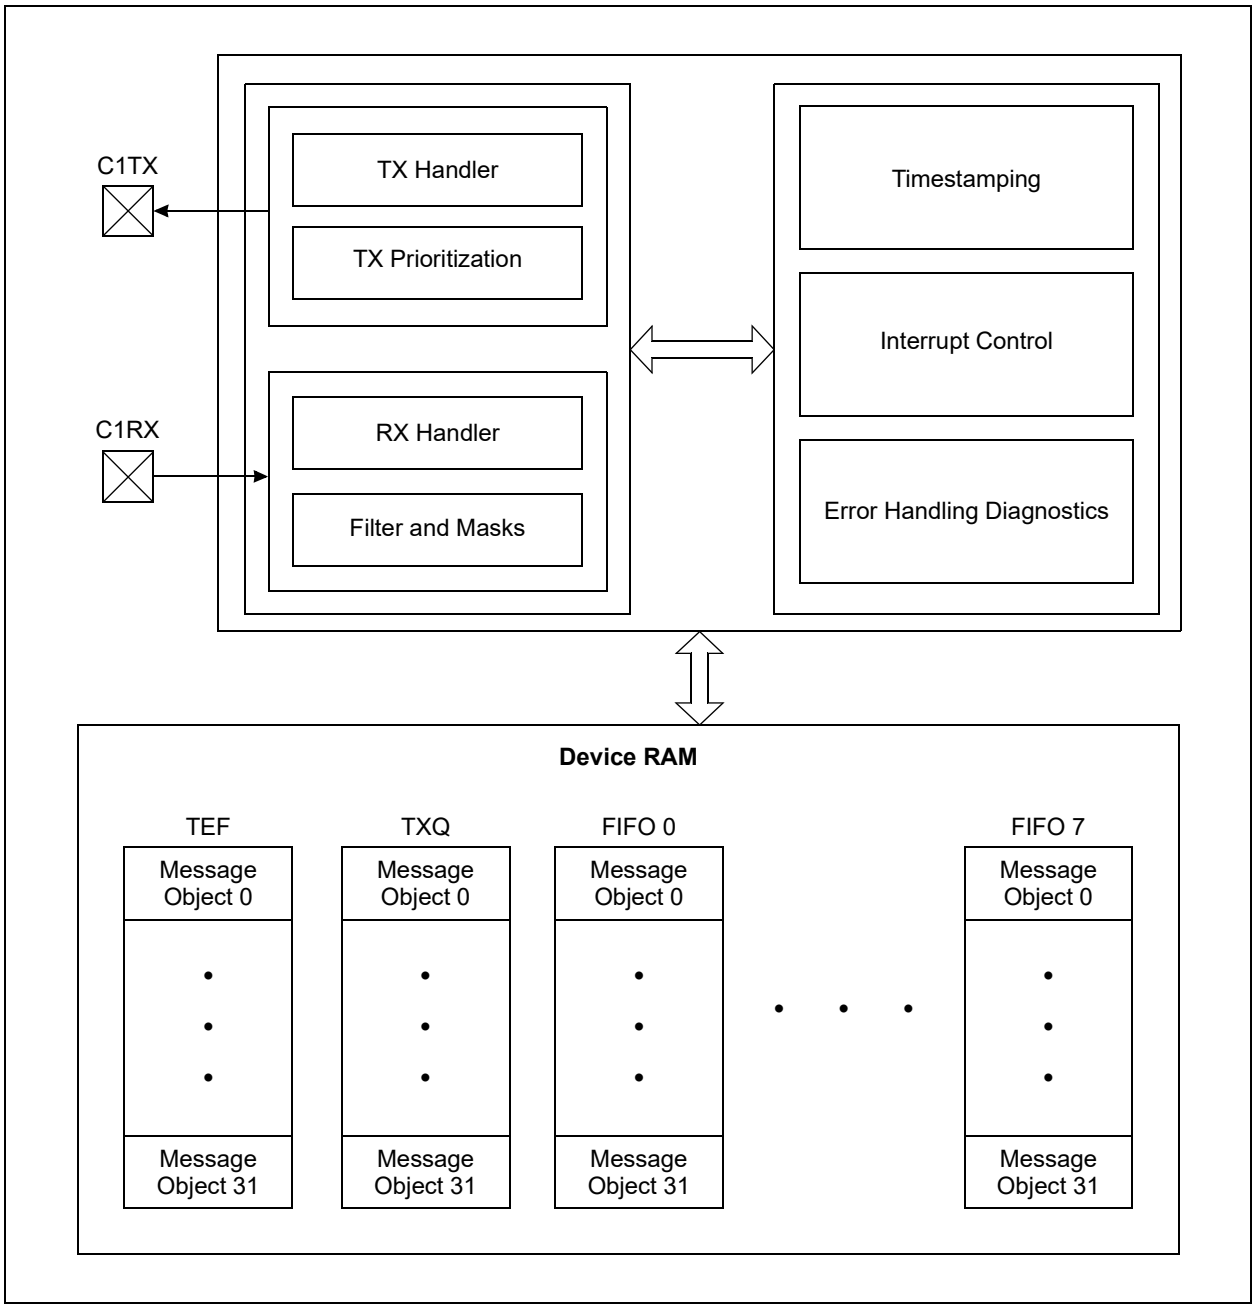



© 2017-2021 Microchip Technology Inc.

## 11.2 Can Control Registers

**REGISTER 11-1: C1CONH: CAN CONTROL REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | S/HC-0 | R/W-1 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TXBWS3 | TXBWS2 | TXBWS1 | TXBWS0 | ABAT | REQOP2 | REQOP1 | REQOP0 |
| bit 15 | | | | | | | bit 8 |

| R-1 | R-0 | R-0 | R/W-1 | R/W-1 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| OPMOD2 | OPMOD1 | OPMOD0 | TXQEN(1) | STEF(1) | SERRLOM(1) | ESIGM(1) | RTXAT(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | S = Settable bit | HC = Hardware Clearable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **TXBWS[3:0]:** Transmit Bandwidth Sharing bits
1111-1100 = 4096
1011 = 2048
1010 = 1024
1001 = 512
1000 = 256
0111 = 128
0110 = 64
0101 = 32
0100 = 16
0011 = 8
0010 = 4
0001 = 2
0000 = No delay

bit 11 **ABAT:** Abort All Pending Transmissions bit
1 = Signals all transmit buffers to abort transmission
0 = Module will clear this bit when all transmissions are aborted

bit 10-8 **REQOP[2:0]:** Request Operation Mode bits
111 = Sets Restricted Operation mode
110 = Sets Normal CAN 2.0 mode; error frames on CAN FD frames
101 = Sets External Loopback mode
100 = Sets Configuration mode
011 = Sets Listen Only mode
010 = Sets Internal Loopback mode
001 = Sets Disable mode
000 = Sets Normal CAN FD mode; supports mixing of full CAN FD and classic CAN 2.0 frames

bit 7-5 **OPMOD[2:0]:** Operation Mode Status bits
111 = Module is in Restricted Operation mode
110 = Module is in Normal CAN 2.0 mode; error frames on CAN FD frames
101 = Module is in External Loopback mode
100 = Module is in Configuration mode
011 = Module is in Listen Only mode
010 = Module is in Internal Loopback mode
001 = Module is in Disable mode
000 = Module is in Normal CAN FD mode; supports mixing of full CAN FD and classic CAN 2.0 frames

**Note 1:** These bits can only be modified in Configuration mode (OPMOD[2:0] = 100).

**REGISTER 11-1: C1CONH: CAN CONTROL REGISTER HIGH (CONTINUED)**

bit 4 **TXQEN:** Enable Transmit Queue bit(1)
1 = Enables Transmit Message Queue (TXQ) and reserves space in RAM
0 = Does not reserve space in RAM for TXQ

bit 3 **STEF:** Store in Transmit Event FIFO bit(1)
1 = Saves transmitted messages in TEF
0 = Does not save transmitted messages in TEF

bit 2 **SERRLOM:** Transition to Listen Only Mode on System Error bit(1)
1 = Transitions to Listen Only mode
0 = Transitions to Restricted Operation mode

bit 1 **ESIGM:** Transmit ESI in Gateway Mode bit(1)
1 = ESI is transmitted as recessive when ESI of the message is high or CAN controller is error passive
0 = ESI reflects error status of CAN controller

bit 0 **RTXAT:** Restrict Retransmission Attempts bit(1)
1 = Restricted retransmission attempts, uses TXAT[1:0] bits (C1TXQCONH[6:5])
0 = Unlimited number of retransmission attempts, TXAT[1:0] bits will be ignored

**Note 1:** These bits can only be modified in Configuration mode (OPMOD[2:0] = 100).


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-2: C1CONL: CAN CONTROL REGISTER LOW**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-1 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| CON | — | SIDL | BRSDIS | BUSY | WFT1 | WFT0 | WAKFIL(1) |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-1 | R/W-1 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CLKSEL(1) | PXEDIS(1) | ISOCRCEN(1) | DNCNT4 | DNCNT3 | DNCNT2 | DNCNT1 | DNCNT0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **CON:** CAN Enable bit
1 = CAN module is enabled
0 = CAN module is disabled

bit 14 **Unimplemented:** Read as '0'

bit 13 **SIDL:** CAN Stop in Idle Control bit
1 = Stops module operation in Idle mode
0 = Does not stop module operation in Idle mode

bit 12 **BRSDIS:** Bit Rate Switching (BRS) Disable bit
1 = Bit Rate Switching is disabled, regardless of BRS in the transmit message object
0 = Bit Rate Switching depends on BRS in the transmit message object

bit 11 **BUSY:** CAN Module is Busy bit
1 = The CAN module is active
0 = The CAN module is inactive

bit 10-9 **WFT[1:0]:** Selectable Wake-up Filter Time bits
11 = T11FILTER
10 = T10FILTER
01 = T01FILTER
00 = T00FILTER

bit 8 **WAKFIL:** Enable CAN Bus Line Wake-up Filter bit(1)
1 = Uses CAN bus line filter for wake-up
0 = CAN bus line filter is not used for wake-up

bit 7 **CLKSEL:** Module Clock Source Select bit(1)
1 = Auxiliary clock is active when module is enabled
0 = CAN clock is not active when module is enabled

bit 6 **PXEDIS:** Protocol Exception Event Detection Disabled bit(1)
A recessive "reserved bit" following a recessive FDF bit is called a Protocol Exception.
1 = Protocol Exception is treated as a form error
0 = If a Protocol Exception is detected, CAN will enter the bus integrating state

bit 5 **ISOCRCEN:** Enable ISO CRC in CAN FD Frames bit(1)
1 = Includes stuff bit count in CRC field and uses non-zero CRC initialization vector
0 = Does not include stuff bit count in CRC field and uses CRC initialization vector with all zeros

bit 4-0 **DNCNT[4:0]:** DeviceNet™ Filter Bit Number bits
10011-11111 = Invalid selection (compares up to 18 bits of data with EID)
10010 = Compares up to Data Byte 2, bit 6 with EID17
...
00001 = Compares up to Data Byte 0, bit 7 with EID0
00000 = Does not compare data bytes

**Note 1:** These bits can only be modified in Configuration mode (OPMOD[2:0] = 100).

**REGISTER 11-3: C1NBTCFGH: CAN NOMINAL BIT TIME CONFIGURATION REGISTER HIGH(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| BRP[7:0] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-1 | R/W-1 | R/W-1 | R/W-1 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TSEG1[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **BRP[7:0]:** Baud Rate Prescaler bits
1111 1111 = TQ = 256/FSYS
...
0000 0000 = TQ = 1/FSYS

bit 7-0 **TSEG1[7:0]:** Time Segment 1 bits (Propagation Segment + Phase Segment 1)
1111 1111 = Length is 256 x TQ
...
0000 0000 = Length is 1 x TQ

**Note 1:** These bits can only be modified in Configuration mode (OPMOD[2:0] = 100).

**REGISTER 11-4: C1NBTCFGL: CAN NOMINAL BIT TIME CONFIGURATION REGISTER LOW(1)**

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-1 | R/W-1 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| — | TSEG2[6:0] | | | | | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-1 | R/W-1 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| — | SJW[6:0] | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14-8 **TSEG2[6:0]:** Time Segment 2 bits (Phase Segment 2)
111 1111 = Length is 128 x TQ
...
000 0000 = Length is 1 x TQ

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **SJW[6:0]:** Synchronization Jump Width bits
111 1111 = Length is 128 x TQ
...
000 0000 = Length is 1 x TQ

**Note 1:** These bits can only be modified in Configuration mode (OPMOD[2:0] = 100).


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-5: C1DBTCFGH: CAN DATA BIT TIME CONFIGURATION REGISTER HIGH(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| BRP[7:0] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | R/W-0 | R/W-1 | R/W-1 | R/W-1 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | TSEG1[4:0] | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **BRP[7:0]:** Baud Rate Prescaler bits
1111 1111 = TQ = 256/FSYS
...
0000 0000 = TQ = 1/FSYS

bit 7-5 **Unimplemented:** Read as '0'

bit 4-0 **TSEG1[4:0]:** Time Segment 1 bits (Propagation Segment + Phase Segment 1)
1 1111 = Length is 32 x TQ
...
0 0000 = Length is 1 x TQ

**Note 1:** This register can only be modified in Configuration mode (OPMOD[2:0] = 100).

**REGISTER 11-6: C1DBTCFGL: CAN DATA BIT TIME CONFIGURATION REGISTER LOW(1)**

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | TSEG2[3:0] | | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-1 | R/W-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | SJW[3:0] | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **Unimplemented:** Read as '0'

bit 11-8 **TSEG2[3:0]:** Time Segment 2 bits (Phase Segment 2)
1111 = Length is 16 x TQ
...
0000 = Length is 1 x TQ

bit 7-4 **Unimplemented:** Read as '0'

bit 3-0 **SJW[3:0]:** Synchronization Jump Width bits
1111 = Length is 16 x TQ
...
0000 = Length is 1 x TQ

**Note 1:** This register can only be modified in Configuration mode (OPMOD[2:0] = 100).

**REGISTER 11-7: C1TDCH: CAN TRANSMITTER DELAY COMPENSATION REGISTER HIGH(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | EDGFLTEN | SID11EN |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-1 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | TDCMOD1 | TDCMOD0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9 **EDGFLTEN:** Enable Edge Filtering During Bus Integration State bit
1 = Edge filtering is enabled according to ISO 11898-1:2015
0 = Edge filtering is disabled

bit 8 **SID11EN:** Enable 12-Bit SID in CAN FD Base Format Messages bit
1 = RRS is used as SID11 in CAN FD base format messages: SID[11:0] = {SID[10:0], SID11}
0 = Does not use RRS; SID[10:0]

bit 7-2 **Unimplemented:** Read as '0'

bit 1-0 **TDCMOD[1:0]:** Transmitter Delay Compensation Mode bits (Secondary Sample Point (SSP))
10-11 = Auto: Measures delay and adds TSEG1[4:0] (C1DBTCFGH[4:0]), adds TDCO[6:0]
01 = Manual: Does not measure, uses TDCV[5:0] + TDCO[6:0] from register
00 = Disable

**Note 1:** This register can only be modified in Configuration mode (OPMOD[2:0] = 100).


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-8: C1TDCL: CAN TRANSMITTER DELAY COMPENSATION REGISTER LOW(1)**

| U-0 | R/W-0 | R/W-0 | R/W-1 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | TDCO[6:0] | | | | | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | TDCV[5:0] | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14-8 **TDCO[6:0]:** Transmitter Delay Compensation Offset bits (Secondary Sample Point (SSP))
111 1111 = -64 x TCY
...
011 1111 = 63 x TCY
...
000 0000 = 0 x TCY

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **TDCV[5:0]:** Transmitter Delay Compensation Value bits (Secondary Sample Point (SSP))
11 1111 = FP
...
00 0000 = 0 x FP

**Note 1:** This register can only be modified in Configuration mode (OPMOD[2:0] = 100).

**REGISTER 11-9: C1TBCH: CAN TIME BASE COUNTER REGISTER HIGH(1,2)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TBC[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TBC[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **TBC[31:16]** CAN Time Base Counter bits
This is a free-running timer that increments every TBCPREx clock when TBCEN is set.

**Note 1:** The Time Base Counter (TBC) will be stopped and reset when TBCEN = 0 to save power.
**2:** The TBC prescaler count will be reset on any write to C1TBCH/L (TBCPREx will be unaffected).

**REGISTER 11-10: C1TBCL: CAN TIME BASE COUNTER REGISTER LOW(1,2)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TBC[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TBC[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **TBC[15:0]** CAN Time Base Counter bits
This is a free-running timer that increments every TBCPREx clock when TBCEN is set.

**Note 1:** The TBC will be stopped and reset when TBCEN = 0 to save power.
**2:** The TBC prescaler count will be reset on any write to C1TBCH/L (TBCPREx will be unaffected).


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-11: C1TSCONH: CAN TIMESTAMP CONTROL REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | TSRES | TSEOF | TBCEN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-3 **Unimplemented:** Read as '0'

bit 2 **TSRES:** Timestamp Reset bit (CAN FD frames only)
1 = At sample point of the bit following the FDF bit
0 = At sample point of Start-of-Frame (SOF)

bit 1 **TSEOF:** Timestamp End-of-Frame (EOF) bit
1 = Timestamp when frame is taken valid (11898-1 10.7):
- RX no error until last, but one bit of EOF
- TX no error until the end of EOF

0 = Timestamp at "beginning" of frame:
- Classical Frame: At sample point of SOF
- FD Frame: See TSRES bit

bit 0 **TBCEN:** Time Base Counter Enable bit
1 = Enables TBC
0 = Stops and resets TBC

**REGISTER 11-12: C1TSCONL: CAN TIMESTAMP CONTROL REGISTER LOW**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | TBCPRE[9:8] | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TBCPRE[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-0 **TBCPRE[9:0]:** CAN Time Base Counter Prescaler bits
1023 = TBC increments every 1024 clocks
...
0 = TBC increments every 1 clock

**REGISTER 11-13: C1VECH: CAN INTERRUPT CODE REGISTER HIGH**

| U-0 | R-1 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | RXCODE[6:0] | | | | | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | R-1 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | TXCODE[6:0] | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14-8 **RXCODE[6:0]:** Receive Interrupt Flag Code bits
1000001-1111111 = Reserved
1000000 = No interrupt
0001000-0111111 = Reserved
0000111 = FIFO 7 interrupt (RFIF7 is set)
...
0000010 = FIFO 2 interrupt (RFIF2 is set)
0000001 = FIFO 1 interrupt (RFIF1 is set)
0000000 = Reserved; FIFO 0 cannot receive

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **TXCODE[6:0]:** Transmit Interrupt Flag Code bits
1000001-1111111 = Reserved
1000000 = No interrupt
0001000-0111111 = Reserved
0000111 = FIFO 7 interrupt (TFIF7 is set)
...
0000001 = FIFO 1 interrupt (TFIF1 is set)
0000000 = FIFO 0 interrupt (TFIF0 is set)


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-14: C1VECL: CAN INTERRUPT CODE REGISTER LOW**

| U-0 | U-0 | U-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | FILHIT[4:0] | | | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | R-1 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | ICODE[6:0] | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **Unimplemented:** Read as '0'

bit 12-8 **FILHIT[4:0]:** Filter Hit Number bits
01111 = Filter 15
01110 = Filter 14
...
00001 = Filter 1
00000 = Filter 0

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **ICODE[6:0]:** Interrupt Flag Code bits
1001011-1111111 = Reserved
1001010 = Transmit attempt interrupt (any bit in C1TXATIF is set)
1001001 = Transmit event FIFO interrupt (any bit in C1TEFSTA is set)
1001000 = Invalid message occurred (IVMIF/IE)
1000111 = CAN module mode change occurred (MODIF/IE)
1000110 = CAN timer overflow (TBCIF/IE)
1000101 = RX/TX MAB overflow/underflow (RX: Message received before previous message was saved to memory; TX: Can't feed TX MAB fast enough to transmit consistent data)
1000100 = Address error interrupt (illegal FIFO address presented to system)
1000011 = Receive FIFO overflow interrupt (any bit in C1RXOVIF is set)
1000010 = Wake-up interrupt (WAKIF/WAKIE)
1000001 = Error interrupt (CERRIF/IE)
1000000 = No interrupt
0001000-0111111 = Reserved
0000111 = FIFO 7 interrupt (TFIF7 or RFIF7 is set)
...
0000001 = FIFO 1 interrupt (TFIF1 or RFIF1 is set)
0000000 = FIFO 0 interrupt (TFIF0 is set)

**REGISTER 11-15: C1INTH: CAN INTERRUPT REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| IVMIE | WAKIE | CERRIE | SERRIE | RXOVIE | TXATIE | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | TEFIE | MODIE | TBCIE | RXIE | TXIE |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **IVMIE:** Invalid Message Interrupt Enable bit
1 = Invalid message interrupt is enabled
0 = Invalid message interrupt is disabled

bit 14 **WAKIE:** Bus Wake-up Activity Interrupt Enable bit
1 = Wake-up activity interrupt is enabled
0 = Wake-up Activity Interrupt is disabled

bit 13 **CERRIE:** CAN Bus Error Interrupt Enable bit
1 = CAN bus error interrupt is enabled
0 = CAN bus error interrupt is disabled

bit 12 **SERRIE:** System Error Interrupt Enable bit
1 = System error interrupt is enabled
0 = System error interrupt is disabled

bit 11 **RXOVIE:** Receive Buffer Overflow Interrupt Enable bit
1 = Receive buffer overflow interrupt is enabled
0 = Receive buffer overflow interrupt is disabled

bit 10 **TXATIE:** Transmit Attempt Interrupt Enable bit
1 = Transmit attempt interrupt is enabled
0 = Transmit attempt interrupt is disabled

bit 9-5 **Unimplemented:** Read as '0'

bit 4 **TEFIE:** Transmit Event FIFO Interrupt Enable bit
1 = Transmit event FIFO interrupt is enabled
0 = Transmit event FIFO interrupt is disabled

bit 3 **MODIE:** Mode Change Interrupt Enable bit
1 = Mode change interrupt is enabled
0 = Mode change interrupt is disabled

bit 2 **TBCIE:** CAN Timer Interrupt Enable bit
1 = CAN timer interrupt is enabled
0 = CAN timer interrupt is disabled

bit 1 **RXIE:** Receive Object Interrupt Enable bit
1 = Receive object interrupt is enabled
0 = Receive object interrupt is disabled

bit 0 **TXIE:** Transmit Object Interrupt Enable bit
1 = Transmit object interrupt is enabled
0 = Transmit object interrupt is disabled


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-16: C1INTL: CAN INTERRUPT REGISTER LOW**

| HS/C-0 | HS/C-0 | HS/C-0 | HS/C-0 | R-0 | R-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| IVMIF(1) | WAKIF(1) | CERRIF(1) | SERRIF(1) | RXOVIF | TXATIF | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | R-0 | HS/C-0 | HS/C-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | TEFIF | MODIF(1) | TBCIF(1) | RXIF | TXIF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | HS = Hardware Settable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **IVMIF:** Invalid Message Interrupt Flag bit(1)
1 = Invalid message interrupt occurred
0 = No invalid message interrupt occurred

bit 14 **WAKIF:** Bus Wake-up Activity Interrupt Flag bit(1)
1 = Wake-up activity interrupt occurred
0 = No wake-up activity interrupt occurred

bit 13 **CERRIF:** CAN Bus Error Interrupt Flag bit(1)
1 = CAN bus error interrupt occurred
0 = No CAN bus error interrupt occurred

bit 12 **SERRIF:** System Error Interrupt Flag bit(1)
1 = System error interrupt occurred
0 = No system error interrupt occurred

bit 11 **RXOVIF:** Receive Buffer Overflow Interrupt Flag bit
1 = Receive buffer overflow interrupt occurred
0 = No receive buffer overflow interrupt occurred

bit 10 **TXATIF:** Transmit Attempt Interrupt Flag bit
1 = Transmit attempt interrupt occurred
0 = No transmit attempt Interrupt occurred

bit 9-5 **Unimplemented:** Read as '0'

bit 4 **TEFIF:** Transmit Event FIFO Interrupt Flag bit
1 = Transmit event FIFO interrupt occurred
0 = No transmit event FIFO interrupt occurred

bit 3 **MODIF:** CAN Mode Change Interrupt Flag bit(1)
1 = CAN module mode change occurred (OPMOD[2:0] have changed to reflect REQOP[2:0])
0 = No mode change occurred

bit 2 **TBCIF:** CAN Timer Overflow Interrupt Flag bit(1)
1 = TBC has overflowed
0 = TBC has not overflowed

bit 1 **RXIF:** Receive Object Interrupt Flag bit
1 = Receive object interrupt is pending
0 = No receive object interrupts are pending

bit 0 **TXIF:** Transmit Object Interrupt Flag bit
1 = Transmit object interrupt is pending
0 = No transmit object interrupts are pending

**Note 1:** C1INTL: Flags are set by hardware and cleared by application.

**REGISTER 11-17: C1RXIFH: CAN RECEIVE INTERRUPT STATUS REGISTER HIGH(1)**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| RFIF[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| RFIF[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **RFIF[31:16]:** Unimplemented

**Note 1:** C1RXIFH: FIFO: RFIFx = 'or' of enabled RX FIFO flags (flags need to be cleared in the FIFO register).

**REGISTER 11-18: C1RXIFL: CAN RECEIVE INTERRUPT STATUS REGISTER LOW(1)**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| RFIF[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | U-0 |
|---|---|---|---|---|---|---|---|
| RFIF[7:1] | | | | | | | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **RFIF[15:8]:** Unimplemented

bit 7-1 **RFIF[7:1]:** Receive FIFO Interrupt Pending bits
1 = One or more enabled receive FIFO interrupts are pending
0 = No enabled receive FIFO interrupts are pending

bit 0 **Unimplemented:** Read as '0'

**Note 1:** C1RXIFL: FIFO: RFIFx = 'or' of enabled RX FIFO flags (flags need to be cleared in the FIFO register).


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-19: C1RXOVIFH: CAN RECEIVE OVERFLOW INTERRUPT STATUS REGISTER HIGH(1)**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| RFOVIF[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| RFOVIF[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **RFOVIF[31:16]:** Unimplemented

**Note 1:** C1RXOVIFH: FIFO: RFOVIFx (flag needs to be cleared in the FIFO register).

**REGISTER 11-20: C1RXOVIFL: CAN RECEIVE OVERFLOW INTERRUPT STATUS REGISTER LOW(1)**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| RFOVIF[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | U-0 |
|---|---|---|---|---|---|---|---|
| RFOVIF[7:1] | | | | | | | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **RFOVIF[15:8]:** Unimplemented

bit 7-1 **RFOVIF[7:1]:** Receive FIFO Overflow Interrupt Pending bits
1 = Interrupt is pending
0 = Interrupt is not pending

bit 0 **Unimplemented:** Read as '0'

**Note 1:** C1RXOVIFL: FIFO: RFOVIFx (flag needs to be cleared in the FIFO register).

**REGISTER 11-21: C1TXIFH: CAN TRANSMIT INTERRUPT STATUS REGISTER HIGH(1)**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TFIF[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TFIF[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **TFIF[31:16]:** Unimplemented

**Note 1:** C1TXIFH: FIFO: TFIFx = 'or' of the enabled TX FIFO flags (flags need to be cleared in the FIFO register).

**REGISTER 11-22: C1TXIFL: CAN TRANSMIT INTERRUPT STATUS REGISTER LOW(1)**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TFIF[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TFIF[7:0](2) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **TFIF[15:8]:** Unimplemented

bit 7-0 **TFIF[7:0]:** Transmit FIFO/TXQ Interrupt Pending bits(2)

1 = One or more enabled transmit FIFO/TXQ interrupts are pending

0 = No enabled transmit FIFO/TXQ interrupts are pending

**Note 1:** C1TXIFL: FIFO: TFIFx = 'or' of the enabled TX FIFO flags (flags need to be cleared in the FIFO register).

**2:** TFIF0 is for the transmit queue.


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-23: C1TXATIFH: CAN TRANSMIT ATTEMPT INTERRUPT STATUS REGISTER HIGH(1)**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TFATIF[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TFATIF[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **TFATIF[31:16]:** Unimplemented

**Note 1:** C1TXATIFH: FIFO: TFATIFx (flag needs to be cleared in the FIFO register).

**REGISTER 11-24: C1TXATIFL: CAN TRANSMIT ATTEMPT INTERRUPT STATUS REGISTER LOW(1)**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TFATIF[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TFATIF[7:0](2) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **TFATIF[15:8]:** Unimplemented

bit 7-0 **TFATIF[7:0]:** Transmit FIFO/TXQ Attempt Interrupt Pending bits(2)

1 = Interrupt is pending
0 = Interrupt is not pending

**Note 1:** C1TXATIFL: FIFO: TFATIFx (flag needs to be cleared in the FIFO register).

**2:** TFATIF0 is for the transmit queue.

**REGISTER 11-25: C1TXREQH: CAN TRANSMIT REQUEST REGISTER HIGH**

| S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 |
|---|---|---|---|---|---|---|---|
| TXREQ[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 |
|---|---|---|---|---|---|---|---|
| TXREQ[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | S = Settable bit | HC = Hardware Clearable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **TXREQ[31:16]:** Unimplemented

**REGISTER 11-26: C1TXREQL: CAN TRANSMIT REQUEST REGISTER LOW**

| S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 |
|---|---|---|---|---|---|---|---|
| TXREQ[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 | S/HC-0 |
|---|---|---|---|---|---|---|---|
| TXREQ[7:1] | | | | | | | TXREQ0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | S = Settable bit | HC = Hardware Clearable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **TXREQ[15:8]:** Unimplemented

bit 7-1 **TXREQ[7:1]:** Message Send Request bits

TXEN = 1 (object configured as a transmit object):
Setting this bit to '1' requests sending a message. The bit will automatically clear when the message(s) queued in the object is (are) successfully sent. This bit can NOT be used for aborting a transmission.

TXEN = 0 (object configured as a receive object):
This bit has no effect.

bit 0 **TXREQ0:** Transmit Queue Message Send Request bit

Setting this bit to '1' requests sending a message. The bit will automatically clear when the message(s) queued in the object is (are) successfully sent. This bit can NOT be used for aborting a transmission.


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-27: C1FIFOBAH: CAN MESSAGE MEMORY BASE ADDRESS REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FIFOBA[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FIFOBA[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **FIFOBA[31:16]:** Message Memory Base Address bits
Defines the base address for the transmit event FIFO followed by the message objects.

**REGISTER 11-28: C1FIFOBAL: CAN MESSAGE MEMORY BASE ADDRESS REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FIFOBA[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R-0(1) | R-0(1) |
|---|---|---|---|---|---|---|---|
| FIFOBA[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **FIFOBA[15:0]:** Message Memory Base Address bits(1)
Defines the base address for the transmit event FIFO followed by the message objects.

**Note 1:** Bits[1:0] are '0' to make base address location 32-bit word-aligned.

**REGISTER 11-29: C1TXQCONH: CAN TRANSMIT QUEUE CONTROL REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PLSIZE2(1) | PLSIZE1(1) | PLSIZE0(1) | FSIZE4(1) | FSIZE3(1) | FSIZE2(1) | FSIZE1(1) | FSIZE0(1) |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-1 | R/W-1 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | TXAT1 | TXAT0 | TXPRI4 | TXPRI3 | TXPRI2 | TXPRI1 | TXPRI0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **PLSIZE[2:0]:** Payload Size bits(1)
111 = 64 data bytes
110 = 48 data bytes
101 = 32 data bytes
100 = 24 data bytes
011 = 20 data bytes
010 = 16 data bytes
001 = 12 data bytes
000 = 8 data bytes

bit 12-8 **FSIZE[4:0]:** FIFO Size bits(1)
11111 = FIFO is 32 messages deep
...
00010 = FIFO is 3 messages deep
00001 = FIFO is 2 messages deep
00000 = FIFO is 1 message deep

bit 7 **Unimplemented:** Read as '0'

bit 6-5 **TXAT[1:0]:** Retransmission Attempts bits
This feature is enabled when RTXAT (C1CONH[0]) is set.
11 = Unlimited number of retransmission attempts
10 = Unlimited number of retransmission attempts
01 = Three retransmission attempts
00 = Disables retransmission attempts

bit 4-0 **TXPRI[4:0]:** Message Transmit Priority bits
11111 = Highest message priority
...
00000 = Lowest message priority

**Note 1:** These bits can only be modified in Configuration mode (OPMOD[2:0] = 100).


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-30: C1TXQCONL: CAN TRANSMIT QUEUE CONTROL REGISTER LOW**

| U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | FRESET | TXREQ | UINC |
| bit 15 | | | | | | | bit 8 |

| R-0 | U-0 | U-0 | R/W-0 | U-0 | R/W-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TXEN | — | — | TXATIE | — | TXQEIE | — | TXQNIE |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-11 **Unimplemented:** Read as '0'

bit 10 **FRESET:** FIFO Reset bit
- 1 = FIFO will be reset when bit is set, cleared by hardware when FIFO is reset; user should poll whether this bit is clear before taking any action
- 0 = No effect

bit 9 **TXREQ:** Message Send Request bit
- 1 = Requests sending a message; the bit will automatically clear when all the messages queued in the TXQ are successfully sent
- 0 = Clearing the bit to '0' while set ('1') will request a message abort

bit 8 **UINC:** Increment Head/Tail bit

When this bit is set, the FIFO head will increment by a single message.

bit 7 **TXEN:** TX Enable bit

bit 6-5 **Unimplemented:** Read as '0'

bit 4 **TXATIE:** Transmit Attempts Exhausted Interrupt Enable bit
- 1 = Enables interrupt
- 0 = Disables interrupt

bit 3 **Unimplemented:** Read as '0'

bit 2 **TXQEIE:** Transmit Queue Empty Interrupt Enable bit
- 1 = Interrupt is enabled for TXQ empty
- 0 = Interrupt is disabled for TXQ empty

bit 1 **Unimplemented:** Read as '0'

bit 0 **TXQNIE:** Transmit Queue Not Full Interrupt Enable bit
- 1 = Interrupt is enabled for TXQ not full
- 0 = Interrupt is disabled for TXQ not full

**REGISTER 11-31: C1TXQSTA: CAN TRANSMIT QUEUE STATUS REGISTER**

| U-0 | U-0 | U-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | TXQCI[4:0](1) | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | C/HS-0 | U-0 | R-1 | U-0 | R-1 |
|---|---|---|---|---|---|---|---|
| TXABT(2) | TXLARB | TXERR | TXATIF | — | TXQEIF | — | TXQNIF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | HS = Hardware Settable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **Unimplemented:** Read as '0'

bit 12-8 **TXQCI[4:0]:** Transmit Message Queue Index bits(1)
A read of this register will return an index to the message that the FIFO will next attempt to transmit.

bit 7 **TXABT:** Message Aborted Status bit(2)
1 = Message was aborted
0 = Message completed successfully

bit 6 **TXLARB:** Message Lost Arbitration Status bit
1 = Message lost arbitration while being sent
0 = Message did not lose arbitration while being sent

bit 5 **TXERR:** Error Detected During Transmission bit
1 = A bus error occurred while the message was being sent
0 = A bus error did not occur while the message was being sent

bit 4 **TXATIF:** Transmit Attempts Exhausted Interrupt Pending bit
1 = Interrupt is pending
0 = Interrupt is not pending

bit 3 **Unimplemented:** Read as '0'

bit 2 **TXQEIF:** Transmit Queue Empty Interrupt Flag bit
1 = TXQ is empty
0 = TXQ is not empty, at least 1 message is queued to be transmitted

bit 1 **Unimplemented:** Read as '0'

bit 0 **TXQNIF:** Transmit Queue Not Full Interrupt Flag bit
1 = TXQ is not full
0 = TXQ is full

**Note 1:** The TXQCI[4:0] bits give a zero-indexed value to the message in the TXQ. If the TXQ is four messages deep (FSIZE[4:0] = 3), TXQCIx will take on a value of 0 to 3, depending on the state of the TXQ.

**2:** This bit is updated when a message completes (or aborts) or when the TXQ is reset.


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-32: C1FIFOCONHx: CAN FIFO CONTROL REGISTER x (x = 1 TO 7) HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PLSIZE2(1) | PLSIZE1(1) | PLSIZE0(1) | FSIZE4(1) | FSIZE3(1) | FSIZE2(1) | FSIZE1(1) | FSIZE0(1) |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-1 | R/W-1 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | TXAT1 | TXAT0 | TXPRI4 | TXPRI3 | TXPRI2 | TXPRI1 | TXPRI0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **PLSIZE[2:0]:** Payload Size bits(1)
111 = 64 data bytes
110 = 48 data bytes
101 = 32 data bytes
100 = 24 data bytes
011 = 20 data bytes
010 = 16 data bytes
001 = 12 data bytes
000 = 8 data bytes

bit 12-8 **FSIZE[4:0]:** FIFO Size bits(1)
11111 = FIFO is 32 messages deep
...
00010 = FIFO is 3 messages deep
00001 = FIFO is 2 messages deep
00000 = FIFO is 1 message deep

bit 7 **Unimplemented:** Read as '0'

bit 6-5 **TXAT[1:0]:** Retransmission Attempts bits
This feature is enabled when RTXAT (C1CONH[0]) is set.
11 = Unlimited number of retransmission attempts
10 = Unlimited number of retransmission attempts
01 = Three retransmission attempts
00 = Disables retransmission attempts

bit 4-0 **TXPRI[4:0]:** Message Transmit Priority bits
11111 = Highest message priority
...
00000 = Lowest message priority

**Note 1:** These bits can only be modified in Configuration mode (OPMOD[2:0] = 100).

**REGISTER 11-33: C1FIFOCONLx: CAN FIFO CONTROL REGISTER x (x = 1 TO 7) LOW**

| U-0 | U-0 | U-0 | U-0 | U-0 | S/HC-1 | R/W/HC-0 | S/HC-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | FRESET | TXREQ | UINC |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TXEN | RTREN | RXTSEN(1) | TXATIE | RXOVIE | TFERFFIE | TFHRFHIE | TFNRFNIE |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | S = Settable bit | HC = Hardware Clearable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-11 **Unimplemented:** Read as '0'

bit 10 **FRESET:** FIFO Reset bit
1 = FIFO will be reset when bit is set, cleared by hardware when FIFO is reset; user should poll whether this bit is clear before taking any action
0 = No effect

bit 9 **TXREQ:** Message Send Request bit
TXEN = 1 (FIFO configured as a transmit FIFO):
1 = Requests sending a message; the bit will automatically clear when all the messages queued in the FIFO are successfully sent
0 = Clearing the bit to '0' while set ('1') will request a message abort
TXEN = 0 (FIFO configured as a receive FIFO):
This bit has no effect.

bit 8 **UINC:** Increment Head/Tail bit
TXEN = 1 (FIFO configured as a transmit FIFO):
When this bit is set, the FIFO head will increment by a single message.
TXEN = 0 (FIFO configured as a receive FIFO):
When this bit is set, the FIFO tail will increment by a single message.

bit 7 **TXEN:** TX/RX Buffer Selection bit
1 = Transmits message object
0 = Receives message object

bit 6 **RTREN:** Auto-Remote Transmit (RTR) Enable bit
1 = When a Remote Transmit is received, TXREQ will be set
0 = When a Remote Transmit is received, TXREQ will be unaffected

bit 5 **RXTSEN:** Received Message Timestamp Enable bit(1)
1 = Captures timestamp in received message object in RAM
0 = Does not capture timestamp

bit 4 **TXATIE:** Transmit Attempts Exhausted Interrupt Enable bit
1 = Enables interrupt
0 = Disables interrupt

bit 3 **RXOVIE:** Overflow Interrupt Enable bit
1 = Interrupt is enabled for overflow event
0 = Interrupt is disabled for overflow event

**Note 1:** This bit can only be modified in Configuration mode (OPMOD[2:0] = 100).


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-33: C1FIFOCONLx: CAN FIFO CONTROL REGISTER x (x = 1 TO 7) LOW (CONTINUED)**

bit 2 **TFERFFIE:** Transmit/Receive FIFO Empty/Full Interrupt Enable bit

TXEN = 1 (FIFO configured as a transmit FIFO):
Transmit FIFO Empty Interrupt Enable
1 = Interrupt is enabled for FIFO empty
0 = Interrupt is disabled for FIFO empty

TXEN = 0 (FIFO configured as a receive FIFO):
Receive FIFO Full Interrupt Enable
1 = Interrupt is enabled for FIFO full
0 = Interrupt is disabled for FIFO full

bit 1 **TFHRFHIE:** Transmit/Receive FIFO Half Empty/Half Full Interrupt Enable bit

TXEN = 1 (FIFO configured as a transmit FIFO):
Transmit FIFO Half Empty Interrupt Enable
1 = Interrupt is enabled for FIFO half empty
0 = Interrupt is disabled for FIFO half empty

TXEN = 0 (FIFO configured as a receive FIFO):
Receive FIFO Half Full Interrupt Enable
1 = Interrupt is enabled for FIFO half full
0 = Interrupt is disabled for FIFO half full

bit 0 **TFNRFNIE:** Transmit/Receive FIFO Not Full/Not Empty Interrupt Enable bit

TXEN = 1 (FIFO configured as a transmit FIFO):
Transmit FIFO Not Full Interrupt Enable
1 = Interrupt is enabled for FIFO not full
0 = Interrupt is disabled for FIFO not full

TXEN = 0 (FIFO configured as a receive FIFO):
Receive FIFO Not Empty Interrupt Enable
1 = Interrupt is enabled for FIFO not empty
0 = Interrupt is disabled for FIFO not empty

**Note 1:** This bit can only be modified in Configuration mode (OPMOD[2:0] = 100).

**REGISTER 11-34: C1FIFOSTAx: CAN FIFO STATUS REGISTER x (x = 1 TO 7)**

| U-0 | U-0 | U-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | FIFOCI[4:0](1) | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | C/HS-0 | C/HS-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TXABT(3) | TXLARB(2) | TXERR(2) | TXATIF | RXOVIF | TFERFFIF | TFHRFHIF | TFNRFNIF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | HS = Hardware Settable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **Unimplemented:** Read as '0'

bit 12-8 **FIFOCI[4:0]:** FIFO Message Index bits(1)

TXEN = 1 (FIFO configured as a transmit buffer):
A read of this register will return an index to the message that the FIFO will next attempt to transmit.

TXEN = 0 (FIFO configured as a receive buffer):
A read of this register will return an index to the message that the FIFO will use to save the next message.

bit 7 **TXABT:** Message Aborted Status bit(3)

1 = Message was aborted
0 = Message completed successfully

bit 6 **TXLARB:** Message Lost Arbitration Status bit(2)

1 = Message lost arbitration while being sent
0 = Message did not lose arbitration while being sent

bit 5 **TXERR:** Error Detected During Transmission bit(2)

1 = A bus error occurred while the message was being sent
0 = A bus error did not occur while the message was being sent

bit 4 **TXATIF:** Transmit Attempts Exhausted Interrupt Pending bit

TXEN = 1 (FIFO configured as a transmit buffer):
1 = Interrupt is pending
0 = Interrupt is not pending

TXEN = 0 (FIFO configured as a receive buffer):
Unused, read as '0'.

bit 3 **RXOVIF:** Receive FIFO Overflow Interrupt Flag bit

TXEN = 1 (FIFO configured as a transmit buffer):
Unused, read as '0'.

TXEN = 0 (FIFO configured as a receive buffer):
1 = Overflow event has occurred
0 = No overflow event has occurred

**Note 1:** FIFOCI[4:0] gives a zero-indexed value to the message in the FIFO. If the FIFO is four messages deep (FSIZE[4:0] = 3), FIFOCIx will take on a value of 0 to 3, depending on the state of the FIFO.

**2:** These bits are updated when a message completes (or aborts) or when the FIFO is reset.

**3:** This bit is reset on any read of this register or when the TXQ is reset. The bits are cleared when TXREQ is set or using an SPI write.


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-34: C1FIFOSTAx: CAN FIFO STATUS REGISTER x (x = 1 TO 7) (CONTINUED)**

bit 2 **TFERFFIF:** Transmit/Receive FIFO Empty/Full Interrupt Flag bit
TXEN = 1 (FIFO configured as a transmit FIFO):
Transmit FIFO Empty Interrupt Flag
1 = FIFO is empty
0 = FIFO is not empty, at least one message is queued to be transmitted
TXEN = 0 (FIFO configured as a receive FIFO):
Receive FIFO Full Interrupt Flag
1 = FIFO is full
0 = FIFO is not full

bit 1 **TFHRFHIF:** Transmit/Receive FIFO Half Empty/Half Full Interrupt Flag bit
TXEN = 1 (FIFO configured as a transmit FIFO):
Transmit FIFO Half Empty Interrupt Flag
1 = FIFO is ≤ half full
0 = FIFO is > half full
TXEN = 0 (FIFO configured as a receive FIFO):
Receive FIFO Half Full Interrupt Flag
1 = FIFO is ≥ half full
0 = FIFO is < half full

bit 0 **TFNRFNIF:** Transmit/Receive FIFO Not Full/Not Empty Interrupt Flag bit
TXEN = 1 (FIFO configured as a transmit FIFO):
Transmit FIFO Not Full Interrupt Flag
1 = FIFO is not full
0 = FIFO is full
TXEN = 0 (FIFO configured as a receive FIFO):
Receive FIFO Not Empty Interrupt Flag
1 = FIFO is not empty, has at least 1 message
0 = FIFO is empty

**Note 1:** FIFOCI[4:0] gives a zero-indexed value to the message in the FIFO. If the FIFO is four messages deep (FSIZE[4:0] = 3), FIFOCIx will take on a value of 0 to 3, depending on the state of the FIFO.
**2:** These bits are updated when a message completes (or aborts) or when the FIFO is reset.
**3:** This bit is reset on any read of this register or when the TXQ is reset. The bits are cleared when TXREQ is set or using an SPI write.

**REGISTER 11-35: C1TEFCONH: CAN TRANSMIT EVENT FIFO CONTROL REGISTER HIGH**

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | FSIZE[4:0](1) | | | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **Unimplemented:** Read as '0'

bit 12-8 **FSIZE[4:0]:** FIFO Size bits(1)
11111 = FIFO is 32 messages deep
...
00010 = FIFO is 3 messages deep
00001 = FIFO is 2 messages deep
00000 = FIFO is 1 message deep

bit 7-0 **Unimplemented:** Read as '0'

**Note 1:** These bits can only be modified in Configuration mode (OPMOD[2:0] = 100).


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-36: C1TEFCONL: CAN TRANSMIT EVENT FIFO CONTROL REGISTER LOW**

| U-0 | U-0 | U-0 | U-0 | U-0 | S/HC-0 | U-0 | S/HC-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | FRESET | — | UINC |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | TEFTSEN(1) | — | TEFOVIE | TEFFIE | TEFHIE | TEFNEIE |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | S = Settable bit | HC = Hardware Clearable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-11 **Unimplemented:** Read as '0'

bit 10 **FRESET:** FIFO Reset bit
1 = FIFO will be reset when bit is set, cleared by hardware when FIFO is reset; the user should poll whether this bit is clear before taking any action
0 = No effect

bit 9 **Unimplemented:** Read as '0'

bit 8 **UINC:** Increment Tail bit
1 = When this bit is set, the FIFO tail will increment by a single message
0 = FIFO tail will not increment

bit 7-6 **Unimplemented:** Read as '0'

bit 5 **TEFTSEN:** Transmit Event FIFO Timestamp Enable bit(1)
1 = Timestamps elements in TEF
0 = Does not timestamp elements in TEF

bit 4 **Unimplemented:** Read as '0'

bit 3 **TEFOVIE:** Transmit Event FIFO Overflow Interrupt Enable bit
1 = Interrupt is enabled for overflow event
0 = Interrupt is disabled for overflow event

bit 2 **TEFFIE:** Transmit Event FIFO Full Interrupt Enable bit
1 = Interrupt is enabled for FIFO full
0 = Interrupt is disabled for FIFO full

bit 1 **TEFHIE:** Transmit Event FIFO Half Full Interrupt Enable bit
1 = Interrupt is enabled for FIFO half full
0 = Interrupt is disabled for FIFO half full

bit 0 **TEFNEIE:** Transmit Event FIFO Not Empty Interrupt Enable bit
1 = Interrupt is enabled for FIFO not empty
0 = Interrupt is disabled for FIFO not empty

**Note 1:** These bits can only be modified in Configuration mode (OPMOD[2:0] = 100).

**REGISTER 11-37: C1TEFSTA: CAN TRANSMIT EVENT FIFO STATUS REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | S/HC-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | TEFOVIF | TEFFIF(1) | TEFHIF(1) | TEFNEIF(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HC = Hardware Clearable bit | S = Settable bit Can Set by ‘1’ | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-4 **Unimplemented:** Read as ‘0’

bit 3 **TEFOVIF:** Transmit Event FIFO Overflow Interrupt Flag bit
1 = Overflow event has occurred
0 = No overflow event has occurred

bit 2 **TEFFIF:** Transmit Event FIFO Full Interrupt Flag bit(1)
1 = FIFO is full
0 = FIFO is not full

bit 1 **TEFHIF:** Transmit Event FIFO Half Full Interrupt Flag bit(1)
1 = FIFO is ≥ half full
0 = FIFO is < half full

bit 0 **TEFNEIF:** Transmit Event FIFO Not Empty Interrupt Flag bit(1)
1 = FIFO is not empty
0 = FIFO is empty

**Note 1:** These bits are read-only and reflect the status of the FIFO.


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-38: C1FIFOUAHx: CAN FIFO USER ADDRESS REGISTER x (x = 1 TO 7) HIGH(1)**

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| FIFOUA[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| FIFOUA[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **FIFOUA[31:16]:** FIFO User Address bits

TXEN = 1 (FIFO configured as a transmit buffer):
A read of this register will return the address where the next message is to be written (FIFO head).

TXEN = 0 (FIFO configured as a receive buffer):
A read of this register will return the address where the next message is to be read (FIFO tail).

**Note 1:** This register is not ensured to read correctly in Configuration mode and should only be accessed when the module is not in Configuration mode.

**REGISTER 11-39: C1FIFOUALx: CAN FIFO USER ADDRESS REGISTER x (x = 1 TO 7) LOW(1)**

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| FIFOUA[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| FIFOUA[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **FIFOUA[15:0]:** FIFO User Address bits

TXEN = 1 (FIFO configured as a transmit buffer):
A read of this register will return the address where the next message is to be written (FIFO head).

TXEN = 0 (FIFO configured as a receive buffer):
A read of this register will return the address where the next message is to be read (FIFO tail).

**Note 1:** This register is not ensured to read correctly in Configuration mode and should only be accessed when the module is not in Configuration mode.

**REGISTER 11-40: C1TEFUAH: CAN TRANSMIT EVENT FIFO USER ADDRESS REGISTER HIGH(1)**

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| TEFUA[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| TEFUA[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **TEFUA[31:16]:** Transmit Event FIFO User Address bits
A read of this register will return the address where the next event is to be read (FIFO tail).

**Note 1:** This register is not ensured to read correctly in Configuration mode and should only be accessed when the module is not in Configuration mode.

**REGISTER 11-41: C1TEFUAL: CAN TRANSMIT EVENT FIFO USER ADDRESS REGISTER LOW(1)**

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| TEFUA[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| TEFUA[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **TEFUA[15:0]:** Transmit Event FIFO User Address bits
A read of this register will return the address where the next event is to be read (FIFO tail).

**Note 1:** This register is not ensured to read correctly in Configuration mode and should only be accessed when the module is not in Configuration mode.


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-42: C1TXQUAH: CAN TRANSMIT QUEUE USER ADDRESS REGISTER HIGH(1)**

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| TXQUA[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| TXQUA[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **TXQUA[31:16]:** TXQ User Address bits
A read of this register will return the address where the next message is to be written (TXQ head).

**Note 1:** This register is not ensured to read correctly in Configuration mode and should only be accessed when the module is not in Configuration mode.

**REGISTER 11-43: C1TXQUAL: CAN TRANSMIT QUEUE USER ADDRESS REGISTER LOW(1)**

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| TXQUA[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| TXQUA[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **TXQUA[15:0]:** TXQ User Address bits
A read of this register will return the address where the next message is to be written (TXQ head).

**Note 1:** This register is not ensured to read correctly in Configuration mode and should only be accessed when the module is not in Configuration mode.

**REGISTER 11-44: C1TRECH: CAN TRANSMIT/RECEIVE ERROR COUNT REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R-1 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| — | — | TXBO | TXBP | RXBP | TXWARN | RXWARN | EWARN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-6 **Unimplemented:** Read as '0'

bit 5 **TXBO:** Transmitter in Bus Off Error State bit (TERRCNT[7:0] > 255)
In Configuration mode, TXBO is set since the module is not on the bus.

bit 4 **TXBP:** Transmitter in Bus Passive Error State bit (TERRCNT[7:0] > 127)

bit 3 **RXBP:** Receiver in Bus Passive Error State bit (RERRCNT[7:0] > 127)

bit 2 **TXWARN:** Transmitter in Warning State bit (128 > TERRCNT[7:0] > 95)

bit 1 **RXWARN:** Receiver in Warning State bit (128 > RERRCNT[7:0] > 95)

bit 0 **EWARN:** Transmitter or Receiver in Warning State bit

**REGISTER 11-45: C1TRECL: CAN TRANSMIT/RECEIVE ERROR COUNT REGISTER LOW**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TERRCNT[7:0] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| RERRCNT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **TERRCNT[7:0]:** Transmit Error Counter bits

bit 7-0 **RERRCNT[7:0]:** Receive Error Counter bits


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-46: C1BDIAG0H: CAN BUS DIAGNOSTICS REGISTER 0 HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DTERRCNT[7:0] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DRERRCNT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **DTERRCNT[7:0]:** Data Bit Rate Transmit Error Counter bits

bit 7-0 **DRERRCNT[7:0]:** Data Bit Rate Receive Error Counter bits

**REGISTER 11-47: C1BDIAG0L: CAN BUS DIAGNOSTICS REGISTER 0 LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| NTERRCNT[7:0] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| NRERRCNT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **NTERRCNT[7:0]:** Nominal Bit Rate Transmit Error Counter bits

bit 7-0 **NRERRCNT[7:0]:** Nominal Bit Rate Receive Error Counter bits

**REGISTER 11-48: C1BDIAG1H: CAN BUS DIAGNOSTICS REGISTER 1 HIGH**

| R/W-0 | R/W-0 | R/C-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DLCMM | ESI | DCRCERR | DSTUFERR | DFORMERR | — | DBIT1ERR | DBIT0ERR |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TXBOERR | — | NCRCERR | NSTUFERR | NFORMERR | NACKERR | NBIT1ERR | NBIT0ERR |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **DLCMM:** DLC Mismatch bit
During a transmission or reception, the specified DLC is larger than the PLSIZE[2:0] of the FIFO element.

bit 14 **ESI:** ESI Flag of a Received CAN FD Message Set bit

bit 13 **DCRCERR:** Same as for nominal bit rate

bit 12 **DSTUFERR:** Same as for nominal bit rate

bit 11 **DFORMERR:** Same as for nominal bit rate

bit 10 **Unimplemented:** Read as '0'

bit 9 **DBIT1ERR:** Same as for nominal bit rate

bit 8 **DBIT0ERR:** Same as for nominal bit rate

bit 7 **TXBOERR:** Device Went to Bus Off bit (and auto-recovered)

bit 6 **Unimplemented:** Read as '0'

bit 5 **NCRCERR:** Received Message with CRC Incorrect Checksum bit
The CRC checksum of a received message was incorrect. The CRC of an incoming message does not match with the CRC calculated from the received data.

bit 4 **NSTUFERR:** Received Message with Illegal Sequence bit
More than 5 equal bits in a sequence have occurred in a part of a received message where this is not allowed.

bit 3 **NFORMERR:** Received Frame Fixed Format bit
A fixed format part of a received frame has the wrong format.

bit 2 **NACKERR:** Transmitted Message Not Acknowledged bit
Transmitted message was not acknowledged.

bit 1 **NBIT1ERR:** Transmitted Message Recessive Level bit
During the transmission of a message (with the exception of the arbitration field), the device wanted to send a recessive level (bit of logical value '1'), but the monitored bus value was dominant.

bit 0 **NBIT0ERR:** Transmitted Message Dominant Level bit
During the transmission of a message (or Acknowledge bit, active error flag or overload flag), the device wanted to send a dominant level (data or identifier bit of logical value '0'), but the monitored bus value was recessive. During bus off recovery, this status is set each time a sequence of 11 recessive bits has been monitored. This enables the CPU to monitor the proceeding of the bus off recovery sequence (indicating the bus is not stuck at dominant or continuously disturbed).


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-49: C1BDIAG1L: CAN BUS DIAGNOSTICS REGISTER 1 LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EFMSGCNT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EFMSGCNT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-0 **EFMSGCNT[15:0]:** Error-Free Message Counter bits

**REGISTER 11-50: C1FLTCONxH: CAN FILTER CONTROL REGISTER x HIGH (x = 0 TO 3; c = 2, 6, 10, 14; d = 3, 7, 11, 15)**

| R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FLTENd | — | — | FdBP4 | FdBP3 | FdBP2 | FdBP1 | FdBP0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FLTENc | — | — | FcBP4 | FcBP3 | FcBP2 | FcBP1 | FcBP0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **FLTENd:** Enable Filter d to Accept Messages bit
1 = Filter is enabled
0 = Filter is disabled

bit 14-13 **Unimplemented:** Read as '0'

bit 12-8 **FdBP[4:0]:** Pointer to Object When Filter d Hits bits
11111 to 11000 = Reserved
00111 = Message matching filter is stored in Object 7
00110 = Message matching filter is stored in Object 6
. . .
00010 = Message matching filter is stored in Object 2
00001 = Message matching filter is stored in Object 1
00000 = Reserved; Object 0 is the TX Queue and can't receive messages

bit 7 **FLTENc:** Enable Filter c to Accept Messages bit
1 = Filter is enabled
0 = Filter is disabled

bit 6-5 **Unimplemented:** Read as '0'

bit 4-0 **FcBP[4:0]:** Pointer to Object When Filter c Hits bits
11111 to 11000 = Reserved
00111 = Message matching filter is stored in Object 7
00110 = Message matching filter is stored in Object 6
. . .
00010 = Message matching filter is stored in Object 2
00001 = Message matching filter is stored in Object 1
00000 = Reserved; Object 0 is the TX Queue and can't receive messages


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-51: C1FLTCONxL: CAN FILTER CONTROL REGISTER x LOW (x = 0 TO 3; a = 0, 4, 8, 12; b = 1, 5, 9, 13)**

| R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FLTENb | — | — | FbBP4 | FbBP3 | FbBP2 | FbBP1 | FbBP0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FLTENa | — | — | FaBP4 | FaBP3 | FaBP2 | FaBP1 | FaBP0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **FLTENb:** Enable Filter b to Accept Messages bit
1 = Filter is enabled
0 = Filter is disabled

bit 14-13 **Unimplemented:** Read as '0'

bit 12-8 **FbBP[4:0]:** Pointer to Object When Filter b Hits bits
11111 to 11000 = Reserved
00111 = Message matching filter is stored in Object 7
00110 = Message matching filter is stored in Object 6
. . .
00010 = Message matching filter is stored in Object 2
00001 = Message matching filter is stored in Object 1
00000 = Reserved; Object 0 is the TX Queue and can't receive messages

bit 7 **FLTENa:** Enable Filter a to Accept Messages bit
1 = Filter is enabled
0 = Filter is disabled

bit 6-5 **Unimplemented:** Read as '0'

bit 4-0 **FaBP[4:0]:** Pointer to Object When Filter a Hits bits
11111 to 11000 = Reserved
00111 = Message matching filter is stored in Object 7
00110 = Message matching filter is stored in Object 6
. . .
00010 = Message matching filter is stored in Object 2
00001 = Message matching filter is stored in Object 1
00000 = Reserved; Object 0 is the TX Queue and can't receive messages

**REGISTER 11-52: C1FLTOBJxH: CAN FILTER OBJECT REGISTER x HIGH (x = 0 TO 15)**

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | EXIDE | SID11 | EID[17:13] | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EID[12:5] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14 **EXIDE:** Extended Identifier Enable bit
If MIDE = 1:
1 = Matches only messages with Extended Identifier addresses
0 = Matches only messages with Standard Identifier addresses

bit 13 **SID11:** Standard Identifier Filter bit

bit 12-0 **EID[17:5]:** Extended Identifier Filter bits
In DeviceNet™ mode, these are the filter bits for the first two data bytes.

**REGISTER 11-53: C1FLTOBJxL: CAN FILTER OBJECT REGISTER x LOW (x = 0 TO 15)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EID[4:0] | | | | | SID[10:8] | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SID[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-11 **EID[4:0]:** Extended Identifier Filter bits
In DeviceNet™ mode, these are the filter bits for the first two data bytes.

bit 10-0 **SID[10:0]:** Standard Identifier Filter bits


© 2017-2021 Microchip Technology Inc.

**REGISTER 11-54: C1MASKxH: CAN MASK REGISTER x HIGH (x = 0 TO 15)**

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | MIDE | MSID11 | MEID[17:13] | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MEID[12:5] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14 **MIDE:** Identifier Receive Mode bit
- 1 = Matches only message types (standard or extended address) that correspond to the EXIDE bit in the filter
- 0 = Matches either standard or extended address message if filters match (i.e., if (Filter SID) = (Message SID) or if (Filter SID/EID) = (Message SID/EID))

bit 13 **MSID11:** Standard Identifier Mask bit

bit 12-0 **MEID[17:5]:** Extended Identifier Mask bits

In DeviceNet™ mode, these are the mask bits for the first two data bytes.

**REGISTER 11-55: C1MASKxL: CAN MASK REGISTER x LOW (x = 0 TO 15)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MEID[4:0] | | | | | MSID[10:8] | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MSID[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-11 **MEID[4:0]:** Extended Identifier Mask bits

In DeviceNet™ mode, these are the mask bits for the first two data bytes.

bit 10-0 **MSID[10:0]:** Standard Identifier Mask bits

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 12.0 HIGH-RESOLUTION PWM WITH FINE EDGE PLACEMENT

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"High-Resolution PWM with Fine Edge Placement"** (www.microchip.com/DS70005320) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The High-Speed PWM (HSPWM) module is a Pulse-Width Modulated (PWM) module to support both motor control and power supply applications. This flexible module provides features to support many types of Motor Control (MC) and Power Control (PC) applications, including:

- AC-to-DC Converters
- DC-to-DC Converters
- AC and DC Motors: BLDC, PMSM, ACIM, SRM, etc.
- Inverters
- Battery Chargers
- Digital Lighting
- Power Factor Correction (PFC)

Due to pin limitations, only the larger pin count packages have all eight pairs of PWM outputs available. PWM4H and PWM4L are always available on Peripheral Pin Select (PPS). See Table 12-1 for PWM output availability.

**TABLE 12-1: PWM OUTPUT AVAILABILITY**

| Package Type | Total PGx Instances | Dedicated Outputs | Dedicated + PPS Outputs |
|---|---|---|---|
| 80-pin | 8 | 8 pairs | 8 pairs |
| 64-pin | 8 | 8 pairs | 8 pairs |
| 48-pin | 8 | 8 pairs | 8 pairs |
| 36-pin | 8 | 5 pairs | 6 pairs |
| 28-pin | 8 | 3 pairs | 4 pairs |

### 12.1 Features

- Eight Independent PWM Generators, each with Dual Outputs
- Operating modes:
  - Independent Edge mode
  - Variable Phase PWM mode
  - Center-Aligned mode
  - Double Update Center-Aligned mode
  - Dual Edge Center-Aligned mode
  - Dual PWM mode
- Output modes:
  - Complementary
  - Independent
  - Push-Pull
- Dead-Time Generator
- Leading-Edge Blanking (LEB)
- Output Override for Fault Handling
- Flexible Period/Duty Cycle Updating Options
- Programmable Control Inputs (PCI)
- Advanced Triggering Options
- Six Combinatorial Logic Outputs
- Six PWM Event Outputs

## 12.2 Architecture Overview

The PWM module consists of a common set of controls and features, and multiple instantiations of PWM Generators (PGs). Each PWM Generator can be independently configured or multiple PWM Generators can be used to achieve complex multiphase systems. PWM Generators can also be used to implement sophisticated triggering, protection and logic functions. A high-level block diagram is shown in Figure 12-1.

**FIGURE 12-1: PWM HIGH-LEVEL BLOCK DIAGRAM**

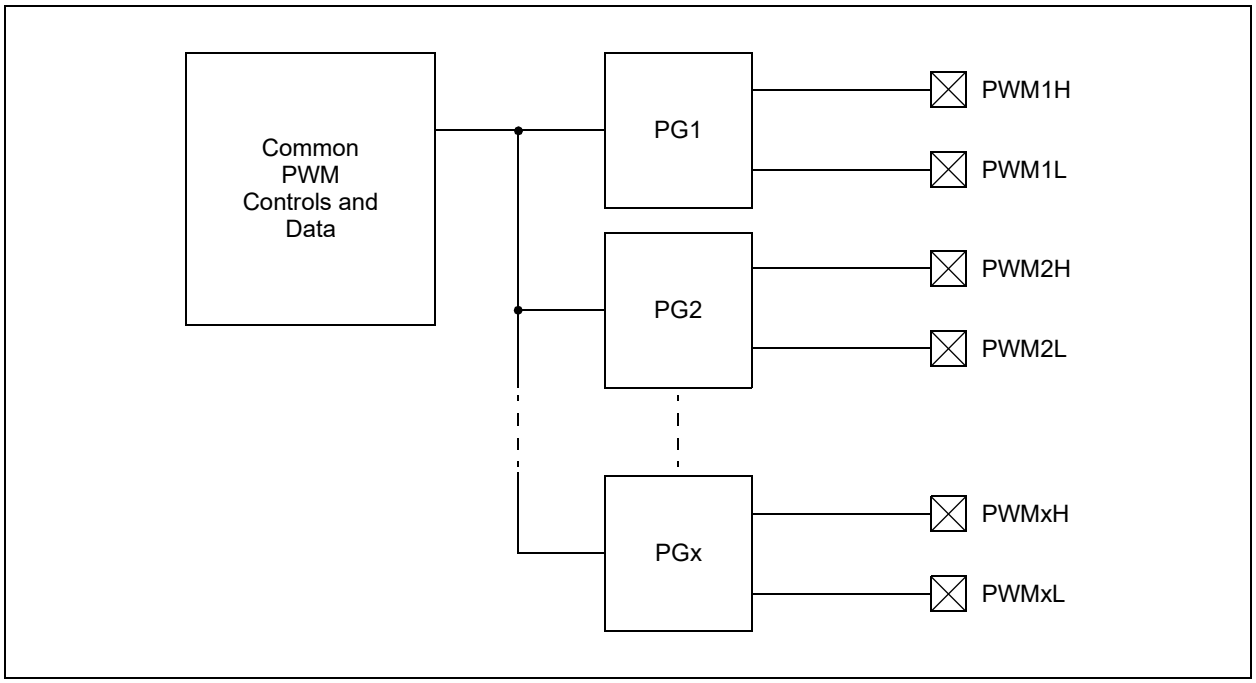



© 2017-2021 Microchip Technology Inc.

## 12.3 Lock and Write Restrictions

The LOCK bit (PCLKCON[8]) may be set in software to block writes to certain registers. For more information, refer to **"High-Resolution PWM with Fine Edge Placement"** (www.microchip.com/DS70005320) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The following lock/unlock sequence is required to set or clear the LOCK bit.

1. Write 0x55 to NVMKEY.
2. Write 0xAA to NVMKEY.
3. Clear (or set) the LOCK bit (PCLKCON[8]) as a single operation.

In general, modifications to configuration controls should not be done while the module is running, as indicated by the ON bit (PGxCONL[15]) being set.

## 12.4 PWM4H/L Output on Peripheral Pin Select

All devices support the capability to output PWM4H and PWM4L signals via Peripheral Pin Select (PPS) on to any "RPn" pin. This feature is intended for lower pin count devices that do not have PWM4H/L on dedicated pins. If PWM4H/L PPS output functions are used on devices that also have fixed PWM4H/L pins, the output signal will be present on both dedicated and "RPn" pins. The output port enable bits, PENH and PENL (PGxIOCONH[3:2]), control both dedicated and PPS pins together; it is not possible to disable the dedicated pins and use only PPS.

Given the natural priority of the "RPn" functions above that of the PWM, it is possible to use the PPS output functions on the dedicated PWM4H/L pins while the PWM4 signals are routed to other pins via PPS. Any of the peripheral outputs listed in Table 8-7, with the exception of 'Default Port', can be used. Input functions, including the ports and peripherals listed in Table 8-5, cannot be used through the "RPn" function on dedicated PWM4H/L pins when PWM4 is active.

## 12.5 Control Registers

There are two categories of Special Function Registers (SFRs) used to control the operation of the PWM module:

- Common, shared by all PWM Generators
- PWM Generator-specific

An 'x' in the register name denotes an instance of a PWM Generator.

A 'y' in the register name denotes an instance of the common function.

**REGISTER 12-1: PCLKCON: PWM CLOCK CONTROL REGISTER**

| R/W-0 | R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| HRRDY | HRERR | — | — | — | — | — | LOCK(1) |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | DIVSEL1 | DIVSEL0 | — | — | MCLKSEL1(2) | MCLKSEL0(2) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **HRRDY:** High-Resolution Ready bit
1 = The high-resolution circuitry is ready
0 = The high-resolution circuitry is not ready

bit 14 **HRERR:** High-Resolution Error bit
1 = An error has occurred; PWM signals will have limited resolution
0 = No error has occurred; PWM signals will have full resolution when HRRDY = 1

bit 13-9 **Unimplemented:** Read as '0'

bit 8 **LOCK:** Lock bit(1)
1 = Write-protected registers and bits are locked
0 = Write-protected registers and bits are unlocked

bit 7-6 **Unimplemented:** Read as '0'

bit 5-4 **DIVSEL[1:0]:** PWM Clock Divider Selection bits
11 = Divide ratio is 1:16
10 = Divide ratio is 1:8
01 = Divide ratio is 1:4
00 = Divide ratio is 1:2

bit 3-2 **Unimplemented:** Read as '0'

bit 1-0 **MCLKSEL[1:0]:** PWM Master Clock Selection bits(2)
11 = $AF_{PLLO}$ – Auxiliary PLL post-divider output
10 = $F_{PLLO}$ – Primary PLL post-divider output
01 = $AF_{VCO}/2$ – Auxiliary VCO/2
00 = $F_{OSC}$

**Note 1:** An unlock sequence must be performed before this bit can be cleared (see **Section 12.3 "Lock and Write Restrictions"**).

**2:** Changing the MCLKSEL[1:0] bits while ON (PGxCONL[15]) = 1 is not recommended.


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-2: FSCL: FREQUENCY SCALE REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FSCL[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FSCL[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **FSCL[15:0]:** Frequency Scale Register bits
The value in this register is added to the frequency scaling accumulator at each pwm_master_clk. When the accumulated value exceeds the value of FSMINPER, a clock pulse is produced.

**REGISTER 12-3: FSMINPER: FREQUENCY SCALING MINIMUM PERIOD REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FSMINPER[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FSMINPER[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **FSMINPER[15:0]:** Frequency Scaling Minimum Period Register bits
This register holds the minimum clock period (maximum clock frequency) that can be produced by the frequency scaling circuit.

**REGISTER 12-4: MPHASE: MASTER PHASE REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MPHASE[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MPHASE[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **MPHASE[15:0]:** Master Phase Register bits
This register holds the phase offset value that can be shared by multiple PWM Generators.

**REGISTER 12-5: MDC: MASTER DUTY CYCLE REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MDC[15:8](1) | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MDC[7:0](1) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **MDC[15:0]:** Master Duty Cycle Register bits(1)
This register holds the duty cycle value that can be shared by multiple PWM Generators.

**Note 1:** Duty cycle values less than '0x0008' should not be used ('0x0020' in High-Resolution mode).


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-6: MPER: MASTER PERIOD REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MPER[15:8](1) | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MPER[7:0](1) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **MPER[15:0]:** Master Period Register bits(1)
This register holds the period value that can be shared by multiple PWM Generators.

**Note 1:** Period values less than '0x0010' should not be used ('0x0080' in High-Resolution mode).

**REGISTER 12-7: CMBTRIGL: COMBINATIONAL TRIGGER REGISTER LOW**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CTA8EN | CTA7EN | CTA6EN | CTA5EN | CTA4EN | CTA3EN | CTA2EN | CTA1EN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7 **CTA8EN:** Enable Trigger Output from PWM Generator #8 as Source for Combinational Trigger A bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger A signal
0 = Disabled

bit 6 **CTA7EN:** Enable Trigger Output from PWM Generator #7 as Source for Combinational Trigger A bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger A signal
0 = Disabled

bit 5 **CTA6EN:** Enable Trigger Output from PWM Generator #6 as Source for Combinational Trigger A bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger A signal
0 = Disabled

bit 4 **CTA5EN:** Enable Trigger Output from PWM Generator #5 as Source for Combinational Trigger A bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger A signal
0 = Disabled

bit 3 **CTA4EN:** Enable Trigger Output from PWM Generator #4 as Source for Combinational Trigger A bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger A signal
0 = Disabled

bit 2 **CTA3EN:** Enable Trigger Output from PWM Generator #3 as Source for Combinational Trigger A bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger A signal
0 = Disabled

bit 1 **CTA2EN:** Enable Trigger Output from PWM Generator #2 as Source for Combinational Trigger A bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger A signal
0 = Disabled

bit 0 **CTA1EN:** Enable Trigger Output from PWM Generator #1 as Source for Combinational Trigger A bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger A signal
0 = Disabled


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-8: CMBTRIGH: COMBINATIONAL TRIGGER REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CTB8EN | CTB7EN | CTB6EN | CTB5EN | CTB4EN | CTB3EN | CTB2EN | CTB1EN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7 **CTB8EN:** Enable Trigger Output from PWM Generator #8 as Source for Combinational Trigger B bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger B signal
0 = Disabled

bit 6 **CTB7EN:** Enable Trigger Output from PWM Generator #7 as Source for Combinational Trigger B bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger B signal
0 = Disabled

bit 5 **CTB6EN:** Enable Trigger Output from PWM Generator #6 as Source for Combinational Trigger B bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger B signal
0 = Disabled

bit 4 **CTB5EN:** Enable Trigger Output from PWM Generator #5 as Source for Combinational Trigger B bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger B signal
0 = Disabled

bit 3 **CTB4EN:** Enable Trigger Output from PWM Generator #4 as Source for Combinational Trigger B bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger B signal
0 = Disabled

bit 2 **CTB3EN:** Enable Trigger Output from PWM Generator #3 as Source for Combinational Trigger B bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger B signal
0 = Disabled

bit 1 **CTB2EN:** Enable Trigger Output from PWM Generator #2 as Source for Combinational Trigger B bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger B signal
0 = Disabled

bit 0 **CTB1EN:** Enable Trigger Output from PWM Generator #1 as Source for Combinational Trigger B bit
1 = Enables specified trigger signal to be OR'd into the Combinatorial Trigger B signal
0 = Disabled

**REGISTER 12-9: LOGCONy: COMBINATORIAL PWM LOGIC CONTROL REGISTER y(2)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PWMS1y3(1) | PWMS1y2(1) | PWMS1y1(1) | PWMS1y0(1) | PWMS2y3(1) | PWMS2y2(1) | PWMS2y1(1) | PWMS2y0(1) |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| S1yPOL | S2yPOL | PWMLFy1 | PWMLFy0 | — | PWMLFyD2(3) | PWMLFyD1(3) | PWMLFyD0(3) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **PWMS1y[3:0]:** Combinatorial PWM Logic Source #1 Selection bits(1)
- 1111 = PWM8L
- 1110 = PWM8H
- 1101 = PWM7L
- 1100 = PWM7H
- 1011 = PWM6L
- 1010 = PWM6H
- 1001 = PWM5L
- 1000 = PWM5H
- 0111 = PWM4L
- 0110 = PWM4H
- 0101 = PWM3L
- 0100 = PWM3H
- 0011 = PWM2L
- 0010 = PWM2H
- 0001 = PWM1L
- 0000 = PWM1H

bit 11-8 **PWMS2y[3:0]:** Combinatorial PWM Logic Source #2 Selection bits(1)
- 1111 = PWM8L
- 1110 = PWM8H
- 1101 = PWM7L
- 1100 = PWM7H
- 1011 = PWM6L
- 1010 = PWM6H
- 1001 = PWM5L
- 1000 = PWM5H
- 0111 = PWM4L
- 0110 = PWM4H
- 0101 = PWM3L
- 0100 = PWM3H
- 0011 = PWM2L
- 0010 = PWM2H
- 0001 = PWM1L
- 0000 = PWM1H

**Note 1:** Logic function input will be connected to '0' if the PWM channel is not present.
**2:** 'y' denotes a common instance (A-F).
**3:** Instances of y = A, C, E of LOGCONy assign logic function output to the PWMxH pin. Instances of y = B, D, F of LOGCONy assign logic function to the PWMxL pin.


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-9: LOGCONy: COMBINATORIAL PWM LOGIC CONTROL REGISTER y(2) (CONTINUED)**

bit 7 **S1yPOL:** Combinatorial PWM Logic Source #1 Polarity bit
1 = Input is inverted
0 = Input is positive logic

bit 6 **S2yPOL:** Combinatorial PWM Logic Source #2 Polarity bit
1 = Input is inverted
0 = Input is positive logic

bit 5-4 **PWMLFy[1:0]:** Combinatorial PWM Logic Function Selection bits
11 = Reserved
10 = PWMS1y ^ PWMS2y (XOR)
01 = PWMS1y & PWMS2y (AND)
00 = PWMS1y | PWMS2y (OR)

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **PWMLFyD[2:0]:** Combinatorial PWM Logic Destination Selection bits(3)
111 = Logic function is assigned to PWM8H or PWM8L pin
110 = Logic function is assigned to PWM7H or PWM7L pin
101 = Logic function is assigned to PWM6H or PWM6L pin
100 = Logic function is assigned to PWM5H or PWM5L pin
011 = Logic function is assigned to PWM4H or PWM4L pin
010 = Logic function is assigned to PWM3H or PWM3L pin
001 = Logic function is assigned to PWM2H or PWM2L pin
000 = No assignment, combinatorial PWM logic function is disabled

**Note 1:** Logic function input will be connected to '0' if the PWM channel is not present.
**2:** 'y' denotes a common instance (A-F).
**3:** Instances of y = A, C, E of LOGCONy assign logic function output to the PWMxH pin. Instances of y = B, D, F of LOGCONy assign logic function to the PWMxL pin.

**REGISTER 12-10: PWMEVTy: PWM EVENT OUTPUT CONTROL REGISTER y(5)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| EVTyOEN | EVTyPOL | EVTySTRD | EVTySYNC | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EVTySEL3 | EVTySEL2 | EVTySEL1 | EVTySEL0 | — | EVTyPGS2(2) | EVTyPGS1(2) | EVTyPGS0(2) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **EVTyOEN:** PWM Event Output Enable bit
1 = Event output signal is output on PWMEy pin
0 = Event output signal is internal only

bit 14 **EVTyPOL:** PWM Event Output Polarity bit
1 = Event output signal is active-low
0 = Event output signal is active-high

bit 13 **EVTySTRD:** PWM Event Output Stretch Disable bit
1 = Event output signal pulse width is not stretched
0 = Event output signal is stretched to eight PWM clock cycles minimum(1)

bit 12 **EVTySYNC:** PWM Event Output Sync bit
1 = Event output signal is synchronized to the system clock
0 = Event output is not synchronized to the system clock
Event output signal pulse will be two system clocks when this bit is set and EVTySTRD = 1.

bit 11-8 **Unimplemented:** Read as '0'

bit 7-4 **EVTySEL[3:0]:** PWM Event Selection bits
1111 = High-resolution error event signal
1110-1010 = Reserved
1001 = ADC Trigger 2 signal
1000 = ADC Trigger 1 signal
0111 = STEER signal (available in Push-Pull Output modes only)(4)
0110 = CAHALF signal (available in Center-Aligned modes only)(4)
0101 = PCI Fault active output signal
0100 = PCI current-limit active output signal
0011 = PCI feed-forward active output signal
0010 = PCI Sync active output signal
0001 = PWM Generator output signal(3)
0000 = Source is selected by the PGTRGSEL[2:0] bits

bit 3 **Unimplemented:** Read as '0'

**Note 1:** The event signal is stretched using peripheral_clk because different PWM Generators may be operating from different clock sources.
**2:** No event will be produced if the selected PWM Generator is not present.
**3:** This is the PWM Generator output signal prior to output mode logic and any output override logic.
**4:** This signal should be the PGx_clk domain signal prior to any synchronization into the system clock domain.
**5:** 'y' denotes a common instance (A-F).


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-10: PWMEVTy: PWM EVENT OUTPUT CONTROL REGISTER y(5) (CONTINUED)**

bit 2-0 **EVTyPGS[2:0]:** PWM Event Source Selection bits(2)

111 = PWM Generator 8
110 = PWM Generator 7
. . .
000 = PWM Generator 1

**Note 1:** The event signal is stretched using peripheral_clk because different PWM Generators may be operating from different clock sources.

**2:** No event will be produced if the selected PWM Generator is not present.

**3:** This is the PWM Generator output signal prior to output mode logic and any output override logic.

**4:** This signal should be the PGx_clk domain signal prior to any synchronization into the system clock domain.

**5:** 'y' denotes a common instance (A-F).

**REGISTER 12-11: LFSR: LINEAR FEEDBACK SHIFT REGISTER**

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | LFSR[14:8] | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| LFSR[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14-0 **LFSR[14:0]:** Linear Feedback Shift Register bits
A read of this register will provide a 15-bit pseudorandom value.


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-12: PGxCONL: PWM GENERATOR x CONTROL REGISTER LOW**

| R/W-0 | r-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ON | — | — | — | — | TRGCNT2 | TRGCNT1 | TRGCNT0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| HREN | — | — | CLKSEL1 | CLKSEL0 | MODSEL2 | MODSEL1 | MODSEL0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **ON:** Enable bit
1 = PWM Generator is enabled
0 = PWM Generator is not enabled

bit 14 **Reserved:** Maintain as '0'

bit 13-11 **Unimplemented:** Read as '0'

bit 10-8 **TRGCNT[2:0]:** Trigger Count Select bits
111 = PWM Generator produces eight PWM cycles after triggered
110 = PWM Generator produces seven PWM cycles after triggered
101 = PWM Generator produces six PWM cycles after triggered
100 = PWM Generator produces five PWM cycles after triggered
011 = PWM Generator produces four PWM cycles after triggered
010 = PWM Generator produces three PWM cycles after triggered
001 = PWM Generator produces two PWM cycles after triggered
000 = PWM Generator produces one PWM cycle after triggered

bit 7 **HREN:** PWM Generator x High-Resolution Enable bit
1 = PWM Generator x operates in High-Resolution mode(2)
0 = PWM Generator x operates in standard resolution

bit 6-5 **Unimplemented:** Read as '0'

bit 4-3 **CLKSEL[1:0]:** Clock Selection bits
11 = PWM Generator uses Master clock scaled by frequency scaling circuit(1)
10 = PWM Generator uses Master clock divided by clock divider circuit(1)
01 = PWM Generator uses Master clock selected by the MCLKSEL[1:0] (PCLKCON[1:0]) control bits
00 = No clock selected, PWM Generator is in lowest power state (default)

bit 2-0 **MODSEL[2:0]:** Mode Selection bits
111 = Dual Edge Center-Aligned PWM mode (interrupt/register update twice per cycle)
110 = Dual Edge Center-Aligned PWM mode (interrupt/register update once per cycle)
101 = Double-Update Center-Aligned PWM mode
100 = Center-Aligned PWM mode
011 = Reserved
010 = Independent Edge PWM mode, dual output
001 = Variable Phase PWM mode
000 = Independent Edge PWM mode

**Note 1:** The PWM Generator time base operates from the frequency scaling circuit clock, effectively scaling the duty cycle and period of the PWM Generator output.

**2:** Input frequency of 500 MHz must be used for High-Resolution mode.

**REGISTER 12-13: PGxCONH: PWM GENERATOR x CONTROL REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MDCSEL | MPERSEL | MPHSEL | — | MSTEN | UPDMOD2 | UPDMOD1 | UPDMOD0 |
| bit 15 | | | | | | | bit 8 |

| r-0 | R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | TRGMOD | — | — | SOCS3(1,2,3) | SOCS2(1,2,3) | SOCS1(1,2,3) | SOCS0(1,2,3) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **MDCSEL:** Master Duty Cycle Register Select bit
1 = PWM Generator uses MDC register
0 = PWM Generator uses PGxDC register

bit 14 **MPERSEL:** Master Period Register Select bit
1 = PWM Generator uses MPER register
0 = PWM Generator uses PGxPER register

bit 13 **MPHSEL:** Master Phase Register Select bit
1 = PWM Generator uses MPHASE register
0 = PWM Generator uses PGxPHASE register

bit 12 **Unimplemented:** Read as '0'

bit 11 **MSTEN:** Host Update Enable bit
1 = PWM Generator broadcasts software set/clear of the UPDREQ status bit and EOC signal to other PWM Generators
0 = PWM Generator does not broadcast the UPDREQ status bit state or EOC signal

bit 10-8 **UPDMOD[2:0]:** PWM Buffer Update Mode Selection bits
011 = Client immediate update
Update data registers immediately, or as soon as possible, when a Host update request is received. A Host update request will be transmitted if MSTEN = 1 and UPDREQ = 1 for the requesting PWM Generator.
010 = Client SOC update
Update data registers at start of next cycle if a Host update request is received. A Host update request will be transmitted if MSTEN = 1 and UPDREQ = 1 for the requesting PWM Generator.
001 = Immediate update
Data registers immediately, or as soon as possible, if UPDREQ = 1. The UPDATE status bit will be cleared automatically after the update occurs.
000 = SOC update
Data registers at start of next PWM cycle if UPDREQ = 1. The UPDATE status bit will be cleared automatically after the update occurs(1)

bit 7 **Reserved:** Maintain as '0'

**Note 1:** The PCI selected Sync signal is always available to be OR'd with the selected SOC signal per the SOCS[3:0] bits if the PCI Sync function is enabled.

**2:** The source selected by the SOCS[3:0] bits MUST operate from the same clock source as the local PWM Generator. If not, the source must be routed through the PCI Sync logic so the trigger signal may be synchronized to the PWM Generator clock domain.

**3:** PWM Generators are grouped into groups of four: PG1-PG4 and PG5-PG8, if available. Any generator within a group of four may be used to trigger another generator within the same group.


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-13: PGxCONH: PWM GENERATOR x CONTROL REGISTER HIGH (CONTINUED)**

bit 6 **TRGMOD:** PWM Generator Trigger Mode Selection bit
1 = PWM Generator operates in Retriggerable mode
0 = PWM Generator operates in Single Trigger mode

bit 5-4 **Unimplemented:** Read as '0'

bit 3-0 **SOCS[3:0]:** Start-of-Cycle Selection bits(1,2,3)
1111 = TRIG bit or PCI Sync function only (no hardware trigger source is selected)
1110-0101 = Reserved
0100 = Trigger output selected by PG4 or PG8 PGTRGSEL[2:0] bits (PGxEVTL[2:0])
0011 = Trigger output selected by PG3 or PG7 PGTRGSEL[2:0] bits (PGxEVTL[2:0])
0010 = Trigger output selected by PG2 or PG6 PGTRGSEL[2:0] bits (PGxEVTL[2:0])
0001 = Trigger output selected by PG1 or PG5 PGTRGSEL[2:0] bits (PGxEVTL[2:0])
0000 = Local EOC – PWM Generator is self-triggered

**Note 1:** The PCI selected Sync signal is always available to be OR'd with the selected SOC signal per the SOCS[3:0] bits if the PCI Sync function is enabled.

**2:** The source selected by the SOCS[3:0] bits MUST operate from the same clock source as the local PWM Generator. If not, the source must be routed through the PCI Sync logic so the trigger signal may be synchronized to the PWM Generator clock domain.

**3:** PWM Generators are grouped into groups of four: PG1-PG4 and PG5-PG8, if available. Any generator within a group of four may be used to trigger another generator within the same group.

**REGISTER 12-14: PGxSTAT: PWM GENERATOR x STATUS REGISTER**

| HS/C-0 | HS/C-0 | HS/C-0 | HS/C-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| SEVT | FLTEVT | CLEVT | FFEVT | SACT | FLTACT | CLACT | FFACT |
| bit 15 | | | | | | | bit 8 |

| W-0 | W-0 | HS/R-0 | R-0 | W-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| TRSET | TRCLR | CAP(1) | UPDATE | UPDREQ | STEER | CAHALF | TRIG |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | HS = Hardware Settable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | '0' = Bit is cleared | x = Bit is unknown |
| -n = Value at POR | '1' = Bit is set | U = Unimplemented bit, read as '0' | |

bit 15 **SEVT:** PCI Sync Event bit
1 = A PCI Sync event has occurred (rising edge on PCI Sync output or PCI Sync output is high when module is enabled)
0 = No PCI Sync event has occurred

bit 14 **FLTEVT:** PCI Fault Active Status bit
1 = A Fault event has occurred (rising edge on PCI Fault output or PCI Fault output is high when module is enabled)
0 = No Fault event has occurred

bit 13 **CLEVT:** PCI Current-Limit Status bit
1 = A PCI current-limit event has occurred (rising edge on PCI current-limit output or PCI current-limit output is high when module is enabled)
0 = No PCI current-limit event has occurred

bit 12 **FFEVT:** PCI Feed-Forward Active Status bit
1 = A PCI feed-forward event has occurred (rising edge on PCI feed-forward output or PCI feed-forward output is high when module is enabled)
0 = No PCI feed-forward event has occurred

bit 11 **SACT:** PCI Sync Status bit
1 = PCI Sync output is active
0 = PCI Sync output is inactive

bit 10 **FLTACT:** PCI Fault Active Status bit
1 = PCI Fault output is active
0 = PCI Fault output is inactive

bit 9 **CLACT:** PCI Current-Limit Status bit
1 = PCI current-limit output is active
0 = PCI current-limit output is inactive

bit 8 **FFACT:** PCI Feed-Forward Active Status bit
1 = PCI feed-forward output is active
0 = PCI feed-forward output is inactive

bit 7 **TRSET:** PWM Generator Software Trigger Set bit
User software writes a '1' to this bit location to trigger a PWM Generator cycle. The bit location always reads as '0'. The TRIG bit will indicate '1' when the PWM Generator is triggered.

bit 6 **TRCLR:** PWM Generator Software Trigger Clear bit
User software writes a '1' to this bit location to stop a PWM Generator cycle. The bit location always reads as '0'. The TRIG bit will indicate '0' when the PWM Generator is not triggered.

**Note 1:** The CAP status bit will be set when the capture event has occurred. No further captures will occur until CAP is cleared by software.


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-14: PGxSTAT: PWM GENERATOR x STATUS REGISTER (CONTINUED)**

bit 5 **CAP:** Capture Status bit(1)
1 = PWM Generator time base value has been captured in PGxCAP
0 = No capture has occurred

bit 4 **UPDATE:** PWM Data Register Update Status bit
1 = PWM Data register update is pending – user Data registers are not writable
0 = No PWM Data register update is pending

bit 3 **UPDREQ:** PWM Data Register Update Request bit
User software writes a '1' to this bit location to request a PWM Data register update. The bit location always reads as '0'. The UPDATE status bit will indicate '1' when an update is pending.

bit 2 **STEER:** Output Steering Status bit (Push-Pull Output mode only)
1 = PWM Generator is in 2nd cycle of Push-Pull mode
0 = PWM Generator is in 1st cycle of Push-Pull mode

bit 1 **CAHALF:** Half Cycle Status bit (Center-Aligned modes only)
1 = PWM Generator is in 2nd half of time base cycle
0 = PWM Generator is in 1st half of time base cycle

bit 0 **TRIG:** PWM Trigger Status bit
1 = PWM Generator is triggered and PWM cycle is in progress
0 = No PWM cycle is in progress

**Note 1:** The CAP status bit will be set when the capture event has occurred. No further captures will occur until CAP is cleared by software.

**REGISTER 12-15: PGxIOCONL: PWM GENERATOR x I/O CONTROL REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CLMOD | SWAP | OVRENH | OVRENL | OVRDAT1 | OVRDAT0 | OSYNC1 | OSYNC0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FLTDAT1 | FLTDAT0 | CLDAT1 | CLDAT0 | FFDAT1 | FFDAT0 | DBDAT1 | DBDAT0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **CLMOD:** Current-Limit Mode Select bit
1 = If PCI current limit is active, then the PWMxH and PWMxL output signals are inverted (bit flipping), and the CLDAT[1:0] bits are not used
0 = If PCI current limit is active, then the CLDAT[1:0] bits define the PWM output levels

bit 14 **SWAP:** Swap PWM Signals to PWMxH and PWMxL Device Pins bit
1 = The PWMxH signal is connected to the PWMxL pin and the PWMxL signal is connected to the PWMxH pin
0 = PWMxH/L signals are mapped to their respective pins

bit 13 **OVRENH:** User Override Enable for PWMxH Pin bit
1 = OVRDAT1 provides data for output on the PWMxH pin
0 = PWM Generator provides data for the PWMxH pin

bit 12 **OVRENL:** User Override Enable for PWMxL Pin bit
1 = OVRDAT0 provides data for output on the PWMxL pin
0 = PWM Generator provides data for the PWMxL pin

bit 11-10 **OVRDAT[1:0]:** Data for PWMxH/PWMxL Pins if Override is Enabled bits
If OVERENH = 1, then OVRDAT1 provides data for PWMxH.
If OVERENL = 1, then OVRDAT0 provides data for PWMxL.

bit 9-8 **OSYNC[1:0]:** User Output Override Synchronization Control bits
11 = Reserved
10 = User output overrides via the OVRENH/L and OVRDAT[1:0] bits occur when specified by the UPDMOD[2:0] bits in the PGxCONH register
01 = User output overrides via the OVRENH/L and OVRDAT[1:0] bits occur immediately (as soon as possible)
00 = User output overrides via the OVRENH/L and OVRDAT[1:0] bits are synchronized to the local PWM time base (next Start-of-Cycle)

bit 7-6 **FLTDAT[1:0]:** Data for PWMxH/PWMxL Pins if Fault Event is Active bits
If Fault is active, then FLTDAT1 provides data for PWMxH.
If Fault is active, then FLTDAT0 provides data for PWMxL.

bit 5-4 **CLDAT[1:0]:** Data for PWMxH/PWMxL Pins if Current-Limit Event is Active bits
If current limit is active, then CLDAT1 provides data for PWMxH.
If current limit is active, then CLDAT0 provides data for PWMxL.

bit 3-2 **FFDAT[1:0]:** Data for PWMxH/PWMxL Pins if Feed-Forward Event is Active bits
If feed-forward is active, then FFDAT1 provides data for PWMxH.
If feed-forward is active, then FFDAT0 provides data for PWMxL.

bit 1-0 **DBDAT[1:0]:** Data for PWMxH/PWMxL Pins if Debug Mode is Active bits
If Debug mode is active and device halted, then DBDAT1 provides data for PWMxH.
If Debug mode is active and device halted, then DBDAT0 provides data for PWMxL.


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-16: PGxIOCONH: PWM GENERATOR x I/O CONTROL REGISTER HIGH**

| U-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | CAPSRC2(1) | CAPSRC1(1) | CAPSRC0(1) | — | — | — | DTCMPSEL |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | PMOD1 | PMOD0 | PENH | PENL | POLH | POLL |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **CAPSRC[2:0]:** Time Base Capture Source Selection bits(1)
- 111 = Reserved
- 110 = Reserved
- 101 = Reserved
- 100 = Capture time base value at assertion of selected PCI Fault signal
- 011 = Capture time base value at assertion of selected PCI current-limit signal
- 010 = Capture time base value at assertion of selected PCI feed-forward signal
- 001 = Capture time base value at assertion of selected PCI Sync signal
- 000 = No hardware source selected for time base capture – software only

bit 11-9 **Unimplemented:** Read as '0'

bit 8 **DTCMPSEL:** Dead-Time Compensation Select bit
- 1 = Dead-time compensation is controlled by PCI feed-forward limit logic
- 0 = Dead-time compensation is controlled by PCI Sync logic

bit 7-6 **Unimplemented:** Read as '0'

bit 5-4 **PMOD[1:0]:** PWM Generator Output Mode Selection bits
- 11 = Reserved
- 10 = PWM Generator outputs operate in Push-Pull mode
- 01 = PWM Generator outputs operate in Independent mode
- 00 = PWM Generator outputs operate in Complementary mode

bit 3 **PENH:** PWMxH Output Port Enable bit
- 1 = PWM Generator controls the PWMxH output pin
- 0 = PWM Generator does not control the PWMxH output pin

bit 2 **PENL:** PWMxL Output Port Enable bit
- 1 = PWM Generator controls the PWMxL output pin
- 0 = PWM Generator does not control the PWMxL output pin

bit 1 **POLH:** PWMxH Output Polarity bit
- 1 = Output pin is active-low
- 0 = Output pin is active-high

bit 0 **POLL:** PWMxL Output Polarity bit
- 1 = Output pin is active-low
- 0 = Output pin is active-high

**Note 1:** A capture may be initiated in software at any time by writing a '1' to PGxCAP[0].

**REGISTER 12-17: PGxEVTL: PWM GENERATOR x EVENT REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ADTR1PS4 | ADTR1PS3 | ADTR1PS2 | ADTR1PS1 | ADTR1PS0 | ADTR1EN3 | ADTR1EN2 | ADTR1EN1 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | UPDTRG1 | UPDTRG0 | PGTRGSEL2(1) | PGTRGSEL1(1) | PGTRGSEL0(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-11 **ADTR1PS[4:0]:** ADC Trigger 1 Postscaler Selection bits
11111 = 1:32
...
00010 = 1:3
00001 = 1:2
00000 = 1:1

bit 10 **ADTR1EN3:** ADC Trigger 1 Source is PGxTRIGC Compare Event Enable bit
1 = PGxTRIGC register compare event is enabled as trigger source for ADC Trigger 1
0 = PGxTRIGC register compare event is disabled as trigger source for ADC Trigger 1

bit 9 **ADTR1EN2:** ADC Trigger 1 Source is PGxTRIGB Compare Event Enable bit
1 = PGxTRIGB register compare event is enabled as trigger source for ADC Trigger 1
0 = PGxTRIGB register compare event is disabled as trigger source for ADC Trigger 1

bit 8 **ADTR1EN1:** ADC Trigger 1 Source is PGxTRIGA Compare Event Enable bit
1 = PGxTRIGA register compare event is enabled as trigger source for ADC Trigger 1
0 = PGxTRIGA register compare event is disabled as trigger source for ADC Trigger 1

bit 7-5 **Unimplemented:** Read as '0'

bit 4-3 **UPDTRG[1:0]:** Update Trigger Select bits
11 = A write of the PGxTRIGA register automatically sets the UPDATE bit
10 = A write of the PGxPHASE register automatically sets the UPDATE bit
01 = A write of the PGxDC register automatically sets the UPDATE bit
00 = User must set the UPDREQ bit (PGxSTAT[3]) manually

bit 2-0 **PGTRGSEL[2:0]:** PWM Generator Trigger Output Selection bits(1)
111 = Reserved
110 = Reserved
101 = Reserved
100 = Reserved
011 = PGxTRIGC compare event is the PWM Generator trigger
010 = PGxTRIGB compare event is the PWM Generator trigger
001 = PGxTRIGA compare event is the PWM Generator trigger
000 = EOC event is the PWM Generator trigger

**Note 1:** These events are derived from the internal PWM Generator time base comparison events.


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-18: PGxEVTH: PWM GENERATOR x EVENT REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FLTIEN(1) | CLIEN(2) | FFIEN(3) | SIEN(4) | — | — | IEVTSEL1 | IEVTSEL0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ADTR2EN3 | ADTR2EN2 | ADTR2EN1 | ADTR1OFS4 | ADTR1OFS3 | ADTR1OFS2 | ADTR1OFS1 | ADTR1OFS0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **FLTIEN:** PCI Fault Interrupt Enable bit(1)
- 1 = Fault interrupt is enabled
- 0 = Fault interrupt is disabled

bit 14 **CLIEN:** PCI Current-Limit Interrupt Enable bit(2)
- 1 = Current-limit interrupt is enabled
- 0 = Current-limit interrupt is disabled

bit 13 **FFIEN:** PCI Feed-Forward Interrupt Enable bit(3)
- 1 = Feed-forward interrupt is enabled
- 0 = Feed-forward interrupt is disabled

bit 12 **SIEN:** PCI Sync Interrupt Enable bit(4)
- 1 = Sync interrupt is enabled
- 0 = Sync interrupt is disabled

bit 11-10 **Unimplemented:** Read as '0'

bit 9-8 **IEVTSEL[1:0]:** Interrupt Event Selection bits
- 11 = Time base interrupts are disabled (Sync, Fault, current-limit and feed-forward events can be independently enabled)
- 10 = Interrupts CPU at ADC Trigger 1 event
- 01 = Interrupts CPU at TRIGA compare event
- 00 = Interrupts CPU at EOC

bit 7 **ADTR2EN3:** ADC Trigger 2 Source is PGxTRIGC Compare Event Enable bit
- 1 = PGxTRIGC register compare event is enabled as trigger source for ADC Trigger 2
- 0 = PGxTRIGC register compare event is disabled as trigger source for ADC Trigger 2

bit 6 **ADTR2EN2:** ADC Trigger 2 Source is PGxTRIGB Compare Event Enable bit
- 1 = PGxTRIGB register compare event is enabled as trigger source for ADC Trigger 2
- 0 = PGxTRIGB register compare event is disabled as trigger source for ADC Trigger 2

bit 5 **ADTR2EN1:** ADC Trigger 2 Source is PGxTRIGA Compare Event Enable bit
- 1 = PGxTRIGA register compare event is enabled as trigger source for ADC Trigger 2
- 0 = PGxTRIGA register compare event is disabled as trigger source for ADC Trigger 2

**Note 1:** An interrupt is only generated on the rising edge of the PCI Fault active signal.
**2:** An interrupt is only generated on the rising edge of the PCI current-limit active signal.
**3:** An interrupt is only generated on the rising edge of the PCI feed-forward active signal.
**4:** An interrupt is only generated on the rising edge of the PCI Sync active signal.

**REGISTER 12-18: PGxEVTH: PWM GENERATOR x EVENT REGISTER HIGH (CONTINUED)**

bit 4-0 **ADTR1OFS[4:0]:** ADC Trigger 1 Offset Selection bits
11111 = Offset by 31 trigger events
...
00010 = Offset by 2 trigger events
00001 = Offset by 1 trigger event
00000 = No offset

**Note 1:** An interrupt is only generated on the rising edge of the PCI Fault active signal.
**2:** An interrupt is only generated on the rising edge of the PCI current-limit active signal.
**3:** An interrupt is only generated on the rising edge of the PCI feed-forward active signal.
**4:** An interrupt is only generated on the rising edge of the PCI Sync active signal.


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-19: PGxyPCIL: PWM GENERATOR xy PCI REGISTER LOW (x = PWM GENERATOR #; y = F, CL, FF OR S)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TSYNCDIS | TERM2 | TERM1 | TERM0 | AQPS | AQSS2 | AQSS1 | AQSS0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SWTERM | PSYNC | PPS | PSS4 | PSS3 | PSS2 | PSS1 | PSS0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **TSYNCDIS:** Termination Synchronization Disable bit
1 = Termination of latched PCI occurs immediately
0 = Termination of latched PCI occurs at PWM EOC

bit 14-12 **TERM[2:0]:** Termination Event Selection bits
111 = Selects PCI Source #9
110 = Selects PCI Source #8
101 = Selects PCI Source #1 (PWM Generator output selected by the PWMPCI[2:0] bits)
100 = PGxTRIGC trigger event
011 = PGxTRIGB trigger event
010 = PGxTRIGA trigger event
001 = Auto-Terminate: Terminate when PCI source transitions from active to inactive
000 = Manual Terminate: Terminate on a write of '1' to the SWTERM bit location

bit 11 **AQPS:** Acceptance Qualifier Polarity Select bit
1 = Inverted
0 = Not inverted

bit 10-8 **AQSS[2:0]:** Acceptance Qualifier Source Selection bits
111 = SWPCI control bit only (qualifier forced to '0')
110 = Selects PCI Source #9
101 = Selects PCI Source #8
100 = Selects PCI Source #1 (PWM Generator output selected by the PWMPCI[2:0] bits)
011 = PWM Generator is triggered
010 = LEB is active
001 = Duty cycle is active (base PWM Generator signal)
000 = No acceptance qualifier is used (qualifier forced to '1')

bit 7 **SWTERM:** PCI Software Termination bit
A write of '1' to this location will produce a termination event. This bit location always reads as '0'.

bit 6 **PSYNC:** PCI Synchronization Control bit
1 = PCI source is synchronized to PWM EOC
0 = PCI source is not synchronized to PWM EOC

bit 5 **PPS:** PCI Polarity Select bit
1 = Inverted
0 = Not inverted

**REGISTER 12-19: PGxyPCIL: PWM GENERATOR xy PCI REGISTER LOW (x = PWM GENERATOR #; y = F, CL, FF OR S) (CONTINUED)**

bit 4-0 **PSS[4:0]:** PCI Source Selection bits
11111 = CLC1
11110 = Reserved
11101 = Comparator 3 output
11100 = Comparator 2 output
11011 = Comparator 1 output
11010 = PWM Event D
11001 = PWM Event C
11000 = PWM Event B
10111 = PWM Event A
10110 = Device pin, PCI[22]
10101 = Device pin, PCI[21]
10100 = Device pin, PCI[20]
10011 = Device pin, PCI[19]
10010 = RPn input, PCI18R
10001 = RPn input, PCI17R
10000 = RPn input, PCI16R
01111 = RPn input, PCI15R
01110 = RPn input, PCI14R
01101 = RPn input, PCI13R
01100 = RPn input, PCI12R
01011 = RPn input, PCI11R
01010 = RPn input, PCI10R
01001 = RPn input, PCI9R
01000 = RPn input, PCI8R
00111 = Reserved
00110 = Reserved
00101 = Reserved
00100 = Reserved
00011 = Internally connected to Combo Trigger B
00010 = Internally connected to Combo Trigger A
00001 = Internally connected to the output of PWMPCI[2:0] MUX
00000 = Tied to ‘0’


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-20: PGxyPCIH: PWM GENERATOR xy PCI REGISTER HIGH (x = PWM GENERATOR #; y = F, CL, FF OR S)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| BPEN | BPSEL2(1) | BPSEL1(1) | BPSEL0(1) | — | ACP2 | ACP1 | ACP0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SWPCI | SWPCIM1 | SWPCIM0 | LATMOD | TQPS | TQSS2 | TQSS1 | TQSS0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **BPEN:** PCI Bypass Enable bit
1 = PCI function is enabled and local PCI logic is bypassed; PWM Generator will be controlled by PCI function in the PWM Generator selected by the BPSEL[2:0] bits
0 = PCI function is not bypassed

bit 14-12 **BPSEL[2:0]:** PCI Bypass Source Selection bits(1)
111 = PCI control is sourced from PWM Generator 8 PCI logic when BPEN = 1
110 = PCI control is sourced from PWM Generator 7 PCI logic when BPEN = 1
101 = PCI control is sourced from PWM Generator 6 PCI logic when BPEN = 1
100 = PCI control is sourced from PWM Generator 5 PCI logic when BPEN = 1
011 = PCI control is sourced from PWM Generator 4 PCI logic when BPEN = 1
010 = PCI control is sourced from PWM Generator 3 PCI logic when BPEN = 1
001 = PCI control is sourced from PWM Generator 2 PCI logic when BPEN = 1
000 = PCI control is sourced from PWM Generator 1 PCI logic when BPEN = 1

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **ACP[2:0]:** PCI Acceptance Criteria Selection bits
111 = Reserved
110 = Reserved
101 = Latched any edge
100 = Latched rising edge
011 = Latched
010 = Any edge
001 = Rising edge
000 = Level-sensitive

bit 7 **SWPCI:** Software PCI Control bit
1 = Drives a '1' to PCI logic assigned to by the SWPCIM[1:0] control bits
0 = Drives a '0' to PCI logic assigned to by the SWPCIM[1:0] control bits

bit 6-5 **SWPCIM[1:0]:** Software PCI Control Mode bits
11 = Reserved
10 = SWPCI bit is assigned to termination qualifier logic
01 = SWPCI bit is assigned to acceptance qualifier logic
00 = SWPCI bit is assigned to PCI acceptance logic

bit 4 **LATMOD:** PCI SR Latch Mode bit
1 = SR latch is Reset-dominant in Latched Acceptance modes
0 = SR latch is Set-dominant in Latched Acceptance modes

**Note 1:** Selects '0' if selected PWM Generator is not present.

**REGISTER 12-20: PGxyPCIH: PWM GENERATOR xy PCI REGISTER HIGH (x = PWM GENERATOR #; y = F, CL, FF OR S) (CONTINUED)**

bit 3 **TQPS:** Termination Qualifier Polarity Select bit
1 = Inverted
0 = Not inverted

bit 2-0 **TQSS[2:0]:** Termination Qualifier Source Selection bits
111 = SWPCI control bit only (qualifier forced to '0')
110 = Selects PCI Source #9
101 = Selects PCI Source #8
100 = Selects PCI Source #1 (PWM Generator output selected by the PWMPCI[2:0] bits)
011 = PWM Generator is triggered
010 = LEB is active
001 = Duty cycle is active (base PWM Generator signal)
000 = No termination qualifier used (qualifier forced to '1')

**Note 1:** Selects '0' if selected PWM Generator is not present.


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-21: PGxLEBL: PWM GENERATOR x LEADING-EDGE BLANKING REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| LEB[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R-0(1) | R-0(1) | R-0(1) |
|---|---|---|---|---|---|---|---|
| LEB[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **LEB[15:0]:** Leading-Edge Blanking Period bits

Leading-Edge Blanking period. The three LSbs of the blanking time are not used, providing a blanking resolution of eight PGx_clks. The minimum blanking period is eight PGx_clks which occurs when LEB[15:3] = 0.

**Note 1:** Bits[2:0] are read-only and always remain as '0'.

**REGISTER 12-22: PGxLEBH: PWM GENERATOR x LEADING-EDGE BLANKING REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | PWMPCI[2:0](1) | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | PHR | PHF | PLR | PLF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-11 **Unimplemented:** Read as '0'

bit 10-8 **PWMPCI[2:0]:** PWM Source for PCI Selection bits(1)
- 111 = PWM Generator #8 output is made available to PCI logic
- 110 = PWM Generator #7 output is made available to PCI logic
- 101 = PWM Generator #6 output is made available to PCI logic
- 100 = PWM Generator #5 output is made available to PCI logic
- 011 = PWM Generator #4 output is made available to PCI logic
- 010 = PWM Generator #3 output is made available to PCI logic
- 001 = PWM Generator #2 output is made available to PCI logic
- 000 = PWM Generator #1 output is made available to PCI logic

bit 7-4 **Unimplemented:** Read as '0'

bit 3 **PHR:** PWMxH Rising Edge Trigger Enable bit
- 1 = Rising edge of PWMxH will trigger the LEB duration counter
- 0 = LEB ignores the rising edge of PWMxH

bit 2 **PHF:** PWMxH Falling Edge Trigger Enable bit
- 1 = Falling edge of PWMxH will trigger the LEB duration counter
- 0 = LEB ignores the falling edge of PWMxH

bit 1 **PLR:** PWMxL Rising Edge Trigger Enable bit
- 1 = Rising edge of PWMxL will trigger the LEB duration counter
- 0 = LEB ignores the rising edge of PWMxL

bit 0 **PLF:** PWMxL Falling Edge Trigger Enable bit
- 1 = Falling edge of PWMxL will trigger the LEB duration counter
- 0 = LEB ignores the falling edge of PWMxL

**Note 1:** The selected PWM Generator source does not affect the LEB counter. This source can be optionally used as a PCI input, PCI qualifier, PCI terminator or PCI terminator qualifier (see the description in Register 12-19 and Register 12-20 for more information).


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-23: PGxPHASE: PWM GENERATOR x PHASE REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxPHASE[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxPHASE[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PGxPHASE[15:0]:** PWM Generator x Phase Register bits

**REGISTER 12-24: PGxDC: PWM GENERATOR x DUTY CYCLE REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxDC[15:8](1) | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxDC[7:0](1) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PGxDC[15:0]:** PWM Generator x Duty Cycle Register bits(1)

**Note 1:** Duty cycle values less than '0x0008' should not be used ('0x0020' in High-Resolution mode).

**REGISTER 12-25: PGxDCA: PWM GENERATOR x DUTY CYCLE ADJUSTMENT REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxDCA[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **PGxDCA[7:0]:** PWM Generator x Duty Cycle Adjustment Value bits
Depending on the state of the selected PCI source, the PGxDCA value will be added to the value in the PGxDC register to create the effective duty cycle. When the PCI source is active, PGxDCA is added.

**REGISTER 12-26: PGxPER: PWM GENERATOR x PERIOD REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxPER[15:8](1) | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxPER[7:0](1) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PGxPER[15:0]:** PWM Generator x Period Register bits(1)

**Note 1:** Period values less than '0x0010' should not be used ('0x0080' in High-Resolution mode).


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-27: PGxTRIGA: PWM GENERATOR x TRIGGER A REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxTRIGA[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxTRIGA[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PGxTRIGA[15:0]:** PWM Generator x Trigger A Register bits

**REGISTER 12-28: PGxTRIGB: PWM GENERATOR x TRIGGER B REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxTRIGB[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxTRIGB[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PGxTRIGB[15:0]:** PWM Generator x Trigger B Register bits

**REGISTER 12-29: PGxTRIGC: PWM GENERATOR x TRIGGER C REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxTRIGC[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxTRIGC[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PGxTRIGC[15:0]:** PWM Generator x Trigger C Register bits

**REGISTER 12-30: PGxDTL: PWM GENERATOR x DEAD-TIME REGISTER LOW**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | DTL[13:8](1) | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DTL[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-0 **DTL[13:0]:** PWMxL Dead-Time Delay bits(1)

**Note 1:** DTL[13:11] bits are not available when HREN (PGxCONL[7]) = 0.

**REGISTER 12-31: PGxDTH: PWM GENERATOR x DEAD-TIME REGISTER HIGH**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | DTH[13:8](1) | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DTH[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-0 **DTH[13:0]:** PWMxH Dead-Time Delay bits(1)

**Note 1:** DTH[13:11] bits are not available when HREN (PGxCONL[7]) = 0.


© 2017-2021 Microchip Technology Inc.

**REGISTER 12-32: PGxCAP: PWM GENERATOR x CAPTURE REGISTER**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| PGxCAP[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PGxCAP[7:0](1) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PGxCAP[15:0]:** PGx Time Base Capture bits(1)

**Note 1:** A capture event can be manually initiated in software by writing a '1' to PGxCAP[0]. The CAP bit (PGxSTAT[5]) will indicate when a new capture value is available. A read of PGxCAP will automatically clear the CAP bit and allow a new capture event to occur. The PGxCAP[1:0] bits will always read as '0'. In High-Resolution mode, the PGxCAP[4:0] bits will always read as '0'.

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 13.0 HIGH-SPEED, 12-BIT ANALOG-TO-DIGITAL CONVERTER (ADC)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"12-Bit High-Speed, Multiple SARs A/D Converter (ADC)"** (www.microchip.com/DS70005213) in the *"dsPIC33/PIC24 Family Reference Manual"*.

**2:** Some registers and associated bits described in this section may not be available on all devices due to the number of implemented ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on device variants.

The dsPIC33CK256MP508 devices have a high-speed, 12-bit Analog-to-Digital Converter (ADC) that features a low conversion latency, high resolution and over-sampling capabilities to improve performance in AC/DC, DC/DC power converters. The devices implement the ADC with three SAR cores, two dedicated and one shared.

The number of available channels and negative inputs is dependent on package size, as shown in Table 13-1.

**TABLE 13-1: ADC EXTERNAL INPUT AVAILABILITY**

| Package Type | External Inputs | Negative Inputs |
|---|---|---|
| 80-pin | AN0-AN25 | ANN0-ANN2 |
| 64-pin | AN0-AN19 | ANN0-ANN2 |
| 48-pin | AN0-AN18 | ANN0-ANN2 |
| 36-pin | AN0-AN15 | ANN0 |
| 28-pin | AN0-AN11 | — |

### 13.1 ADC Features Overview

The High-Speed, 12-Bit Multiple SARs Analog-to-Digital Converter (ADC) includes the following features:

- Three ADC Cores: Two Dedicated Cores and One Shared (common) Core
- User-Configurable Resolution of up to 12 Bits for each Core
- Up to 3.5 Msps Conversion Rate per Channel at 12-Bit Resolution
- Low-Latency Conversion
- Up to 24 Analog Input Channels, with a Separate 16-Bit Conversion Result Register for each Input
- Conversion Result can be Formatted as Unsigned or Signed Data, on a per Channel Basis, for All Channels
- Simultaneous Sampling of up to Three Analog Inputs
- Channel Scan Capability
- Multiple Conversion Trigger Options for each Core, including:
  - PWM triggers from CPU cores
  - MCCP/SCCP modules triggers
  - CLC modules triggers
  - External pin trigger event (ADTRG31)
  - Software trigger
- Four Integrated Digital Comparators with Dedicated Interrupts:
  - Multiple comparison options
  - Assignable to specific analog inputs
- Four Oversampling Filters with Dedicated Interrupts:
  - Provide increased resolution
  - Assignable to a specific analog input

The module consists of three independent SAR ADC cores. Simplified block diagrams of the Multiple SARs 12-Bit ADC are shown in Figure 13-1 and Figure 13-2.

The analog inputs (channels) are connected through multiplexers and switches to the Sample-and-Hold (S&H) circuit of each ADC core. The core uses the channel information (the output format, the Measurement mode and the input number) to process the analog sample. When conversion is complete, the result is stored in the result buffer for the specific analog input, and passed to the digital filter and digital comparator if they were configured to use data from this particular channel.

The ADC module can sample up to three inputs at a time (two inputs from the dedicated SAR cores and one from the shared SAR core). If multiple ADC inputs request conversion on the shared core, the module will convert them in a sequential manner, starting with the lowest order input.

The ADC provides each analog input the ability to specify its own trigger source. This capability allows the ADC to sample and convert analog inputs that are associated with PWM generators operating on independent time bases.

© 2017-2021 Microchip Technology Inc.

**FIGURE 13-1: ADC MODULE BLOCK DIAGRAM**

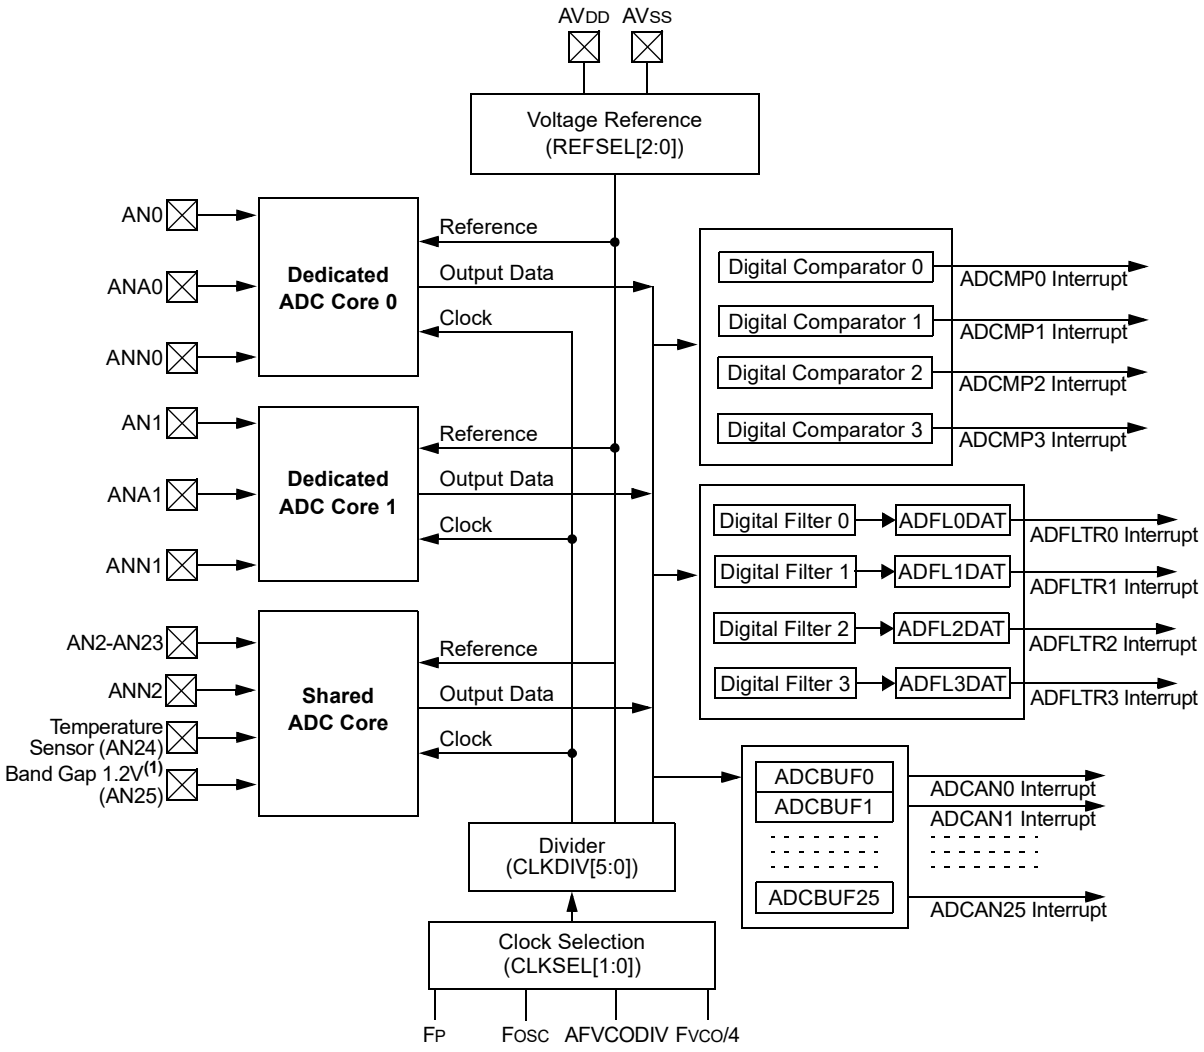


**Note 1:** Band Gap Reference ($V_{BG}$) is an internal analog input and is not available on device pins.


© 2017-2021 Microchip Technology Inc.

**FIGURE 13-2: ADC SHARED CORE BLOCK DIAGRAM**

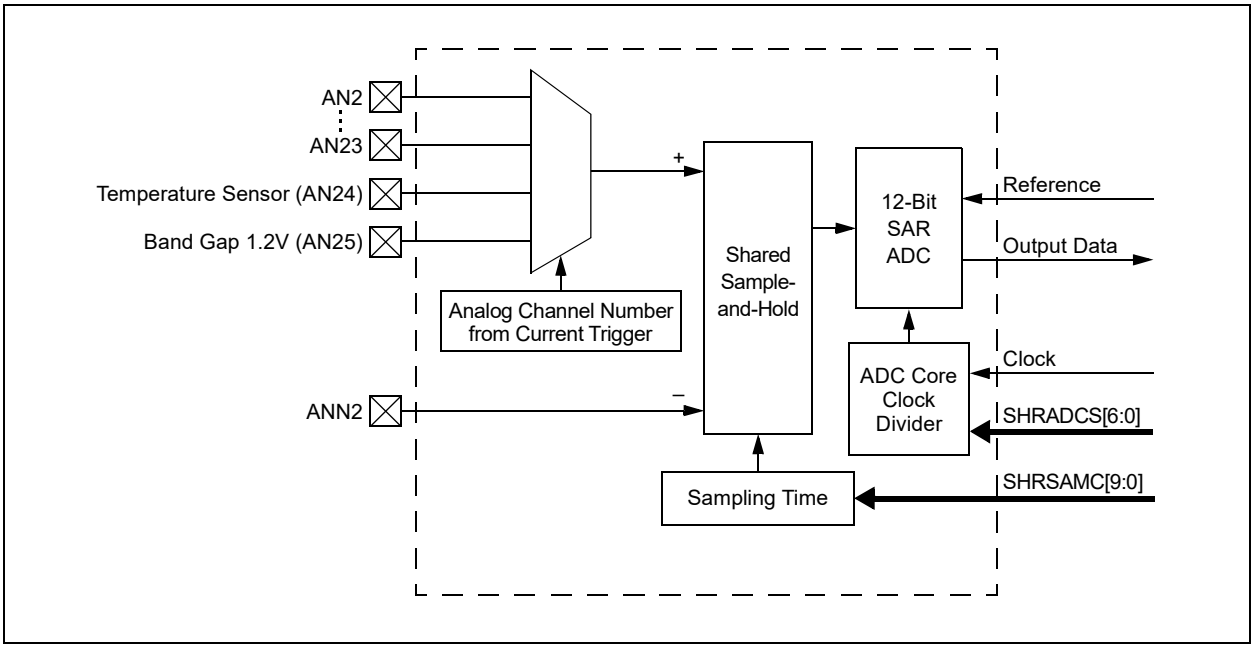


**FIGURE 13-3: DEDICATED ADC CORE**

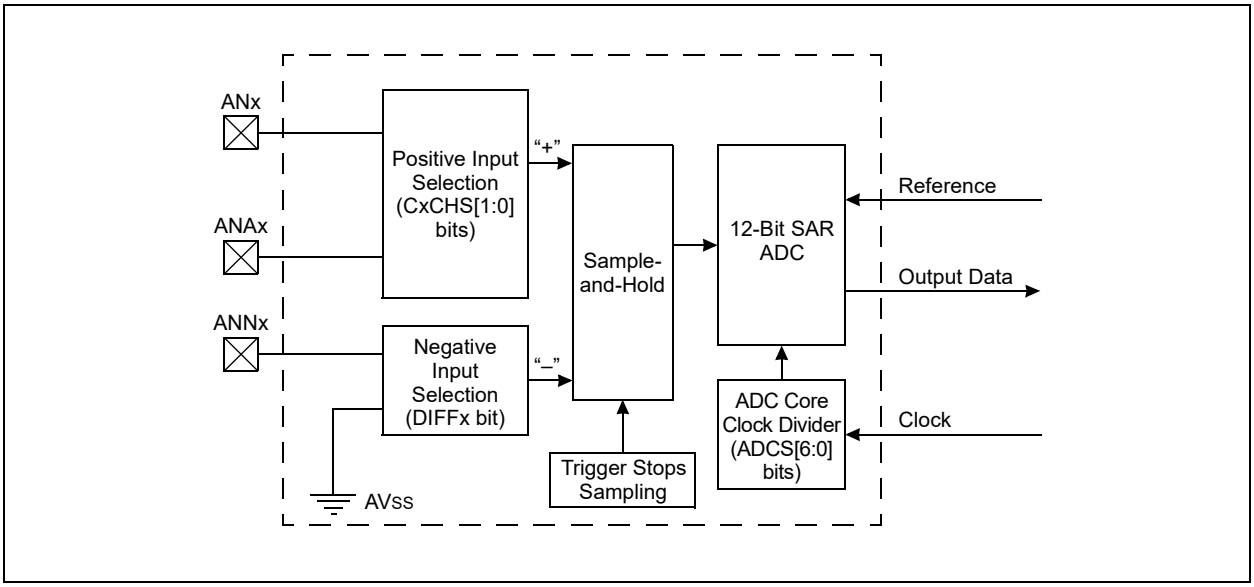

## 13.2 Temperature Sensor

The ADC channel, AN19, is connected to a forward-biased diode. It can be used to measure a die temperature. This diode provides an output with a temperature coefficient of approximately -1.5 mV/C that can be monitored by the ADC. To get the exact gain and offset numbers, the two temperature points' calibration is recommended.

## 13.3 Analog-to-Digital Converter Resources

Many useful resources are provided on the main product page of the Microchip website for the devices listed in this data sheet. This product page contains the latest updates and additional information.

## 13.4 Differential-Mode

ANNx negative external inputs are used for Differential-mode, as shown in Figure 13-2. To enable Differential-mode, the DIFF bit (in ADMODxL or ADMODxH register) is set for the corresponding channel.

### 13.4.1 KEY RESOURCES

- **"12-Bit High-Speed, Multiple SARs A/D Converter (ADC)**" (DS70005213) in the *"dsPIC33/PIC24 Family Reference Manual"*
- Code Samples
- Application Notes
- Software Libraries
- Webinars
- All Related *"dsPIC33/PIC24 Family Reference Manual"* Sections
- Development Tools


© 2017-2021 Microchip Technology Inc.

## 13.5 Control Registers

**REGISTER 13-1: ADCON1L: ADC CONTROL REGISTER 1 LOW**

| R/W-0 | U-0 | R/W-0 | U-0 | r-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| ADON(1) | — | ADSIDL | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **ADON:** ADC Enable bit(1)
1 = ADC module is enabled
0 = ADC module is off

bit 14 **Unimplemented:** Read as '0'

bit 13 **ADSIDL:** ADC Stop in Idle Mode bit
1 = Discontinues module operation when device enters Idle mode
0 = Continues module operation in Idle mode

bit 12 **Unimplemented:** Read as '0'

bit 11 **Reserved:** Maintain as '0'

bit 10-0 **Unimplemented:** Read as '0'

**Note 1:** Set the ADON bit only after the ADC module has been configured. Changing ADC Configuration bits when ADON = 1 will result in unpredictable behavior.

**REGISTER 13-2: ADCON1H: ADC CONTROL REGISTER 1 HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-1 | R/W-1 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| FORM | SHRRES1 | SHRRES0 | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7 **FORM:** Fractional Data Output Format bit
1 = Fractional
0 = Integer

bit 6-5 **SHRRES[1:0]:** Shared ADC Core Resolution Selection bits
11 = 12-bit resolution
10 = 10-bit resolution
01 = 8-bit resolution
00 = 6-bit resolution

bit 4-0 **Unimplemented:** Read as '0'


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-3: ADCON2L: ADC CONTROL REGISTER 2 LOW**

| R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| REFCIE | REFERCIE | — | EIEN | PTGEN | SHREISEL2(1) | SHREISEL1(1) | SHREISEL0(1) |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | SHRADCS[6:0] | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **REFCIE:** Band Gap and Reference Voltage Ready Common Interrupt Enable bit
1 = Common interrupt will be generated when the band gap will become ready
0 = Common interrupt is disabled for the band gap ready event

bit 14 **REFERCIE:** Band Gap or Reference Voltage Error Common Interrupt Enable bit
1 = Common interrupt will be generated when a band gap or reference voltage error is detected
0 = Common interrupt is disabled for the band gap and reference voltage error event

bit 13 **Unimplemented:** Read as '0'

bit 12 **EIEN:** Early Interrupts Enable bit
1 = The early interrupt feature is enabled for the input channel interrupts (when the EISTATx flag is set)
0 = The individual interrupts are generated when conversion is done (when the ANxRDY flag is set)

bit 11 **PTGEN:** External Conversion Request Interface bit
Setting this bit will enable the PTG to request conversion of an ADC input.

bit 10-8 **SHREISEL[2:0]:** Shared Core Early Interrupt Time Selection bits(1)
111 = Early interrupt is set and interrupt is generated 8 TADCORE clocks prior to when the data are ready
110 = Early interrupt is set and interrupt is generated 7 TADCORE clocks prior to when the data are ready
101 = Early interrupt is set and interrupt is generated 6 TADCORE clocks prior to when the data are ready
100 = Early interrupt is set and interrupt is generated 5 TADCORE clocks prior to when the data are ready
011 = Early interrupt is set and interrupt is generated 4 TADCORE clocks prior to when the data are ready
010 = Early interrupt is set and interrupt is generated 3 TADCORE clocks prior to when the data are ready
001 = Early interrupt is set and interrupt is generated 2 TADCORE clocks prior to when the data are ready
000 = Early interrupt is set and interrupt is generated 1 TADCORE clock prior to when the data are ready

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **SHRADCS[6:0]:** Shared ADC Core Input Clock Divider bits
These bits determine the number of TCORESRC (Source Clock Periods) for one shared TADCORE (Core Clock Period).
1111111 = 254 Source Clock Periods
...
0000011 = 6 Source Clock Periods
0000010 = 4 Source Clock Periods
0000001 = 2 Source Clock Periods
0000000 = 2 Source Clock Periods

**Note 1:** For the 6-bit shared ADC core resolution (SHRRES[1:0] = 00), the SHREISEL[2:0] settings, from '100' to '111', are not valid and should not be used. For the 8-bit shared ADC core resolution (SHRRES[1:0] = 01), the SHREISEL[2:0] settings, '110' and '111', are not valid and should not be used.

**REGISTER 13-4: ADCON2H: ADC CONTROL REGISTER 2 HIGH**

| HSC/R-0 | HSC/R-0 | U-0 | r-0 | r-0 | r-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| REFRDY | REFERR | — | — | — | — | SHRSAMC[9:8] | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SHRSAMC[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | U = Unimplemented bit, read as '0' | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | HSC = Hardware Settable/Clearable bit | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **REFRDY:** Band Gap and Reference Voltage Ready Flag bit
1 = Band gap is ready
0 = Band gap is not ready

bit 14 **REFERR:** Band Gap or Reference Voltage Error Flag bit
1 = Band gap was removed after the ADC module was enabled (ADON = 1)
0 = No band gap error was detected

bit 13 **Unimplemented:** Read as '0'

bit 12-10 **Reserved:** Maintain as '0'

bit 9-0 **SHRSAMC[9:0]:** Shared ADC Core Sample Time Selection bits
These bits specify the number of shared ADC Core Clock Periods (TADCORE) for the shared ADC core sample time.
1111111111 = 1025 TADCORE
. . .
0000000001 = 3 TADCORE
0000000000 = 2 TADCORE


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-5: ADCON3L: ADC CONTROL REGISTER 3 LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | HSC/R-0 | R/W-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| REFSEL2 | REFSEL1 | REFSEL0 | SUSPEND | SUSPCIE | SUSPRDY | SHRSAMP | CNVRTCH |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | HSC/R-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SWLCTRG | SWCTRG | CNVCHSEL5 | CNVCHSEL4 | CNVCHSEL3 | CNVCHSEL2 | CNVCHSEL1 | CNVCHSEL0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | U = Unimplemented bit, read as '0' | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | HSC = Hardware Settable/Clearable bit | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **REFSEL[2:0]:** ADC Reference Voltage Selection bits

| Value | VREFH | VREFL |
|---|---|---|
| 000 | AVDD | AVSS |

001-111 = **Unimplemented:** Do not use

bit 12 **SUSPEND:** All ADC Core Triggers Disable bit

1 = All new trigger events for all ADC cores are disabled
0 = All ADC cores can be triggered

bit 11 **SUSPCIE:** Suspend All ADC Cores Common Interrupt Enable bit

1 = Common interrupt will be generated when ADC core triggers are suspended (SUSPEND bit = 1) and all previous conversions are finished (SUSPRDY bit becomes set)
0 = Common interrupt is not generated for suspend ADC cores event

bit 10 **SUSPRDY:** All ADC Cores Suspended Flag bit

1 = All ADC cores are suspended (SUSPEND bit = 1) and have no conversions in progress
0 = ADC cores have previous conversions in progress

bit 9 **SHRSAMP:** Shared ADC Core Sampling Direct Control bit

This bit should be used with the individual channel conversion trigger controlled by the CNVRTCH bit. It connects an analog input, specified by the CNVCHSEL[5:0] bits, to the shared ADC core and allows extending the sampling time. This bit is not controlled by hardware.
1 = Shared ADC core samples an analog input specified by the CNVCHSEL[5:0] bits
0 = Sampling is controlled by the shared ADC core hardware

bit 8 **CNVRTCH:** Software Individual Channel Conversion Trigger bit

1 = Single trigger is generated for an analog input specified by the CNVCHSEL[5:0] bits; when the bit is set, it is automatically cleared by hardware on the next instruction cycle
0 = Next individual channel conversion trigger can be generated

bit 7 **SWLCTRG:** Software Level-Sensitive Common Trigger bit

1 = Triggers are continuously generated for all channels with the software, level-sensitive common trigger selected as a source in the ADTRIGnL and ADTRIGnH registers
0 = No software, level-sensitive common triggers are generated

bit 6 **SWCTRG:** Software Common Trigger bit

1 = Single trigger is generated for all channels with the software; common trigger selected as a source in the ADTRIGnL and ADTRIGnH registers; when the bit is set, it is automatically cleared by hardware on the next instruction cycle
0 = Ready to generate the next software common trigger

bit 5-0 **CNVCHSEL [5:0]:** Channel Number Selection for Software Individual Channel Conversion Trigger bits

These bits define a channel to be converted when the CNVRTCH bit is set.

**REGISTER 13-6: ADCON3H: ADC CONTROL REGISTER 3 HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CLKSEL1(1) | CLKSEL0(1) | CLKDIV5(2) | CLKDIV4(2) | CLKDIV3(2) | CLKDIV2(2) | CLKDIV1(2) | CLKDIV0(2) |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SHREN | — | — | — | — | — | C1EN | C0EN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **CLKSEL[1:0]:** ADC Module Clock Source Selection bits(1)
11 = FVCO/4
10 = AFVCODIV
01 = FOSC
00 = FP (Peripheral Clock)

bit 13-8 **CLKDIV[5:0]:** ADC Module Clock Source Divider bits(2)
The divider forms a TCORESRC clock used by all ADC cores (shared and dedicated) from the TSRC ADC module clock source selected by the CLKSEL[1:0] bits. Then, each ADC core individually divides the TCORESRC clock to get a core-specific TADCORE clock using the ADCS[6:0] bits in the ADCOREXH register or the SHRADCS[6:0] bits in the ADCON2L register.
111111 = 64 Source Clock Periods
...
000011 = 4 Source Clock Periods
000010 = 3 Source Clock Periods
000001 = 2 Source Clock Periods
000000 = 1 Source Clock Period

bit 7 **SHREN:** Shared ADC Core Enable bit
1 = Shared ADC core is enabled
0 = Shared ADC core is disabled

bit 6-2 **Unimplemented:** Read as '0'

bit 1 **C1EN:** Dedicated ADC Core 1 Enable bits
1 = Dedicated ADC Core 1 is enabled
0 = Dedicated ADC Core 1 is disabled

bit 0 **C0EN:** Dedicated ADC Core 0 Enable bits
1 = Dedicated ADC Core 0 is enabled
0 = Dedicated ADC Core 0 is disabled

**Note 1:** The ADC input clock frequency, selected by the CLKSEL[1:0] bits, must not exceed AD67 listed in Table 33-36.

**2:** The ADC clock frequency, after the divider selected by the CLKDIV[5:0] bits, must not exceed AD67 listed in Table 33-36.


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-7: ADCON4L: ADC CONTROL REGISTER 4 LOW**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | r-0 | r-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | SAMC1EN | SAMC0EN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-8 **Reserved:** Must be written as '0'

bit 7-2 **Unimplemented:** Read as '0'

bit 1 **SAMC1EN:** Dedicated ADC Core 1 Conversion Delay Enable bit

1 = After trigger, the conversion will be delayed and the ADC core will continue sampling during the time specified by the SAMC[9:0] bits in the ADCORE1L register

0 = After trigger, the sampling will be stopped immediately and the conversion will be started on the next core clock cycle

bit 0 **SAMC0EN:** Dedicated ADC Core 0 Conversion Delay Enable bit

1 = After trigger, the conversion will be delayed and the ADC core will continue sampling during the time specified by the SAMC[9:0] bits in the ADCORE0L register

0 = After trigger, the sampling will be stopped immediately and the conversion will be started on the next core clock cycle

**REGISTER 13-8: ADCON4H: ADC CONTROL REGISTER 4 HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | C1CHS1 | C1CHS0 | C0CHS1 | C0CHS0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-4 **Unimplemented:** Read as '0'

bit 3-2 **C1CHS[1:0]:** Dedicated ADC Core 1 Input Channel Selection bits
11 = Reserved
10 = Reserved
01 = ANA1
00 = AN1

bit 1-0 **C0CHS[1:0]:** Dedicated ADC Core 0 Input Channel Selection bits
11 = Reserved
10 = Reserved
01 = ANA0
00 = AN0


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-9: ADCON5L: ADC CONTROL REGISTER 5 LOW**

| HSC/R-0 | U-0 | U-0 | U-0 | U-0 | U-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| SHRRDY | — | — | — | — | — | C1RDY | C0RDY |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SHRPWR | — | — | — | — | — | C1PWR | C0PWR |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | U = Unimplemented bit, read as '0' | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | HSC = Hardware Settable/Clearable bit | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **SHRRDY:** Shared ADC Core Ready Flag bit
1 = ADC core is powered and ready for operation
0 = ADC core is not ready for operation

bit 14-10 **Unimplemented:** Read as '0'

bit 9 **C1RDY:** Dedicated ADC Core 1 Ready Flag bit
1 = ADC Core 1 is powered and ready for operation
0 = ADC Core 1 is not ready for operation

bit 8 **C0RDY:** Dedicated ADC Core 0 Ready Flag bit
1 = ADC Core 0 is powered and ready for operation
0 = ADC Core 0 is not ready for operation

bit 7 **SHRPWR:** Shared ADC Core Power Enable bit
1 = ADC core is powered
0 = ADC core is off

bit 6-2 **Unimplemented:** Read as '0'

bit 1 **C1PWR:** Dedicated ADC Core 1 Power Enable bit
1 = ADC Core 1 is powered
0 = ADC Core 1 is off

bit 0 **C0PWR:** Dedicated ADC Core 0 Power Enable bit
1 = ADC Core 0 is powered
0 = ADC Core 0 is off

**REGISTER 13-10: ADCON5H: ADC CONTROL REGISTER 5 HIGH**

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | WARMTIME[3:0] | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SHRCIE | — | — | — | — | — | C1CIE | C0CIE |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **Unimplemented:** Read as '0'

bit 11-8 **WARMTIME[3:0]:** ADC Dedicated Core x Power-up Delay bits

These bits determine the power-up delay in the number of the Core Source Clock Periods (TCORESRC) for all ADC cores.

1111 = 32768 Source Clock Periods
1110 = 16384 Source Clock Periods
1101 = 8192 Source Clock Periods
1100 = 4096 Source Clock Periods
1011 = 2048 Source Clock Periods
1010 = 1024 Source Clock Periods
1001 = 512 Source Clock Periods
1000 = 256 Source Clock Periods
0111 = 128 Source Clock Periods
0110 = 64 Source Clock Periods
0101 = 32 Source Clock Periods
0100 = 16 Source Clock Periods
00xx = 16 Source Clock Periods

bit 7 **SHRCIE:** Shared ADC Core Ready Common Interrupt Enable bit

1 = Common interrupt will be generated when ADC core is powered and ready for operation
0 = Common interrupt is disabled for an ADC core ready event

bit 6-2 **Unimplemented:** Read as '0'

bit 1 **C1CIE:** Dedicated ADC Core 1 Ready Common Interrupt Enable bit

1 = Common interrupt will be generated when ADC Core 1 is powered and ready for operation
0 = Common interrupt is disabled for an ADC Core 1 ready event

bit 0 **C0CIE:** Dedicated ADC Core 0 Ready Common Interrupt Enable bit

1 = Common interrupt will be generated when ADC Core 0 is powered and ready for operation
0 = Common interrupt is disabled for an ADC Core 0 ready event


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-11: ADCORExL: DEDICATED ADC CORE x CONTROL REGISTER LOW (x = 0 TO 1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | SAMC[9:8] | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SAMC[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-0 **SAMC[9:0]:** Dedicated ADC Core x Conversion Delay Selection bits

These bits determine the time between the trigger event and the start of conversion in the number of the Core Clock Periods (TADCORE). During this time, the ADC Core x still continues sampling. This feature is enabled by the SAMCxEN bits in the ADCON4L register.

1111111111 = 1025 TADCORE
. . .
0000000001 = 3 TADCORE
0000000000 = 2 TADCORE

**REGISTER 13-12: ADCOREXH: DEDICATED ADC CORE x CONTROL REGISTER HIGH (x = 0 TO 1)**

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | EISEL2 | EISEL1 | EISEL0 | RES1 | RES2 |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | ADCS[6:0] | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **Unimplemented:** Read as '0'

bit 12-10 **EISEL[2:0]:** ADC Core x Early Interrupt Time Selection bits
111 = Early interrupt is set and an interrupt is generated 8 TADCORE clocks prior to when the data are ready
110 = Early interrupt is set and an interrupt is generated 7 TADCORE clocks prior to when the data are ready
101 = Early interrupt is set and an interrupt is generated 6 TADCORE clocks prior to when the data are ready
100 = Early interrupt is set and an interrupt is generated 5 TADCORE clocks prior to when the data are ready
011 = Early interrupt is set and an interrupt is generated 4 TADCORE clocks prior to when the data are ready
010 = Early interrupt is set and an interrupt is generated 3 TADCORE clocks prior to when the data are ready
001 = Early interrupt is set and an interrupt is generated 2 TADCORE clocks prior to when the data are ready
000 = Early interrupt is set and an interrupt is generated 1 TADCORE clock prior to when the data are ready

bit 9-8 **RES[1:0]:** ADC Core x Resolution Selection bits
11 = 12-bit resolution
10 = 10-bit resolution
01 = 8-bit resolution(1)
00 = 6-bit resolution(1)

bit 7 **Unimplemented:** Read as '0'

bit 6-0 **ADCS[6:0]:** ADC Core x Input Clock Divider bits
These bits determine the number of Source Clock Periods (TCORESRC) for one Core Clock Period (TADCORE).
1111111 = 254 Source Clock Periods
...
0000011 = 6 Source Clock Periods
0000010 = 4 Source Clock Periods
0000001 = 2 Source Clock Periods
0000000 = 2 Source Clock Periods

**Note 1:** For the 6-bit ADC core resolution (RES[1:0] = 00), the EISEL[2:0] bits setting, from '100' to '111', are not valid and should not be used. For the 8-bit ADC core resolution (RES[1:0] = 01), the EISEL[2:0] bits setting, '110' and '111', are not valid and should not be used.


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-13: ADLVLTRGL: ADC LEVEL-SENSITIVE TRIGGER CONTROL REGISTER LOW(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| LVLEN[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| LVLEN[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **LVLEN[15:0]:** Level Trigger for Corresponding Analog Input Enable bits
1 = Input trigger is level-sensitive
0 = Input trigger is edge-sensitive

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-14: ADLVLTRGH: ADC LEVEL-SENSITIVE TRIGGER CONTROL REGISTER HIGH(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | LVLEN[25:24] | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| LVLEN[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-0 **LVLEN[25:16]:** Level Trigger for Corresponding Analog Input Enable bits
1 = Input trigger is level-sensitive
0 = Input trigger is edge-sensitive

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-15: ADEIEL: ADC EARLY INTERRUPT ENABLE REGISTER LOW(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EIEN[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EIEN[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **EIEN[15:0]:** Early Interrupt Enable for Corresponding Analog Inputs bits
1 = Early interrupt is enabled for the channel
0 = Early interrupt is disabled for the channel

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-16: ADEIEH: ADC EARLY INTERRUPT ENABLE REGISTER HIGH(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | EIEN[25:24] | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EIEN[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-0 **EIEN[25:16]:** Early Interrupt Enable for Corresponding Analog Inputs bits
1 = Early interrupt is enabled for the channel
0 = Early interrupt is disabled for the channel

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-17: ADEISTATL: ADC EARLY INTERRUPT STATUS REGISTER LOW(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EISTAT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EISTAT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **EISTAT[15:0]:** Early Interrupt Status for Corresponding Analog Inputs bits
1 = Early interrupt was generated
0 = Early interrupt was not generated since the last ADCBUFx read

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-18: ADEISTATH: ADC EARLY INTERRUPT STATUS REGISTER HIGH(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | EISTAT[25:24] | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| EISTAT[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-0 **EISTAT[25:16]:** Early Interrupt Status for Corresponding Analog Inputs bits
1 = Early interrupt was generated
0 = Early interrupt was not generated since the last ADCBUFx read

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-19: ADMOD0L: ADC INPUT MODE CONTROL REGISTER 0 LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DIFF7 | SIGN7 | DIFF6 | SIGN6 | DIFF5 | SIGN5 | DIFF4 | SIGN4 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DIFF3 | SIGN3 | DIFF2 | SIGN2 | DIFF1 | SIGN1 | DIFF0 | SIGN0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 through bit 1 (odd) **DIFF[7:0]:** Differential-Mode for Corresponding Analog Inputs bits
1 = Channel is differential
0 = Channel is single-ended

bit 14 through bit 0 (even) **SIGN[7:0]:** Output Data Sign for Corresponding Analog Inputs bits
1 = Channel output data are signed
0 = Channel output data are unsigned

**REGISTER 13-20: ADMOD0H: ADC INPUT MODE CONTROL REGISTER 0 HIGH(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DIFF15 | SIGN15 | DIFF14 | SIGN14 | DIFF13 | SIGN13 | DIFF12 | SIGN12 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DIFF11 | SIGN11 | DIFF10 | SIGN10 | DIFF9 | SIGN9 | DIFF8 | SIGN8 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 through bit 1 (odd) **DIFF[15:8]:** Differential-Mode for Corresponding Analog Inputs bits
1 = Channel is differential
0 = Channel is single-ended

bit 14 through bit 0 (even) **SIGN[15:8]:** Output Data Sign for Corresponding Analog Inputs bits
1 = Channel output data are signed
0 = Channel output data are unsigned

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-21: ADMOD1L: ADC INPUT MODE CONTROL REGISTER 1 LOW(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DIFF23 | SIGN23 | DIFF22 | SIGN22 | DIFF21 | SIGN21 | DIFF20 | SIGN20 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DIFF19 | SIGN19 | DIFF18 | SIGN18 | DIFF17 | SIGN17 | DIFF16 | SIGN16 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 through bit 1 (odd) **DIFF[23:16]:** Differential-Mode for Corresponding Analog Inputs bits
1 = Channel is differential
0 = Channel is single-ended

bit 14 through bit 0 (even) **SIGN[23:16]:** Output Data Sign for Corresponding Analog Inputs bits
1 = Channel output data are signed
0 = Channel output data are unsigned

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-22: ADMOD1H: ADC INPUT MODE CONTROL REGISTER 1 HIGH(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | DIFF25 | SIGN25 | DIFF24 | SIGN24 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 3 through bit 1 (odd) **DIFF[25:24]:** Differential-Mode for Corresponding Analog Inputs bits
1 = Channel is differential
0 = Channel is single-ended

bit 2 through bit 0 (even) **SIGN[25:24]:** Output Data Sign for Corresponding Analog Inputs bits
1 = Channel output data are signed
0 = Channel output data are unsigned

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-23: ADIEL: ADC INTERRUPT ENABLE REGISTER LOW(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| IE[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| IE[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **IE[15:0]:** Common Interrupt Enable bits
1 = Common and individual interrupts are enabled for the corresponding channel
0 = Common and individual interrupts are disabled for the corresponding channel

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-24: ADIEH: ADC INTERRUPT ENABLE REGISTER HIGH(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | IE[25:24] | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| IE[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-0 **IE[25:16]:** Common Interrupt Enable bits
1 = Common and individual interrupts are enabled for the corresponding channel
0 = Common and individual interrupts are disabled for the corresponding channel

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-25: ADSTATL: ADC DATA READY STATUS REGISTER LOW(1)**

| HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| AN[15:8]RDY | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| AN[7:0]RDY | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | U = Unimplemented bit, read as '0' | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | HSC = Hardware Settable/Clearable bit | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **AN[15:0]RDY:** Common Interrupt Enable for Corresponding Analog Inputs bits
1 = Channel conversion result is ready in the corresponding ADCBUFx register
0 = Channel conversion result is not ready

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-26: ADSTATH: ADC DATA READY STATUS REGISTER HIGH(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | AN[25:24]RDY | |
| bit 15 | | | | | | | bit 8 |

| HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| AN[23:16]RDY | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | U = Unimplemented bit, read as '0' | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | HSC = Hardware Settable/Clearable bit | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-0 **AN[25:16]RDY:** Common Interrupt Enable for Corresponding Analog Inputs bits
1 = Channel conversion result is ready in the corresponding ADCBUFx register
0 = Channel conversion result is not ready

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-27: ADTRIGnL/ADTRIGnH: ADC CHANNEL TRIGGER n(x) SELECTION REGISTERS LOW AND HIGH (x = 0 TO 25; n = 0 TO 6)(1)**

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | TRGSRC(x+1)4 | TRGSRC(x+1)3 | TRGSRC(x+1)2 | TRGSRC(x+1)1 | TRGSRC(x+1)0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | TRGSRCx4 | TRGSRCx3 | TRGSRCx2 | TRGSRCx1 | TRGSRCx0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **Unimplemented:** Read as '0'

bit 12-8 **TRGSRC(x+1)[4:0]:** Trigger Source Selection for Corresponding Analog Inputs bits (TRGSRC1 to TRGSRC25 – Odd)

11111 = ADTRG31 (PPS input)
11110 = PTG
11101 = CLC2
11100 = CLC1
11011 = Input Capture/Output Compare 9
11010 = Input Capture/Output Compare 7
11001 = Input Capture/Output Compare 6
11000 = Input Capture/Output Compare 5
10111 = Input Capture/Output Compare 4
10110 = Input Capture/Output Compare 3
10101 = Input Capture/Output Compare 2
10100 = Input Capture/Output Compare 1
10011 = PWM8 Trigger 2
10010 = PWM8 Trigger 1
10001 = PWM7 Trigger 2
10000 = PWM7 Trigger 1
01111 = PWM6 Trigger 2
01110 = PWM6 Trigger 1
01101 = PWM5 Trigger 2
01100 = PWM5 Trigger 1
01011 = PWM4 Trigger 2
01010 = PWM4 Trigger 1
01001 = PWM3 Trigger 2
01000 = PWM3 Trigger 1
00111 = PWM2 Trigger 2
00110 = PWM2 Trigger 1
00101 = PWM1 Trigger 2
00100 = PWM1 Trigger 1
00011 = Reserved
00010 = Level software trigger
00001 = Common software trigger
00000 = No trigger is enabled

bit 7-5 **Unimplemented:** Read as '0'

**Note 1:** The number of implemented registers is dependent on the number of available ADC channels. Refer to Table 1 and Table 2 for ADC channel availability of package variants.


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-27: ADTRIGnL/ADTRIGnH: ADC CHANNEL TRIGGER n(x) SELECTION REGISTERS LOW AND HIGH (x = 0 TO 25; n = 0 TO 6)(1) (CONTINUED)**

bit 4-0 **TRGSRCx[4:0]:** Common Interrupt Enable for Corresponding Analog Inputs bits (TRGSRC0 to TRGSRC24 – Even)

11111 = ADTRG31 (PPS input)
11110 = PTG
11101 = CLC2
11100 = CLC1
11011 = Input Capture/Output Compare 9
11010 = Input Capture/Output Compare 7
11001 = Input Capture/Output Compare 6
11000 = Input Capture/Output Compare 5
10111 = Input Capture/Output Compare 4
10110 = Input Capture/Output Compare 3
10101 = Input Capture/Output Compare 2
10100 = Input Capture/Output Compare 1
10011 = PWM8 Trigger 2
10010 = PWM8 Trigger 1
10001 = PWM7 Trigger 2
10000 = PWM7 Trigger 1
01111 = PWM6 Trigger 2
01110 = PWM6 Trigger 1
01101 = PWM5 Trigger 2
01100 = PWM5 Trigger 1
01011 = PWM4 Trigger 2
01010 = PWM4 Trigger 1
01001 = PWM3 Trigger 2
01000 = PWM3 Trigger 1
00111 = PWM2 Trigger 2
00110 = PWM2 Trigger 1
00101 = PWM1 Trigger 2
00100 = PWM1 Trigger 1
00011 = Reserved
00010 = Level software trigger
00001 = Common software trigger
00000 = No trigger is enabled

**Note 1:** The number of implemented registers is dependent on the number of available ADC channels. Refer to Table 1 and Table 2 for ADC channel availability of package variants.

**TABLE 13-2: ADC CHANNEL TRIGGER SOURCE TO REGISTER ASSOCIATION**

| Channel | Location |
|---|---|
| TRGSRC0 | ADTRIG0L[4:0] |
| TRGSRC1 | ADTRIG0L[12:8] |
| TRGSRC2 | ADTRIG0H[4:0] |
| TRGSRC3 | ADTRIG0H[12:8] |
| TRGSRC4 | ADTRIG1L[4:0] |
| TRGSRC5 | ADTRIG1L[12:8] |
| TRGSRC6 | ADTRIG1H[4:0] |
| TRGSRC7 | ADTRIG1H[12:8] |
| TRGSRC8 | ADTRIG2L[4:0] |
| TRGSRC9 | ADTRIG2L[12:8] |
| TRGSRC10 | ADTRIG2H[4:0] |
| TRGSRC1 | ADTRIG2H[12:8] |
| TRGSRC12 | ADTRIG3L[4:0] |
| TRGSRC13 | ADTRIG3L[12:8] |
| TRGSRC14 | ADTRIG3H[4:0] |
| TRGSRC15 | ADTRIG3H[12:8] |
| TRGSRC16 | ADTRIG4L[4:0] |
| TRGSRC17 | ADTRIG4L[12:8] |
| TRGSRC18 | ADTRIG4H[4:0] |
| TRGSRC19 | ADTRIG4H[12:8] |
| TRGSRC20 | ADTRIG5L[4:0] |
| TRGSRC21 | ADTRIG5L[12:8] |
| TRGSRC22 | ADTRIG5H[4:0] |
| TRGSRC23 | ADTRIG5H[12:8] |
| TRGSRC24 | ADTRIG6L[4:0] |
| TRGSRC25 | ADTRIG6L[12:8] |


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-28: ADCMPxCON: ADC DIGITAL COMPARATOR x CONTROL REGISTER (x = 0, 1, 2, 3)**

| U-0 | U-0 | U-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | CHNL[4:0] | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | HS/HC/R-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CMPEN | IE | STAT | BTWN | HIHI | HILO | LOHI | LOLO |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HC = Hardware Clearable bit | U = Unimplemented bit, read as '0' | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | HSC = Hardware Settable/Clearable bit | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | HS = Hardware Settable bit |

bit 15-13 **Unimplemented:** Read as '0'

bit 12-8 **CHNL[4:0]:** Input Channel Number bits
If the comparator has detected an event for a channel, this channel number is written to these bits.
11111 = Reserved
...
11010 = Reserved
11001 = Band gap, 1.2V (AN25)
11000 = Temperature sensor (AN24)
10111 = AN23
...
00011 = AN3
00010 = AN2
00001 = AN1
00000 = AN0

bit 7 **CMPEN:** Comparator Enable bit
1 = Comparator is enabled
0 = Comparator is disabled and the STAT status bit is cleared

bit 6 **IE:** Comparator Common ADC Interrupt Enable bit
1 = Common ADC interrupt will be generated if the comparator detects a comparison event
0 = Common ADC interrupt will not be generated for the comparator

bit 5 **STAT:** Comparator Event Status bit
This bit is cleared by hardware when the channel number is read from the CHNL[4:0] bits.
1 = A comparison event has been detected since the last read of the CHNL[4:0] bits
0 = A comparison event has not been detected since the last read of the CHNL[4:0] bits

bit 4 **BTWN:** Between Low/High Comparator Event bit
1 = Generates a comparator event when ADCMPxLO ≤ ADCBUFx < ADCMPxHI
0 = Does not generate a digital comparator event when ADCMPxLO ≤ ADCBUFx < ADCMPxHI

bit 3 **HIHI:** High/High Comparator Event bit
1 = Generates a digital comparator event when ADCBUFx ≥ ADCMPxHI
0 = Does not generate a digital comparator event when ADCBUFx ≥ ADCMPxHI

bit 2 **HILO:** High/Low Comparator Event bit
1 = Generates a digital comparator event when ADCBUFx < ADCMPxHI
0 = Does not generate a digital comparator event when ADCBUFx < ADCMPxHI

bit 1 **LOHI:** Low/High Comparator Event bit
1 = Generates a digital comparator event when ADCBUFx ≥ ADCMPxLO
0 = Does not generate a digital comparator event when ADCBUFx ≥ ADCMPxLO

bit 0 **LOLO:** Low/Low Comparator Event bit
1 = Generates a digital comparator event when ADCBUFx < ADCMPxLO
0 = Does not generate a digital comparator event when ADCBUFx < ADCMPxLO

**REGISTER 13-29: ADCMPxENL: ADC DIGITAL COMPARATOR x CHANNEL ENABLE REGISTER LOW (x = 0, 1, 2, 3)(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CMPEN[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W/0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CMPEN[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **CMPEN[15:0]:** Comparator Enable for Corresponding Input Channels bits
1 = Conversion result for corresponding channel is used by the comparator
0 = Conversion result for corresponding channel is not used by the comparator

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.

**REGISTER 13-30: ADCMPxENH: ADC DIGITAL COMPARATOR x CHANNEL ENABLE REGISTER HIGH (x = 0, 1, 2, 3)(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | CMPEN[25:24] | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CMPEN[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-0 **CMPEN[25:16]:** Comparator Enable for Corresponding Input Channels bits
1 = Conversion result for corresponding channel is used by the comparator
0 = Conversion result for corresponding channel is not used by the comparator

**Note 1:** Bit availability is dependent on the number of supported ADC channels. Refer to Table 1 and Table 2 for ADC channel availability on package variants.


© 2017-2021 Microchip Technology Inc.

**REGISTER 13-31: ADFLxCON: ADC DIGITAL FILTER x CONTROL REGISTER (x = 0, 1, 2, 3)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| FLEN | MODE1 | MODE0 | OVRSAM2 | OVRSAM1 | OVRSAM0 | IE | RDY |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | FLCHSEL[4:0] | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | U = Unimplemented bit, read as '0' | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | HSC = Hardware Settable/Clearable bit | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **FLEN:** Filter Enable bit
1 = Filter is enabled
0 = Filter is disabled and the RDY bit is cleared

bit 14-13 **MODE[1:0]:** Filter Mode bits
11 = Averaging mode
10 = Reserved
01 = Reserved
00 = Oversampling mode

bit 12-10 **OVRSAM[2:0]:** Filter Averaging/Oversampling Ratio bits
If MODE[1:0] = 00:
111 = 128x (16-bit result in the ADFLxDAT register is in 12.4 format)
110 = 32x (15-bit result in the ADFLxDAT register is in 12.3 format)
101 = 8x (14-bit result in the ADFLxDAT register is in 12.2 format)
100 = 2x (13-bit result in the ADFLxDAT register is in 12.1 format)
011 = 256x (16-bit result in the ADFLxDAT register is in 12.4 format)
010 = 64x (15-bit result in the ADFLxDAT register is in 12.3 format)
001 = 16x (14-bit result in the ADFLxDAT register is in 12.2 format)
000 = 4x (13-bit result in the ADFLxDAT register is in 12.1 format)
If MODE[1:0] = 11 (12-bit result in the ADFLxDAT register in all instances):
111 = 256x
110 = 128x
101 = 64x
100 = 32x
011 = 16x
110 = 8x
001 = 4x
000 = 2x

bit 9 **IE:** Filter Interrupts Enable bit
1 = Individual and common interrupts will be generated when the filter result is ready
0 = Individual and common interrupts will not be generated for the filter

bit 8 **RDY:** Oversampling Filter Data Ready Flag bit
This bit is cleared by hardware when the result is read from the ADFLxDAT register.
1 = Data in the ADFLxDAT register are ready
0 = The ADFLxDAT register has been read and new data in the ADFLxDAT register are not ready

bit 7-5 **Unimplemented:** Read as '0'

**REGISTER 13-31: ADFLxCON: ADC DIGITAL FILTER x CONTROL REGISTER (x = 0, 1, 2, 3) (CONTINUED)**

bit 4-0 **FLCHSEL[4:0]:** Oversampling Filter Input Channel Selection bits

11111 = Reserved
...
11010 = Reserved
11001 = Band gap, 1.2V (AN25)
11000 = Temperature sensor (AN24)
10111 = AN23
...
00011 = AN3
00010 = AN2
00001 = AN1
00000 = AN0


© 2017-2021 Microchip Technology Inc.

## 14.0 HIGH-SPEED ANALOG COMPARATOR WITH SLOPE COMPENSATION DAC

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"High-Speed Analog Comparator Module with Slope Compensation DAC"** (www.microchip.com/DS70005280) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The high-speed analog comparator module provides a method to monitor voltage, current and other critical signals in a power conversion application that may be too fast for the CPU and ADC to capture. There are a total of 3 comparator modules. The analog comparator module can be used to implement Peak Current mode control, Critical Conduction mode (variable frequency) and Hysteretic Control mode.

### 14.1 Overview

The high-speed analog comparator module is comprised of a high-speed comparator, Pulse Density Modulation (PDM) DAC and a slope compensation unit. The slope compensation unit provides a user-defined slope which can be used to alter the DAC output. This feature is useful in applications, such as Peak Current mode control, where slope compensation is required to maintain the stability of the power supply. The user simply specifies the direction and rate of change for the slope compensation and the output of the DAC is modified accordingly.

The DAC consists of a PDM unit, followed by a digitally controlled multiphase RC filter. The PDM unit uses a phase accumulator circuit to generate an output stream of pulses. The density of the pulse stream is proportional to the input data value, relative to the maximum value supported by the bit width of the accumulator. The output pulse density is representative of the desired output voltage. The pulse stream is filtered with an RC filter to yield an analog voltage. The output of the DAC is connected to the negative input of the comparator. The positive input of the comparator can be selected using a MUX from any of the input pins. The comparator provides a high-speed operation with a typical delay of 15 ns.

The output of the comparator is processed by the pulse stretcher and the digital filter blocks, which prevent comparator response to unintended fast transients in the inputs. Figure 14-1 shows a block diagram of the high-speed analog comparator module. The DAC module can be operated in one of three modes: Slope Generation mode, Hysteretic mode and Triangle Wave mode. Each of these modes can be used in a variety of power supply applications.

**Note:** The DACOUT1 pin can only be associated with a single DAC output at any given time. If more than one DACOEN bit is set, the DACOUT1 pin will be a combination of the signals.

**FIGURE 14-1: HIGH-SPEED ANALOG COMPARATOR MODULE BLOCK DIAGRAM**

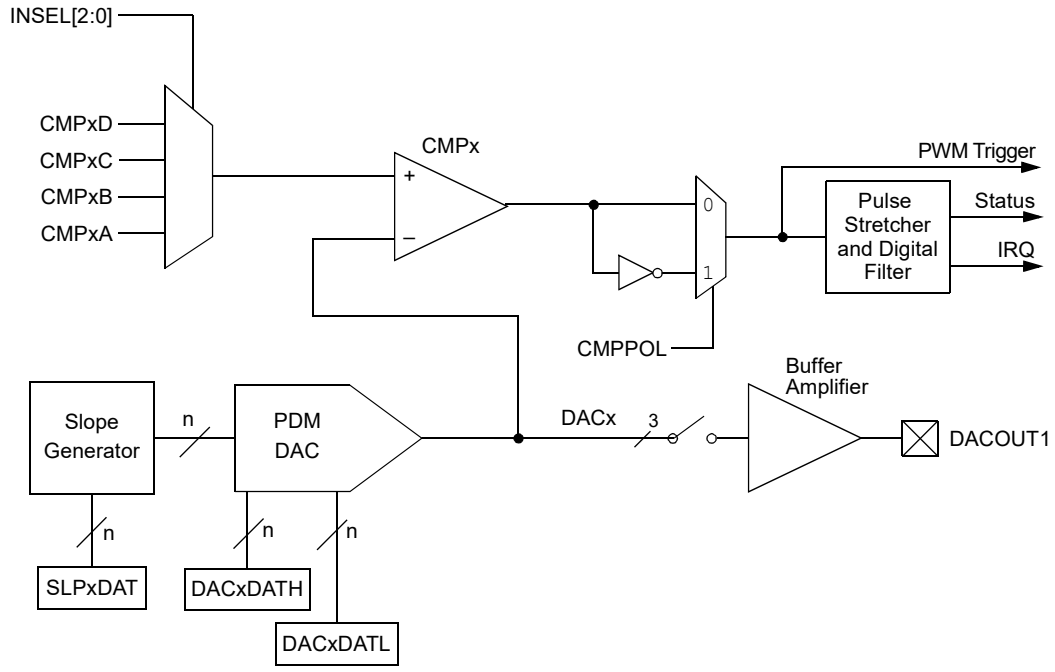


**Note:** n = 16


© 2017-2021 Microchip Technology Inc.

## 14.2 Features Overview

- Three Rail-to-Rail Analog Comparators
- Up to Four Selectable Input Sources per Comparator
- Programmable Comparator Hysteresis
- Programmable Output Polarity
- Interrupt Generation Capability
- Dedicated Pulse Density Modulation DAC for each Analog Comparator:
  - PDM unit followed by a digitally controlled multimode multipole RC filter
- Multimode Multipole RC Output Filter:
  - Transition mode: Provides the fastest response
  - Fast mode: For tracking DAC slopes
  - Steady-State mode: Provides 12-bit resolution
- Slope Compensation along with each DAC:
  - Slope Generation mode
  - Hysteretic Control mode
  - Triangle Wave mode
- Functional Support for the High-Speed PWM module which Includes:
  - PWM duty cycle control
  - PWM period control
  - PWM Fault detect

## 14.3 Control Registers

The DACCTRL1L and DACCTRL2H/L registers are common configuration registers for DAC modules.

The DACxCON, DACxDAT, SLPxCON and SLPxDAT registers specify the operation of individual modules.

**REGISTER 14-1: DACCTRL1L: DAC CONTROL 1 LOW REGISTER**

| R/W-0 | U-0 | R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| DACON | — | DACSIDL | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CLKSEL1(1,3) | CLKSEL0(1,3) | CLKDIV1(1,3) | CLKDIV0(1,3) | — | FCLKDIV2(2) | FCLKDIV1(2) | FCLKDIV0(2) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | |
|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared |

bit 15 **DACON:** Common DAC Module Enable bit
1 = Enables DAC modules
0 = Disables DAC modules and disables FSCM clocks to reduce power consumption; any pending Slope mode and/or underflow conditions are cleared

bit 14 **Unimplemented:** Read as '0'

bit 13 **DACSIDL:** DAC Stop in Idle Mode bit
1 = Discontinues module operation when device enters Idle mode
0 = Continues module operation in Idle mode

bit 12-8 **Unimplemented:** Read as '0'

bit 7-6 **CLKSEL[1:0]:** DAC Clock Source Select bits(1,3)
11 = FPLLO
10 = AFPLLO
01 = FVCO/2
00 = AFVCO/2

bit 5-4 **CLKDIV[1:0]:** DAC Clock Divider bits(1,3)
11 = Divide-by-4
10 = Divide-by-3 (non-uniform duty cycle)
01 = Divide-by-2
00 = 1x

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **FCLKDIV[2:0]:** Comparator Filter Clock Divider bits(2)
111 = Divide-by-8
110 = Divide-by-7
101 = Divide-by-6
100 = Divide-by-5
011 = Divide-by-4
010 = Divide-by-3
001 = Divide-by-2
000 = 1x

**Note 1:** These bits should only be changed when DACON = 0 to avoid unpredictable behavior.
**2:** The input clock to this divider is the selected clock input, CLKSEL[1:0], and then divided by two.
**3:** Clock source and dividers should yield an effective DAC clock input specified in Table 33-37.


© 2017-2021 Microchip Technology Inc.

**REGISTER 14-2: DACCTRL2H: DAC CONTROL 2 HIGH REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | SSTIME[9:8](1,2) | |
| bit 15 | | | | | | | bit 8 |

| R/W-1 | R/W-0 | R/W-0 | R/W-0 | R/W-1 | R/W-0 | R/W-1 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SSTIME[7:0](1,2) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | |
|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared |

bit 15-10 **Unimplemented:** Read as ‘0’

bit 9-0 **SSTIME[9:0]:** Time from Start of Transition Mode until Steady-State Filter is Enabled bits(1,2)

**Note 1:** The value for SSTIME[9:0] should be greater than the TMODTIME[9:0] value.

**2:** The data value for this register should equal the time value specified by DA10 in Table 33-38 given the input clock frequency.

**REGISTER 14-3: DACCTRL2L: DAC CONTROL 2 LOW REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | TMODTIME[9:8](1,2) | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-1 | R/W-0 | R/W-1 | R/W-0 | R/W-1 | R/W-0 | R/W-1 |
|---|---|---|---|---|---|---|---|
| TMODTIME[7:0](1,2) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | |
|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared |

bit 15-10 **Unimplemented:** Read as ‘0’

bit 9-0 **TMODTIME[9:0]:** Transition Mode Duration bits(1,2)

**Note 1:** The value for TMODTIME[9:0] should be less than the SSTIME[9:0] value.

**2:** The data value for this register should equal the time value specified by DA09 in Table 33-38 given the input clock frequency.

**REGISTER 14-4: DACxCONH: DACx CONTROL HIGH REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | TMCB[9:8] | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TMCB[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | |
|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-0 **TMCB[9:0]:** DACx Leading-Edge Blanking bits

These register bits specify the blanking period for the comparator, following changes to the DAC output during Change-of-State (COS), for the input signal selected by the HCFSEL[3:0] bits in Register 14-9.

**REGISTER 14-5: DACxCONL: DACx CONTROL LOW REGISTER**

| R/W-0 | R/W-0 | R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DACEN | IRQM1(1,2) | IRQM0(1,2) | — | — | CBE | DACOEN | FLTREN |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CMPSTAT | CMPPOL | INSEL2 | INSEL1 | INSEL0 | HYSPOL | HYSSEL1 | HYSSEL0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | |
|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared |

bit 15 **DACEN:** Individual DACx Module Enable bit

1 = Enables DACx module

0 = Disables DACx module to reduce power consumption; any pending Slope mode and/or underflow conditions are cleared

bit 14-13 **IRQM[1:0]:** Interrupt Mode select bits(1,2)

11 = Generates an interrupt on either a rising or falling edge detect

10 = Generates an interrupt on a falling edge detect

01 = Generates an interrupt on a rising edge detect

00 = Interrupts are disabled

bit 12-11 **Unimplemented:** Read as '0'

**Note 1:** Changing these bits during operation may generate a spurious interrupt.

**2:** The edge selection is a post-polarity selection via the CMPPOL bit.


© 2017-2021 Microchip Technology Inc.

**REGISTER 14-5: DACxCONL: DACx CONTROL LOW REGISTER (CONTINUED)**

bit 10 **CBE:** Comparator Blank Enable bit
1 = Enables the analog comparator output to be blanked (gated off) during the recovery transition following the completion of a slope operation
0 = Disables the blanking signal to the analog comparator; therefore, the analog comparator output is always active

bit 9 **DACOEN:** DACx Output Buffer Enable bit
1 = DACx analog voltage is connected to the DACOUT1 pin
0 = DACx analog voltage is not connected to the DACOUT1 pin

bit 8 **FLTREN:** Comparator Digital Filter Enable bit
1 = Digital filter is enabled
0 = Digital filter is disabled

bit 7 **CMPSTAT:** Comparator Status bits
The current state of the comparator output including the CMPPOL selection.

bit 6 **CMPPOL:** Comparator Output Polarity Control bit
1 = Output is inverted
0 = Output is noninverted

bit 5-3 **INSEL[2:0]:** Comparator Input Source Select bits
111 = Reserved
110 = Reserved
101 = Reserved
100 = Reserved
011 = CMPxD input pin
010 = CMPxC input pin
001 = CMPxB input pin
000 = CMPxA input pin

bit 2 **HYSPOL:** Comparator Hysteresis Polarity Select bit
1 = Hysteresis is applied to the falling edge of the comparator output
0 = Hysteresis is applied to the rising edge of the comparator output

bit 1-0 **HYSSEL[1:0]:** Comparator Hysteresis Select bits
11 = 45 mv hysteresis
10 = 30 mv hysteresis
01 = 15 mv hysteresis
00 = No hysteresis is selected

**Note 1:** Changing these bits during operation may generate a spurious interrupt.
**2:** The edge selection is a post-polarity selection via the CMPPOL bit.

**REGISTER 14-6: DACxDATH: DACx DATA HIGH REGISTER**

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | DACDAT[11:8] | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DACDAT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | |
|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared |

bit 15-12 **Unimplemented:** Read as ‘0’

bit 11-0 **DACDAT[11:0]:** DACx Data bits
This register specifies the high DACx data value. Valid values are from 205 to 3890.

**REGISTER 14-7: DACxDATL: DACx DATA LOW REGISTER**

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | DACLOW[11:8] | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DACLOW[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | |
|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared |

bit 15-12 **Unimplemented:** Read as ‘0’

bit 11-0 **DACLOW[11:0]:** DACx Low Data bits
In Hysteretic mode, Slope Generator mode and Triangle mode, this register specifies the low data value and/or limit for the DACx module. Valid values are from 205 to 3890.


© 2017-2021 Microchip Technology Inc.

**REGISTER 14-8: SLPxCONH: DACx SLOPE CONTROL HIGH REGISTER**

| R/W-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | U-0 |
|---|---|---|---|---|---|---|---|
| SLOPEN | — | — | — | HME(1) | TWME(2) | PSE | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | |
|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared |

bit 15 **SLOPEN:** Slope Function Enable/On bit
1 = Enables slope function
0 = Disables slope function; slope accumulator is disabled to reduce power consumption

bit 14-12 **Unimplemented:** Read as '0'

bit 11 **HME:** Hysteretic Mode Enable bit(1)
1 = Enables Hysteretic mode for DACx
0 = Disables Hysteretic mode for DACx

bit 10 **TWME:** Triangle Wave Mode Enable bit(2)
1 = Enables Triangle Wave mode for DACx
0 = Disables Triangle Wave mode for DACx

bit 9 **PSE:** Positive Slope Mode Enable bit
1 = Slope mode is positive (increasing)
0 = Slope mode is negative (decreasing)

bit 8-0 **Unimplemented:** Read as '0'

**Note 1:** HME mode requires the user to disable the slope function (SLOPEN = 0).
**2:** TWME mode requires the user to enable the slope function (SLOPEN = 1).

**REGISTER 14-9: SLPxCONL: DACx SLOPE CONTROL LOW REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| HCFSEL3 | HCFSEL2 | HCFSEL1 | HCFSEL0 | SLPSTOPA3 | SLPSTOPA2 | SLPSTOPA1 | SLPSTOPA0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SLPSTOPB3 | SLPSTOPB2 | SLPSTOPB1 | SLPSTOPB0 | SLPSTRT3 | SLPSTRT2 | SLPSTRT1 | SLPSTRT0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | |
|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set0 | '0' = Bit is cleared |

bit 15-12 **HCFSEL[3:0]:** Hysteretic Comparator Function Input Select bits

The selected input signal controls the switching between the DACx high limit (DACxDATH) and the DACx low limit (DACxDATL) as the data source for the PDM DAC. It modifies the polarity of the comparator, and the rising and falling edges initiate the start of the LEB counter (TMCB[9:0] bits in Register 14-4).

| Input Selection | Source |
|---|---|
| 1111 | 1 |
| 1100 | 0 |
| 1011 | 0 |
| 1010 | 0 |
| 1001 | 0 |
| 1000 | PWM8H |
| 0111 | PWM7H |
| 0110 | PWM6H |
| 0101 | PWM5H |
| 0100 | PWM4H |
| 0011 | PWM3H |
| 0010 | PWM2H |
| 0001 | PWM1H |
| 0000 | 0 |


© 2017-2021 Microchip Technology Inc.

**REGISTER 14-9: SLPxCONL: DACx SLOPE CONTROL LOW REGISTER (CONTINUED)**

bit 11-8 **SLPSTOPA[3:0]:** Slope Stop A Signal Select bits

The selected Slope Stop A signal is logically OR'd with the selected Slope Stop B signal to terminate the slope function.

| Slope Stop A Signal Selection | Source |
|---|---|
| 1101-1111 | 1 |
| 1000 | PWM8 Trigger 2 |
| 0111 | PWM7 Trigger 2 |
| 0110 | PWM6 Trigger 2 |
| 0101 | PWM5 Trigger 2 |
| 0100 | PWM4 Trigger 2 |
| 0011 | PWM3 Trigger 2 |
| 0010 | PWM2 Trigger 2 |
| 0001 | PWM1 Trigger 2 |
| 0000 | 0 |

bit 7-4 **SLPSTOPB[3:0]:** Slope Stop B Signal Select bits

The selected Slope Stop B signal is logically OR'd with the selected Slope Stop A signal to terminate the slope function.

| Slope Stop B Signal Selection | Source |
|---|---|
| 0100-1111 | 1 |
| 0011 | CMP3 Out |
| 0010 | CMP2 Out |
| 0001 | CMP1 Out |
| 0000 | 0 |

bit 3-0 **SLPSTRT[3:0]:** Slope Start Signal Select bits

| Slope Start Signal Selection | Source |
|---|---|
| 1101-1111 | 1 |
| 1000 | PWM8 Trigger 1 |
| 0111 | PWM7 Trigger 1 |
| 0110 | PWM6 Trigger 1 |
| 0101 | PWM5 Trigger 1 |
| 0100 | PWM4 Trigger 1 |
| 0011 | PWM3 Trigger 1 |
| 0010 | PWM2 Trigger 1 |
| 0001 | PWM1 Trigger 1 |
| 0000 | 0 |

**REGISTER 14-10: SLPxDAT: DACx SLOPE DATA REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SLPDAT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SLPDAT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | |
|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared |

bit 15-0 **SLPDAT[15:0]:** Slope Ramp Rate Value bits
The SLPDATx value is in 12.4 format.

**Note 1:** Register data are left justified.


© 2017-2021 Microchip Technology Inc.

## 15.0 QUADRATURE ENCODER INTERFACE (QEI)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive resource. For more information, refer to **"Quadrature Encoder Interface (QEI)"** (www.microchip.com/DS70000601) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The Quadrature Encoder Interface (QEI) module provides the interface to incremental encoders for obtaining mechanical position data. The dsPIC33CK256MP508 family implements two instances of the QEI. Quadrature Encoders, also known as incremental encoders or optical encoders, detect position and speed of rotating motion systems. Quadrature Encoders enable closed-loop control of motor control applications, such as Switched Reluctance (SR) and AC Induction Motors (ACIM).

A typical Quadrature Encoder includes a slotted wheel attached to the shaft of the motor and an emitter/detector module that senses the slots in the wheel. Typically, three output channels, Phase A (QEAx), Phase B (QEBx) and Index (INDXx), provide information on the movement of the motor shaft, including distance and direction.

The two channels, Phase A (QEAx) and Phase B (QEBx), are typically 90 degrees out of phase with respect to each other. The Phase A and Phase B channels have a unique relationship. If Phase A leads Phase B, the direction of the motor is deemed positive or forward. If Phase A lags Phase B, the direction of the motor is deemed negative or reverse. The Index pulse occurs once per mechanical revolution and is used as a reference to indicate an absolute position. Figure 15-1 illustrates the Quadrature Encoder Interface signals.

The Quadrature signals from the encoder can have four unique states ('01', '00', '10' and '11') that reflect the relationship between QEAx and QEBx. Figure 15-1 illustrates these states for one count cycle. The order of the states get reversed when the direction of travel changes.

The Quadrature Decoder increments or decrements the 32-bit up/down Position x Counter (POSxCNTH/L) registers for each Change-of-State (COS). The counter increments when QEAx leads QEBx and decrements when QEBx leads QEAx.

**FIGURE 15-1: QUADRATURE ENCODER INTERFACE SIGNALS**

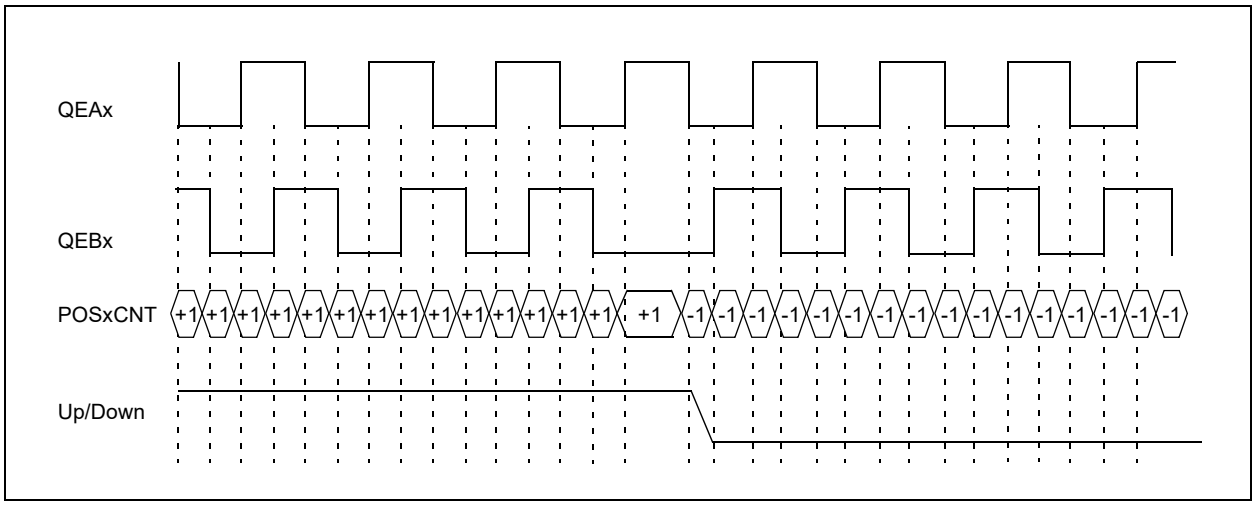

Table 15-1 shows the truth table that describes how the Quadrature signals are decoded.

**TABLE 15-1: TRUTH TABLE FOR QUADRATURE ENCODER**

| Current Quadrature State | | Previous Quadrature State | | Action |
|---|---|---|---|---|
| QEA | QEB | QEA | QEB | |
| 1 | 1 | 1 | 1 | No count or direction change |
| 1 | 1 | 1 | 0 | Count up |
| 1 | 1 | 0 | 1 | Count down |
| 1 | 1 | 0 | 0 | Invalid state change; ignore |
| 1 | 0 | 1 | 1 | Count down |
| 1 | 0 | 1 | 0 | No count or direction change |
| 1 | 0 | 0 | 1 | Invalid state change; ignore |
| 1 | 0 | 0 | 0 | Count up |
| 0 | 1 | 1 | 1 | Count up |
| 0 | 1 | 1 | 0 | Invalid state change; ignore |
| 0 | 1 | 0 | 1 | No count or direction change |
| 0 | 1 | 0 | 0 | Count down |
| 0 | 0 | 1 | 1 | Invalid state change; ignore |
| 0 | 0 | 1 | 0 | Count down |
| 0 | 0 | 0 | 1 | Count up |
| 0 | 0 | 0 | 0 | No count or direction change |

Figure 15-2 illustrates the simplified block diagram of the QEI module. The QEI module consists of decoder logic to interpret the Phase A (QEAx) and Phase B (QEBx) signals, and an up/down counter to accumulate the count. The counter pulses are generated when the Quadrature state changes. The count direction information must be maintained in a register until a direction change is detected. The module also includes digital noise filters, which condition the input signal.

The QEI module consists of the following major features:

- Four Input Pins: Two Phase Signals, an Index Pulse and a Home Pulse
- Programmable Digital Noise Filters on Inputs
- Quadrature Decoder providing Counter Pulses and Count Direction
- Count Direction Status
- 4x Count Resolution
- Index (INDXx) Pulse to Reset the Position Counter
- General Purpose 32-Bit Timer/Counter mode
- Interrupts generated by QEI or Counter Events
- 32-Bit Velocity Counter
- 32-Bit Position Counter
- 32-Bit Index Pulse Counter
- 32-Bit Interval Timer
- 32-Bit Position Initialization/Capture Register
- 32-Bit Compare Less Than and Greater Than Registers
- External Up/Down Count mode
- External Gated Count mode
- External Gated Timer mode
- Interval Timer mode


© 2017-2021 Microchip Technology Inc.

© 2017-2021 Microchip Technology Inc.

**FIGURE 15-2: QUADRATURE ENCODER INTERFACE (QEI) MODULE BLOCK DIAGRAM**

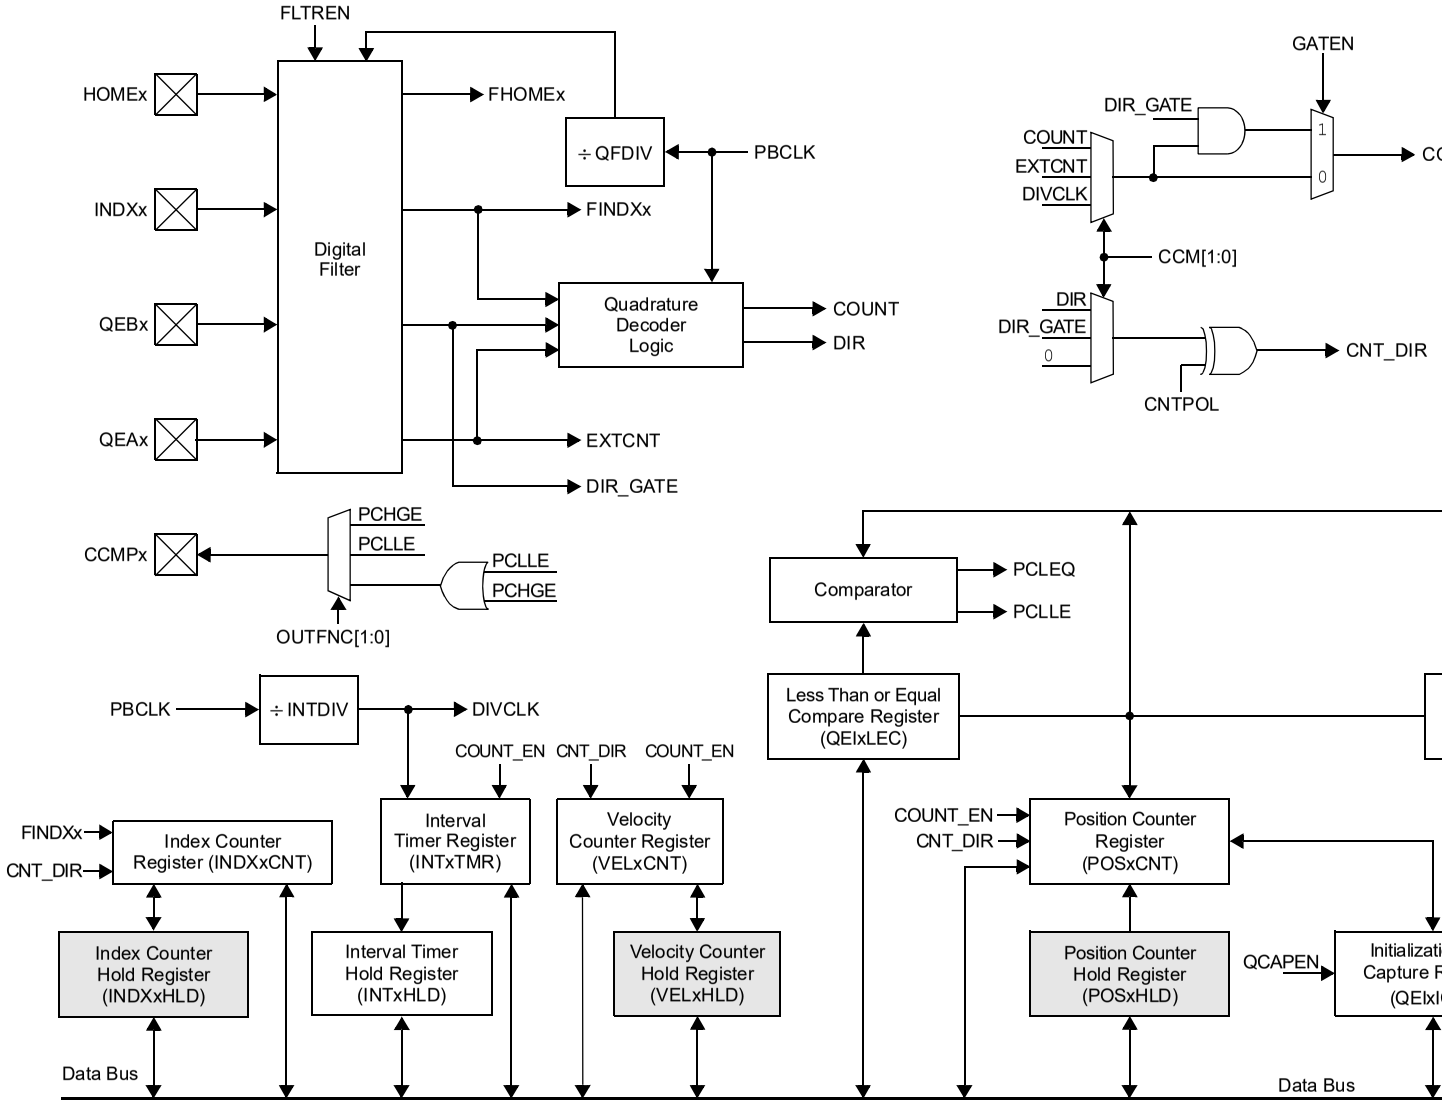


**Note 1:** These registers map to the same memory location.

## 15.1 QEI Control and Status Registers

**REGISTER 15-1: QEIxCON: QEIx CONTROL REGISTER**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIEN | — | QEISIDL | PIMOD2(1,5) | PIMOD1(1,5) | PIMOD0(1,5) | IMV1(2) | IMV0(2) |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | INTDIV2(3) | INTDIV1(3) | INTDIV0(3) | CNTPOL | GATEN | CCM1 | CCM0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **QEIEN:** Quadrature Encoder Interface Module Enable bit
1 = Module counters are enabled
0 = Module counters are disabled, but SFRs can be read or written

bit 14 **Unimplemented:** Read as '0'

bit 13 **QEISIDL:** QEI Stop in Idle Mode bit
1 = Discontinues module operation when device enters Idle mode
0 = Continues module operation in Idle mode

bit 12-10 **PIMOD[2:0]:** Position Counter Initialization Mode Select bits(1,5)
111 = Modulo Count mode for position counter and every Index event resets the position counter(4)
110 = Modulo Count mode for position counter
101 = Resets the position counter when the position counter equals the QEIxGEC register
100 = Second Index event after Home event initializes position counter with contents of QEIxIC register
011 = First Index event after Home event initializes position counter with contents of QEIxIC register
010 = Next Index input event initializes the position counter with contents of QEIxIC register
001 = Every Index input event resets the position counter
000 = Index input event does not affect the position counter

bit 9-8 **IMV[1:0]:** Index Match Value bits(2)
11 = Index match occurs when QEBx = 1 and QEAx = 1
10 = Index match occurs when QEBx = 1 and QEAx = 0
01 = Index match occurs when QEBx = 0 and QEAx = 1
00 = Index match occurs when QEBx = 0 and QEAx = 0

bit 7 **Unimplemented:** Read as '0'

**Note 1:** When CCMx = 10 or CCMx = 11, all of the QEI counters operate as timers and the PIMOD[2:0] bits are ignored.

**2:** When CCMx = 00, and QEAx and QEBx values match the Index Match Value (IMV), the POSxCNTH and POSxCNTL registers are reset.

**3:** The selected clock rate should be at least twice the expected maximum quadrature count rate.

**4:** Not all devices support this mode.

**5:** The QCAPEN and HCAPEN bits must be cleared during PIMODx Modes 2 through 7 to ensure proper functionality. Not all devices support HCAPEN.


© 2017-2021 Microchip Technology Inc.

**REGISTER 15-1: QEIxCON: QEIx CONTROL REGISTER (CONTINUED)**

bit 6-4 **INTDIV[2:0]:** Timer Input Clock Prescale Select bits(3)
(interval timer, main timer (position counter), velocity counter and Index counter internal clock divider select)
111 = 1:256 prescale value
110 = 1:64 prescale value
101 = 1:32 prescale value
100 = 1:16 prescale value
011 = 1:8 prescale value
010 = 1:4 prescale value
001 = 1:2 prescale value
000 = 1:1 prescale value

bit 3 **CNTPOL:** Position and Index Counter/Timer Direction Select bit
1 = Counter direction is negative unless modified by external up/down signal
0 = Counter direction is positive unless modified by external up/down signal

bit 2 **GATEN:** External Count Gate Enable bit
1 = External gate signal controls position counter operation
0 = External gate signal does not affect position counter operation

bit 1-0 **CCM[1:0]:** Counter Control Mode Selection bits
11 = Internal Timer mode
10 = External Clock Count with External Gate mode
01 = External Clock Count with External Up/Down mode
00 = Quadrature Encoder mode

**Note 1:** When CCMx = 10 or CCMx = 11, all of the QEI counters operate as timers and the PIMOD[2:0] bits are ignored.

**2:** When CCMx = 00, and QEAx and QEBx values match the Index Match Value (IMV), the POSxCNTH and POSxCNTL registers are reset.

**3:** The selected clock rate should be at least twice the expected maximum quadrature count rate.

**4:** Not all devices support this mode.

**5:** The QCAPEN and HCAPEN bits must be cleared during PIMODx Modes 2 through 7 to ensure proper functionality. Not all devices support HCAPEN.

**REGISTER 15-2: QEIxIOC: QEIx I/O CONTROL REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QCAPEN | FLTREN | QFDIV2 | QFDIV1 | QFDIV0 | OUTFNC1 | OUTFNC0 | SWPAB |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| HOMPOL | IDXPOL | QEBPOL | QEAPOL | HOME | INDEX | QEB | QEA |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **QCAPEN:** QEIx Position Counter Input Capture by Index Event Enable bit
1 = Index match event (positive edge) triggers a position capture event
0 = Index match event (positive edge) does not trigger a position capture event

bit 14 **FLTREN:** QEAx/QEBx/INDXx/HOMEx Digital Filter Enable bit
1 = Input pin digital filter is enabled
0 = Input pin digital filter is disabled (bypassed)

bit 13-11 **QFDIV[2:0]:** QEAx/QEBx/INDXx/HOMEx Digital Input Filter Clock Divide Select bits
111 = 1:256 clock divide
110 = 1:64 clock divide
101 = 1:32 clock divide
100 = 1:16 clock divide
011 = 1:8 clock divide
010 = 1:4 clock divide
001 = 1:2 clock divide
000 = 1:1 clock divide

bit 10-9 **OUTFNC[1:0]:** QEIx Module Output Function Mode Select bits
11 = The QEICMPx pin goes high when POSxCNT $\leq$ QEIxLEC or POSxCNT $\geq$ QEIxGEC
10 = The QEICMPx pin goes high when POSxCNT $\leq$ QEIxLEC
01 = The QEICMPx pin goes high when POSxCNT $\geq$ QEIxGEC
00 = Output is disabled

bit 8 **SWPAB:** Swap QEAx and QEBx Inputs bit
1 = QEAx and QEBx are swapped prior to Quadrature Decoder logic
0 = QEAx and QEBx are not swapped

bit 7 **HOMPOL:** HOMEx Input Polarity Select bit
1 = Input is inverted
0 = Input is not inverted

bit 6 **IDXPOL:** INDXx Input Polarity Select bit
1 = Input is inverted
0 = Input is not inverted

bit 5 **QEBPOL:** QEBx Input Polarity Select bit
1 = Input is inverted
0 = Input is not inverted

bit 4 **QEAPOL:** QEAx Input Polarity Select bit
1 = Input is inverted
0 = Input is not inverted

bit 3 **HOME:** Status of HOMEx Input Pin After Polarity Control bit (read-only)
1 = Pin is at logic '1' if the HOMPOL bit is set to '0'; pin is at logic '0' if the HOMPOL bit is set to '1'
0 = Pin is at logic '0' if the HOMPOL bit is set to '0'; pin is at logic '1' if the HOMPOL bit is set to '1'


© 2017-2021 Microchip Technology Inc.

**REGISTER 15-2: QEIxIOC: QEIx I/O CONTROL REGISTER (CONTINUED)**

bit 2 **INDEX:** Status of INDXx Input Pin After Polarity Control bit (read-only)
1 = Pin is at logic '1' if the IDXPOL bit is set to '0'; pin is at logic '0' if the IDXPOL bit is set to '1'
0 = Pin is at logic '0' if the IDXPOL bit is set to '0'; pin is at logic '1' if the IDXPOL bit is set to '1'

bit 1 **QEB:** Status of QEBx Input Pin After Polarity Control and SWPAB Pin Swapping bit (read-only)
1 = Physical pin, QEBx, is at logic '1' if the QEBPOL bit is set to '0' and the SWPAB bit is set to '0';
physical pin, QEBx, is at logic '0' if the QEBPOL bit is set to '1' and the SWPAB bit is set to '0';
physical pin, QEAx, is at logic '1' if the QEBPOL bit is set to '0' and the SWPAB bit is set to '1';
physical pin, QEAx, is at logic '0' if the QEBPOL bit is set to '1' and the SWPAB bit is set to '1'
0 = Physical pin, QEBx, is at logic '0' if the QEBPOL bit is set to '0' and the SWPAB bit is set to '0';
physical pin, QEBx, is at logic '1' if the QEBPOL bit is set to '1' and the SWPAB bit is set to '0';
physical pin, QEAx, is at logic '0' if the QEBPOL bit is set to '0' and the SWPAB bit is set to '1';
physical pin, QEAx, is at logic '1' if the QEBPOL bit is set to '1' and the SWPAB bit is set to '1'

bit 0 **QEA:** Status of QEAx Input Pin After Polarity Control and SWPAB Pin Swapping bit (read-only)
1 = Physical pin, QEAx, is at logic '1' if the QEAPOL bit is set to '0' and the SWPAB bit is set to '0';
physical pin, QEAx, is at logic '0' if the QEAPOL bit is set to '1' and the SWPAB bit is set to '0';
physical pin, QEBx, is at logic '1' if the QEAPOL bit is set to '0' and the SWPAB bit is set to '1';
physical pin, QEBx, is at logic '0' if the QEAPOL bit is set to '1' and the SWPAB bit is set to '1'
0 = Physical pin, QEAx, is at logic '0' if the QEAPOL bit is set to '0' and the SWPAB bit is set to '0';
physical pin, QEAx, is at logic '1' if the QEAPOL bit is set to '1' and the SWPAB bit is set to '0';
physical pin, QEBx, is at logic '0' if the QEAPOL bit is set to '0' and the SWPAB bit is set to '1';
physical pin, QEBx, is at logic '1' if the QEAPOL bit is set to '1' and the SWPAB bit is set to '1'

**REGISTER 15-3: QEIxIOCH: QEIx I/O CONTROL HIGH REGISTER(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | HCAPEN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-1 **Unimplemented:** Read as '0'

bit 0 **HCAPEN:** Position Counter Input Capture by Home Event Enable bit
1 = HOMEx input event (positive edge) triggers a position capture event
0 = HOMEx input event (positive edge) does not trigger a position capture event

**Note 1:** This register is not present on all devices.

**REGISTER 15-4: QEIxSTAT: QEIx STATUS REGISTER**

| U-0 | U-0 | HS/R/C-0 | R/W-0 | HS/R/C-0 | R/W-0 | HS/R/C-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | PCHEQIRQ | PCHEQIEN | PCLEQIRQ | PCLEQIEN | POSOVIRQ | POSOVIEN |
| bit 15 | | | | | | | bit 8 |

| HS/R/C-0 | R/W-0 | HS/R/C-0 | R/W-0 | HS/R/C-0 | R/W-0 | HS/R/C-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PCIIRQ(1) | PCIIEN | VELOVIRQ | VELOVIEN | HOMIRQ | HOMIEN | IDXIRQ | IDXIEN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | HS = Hardware Settable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13 **PCHEQIRQ:** Position Counter Greater Than Compare Status bit
1 = POSxCNT ≥ QEIxGEC
0 = POSxCNT < QEIxGEC

bit 12 **PCHEQIEN:** Position Counter Greater Than Compare Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 11 **PCLEQIRQ:** Position Counter Less Than Compare Status bit
1 = POSxCNT ≤ QEIxLEC
0 = POSxCNT > QEIxLEC

bit 10 **PCLEQIEN:** Position Counter Less Than Compare Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 9 **POSOVIRQ:** Position Counter Overflow Status bit
1 = Overflow has occurred
0 = No overflow has occurred

bit 8 **POSOVIEN:** Position Counter Overflow Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 7 **PCIIRQ:** Position Counter (Homing) Initialization Process Complete Status bit(1)
1 = POSxCNT was reinitialized
0 = POSxCNT was not reinitialized

bit 6 **PCIIEN:** Position Counter (Homing) Initialization Process Complete Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 5 **VELOVIRQ:** Velocity Counter Overflow Status bit
1 = Overflow has occurred
0 = No overflow has occurred

bit 4 **VELOVIEN:** Velocity Counter Overflow Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 3 **HOMIRQ:** Status Flag for Home Event Status bit
1 = Home event has occurred
0 = No Home event has occurred

**Note 1:** This status bit is only applicable to PIMOD[2:0] modes, '011' and '100'.


© 2017-2021 Microchip Technology Inc.

**REGISTER 15-4: QEIxSTAT: QEIx STATUS REGISTER (CONTINUED)**

bit 2 **HOMIEN:** Home Input Event Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 1 **IDXIRQ:** Status Flag for Index Event Status bit
1 = Index event has occurred
0 = No Index event has occurred

bit 0 **IDXIEN:** Index Input Event Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

**Note 1:** This status bit is only applicable to PIMOD[2:0] modes, '011' and '100'.

**REGISTER 15-5: POSxCNTL: POSITION x COUNTER REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| POSCNT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| POSCNT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **POSCNT[15:0]:** Low Word Used to Form 32-Bit Position Counter Register (POSxCNT) bits

**REGISTER 15-6: POSxCNTH: POSITION x COUNTER REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| POSCNT[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| POSCNT[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **POSCNT[31:16]:** High Word Used to Form 32-Bit Position Counter Register (POSxCNT) bits


© 2017-2021 Microchip Technology Inc.

**REGISTER 15-7: POSxHLD: POSITION x COUNTER HOLD REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| POSHLD[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| POSHLD[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-0 **POSHLD[15:0]:** Hold Register for Reading/Writing Position x Counter High Word Register (POSxCNTH) bits

**REGISTER 15-8: VELxCNT: VELOCITY x COUNTER REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| VELCNT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| VELCNT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **VELCNT[15:0]:** Velocity Counter bits

**REGISTER 15-9: VELxCNTH: VELOCITY x COUNTER REGISTER HIGH(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| VELCNT[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| VELCNT[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **VELCNT[31:16]:** Velocity Counter bits

**Note 1:** This register is not present on all devices.


© 2017-2021 Microchip Technology Inc.

**REGISTER 15-10: VELxHLD: VELOCITY x COUNTER HOLD REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| VELHLD[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
| VELHLD[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **VELHLD[15:0]:** Hold for Reading/Writing Velocity Counter Register (VELxCNT) bits

**Note 1:** This register is not present on all devices.

**REGISTER 15-11: INTxTMRL: INTERVAL x TIMER REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INTTMR[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INTTMR[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **INTTMR[15:0]:** Low Word Used to Form 32-Bit Interval Timer Register (INTxTMR) bits

**REGISTER 15-12: INTxTMRH: INTERVAL x TIMER REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INTTMR[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INTTMR[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **INTTMR[31:16]:** High Word Used to Form 32-Bit Interval Timer Register (INTxTMR) bits


© 2017-2021 Microchip Technology Inc.

**REGISTER 15-13: INTXxHLDL: INTERVAL x TIMER HOLD REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INTHLD[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INTHLD[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **INTHLD[15:0]:** Low Word Used to Form 32-Bit Interval Timer Hold Register (INTxHLD) bits

**REGISTER 15-14: INTXxHLDH: INTERVAL x TIMER HOLD REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INTHLD[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INTHLD[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **INTHLD[31:16]:** High Word Used to Form 32-Bit Interval Timer Hold Register (INTxHLD) bits

**REGISTER 15-15: INDXxCNTL: INDEX x COUNTER REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INDXCNT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INDXCNT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **INDXCNT[15:0]:** Low Word Used to Form 32-Bit Index x Counter Register (INDXxCNT) bits

**REGISTER 15-16: INDXxCNTH: INDEX x COUNTER REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INDXCNT[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INDXCNT[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **INDXCNT[31:16]:** High Word Used to Form 32-Bit Index x Counter Register (INDXxCNT) bits


© 2017-2021 Microchip Technology Inc.

**REGISTER 15-17: INDXxHLD: INDEX x COUNTER HOLD REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INDXHLD[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| INDXHLD[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **INDXHLD[15:0]:** Hold Register for Reading/Writing Index x Counter High Word Register (INDXxCNTH) bits

**REGISTER 15-18: QEIxICL: QEIx INITIALIZATION/CAPTURE REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIIC[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIIC[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **QEIIC[15:0]:** Low Word Used to Form 32-Bit Initialization/Capture Register (QEIxIC) bits

**REGISTER 15-19: QEIxICH: QEIx INITIALIZATION/CAPTURE REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIIC[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIIC[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **QEIIC[31:16]:** High Word Used to Form 32-Bit Initialization/Capture Register (QEIxIC) bits


© 2017-2021 Microchip Technology Inc.

**REGISTER 15-20: QEIxLECL: QEIx LESS THAN OR EQUAL COMPARE REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEILEC[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEILEC[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-0 **QEILEC[15:0]:** Low Word Used to Form 32-Bit Less Than or Equal Compare Register (QEIxLEC) bits

**REGISTER 15-21: QEIxLECH: QEIx LESS THAN OR EQUAL COMPARE REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEILEC[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEILEC[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-0 **QEILEC[31:16]:** High Word Used to Form 32-Bit Less Than or Equal Compare Register (QEIxLEC) bits

**REGISTER 15-22: QEIxGECL: QEIx GREATER THAN OR EQUAL COMPARE REGISTER LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIGEC[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIGEC[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **QEIGEC[15:0]:** Low Word Used to Form 32-Bit Greater Than or Equal Compare Register (QEIxGEC) bits

**REGISTER 15-23: QEIxGECH: QEIx GREATER THAN OR EQUAL COMPARE REGISTER HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIGEC[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| QEIGEC[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **QEIGEC[31:16]:** High Word Used to Form 32-Bit Greater Than or Equal Compare Register (QEIxGEC) bits


© 2017-2021 Microchip Technology Inc.

## 16.0 UNIVERSAL ASYNCHRONOUS RECEIVER TRANSMITTER (UART)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Multiprotocol Universal Asynchronous Receiver Transmitter (UART) Module"** (www.microchip.com/DS70005288) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The Universal Asynchronous Receiver Transmitter (UART) is a flexible serial communication peripheral used to interface dsPIC® microcontrollers with other equipment, including computers and peripherals. The UART is a full-duplex, asynchronous communication channel that can be used to implement protocols, such as RS-232 and RS-485. The UART also supports the following hardware extensions:

- LIN/J2602
- IrDA®
- Direct Matrix Architecture (DMX)
- Smart Card

The primary features of the UART are:

- Full or Half-Duplex Operation
- Up to 8-Deep TX and RX First In, First Out (FIFO) Buffers
- 8-Bit or 9-Bit Data Width
- Configurable Stop Bit Length
- Flow Control
- Auto-Baud Calibration
- Parity, Framing and Buffer Overrun Error Detection
- Address Detect
- Break Transmission
- Transmit and Receive Polarity Control
- Manchester Encoder/Decoder
- Operation in Sleep mode
- Wake from Sleep on Sync Break Received Interrupt

## 16.1 Architectural Overview

The UART transfers bytes of data, to and from device pins, using First-In First-Out (FIFO) buffers up to eight bytes deep. The status of the buffers and data is made available to user software through Special Function Registers (SFRs). The UART implements multiple interrupt channels for handling transmit, receive and error events. A simplified block diagram of the UART is shown in Figure 16-1.

**FIGURE 16-1: SIMPLIFIED UARTx BLOCK DIAGRAM**

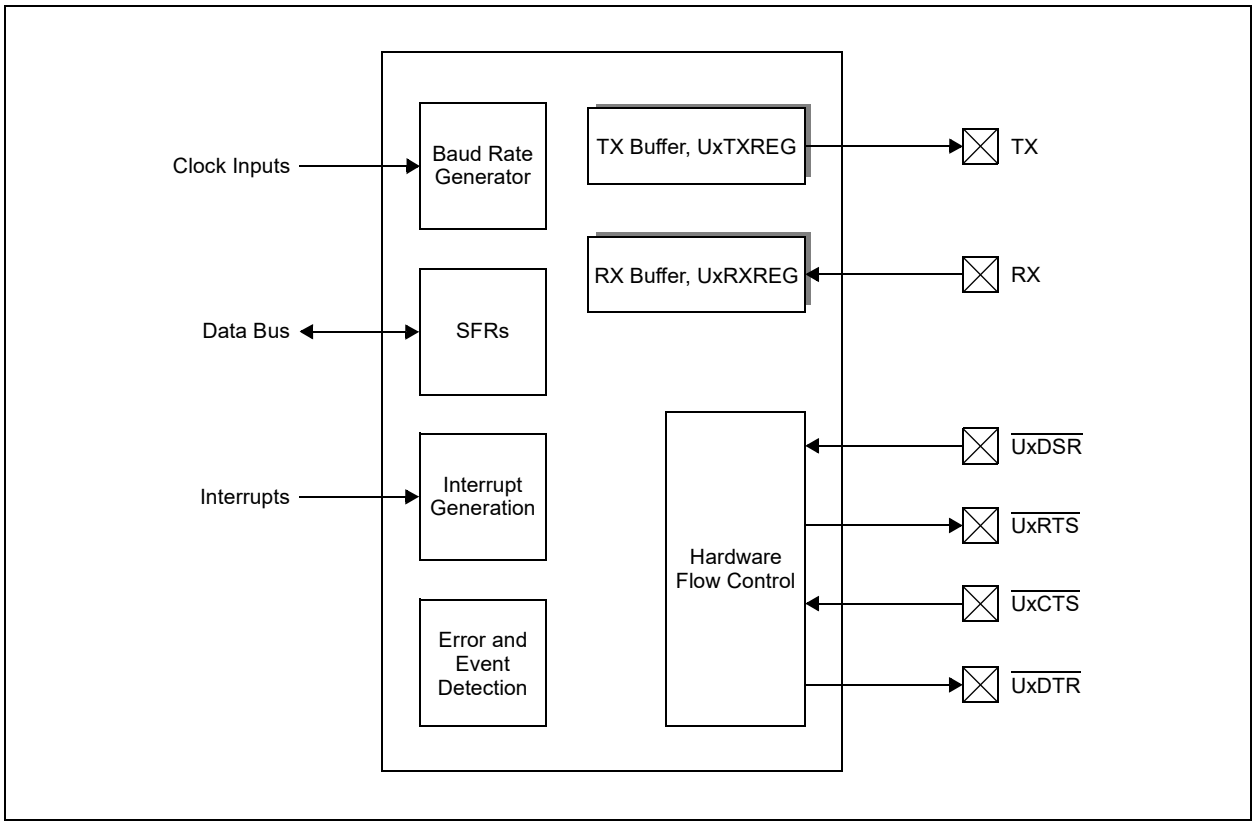



© 2017-2021 Microchip Technology Inc.

## 16.2 Character Frame

A typical UART character frame is shown in Figure 16-2. The Idle state is high with a 'Start' condition indicated by a falling edge. The Start bit is followed by the number of data, parity/address detect and Stop bits defined by the MOD[3:0] (UxMODE[3:0]) bits selected.

**FIGURE 16-2: UART CHARACTER FRAME**

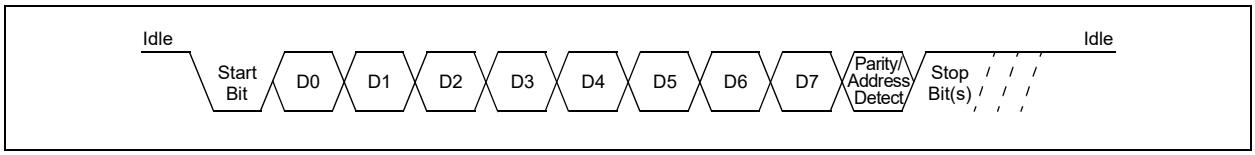


## 16.3 Data Buffers

Both transmit and receive functions use buffers to store data shifted to/from the pins. These buffers are FIFOs and are accessed by reading the SFRs, UxTXREG and UxRXREG, respectively. Each data buffer has multiple flags associated with its operation to allow software to read the status. Interrupts can also be configured based on the space available in the buffers. The transmit and receive buffers can be cleared and their pointers reset using the associated TX/RX Buffer Empty Status bits, UTXBE (UxSTAH[5]) and URXBE (UxSTAH[1]).

## 16.4 Protocol Extensions

The UART provides hardware support for LIN/J2602, IrDA®, DMX and smart card protocol extensions to reduce software overhead. A protocol extension is enabled by writing a value to the MOD[3:0] (UxMODE[3:0]) selection bits and further configured using the UARTx Timing Parameter registers, UxP1 (Register 16-9), UxP2 (Register 16-10), UxP3 (Register 16-11) and UxP3H (Register 16-12). Details regarding operation and usage are discussed in their respective chapters. Not all protocols are available on all devices. Please refer to the specific device data sheet for availability.

## 16.5 UART Control Registers

**REGISTER 16-1: UxMODE: UARTx CONFIGURATION REGISTER**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | HC/R/W-0[(1)] |
|---|---|---|---|---|---|---|---|
| UARTEN | — | USIDL | WAKE | RXBIMD | — | BRKOVR | UTXBRK |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | HC/R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| BRGH | ABAUD | UTXEN | URXEN | MOD3 | MOD2 | MOD1 | MOD0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HC = Hardware Clearable bit | HS = Hardware Settable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **UARTEN:** UART Enable bit
1 = UART is ready to transmit and receive
0 = UART state machine, FIFO Buffer Pointers and counters are reset; registers are readable and writable

bit 14 **Unimplemented:** Read as '0'

bit 13 **USIDL:** UART Stop in Idle Mode bit
1 = Discontinues module operation when device enters Idle mode
0 = Continues module operation in Idle mode

bit 12 **WAKE:** Wake-up Enable bit
1 = Module will continue to sample the RX pin – interrupt generated on falling edge, bit cleared in hardware on following rising edge; if ABAUD is set, Auto-Baud Detection (ABD) will begin immediately
0 = RX pin is not monitored nor rising edge detected

bit 11 **RXBIMD:** Receive Break Interrupt Mode bit
1 = RXBKIF flag when a minimum of 23 (DMX)/11 (asynchronous or LIN/J2602) low bit periods are detected
0 = RXBKIF flag when the Break makes a low-to-high transition after being low for at least 23/11 bit periods

bit 10 **Unimplemented:** Read as '0'

bit 9 **BRKOVR:** Send Break Software Override bit
Overrides the TX Data Line:
1 = Makes the TX line active (Output 0 when UTXINV = 0, Output 1 when UTXINV = 1)
0 = TX line is driven by the shifter

bit 8 **UTXBRK:** UART Transmit Break bit[(1)]
1 = Sends Sync Break on next transmission; cleared by hardware upon completion
0 = Sync Break transmission is disabled or has completed

bit 7 **BRGH:** High Baud Rate Select bit
1 = High Speed: Baud rate is baudclk/4
0 = Low Speed: Baud rate is baudclk/16

bit 6 **ABAUD:** Auto-Baud Detect Enable bit (read-only when MOD[3:0] = 1xxx)
1 = Enables baud rate measurement on the next character – requires reception of a Sync field (55h); cleared in hardware upon completion
0 = Baud rate measurement is disabled or has completed

**Note 1:** R/HS/HC in DMX and LIN mode.


© 2017-2021 Microchip Technology Inc.

**REGISTER 16-1: UxMODE: UARTx CONFIGURATION REGISTER (CONTINUED)**

bit 5 **UTXEN:** UART Transmit Enable bit

1 = Transmit enabled – except during Auto-Baud Detection
0 = Transmit disabled – all transmit counters, pointers and state machines are reset; TX buffer is not flushed, status bits are not reset

bit 4 **URXEN:** UART Receive Enable bit

1 = Receive enabled – except during Auto-Baud Detection
0 = Receive disabled – all receive counters, pointers and state machines are reset; RX buffer is not flushed, status bits are not reset

bit 3-0 **MOD[3:0]:** UART Mode bits

Other = Reserved
1111 = Smart card
1110 = IrDA®
1101 = Reserved
1100 = LIN Commander/Responder
1011 = LIN Responder only
1010 = DMX
1001 = Reserved
1000 = Reserved
0111 = Reserved
0110 = Reserved
0101 = Reserved
0100 = Asynchronous 9-bit UART with address detect, ninth bit = 1 signals address
0011 = Asynchronous 8-bit UART without address detect, ninth bit is used as an even parity bit
0010 = Asynchronous 8-bit UART without address detect, ninth bit is used as an odd parity bit
0001 = Asynchronous 7-bit UART
0000 = Asynchronous 8-bit UART

**Note 1:** R/HS/HC in DMX and LIN mode.

**REGISTER 16-2: UxMODEH: UARTx CONFIGURATION REGISTER HIGH**

| R/W-0 | R-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SLPEN | ACTIVE | — | — | BCLKMOD | BCLKSEL1 | BCLKSEL0 | HALFDPLX |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| RUNOVF | URXINV | STSEL1 | STSEL0 | C0EN | UTXINV | FLO1 | FLO0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **SLPEN:** Run During Sleep Enable bit
1 = UART BRG clock runs during Sleep
0 = UART BRG clock is turned off during Sleep

bit 14 **ACTIVE:** UART Running Status bit
1 = UART clock request is active (user can not update the UxMODE/UxMODEH registers)
0 = UART clock request is not active (user can update the UxMODE/UxMODEH registers)

bit 13-12 **Unimplemented:** Read as '0'

bit 11 **BCLKMOD:** Baud Clock Generation Mode Select bit
1 = Uses fractional Baud Rate Generation
0 = Uses legacy divide-by-x counter for baud clock generation (x = 4 or 16 depending on the BRGH bit)

bit 10-9 **BCLKSEL[1:0]:** Baud Clock Source Selection bits
11 = AFVCO/3
10 = FOSC
01 = Reserved
00 = FOSC/2 (FP)

bit 8 **HALFDPLX:** UART Half-Duplex Selection Mode bit
1 = Half-Duplex mode: UxTX is driven as an output when transmitting and tri-stated when TX is Idle
0 = Full-Duplex mode: UxTX is driven as an output at all times when both UARTEN and UTXEN are set

bit 7 **RUNOVF:** Run During Overflow Condition Mode bit
1 = When an Overflow Error (OERR) condition is detected, the RX shifter continues to run so as to remain synchronized with incoming RX data; data are not transferred to UxRXREG when it is full (i.e., no UxRXREG data are overwritten)
0 = When an Overflow Error (OERR) condition is detected, the RX shifter stops accepting new data (Legacy mode)

bit 6 **URXINV:** UART Receive Polarity bit
1 = Inverts RX polarity; Idle state is low
0 = Input is not inverted; Idle state is high

bit 5-4 **STSEL[1:0]:** Number of Stop Bits Selection bits
11 = 2 Stop bits sent, 1 checked at receive
10 = 2 Stop bits sent, 2 checked at receive
01 = 1.5 Stop bits sent, 1.5 checked at receive
00 = 1 Stop bit sent, 1 checked at receive

bit 3 **C0EN:** Enable Legacy Checksum (C0) Transmit and Receive bit
1 = Checksum Mode 1 (enhanced LIN checksum in LIN mode; add all TX/RX words in all other modes)
0 = Checksum Mode 0 (legacy LIN checksum in LIN mode; not used in all other modes)


© 2017-2021 Microchip Technology Inc.

**REGISTER 16-2: UxMODEH: UARTx CONFIGURATION REGISTER HIGH (CONTINUED)**

bit 2 **UTXINV:** UART Transmit Polarity bit
1 = Inverts TX polarity; TX is low in Idle state
0 = Output data are not inverted; TX output is high in Idle state

bit 1-0 **FLO[1:0]:** Flow Control Enable bits (only valid when MOD[3:0] = 0xxx)
11 = Reserved
10 = $\overline{\text{RTS}}$-$\overline{\text{DSR}}$ (for TX side)/$\overline{\text{CTS}}$-DTR (for RX side) hardware flow control
01 = XON/XOFF software flow control
00 = Flow control off

**REGISTER 16-3: UxSTA: UARTx STATUS REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TXMTIE | PERIE | ABDOVE | CERIE | FERIE | RXBKIE | OERIE | TXCIE |
| bit 15 | | | | | | | bit 8 |

| R-1 | R-0 | HS/R/W-0 | HS/R/W-0 | R-0 | HS/R/W-0 | HS/R/W-0 | HS/R/W-0 |
|---|---|---|---|---|---|---|---|
| TRMT | PERR | ABDOVF | CERIF | FERR | RXBKIF | OERR | TXCIF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HS = Hardware Settable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **TXMTIE:** Transmit Shifter Empty Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 14 **PERIE:** Parity Error Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 13 **ABDOVE:** Auto-Baud Rate Acquisition Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 12 **CERIE:** Checksum Error Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 11 **FERIE:** Framing Error Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 10 **RXBKIE:** Receive Break Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 9 **OERIE:** Receive Buffer Overflow Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 8 **TXCIE:** Transmit Collision Interrupt Enable bit
1 = Interrupt is enabled
0 = Interrupt is disabled

bit 7 **TRMT:** Transmit Shifter Empty Interrupt Flag bit (read-only)
1 = Transmit Shift Register (TSR) is empty (end of last Stop bit when STPMD = 1 or middle of first Stop bit when STPMD = 0)
0 = Transmit Shift Register is not empty

bit 6 **PERR:** Parity Error/Address Received/Forward Frame Interrupt Flag bit
LIN and Parity Modes:
1 = Parity error detected
0 = No parity error detected
Address Mode:
1 = Address received
0 = No address detected
All Other Modes:
Not used.


© 2017-2021 Microchip Technology Inc.

**REGISTER 16-3: UxSTA: UARTx STATUS REGISTER (CONTINUED)**

bit 5 **ABDOVF:** Auto-Baud Rate Acquisition Interrupt Flag bit (must be cleared by software)
1 = BRG rolled over during the auto-baud rate acquisition sequence (must be cleared in software)
0 = BRG has not rolled over during the auto-baud rate acquisition sequence

bit 4 **CERIF:** Checksum Error Interrupt Flag bit (must be cleared by software)
1 = Checksum error
0 = No checksum error

bit 3 **FERR:** Framing Error Interrupt Flag bit
1 = Framing Error: Inverted level of the Stop bit corresponding to the topmost character in the buffer; propagates through the buffer with the received character
0 = No framing error

bit 2 **RXBKIF:** Receive Break Interrupt Flag bit (must be cleared by software)
1 = A Break was received
0 = No Break was detected

bit 1 **OERR:** Receive Buffer Overflow Interrupt Flag bit (must be cleared by software)
1 = Receive buffer has overflowed
0 = Receive buffer has not overflowed

bit 0 **TXCIF:** Transmit Collision Interrupt Flag bit (must be cleared by software)
1 = Transmitted word is not equal to the received word
0 = Transmitted word is equal to the received word

**REGISTER 16-4: UxSTAH: UARTx STATUS REGISTER HIGH**

| U-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | UTXISEL2 | UTXISEL1 | UTXISEL0 | — | URXISEL2(1) | URXISEL1(1) | URXISEL0(1) |
| bit 15 | | | | | | | bit 8 |

| HS/R/W-0 | R/W-0 | R/S-1 | R-0 | R-1 | R-1 | R/S-1 | R-0 |
|---|---|---|---|---|---|---|---|
| TXWRE | STPMD | UTXBE | UTXBF | RIDLE | XON | URXBE | URXBF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HS = Hardware Settable bit | S = Settable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **UTXISEL[2:0]:** UART Transmit Interrupt Select bits
111 = Sets transmit interrupt when there is one empty slot left in the buffer
...
010 = Sets transmit interrupt when there are six empty slots or more in the buffer
001 = Sets transmit interrupt when there are seven empty slots or more in the buffer
000 = Sets transmit interrupt when there are eight empty slots in the buffer; TX buffer is empty

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **URXISEL[2:0]:** UART Receive Interrupt Select bits(1)
111 = Triggers receive interrupt when there are eight words in the buffer; RX buffer is full
...
001 = Triggers receive interrupt when there are two words or more in the buffer
000 = Triggers receive interrupt when there is one word or more in the buffer

bit 7 **TXWRE:** TX Write Transmit Error Status bit
LIN and Parity Modes:
1 = A new byte was written when the buffer was full or when P2[8:0] = 0 (must be cleared by software)
0 = No error
Address Detect Mode:
1 = A new byte was written when the buffer was full or to P1[8:0] when P1x was full (must be cleared by software)
0 = No error
Other Modes:
1 = A new byte was written when the buffer was full (must be cleared by software)
0 = No error

bit 6 **STPMD:** Stop Bit Detection Mode bit
1 = Triggers RXIF at the end of the last Stop bit
0 = Triggers RXIF in the middle of the first (or second, depending on the STSEL[1:0] setting) Stop bit

bit 5 **UTXBE:** UART TX Buffer Empty Status bit
1 = Transmit buffer is empty; writing '1' when UTXEN = 0 will reset the TX FIFO Pointers and counters
0 = Transmit buffer is not empty

bit 4 **UTXBF:** UART TX Buffer Full Status bit
1 = Transmit buffer is full
0 = Transmit buffer is not full

bit 3 **RIDLE:** Receive Idle bit
1 = UART RX line is in the Idle state
0 = UART RX line is receiving something

**Note 1:** The receive watermark interrupt is not set if PERR or FERR is set and the corresponding IE bit is set.


© 2017-2021 Microchip Technology Inc.

**REGISTER 16-4: UxSTAH: UARTx STATUS REGISTER HIGH (CONTINUED)**

bit 2 **XON:** UART in XON Mode bit
Only valid when FLO[1:0] control bits are set to XON/XOFF mode.
1 = UART has received XON
0 = UART has not received XON or XOFF was received

bit 1 **URXBE:** UART RX Buffer Empty Status bit
1 = Receive buffer is empty; writing '1' when URXEN = 0 will reset the RX FIFO Pointers and counters
0 = Receive buffer is not empty

bit 0 **URXBF:** UART RX Buffer Full Status bit
1 = Receive buffer is full
0 = Receive buffer is not full

**Note 1:** The receive watermark interrupt is not set if PERR or FERR is set and the corresponding IE bit is set.

**REGISTER 16-5: UxBRG: UARTx BAUD RATE REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| BRG[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| BRG[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **BRG[15:0]:** Baud Rate Divisor bits

**REGISTER 16-6: UxBRGH: UARTx BAUD RATE REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | BRG[19:16] | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-4 **Unimplemented:** Read as '0'

bit 3-0 **BRG[19:16]:** Baud Rate Divisor bits


© 2017-2021 Microchip Technology Inc.

**REGISTER 16-7: UxRXREG: UARTx RECEIVE BUFFER REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R-x | R-x | R-x | R-x | R-x | R-x | R-x | R-x |
|---|---|---|---|---|---|---|---|
| RXREG[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as ‘0’

bit 7-0 **RXREG[7:0]:** Received Character Data bits 7-0

**REGISTER 16-8: UxTXREG: UARTx TRANSMIT BUFFER REGISTER**

| W-x | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| LAST | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| W-x | W-x | W-x | W-x | W-x | W-x | W-x | W-x |
|---|---|---|---|---|---|---|---|
| TXREG[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15 **LAST:** Last Byte Indicator for Smart Card Support bit

bit 14-8 **Unimplemented:** Read as ‘0’

bit 7-0 **TXREG[7:0]:** Transmitted Character Data bits 7-0
If the buffer is full, further writes to the buffer are ignored.

**REGISTER 16-9: UxP1: UARTx TIMING PARAMETER 1 REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | P1[8] |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| P1[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-9 **Unimplemented:** Read as '0'

bit 8-0 **P1[8:0]:** Parameter 1 bits

DMX TX:
Number of Bytes to Transmit – 1 (not including Start code).

LIN Commander TX:
PID to transmit (bits[5:0]).

Asynchronous TX with Address Detect:
Address to transmit. A '1' is automatically inserted into bit 9 (bits[7:0]).

Smart Card Mode:
Guard Time Counter bits. This counter is operated on the bit clock whose period is always equal to one ETU (bits[8:0]).

Other Modes:
Not used.


© 2017-2021 Microchip Technology Inc.

**REGISTER 16-10: UxP2: UARTx TIMING PARAMETER 2 REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | P2[8] |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| P2[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-9 **Unimplemented:** Read as '0'

bit 8-0 **P2[8:0]:** Parameter 2 bits

DMX RX:
The first byte number to receive – 1, not including Start code (bits[8:0]).

LIN Responder TX:
Number of bytes to transmit (bits[7:0]).

Asynchronous RX with Address Detect:
Address to start matching (bits[7:0]).

Smart Card Mode:
Block Time Counter bits. This counter is operated on the bit clock whose period is always equal to one ETU (bits[8:0]).

Other Modes:
Not used.

**REGISTER 16-11: UxP3: UARTx TIMING PARAMETER 3 REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| P3[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| P3[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **P3[15:0]:** Parameter 3 bits

DMX RX:
The last byte number to receive – 1, not including Start code (bits[8:0]).

LIN Responder RX:
Number of bytes to receive (bits[7:0]).

Asynchronous RX:
Used to mask the UxP2 address bits; 1 = P2 address bit is used, 0 = P2 address bit is masked off (bits[7:0]).

Smart Card Mode:
Waiting Time Counter bits (bits[15:0]).

Other Modes:
Not used.

**REGISTER 16-12: UxP3H: UARTx TIMING PARAMETER 3 REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| P3[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **P3[23:16]:** Parameter 3 High bits

Smart Card Mode:
Waiting Time Counter bits (bits[23:16]).

Other Modes:
Not used.


© 2017-2021 Microchip Technology Inc.

**REGISTER 16-13: UxTXCHK: UARTx TRANSMIT CHECKSUM REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TXCHK[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as ‘0’

bit 7-0 **TXCHK[7:0]:** Transmit Checksum bits (calculated from TX words)

LIN Modes:
C0EN = 1: Sum of all transmitted data + addition carries, including PID.
C0EN = 0: Sum of all transmitted data + addition carries, excluding PID.

LIN Responder:
Cleared when Break is detected.

LIN Commander/Responder:
Cleared when Break is detected.

Other Modes:
C0EN = 1: Sum of every byte transmitted + addition carries.
C0EN = 0: Value remains unchanged.

**REGISTER 16-14: UxRXCHK: UARTx RECEIVE CHECKSUM REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| RXCHK[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **RXCHK[7:0]:** Receive Checksum bits (calculated from RX words)

LIN Modes:
C0EN = 1: Sum of all received data + addition carries, including PID.
C0EN = 0: Sum of all received data + addition carries, excluding PID.

LIN Responder:
Cleared when Break is detected.

LIN Commander/Responder:
Cleared when Break is detected.

Other Modes:
C0EN = 1: Sum of every byte received + addition carries.
C0EN = 0: Value remains unchanged.


© 2017-2021 Microchip Technology Inc.

**REGISTER 16-15: UxSCCON: UARTx SMART CARD CONFIGURATION REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | TXRPT1 | TXRPT0 | CONV | T0PD | PRTCL | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-6 **Unimplemented:** Read as '0'

bit 5-4 **TXRPT[1:0]:** Transmit Repeat Selection bits
11 = Retransmits the error byte four times
10 = Retransmits the error byte three times
01 = Retransmits the error byte twice
00 = Retransmits the error byte once

bit 3 **CONV:** Logic Convention Selection bit
1 = Inverse logic convention
0 = Direct logic convention

bit 2 **T0PD:** Pull-Down Duration for T = 0 Error Handling bit
1 = Two ETU
0 = One ETU

bit 1 **PRTCL:** Smart Card Protocol Selection bit
1 = T = 1
0 = T = 0

bit 0 **Unimplemented:** Read as '0'

**REGISTER 16-16: UxSCINT: UARTx SMART CARD INTERRUPT REGISTER**

| U-0 | U-0 | HS/R/W-0 | HS/R/W-0 | U-0 | HS/R/W-0 | HS/R/W-0 | HS/R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RXRPTIF | TXRPTIF | — | BTCIF | WTCIF | GTCIF |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | RXRPTIE | TXRPTIE | — | BTCIE | WTCIE | GTCIE |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HS = Hardware Settable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13 **RXRPTIF:** Receive Repeat Interrupt Flag bit
1 = Parity error has persisted after the same character has been received five times (four retransmits)
0 = Flag is cleared

bit 12 **TXRPTIF:** Transmit Repeat Interrupt Flag bit
1 = Line error has been detected after the last retransmit per TXRPT[1:0]
0 = Flag is cleared

bit 11 **Unimplemented:** Read as '0'

bit 10 **BTCIF:** Block Time Counter Interrupt Flag bit
1 = Block Time Counter has reached 0
0 = Block Time Counter has not reached 0

bit 9 **WTCIF:** Waiting Time Counter Interrupt Flag bit
1 = Waiting Time Counter has reached 0
0 = Waiting Time Counter has not reached 0

bit 8 **GTCIF:** Guard Time Counter Interrupt Flag bit
1 = Guard Time Counter has reached 0
0 = Guard Time Counter has not reached 0

bit 7-6 **Unimplemented:** Read as '0'

bit 5 **RXRPTIE:** Receive Repeat Interrupt Enable bit
1 = An interrupt is invoked when a parity error has persisted after the same character has been received five times (four retransmits)
0 = Interrupt is disabled

bit 4 **TXRPTIE:** Transmit Repeat Interrupt Enable bit
1 = An interrupt is invoked when a line error is detected after the last retransmit per TXRPT[1:0] has been completed
0 = Interrupt is disabled

bit 3 **Unimplemented:** Read as '0'

bit 2 **BTCIE:** Block Time Counter Interrupt Enable bit
1 = Block Time Counter interrupt is enabled
0 = Block Time Counter interrupt is disabled

bit 1 **WTCIE:** Waiting Time Counter Interrupt Enable bit
1 = Waiting Time Counter interrupt is enabled
0 = Waiting Time Counter Interrupt is disabled

bit 0 **GTCIE:** Guard Time Counter interrupt enable bit
1 = Guard Time Counter interrupt is enabled
0 = Guard Time Counter interrupt is disabled


© 2017-2021 Microchip Technology Inc.

**REGISTER 16-17: UxINT: UARTx INTERRUPT REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| HS/R/W-0 | HS/R/W-0 | U-0 | U-0 | U-0 | R/W-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| WUIF | ABDIF | — | — | — | ABDIE | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HS = Hardware Settable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7 **WUIF:** Wake-up Interrupt Flag bit
- 1 = Sets when WAKE = 1 and RX makes a '1'-to-'0' transition; triggers event interrupt (must be cleared by software)
- 0 = WAKE is not enabled or WAKE is enabled, but no wake-up event has occurred

bit 6 **ABDIF:** Auto-Baud Completed Interrupt Flag bit
- 1 = Sets when ABD sequence makes the final '1'-to-'0' transition; triggers event interrupt (must be cleared by software)
- 0 = ABAUD is not enabled or ABAUD is enabled but auto-baud has not completed

bit 5-3 **Unimplemented:** Read as '0'

bit 2 **ABDIE:** Auto-Baud Completed Interrupt Enable Flag bit
- 1 = Allows ABDIF to set an event interrupt
- 0 = ABDIF does not set an event interrupt

bit 1-0 **Unimplemented:** Read as '0'

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 17.0 SERIAL PERIPHERAL INTERFACE (SPI)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Serial Peripheral Interface (SPI) with Audio Codec Support"** (www.microchip.com/DS70005136) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The Serial Peripheral Interface (SPI) module is a synchronous serial interface, useful for communicating with other peripheral or microcontroller devices. These peripheral devices may be serial EEPROMs, shift registers, display drivers, A/D Converters, etc. The SPI module is compatible with the Motorola® SPI and SIOP interfaces. All devices in the dsPIC33CK256MP508 family include three SPI modules. On 48, 64 and 80-pin devices, SPI instance SPI2 can operate at higher speeds when selected as a non-PPS pin. The selection is done using the SPI2PIN bit (FDEVOPT[13]). If the bit for SPI2PIN is '1', the PPS pin will be used. When SPI2PIN is '0', the SPI signals are routed to dedicated pins.

The module supports operation in two Buffer modes. In Standard mode, data are shifted through a single serial buffer. In Enhanced Buffer mode, data are shifted through a FIFO buffer. The FIFO level depends on the configured mode.

**Note:** FIFO depth for this device is four (in 8-Bit Data mode).

Variable length data can be transmitted and received, from 2 to 32 bits.

**Note:** Do not perform Read-Modify-Write operations (such as bit-oriented instructions) on the SPIxBUF register in either Standard or Enhanced Buffer mode.

The module also supports a basic framed SPI protocol while operating in either Host or Client mode. A total of four framed SPI configurations are supported.

The module also supports Audio modes. Four different Audio modes are available.

- $I^2S$ mode
- Left Justified mode
- Right Justified mode
- PCM/DSP mode

In each of these modes, the serial clock is free-running and audio data are always transferred.

If an audio protocol data transfer takes place between two devices, then usually one device is the Host and the other is the Client. However, audio data can be transferred between two Clients. Because the audio protocols require free-running clocks, the Host can be a third-party controller. In either case, the Host generates two free-running clocks: SCKx and LRC (Left, Right Channel Clock/$\overline{SSx}$/FSYNC).

The SPI serial interface consists of four pins:

- SDIx: Serial Data Input
- SDOx: Serial Data Output
- SCKx: Shift Clock Input or Output
- $\overline{SSx}$: Active-Low Client Select or Frame Synchronization I/O Pulse

The SPI module can be configured to operate using two, three or four pins. In the 3-pin mode, $\overline{SSx}$ is not used. In the 2-pin mode, both SDOx and $\overline{SSx}$ are not used.

The SPI module has the ability to generate three interrupts reflecting the events that occur during the data communication. The following types of interrupts can be generated:

1. Receive interrupts are signalled by SPIxRXIF. This event occurs when:
   - RX watermark interrupt
   - SPIROV = 1
   - SPIRBF = 1
   - SPIRBE = 1

   provided the respective mask bits are enabled in SPIxIMSKL/H.
2. Transmit interrupts are signalled by SPIxTXIF. This event occurs when:
   - TX watermark interrupt
   - SPITUR = 1
   - SPITBF = 1
   - SPITBE = 1

   provided the respective mask bits are enabled in SPIxIMSKL/H.
3. General interrupts are signalled by SPIxGIF. This event occurs when:
   - FRMERR = 1
   - SPIBUSY = 1
   - SRMT = 1

   provided the respective mask bits are enabled in SPIxIMSKL/H.

Block diagrams of the module in Standard and Enhanced modes are shown in Figure 17-1 and Figure 17-2.

| **Note:** | In this section, the SPI modules are referred to together as SPIx, or separately as SPI1, SPI2 or SPI3. Special Function Registers will follow a similar notation. For example, SPIxCON1 and SPIxCON2 refer to the control registers for any of the three SPI modules. |
|---|---|

To set up the SPIx module for the Standard Host mode of operation:

1. If using interrupts:
   a) Clear the interrupt flag bits in the respective IFSx register.
   b) Set the interrupt enable bits in the respective IECx register.
   c) Write the SPIxIP bits in the respective IPCx register to set the interrupt priority.
2. Write the desired settings to the SPIxCON1L and SPIxCON1H registers with the MSTEN bit (SPIxCON1L[5]) = 1.
3. Clear the SPIROV bit (SPIxSTATL[6]).
4. Enable SPIx operation by setting the SPIEN bit (SPIxCON1L[15]).
5. Write the data to be transmitted to the SPIxBUFL and SPIxBUFH registers. Transmission (and reception) will start as soon as data are written to the SPIxBUFL and SPIxBUFH registers.

To set up the SPIx module for the Standard Client mode of operation:

1. Clear the SPIxBUF registers.
2. If using interrupts:
   a) Clear the SPIxBUFL and SPIxBUFH registers.
   b) Set the interrupt enable bits in the respective IECx register.
   c) Write the SPIxIP bits in the respective IPCx register to set the interrupt priority.
3. Write the desired settings to the SPIxCON1L, SPIxCON1H and SPIxCON2L registers with the MSTEN bit (SPIxCON1L[5]) = 0.
4. Clear the SMP bit.
5. If the CKE bit (SPIxCON1L[8]) is set, then the SSEN bit (SPIxCON1L[7]) must be set to enable the $\overline{SSx}$ pin.
6. Clear the SPIROV bit (SPIxSTATL[6]).
7. Enable SPIx operation by setting the SPIEN bit (SPIxCON1L[15]).


© 2017-2021 Microchip Technology Inc.

**FIGURE 17-1: SPIx MODULE BLOCK DIAGRAM (STANDARD MODE)**

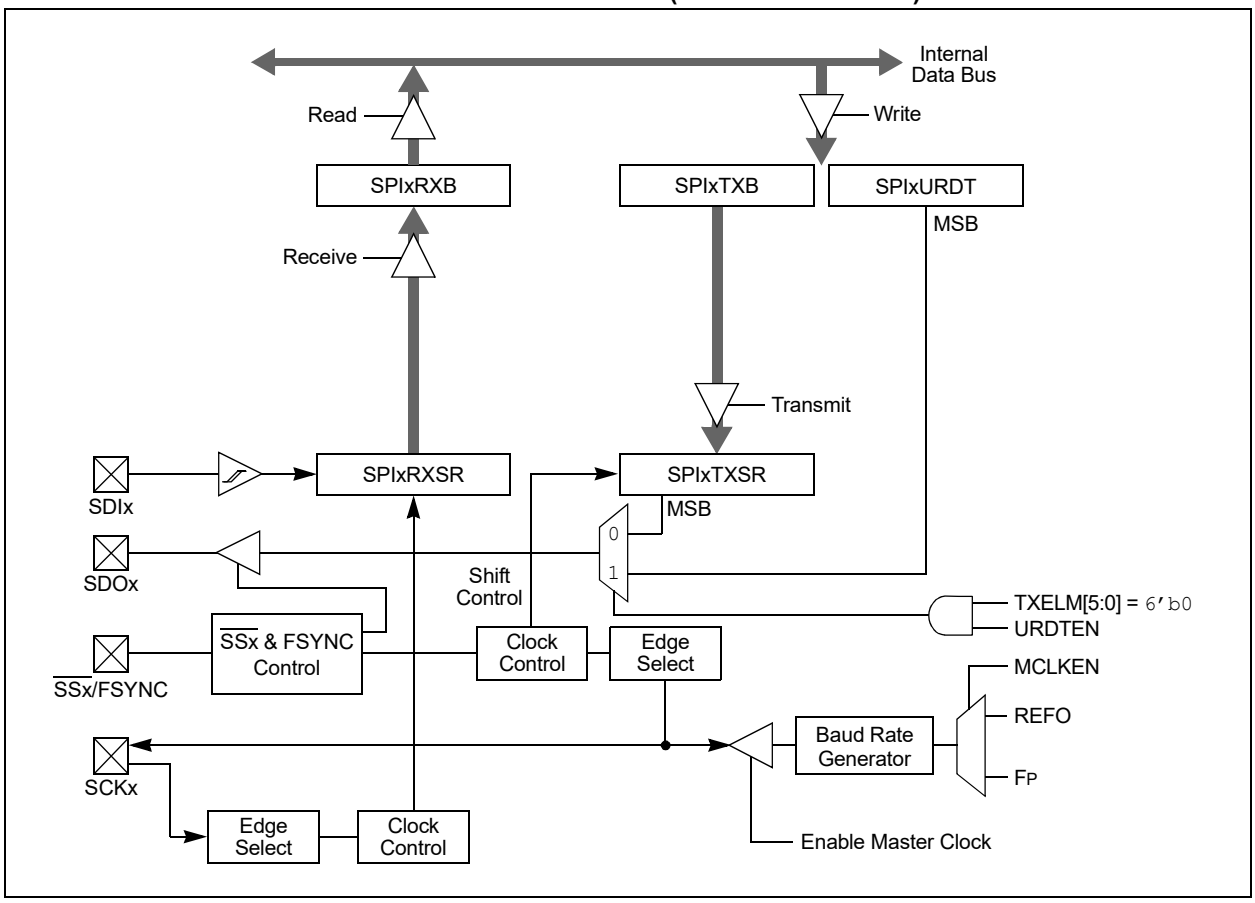

To set up the SPIx module for the Enhanced Buffer Host mode of operation:

1. If using interrupts:
   a) Clear the interrupt flag bits in the respective IFSx register.
   b) Set the interrupt enable bits in the respective IECx register.
   c) Write the SPIxIP bits in the respective IPCx register.
2. Write the desired settings to the SPIxCON1L, SPIxCON1H and SPIxCON2L registers with MSTEN (SPIxCON1L[5]) = `1`.
3. Clear the SPIROV bit (SPIxSTATL[6]).
4. Select Enhanced Buffer mode by setting the ENHBUF bit (SPIxCON1L[0]).
5. Enable SPIx operation by setting the SPIEN bit (SPIxCON1L[15]).
6. Write the data to be transmitted to the SPIxBUFL and SPIxBUFH registers. Transmission (and reception) will start as soon as data are written to the SPIxBUFL and SPIxBUFH registers.

To set up the SPIx module for the Enhanced Buffer Client mode of operation:

1. Clear the SPIxBUFL and SPIxBUFH registers.
2. If using interrupts:
   a) Clear the interrupt flag bits in the respective IFSx register.
   b) Set the interrupt enable bits in the respective IECx register.
   c) Write the SPIxIP bits in the respective IPCx register to set the interrupt priority.
3. Write the desired settings to the SPIxCON1L, SPIxCON1H and SPIxCON2L registers with the MSTEN bit (SPIxCON1L[5]) = `0`.
4. Clear the SMP bit.
5. If the CKE bit is set, then the SSEN bit must be set, thus enabling the $\overline{SSx}$ pin.
6. Clear the SPIROV bit (SPIxSTATL[6]).
7. Select Enhanced Buffer mode by setting the ENHBUF bit (SPIxCON1L[0]).
8. Enable SPIx operation by setting the SPIEN bit (SPIxCON1L[15]).

**FIGURE 17-2: SPIx MODULE BLOCK DIAGRAM (ENHANCED MODE)**

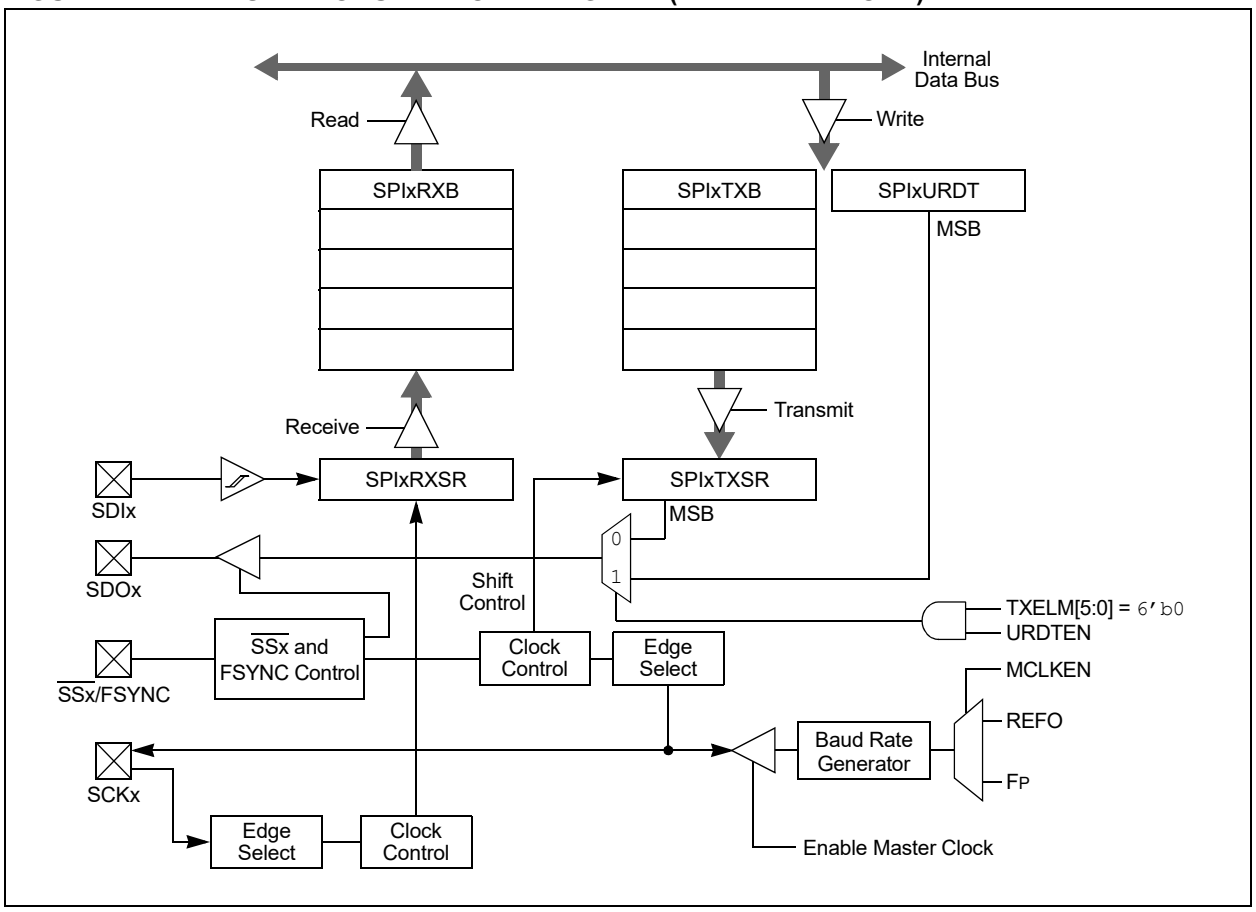



© 2017-2021 Microchip Technology Inc.

To set up the SPIx module for Audio mode:

1. Clear the SPIxBUFL and SPIxBUFH registers.
2. If using interrupts:
   a) Clear the interrupt flag bits in the respective IFSx register.
   b) Set the interrupt enable bits in the respective IECx register.
   a) Write the SPIxIP bits in the respective IPCx register to set the interrupt priority.
3. Write the desired settings to the SPIxCON1L, SPIxCON1H and SPIxCON2L registers with AUDEN (SPIxCON1H[15]) = 1.
4. Clear the SPIROV bit (SPIxSTATL[6]).
5. Enable SPIx operation by setting the SPIEN bit (SPIxCON1L[15]).
6. Write the data to be transmitted to the SPIxBUFL and SPIxBUFH registers. Transmission (and reception) will start as soon as data are written to the SPIxBUFL and SPIxBUFH registers.

## 17.1 SPI Control Registers

**REGISTER 17-1: SPIxCON1L: SPIx CONTROL REGISTER 1 LOW**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SPIEN | — | SPISIDL | DISSDO | MODE32(1,4) | MODE16(1,4) | SMP | CKE(1) |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SSEN(2) | CKP | MSTEN | DISSDI | DISSCK | MCLKEN(3) | SPIFE | ENHBUF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **SPIEN:** SPIx On bit
1 = Enables module
0 = Turns off and resets module, disables clocks, disables interrupt event generation, allows SFR modifications

bit 14 **Unimplemented:** Read as '0'

bit 13 **SPISIDL:** SPIx Stop in Idle Mode bit
1 = Halts in CPU Idle mode
0 = Continues to operate in CPU Idle mode

bit 12 **DISSDO:** Disable SDOx Output Port bit
1 = SDOx pin is not used by the module; pin is controlled by port function
0 = SDOx pin is controlled by the module

bit 11-10 **MODE32** and **MODE16:** Serial Word Length Select bits(1,4)

| MODE32 | MODE16 | AUDEN | Communication |
|---|---|---|---|
| 1 | x | 0 | 32-Bit |
| 0 | 1 | | 16-Bit |
| 0 | 0 | | 8-Bit |
| 1 | 1 | 1 | 24-Bit Data, 32-Bit FIFO, 32-Bit Channel/64-Bit Frame |
| 1 | 0 | | 32-Bit Data, 32-Bit FIFO, 32-Bit Channel/64-Bit Frame |
| 0 | 1 | | 16-Bit Data, 16-Bit FIFO, 32-Bit Channel/64-Bit Frame |
| 0 | 0 | | 16-Bit FIFO, 16-Bit Channel/32-Bit Frame |

bit 9 **SMP:** SPIx Data Input Sample Phase bit
Host Mode:
1 = Input data sampled at the end of data output time
0 = Input data sampled at the middle of data output time
Client Mode:
Input data always sampled at the middle of data output time, regardless of the SMP setting.

bit 8 **CKE:** SPIx Clock Edge Select bit(1)
1 = Transmit happens on transition from active clock state to Idle clock state
0 = Transmit happens on transition from Idle clock state to active clock state

**Note 1:** When AUDEN (SPIxCON1H[15]) = 1, this module functions as if CKE = 0, regardless of its actual value.
**2:** When FRMEN = 1, SSEN is not used.
**3:** MCLKEN can only be written when the SPIEN bit = 0.
**4:** This channel is not meaningful for DSP/PCM mode as LRC follows FRMSYPW.


© 2017-2021 Microchip Technology Inc.

**REGISTER 17-1: SPIxCON1L: SPIx CONTROL REGISTER 1 LOW (CONTINUED)**

bit 7 **SSEN:** Client Select Enable bit (Client mode)(2)
1 = $\overline{SSx}$ pin is used by the macro in Client mode; $\overline{SSx}$ pin is used as the Client select input
0 = $\overline{SSx}$ pin is not used by the macro ($\overline{SSx}$ pin will be controlled by the port I/O)

bit 6 **CKP:** Clock Polarity Select bit
1 = Idle state for clock is a high level; active state is a low level
0 = Idle state for clock is a low level; active state is a high level

bit 5 **MSTEN:** Host Mode Enable bit
1 = Host mode
0 = Client mode

bit 4 **DISSDI:** Disable SDIx Input Port bit
1 = SDIx pin is not used by the module; pin is controlled by port function
0 = SDIx pin is controlled by the module

bit 3 **DISSCK:** Disable SCKx Output Port bit
1 = SCKx pin is not used by the module; pin is controlled by port function
0 = SCKx pin is controlled by the module

bit 2 **MCLKEN:** Master Clock Enable bit(3)
1 = REFO is used by the BRG
0 = FP is used by the BRG

bit 1 **SPIFE:** Frame Sync Pulse Edge Select bit
1 = Frame Sync pulse (Idle-to-active edge) coincides with the first bit clock
0 = Frame Sync pulse (Idle-to-active edge) precedes the first bit clock

bit 0 **ENHBUF:** Enhanced Buffer Enable bit
1 = Enhanced Buffer mode is enabled
0 = Enhanced Buffer mode is disabled

**Note 1:** When AUDEN (SPIxCON1H[15]) = 1, this module functions as if CKE = 0, regardless of its actual value.
**2:** When FRMEN = 1, SSEN is not used.
**3:** MCLKEN can only be written when the SPIEN bit = 0.
**4:** This channel is not meaningful for DSP/PCM mode as LRC follows FRMSYPW.

**REGISTER 17-2: SPIxCON1H: SPIx CONTROL REGISTER 1 HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| AUDEN(1) | SPISGNEXT | IGNROV | IGNTUR | AUDMONO(2) | URDTEN(3) | AUDMOD1(4) | AUDMOD0(4) |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| FRMEN | FRMSYNC | FRMPOL | MSSEN | FRMSYPW | FRMCNT2 | FRMCNT1 | FRMCNT0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **AUDEN:** Audio Codec Support Enable bit(1)
- 1 = Audio protocol is enabled; MSTEN controls the direction of both SCKx and frame (a.k.a. LRC), and this module functions as if FRMEN = 1, FRMSYNC = MSTEN, FRMCNT[2:0] = 001 and SMP = 0, regardless of their actual values
- 0 = Audio protocol is disabled

bit 14 **SPISGNEXT:** SPIx Sign-Extend RX FIFO Read Data Enable bit
- 1 = Data from RX FIFO are sign-extended
- 0 = Data from RX FIFO are not sign-extended

bit 13 **IGNROV:** Ignore Receive Overflow bit
- 1 = A Receive Overflow (ROV) is NOT a critical error; during ROV, data in the FIFO are not overwritten by the receive data
- 0 = A ROV is a critical error that stops SPI operation

bit 12 **IGNTUR:** Ignore Transmit Underrun bit
- 1 = A Transmit Underrun (TUR) is NOT a critical error and data indicated by URDTEN are transmitted until the SPIxTXB is not empty
- 0 = A TUR is a critical error that stops SPI operation

bit 11 **AUDMONO:** Audio Data Format Transmit bit(2)
- 1 = Audio data are mono (i.e., each data word is transmitted on both left and right channels)
- 0 = Audio data are stereo

bit 10 **URDTEN:** Transmit Underrun Data Enable bit(3)
- 1 = Transmits data out of SPIxURDT register during Transmit Underrun conditions
- 0 = Transmits the last received data during Transmit Underrun conditions

bit 9-8 **AUDMOD[1:0]:** Audio Protocol Mode Selection bits(4)
- 11 = PCM/DSP mode
- 10 = Right Justified mode: This module functions as if SPIFE = 1, regardless of its actual value
- 01 = Left Justified mode: This module functions as if SPIFE = 1, regardless of its actual value
- 00 = $I^2S$ mode: This module functions as if SPIFE = 0, regardless of its actual value

bit 7 **FRMEN:** Framed SPIx Support bit
- 1 = Framed SPIx support is enabled ($\overline{SSx}$ pin is used as the FSYNC input/output)
- 0 = Framed SPIx support is disabled

**Note 1:** AUDEN can only be written when the SPIEN bit = 0.
**2:** AUDMONO can only be written when the SPIEN bit = 0 and is only valid for AUDEN = 1.
**3:** URDTEN is only valid when IGNTUR = 1.
**4:** AUDMOD[1:0] can only be written when the SPIEN bit = 0 and is only valid when AUDEN = 1. When NOT in PCM/DSP mode, this module functions as if FRMSYPW = 1, regardless of its actual value.


© 2017-2021 Microchip Technology Inc.

**REGISTER 17-2: SPIxCON1H: SPIx CONTROL REGISTER 1 HIGH (CONTINUED)**

bit 6 **FRMSYNC:** Frame Sync Pulse Direction Control bit
1 = Frame Sync pulse input (Client)
0 = Frame Sync pulse output (Host)

bit 5 **FRMPOL:** Frame Sync/Client Select Polarity bit
1 = Frame Sync pulse/Client select is active-high
0 = Frame Sync pulse/Client select is active-low

bit 4 **MSSEN:** Host Mode Client Select Enable bit
1 = SPIx Client select support is enabled with polarity determined by FRMPOL ($\overline{SSx}$ pin is automatically driven during transmission in Host mode)
0 = Client select SPIx support is disabled ($\overline{SSx}$ pin will be controlled by port I/O)

bit 3 **FRMSYPW:** Frame Sync Pulse-Width bit
1 = Frame Sync pulse is one serial word length wide (as defined by MODE[32,16]/WLENGTH[4:0])
0 = Frame Sync pulse is one clock (SCKx) wide

bit 2-0 **FRMCNT[2:0]:** Frame Sync Pulse Counter bits
Controls the number of serial words transmitted per Sync pulse.
111 = Reserved
110 = Reserved
101 = Generates a Frame Sync pulse on every 32 serial words
100 = Generates a Frame Sync pulse on every 16 serial words
011 = Generates a Frame Sync pulse on every 8 serial words
010 = Generates a Frame Sync pulse on every 4 serial words
001 = Generates a Frame Sync pulse on every 2 serial words (value used by audio protocols)
000 = Generates a Frame Sync pulse on each serial word

**Note 1:** AUDEN can only be written when the SPIEN bit = 0.
**2:** AUDMONO can only be written when the SPIEN bit = 0 and is only valid for AUDEN = 1.
**3:** URDTEN is only valid when IGNTUR = 1.
**4:** AUDMOD[1:0] can only be written when the SPIEN bit = 0 and is only valid when AUDEN = 1. When NOT in PCM/DSP mode, this module functions as if FRMSYPW = 1, regardless of its actual value.

**REGISTER 17-3: SPIxCON2L: SPIx CONTROL REGISTER 2 LOW**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | WLENGTH[4:0](1,2) | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-5 **Unimplemented:** Read as '0'

bit 4-0 **WLENGTH[4:0]:** Variable Word Length bits(1,2)

11111 = 32-bit data
11110 = 31-bit data
11101 = 30-bit data
11100 = 29-bit data
11011 = 28-bit data
11010 = 27-bit data
11001 = 26-bit data
11000 = 25-bit data
10111 = 24-bit data
10110 = 23-bit data
10101 = 22-bit data
10100 = 21-bit data
10011 = 20-bit data
10010 = 19-bit data
10001 = 18-bit data
10000 = 17-bit data
01111 = 16-bit data
01110 = 15-bit data
01101 = 14-bit data
01100 = 13-bit data
01011 = 12-bit data
01010 = 11-bit data
01001 = 10-bit data
01000 = 9-bit data
00111 = 8-bit data
00110 = 7-bit data
00101 = 6-bit data
00100 = 5-bit data
00011 = 4-bit data
00010 = 3-bit data
00001 = 2-bit data
00000 = See MODE[32,16] bits in SPIxCON1L[11:10]

**Note 1:** These bits are effective when AUDEN = 0 only.
**2:** Varying the length by changing these bits does not affect the depth of the TX/RX FIFO.


© 2017-2021 Microchip Technology Inc.

**REGISTER 17-4: SPIxSTATL: SPIx STATUS REGISTER LOW**

| U-0 | U-0 | U-0 | HS/R/C-0 | HSC/R-0 | U-0 | U-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | FRMERR | SPIBUSY | — | — | SPITUR(1) |
| bit 15 | | | | | | | bit 8 |

| HSC/R-0 | HS/R/C-0 | HSC/R-1 | U-0 | HSC/R-1 | U-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| SRMT | SPIROV | SPIRBE | — | SPITBE | — | SPITBF | SPIRBF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | U = Unimplemented, read as '0' | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | HSC = Hardware Settable/Clearable bit | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | HS = Hardware Settable bit |

bit 15-13 **Unimplemented:** Read as '0'

bit 12 **FRMERR**: SPIx Frame Error Status bit
1 = Frame error is detected
0 = No frame error is detected

bit 11 **SPIBUSY:** SPIx Activity Status bit
1 = Module is currently busy with some transactions
0 = No ongoing transactions (at time of read)

bit 10-9 **Unimplemented:** Read as '0'

bit 8 **SPITUR:** SPIx Transmit Underrun Status bit(1)
1 = Transmit buffer has encountered a Transmit Underrun condition
0 = Transmit buffer does not have a Transmit Underrun condition

bit 7 **SRMT:** Shift Register Empty Status bit
1 = No current or pending transactions (i.e., neither SPIxTXB or SPIxTXSR contains data to transmit)
0 = Current or pending transactions

bit 6 **SPIROV:** SPIx Receive Overflow Status bit
1 = A new byte/half-word/word has been completely received when the SPIxRXB was full
0 = No overflow

bit 5 **SPIRBE:** SPIx RX Buffer Empty Status bit
1 = RX buffer is empty
0 = RX buffer is not empty
Standard Buffer Mode:
Automatically set in hardware when SPIxBUF is read from, reading SPIxRXB. Automatically cleared in hardware when SPIx transfers data from SPIxRXSR to SPIxRXB.
Enhanced Buffer Mode:
Indicates RXELM[5:0] = 000000.

bit 4 **Unimplemented:** Read as '0'

**Note 1:** SPITUR is cleared when SPIEN = 0. When IGNTUR = 1, SPITUR provides dynamic status of the Transmit Underrun condition, but does not stop RX/TX operation and does not need to be cleared by software.

**REGISTER 17-4: SPIxSTATL: SPIx STATUS REGISTER LOW (CONTINUED)**

bit 3 **SPITBE:** SPIx Transmit Buffer Empty Status bit
1 = SPIxTXB is empty
0 = SPIxTXB is not empty
Standard Buffer Mode:
Automatically set in hardware when SPIx transfers data from SPIxTXB to SPIxTXSR. Automatically cleared in hardware when SPIxBUF is written, loading SPIxTXB.
Enhanced Buffer Mode:
Indicates TXELM[5:0] = 000000.

bit 2 **Unimplemented:** Read as '0'

bit 1 **SPITBF:** SPIx Transmit Buffer Full Status bit
1 = SPIxTXB is full
0 = SPIxTXB not full
Standard Buffer Mode:
Automatically set in hardware when SPIxBUF is written, loading SPIxTXB. Automatically cleared in hardware when SPIx transfers data from SPIxTXB to SPIxTXSR.
Enhanced Buffer Mode:
Indicates TXELM[5:0] = 111111.

bit 0 **SPIRBF:** SPIx Receive Buffer Full Status bit
1 = SPIxRXB is full
0 = SPIxRXB is not full
Standard Buffer Mode:
Automatically set in hardware when SPIx transfers data from SPIxRXSR to SPIxRXB. Automatically cleared in hardware when SPIxBUF is read from, reading SPIxRXB.
Enhanced Buffer Mode:
Indicates RXELM[5:0] = 111111.

**Note 1:** SPITUR is cleared when SPIEN = 0. When IGNTUR = 1, SPITUR provides dynamic status of the Transmit Underrun condition, but does not stop RX/TX operation and does not need to be cleared by software.


© 2017-2021 Microchip Technology Inc.

**REGISTER 17-5: SPIxSTATH: SPIx STATUS REGISTER HIGH**

| U-0 | U-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| — | — | RXELM5(3) | RXELM4(2) | RXELM3(1) | RXELM2 | RXELM1 | RXELM0 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| — | — | TXELM5(3) | TXELM4(2) | TXELM3(1) | TXELM2 | TXELM1 | TXELM0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HSC = Hardware Settable/Clearable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13-8 **RXELM[5:0]:** Receive Buffer Element Count bits (valid in Enhanced Buffer mode)(1,2,3)

bit 7-6 **Unimplemented:** Read as '0'

bit 5-0 **TXELM[5:0]:** Transmit Buffer Element Count bits (valid in Enhanced Buffer mode)(1,2,3)

**Note 1:** RXELM3 and TXELM3 bits are only present when FIFODEPTH = 8 or higher.

**2:** RXELM4 and TXELM4 bits are only present when FIFODEPTH = 16 or higher.

**3:** RXELM5 and TXELM5 bits are only present when FIFODEPTH = 32.

**REGISTER 17-6: SPIxIMSKL: SPIx INTERRUPT MASK REGISTER LOW**

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | FRMERREN | BUSYEN | — | — | SPITUREN |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SRMTEN | SPIROVEN | SPIRBEN | — | SPITBEN | — | SPITBFEN | SPIRBFEN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-13 **Unimplemented:** Read as '0'

bit 12 **FRMERREN:** Enable Interrupt Events via FRMERR bit
1 = Frame error generates an interrupt event
0 = Frame error does not generate an interrupt event

bit 11 **BUSYEN:** Enable Interrupt Events via SPIBUSY bit
1 = SPIBUSY generates an interrupt event
0 = SPIBUSY does not generate an interrupt event

bit 10-9 **Unimplemented:** Read as '0'

bit 8 **SPITUREN:** Enable Interrupt Events via SPITUR bit
1 = Transmit Underrun (TUR) generates an interrupt event
0 = Transmit Underrun does not generate an interrupt event

bit 7 **SRMTEN:** Enable Interrupt Events via SRMT bit
1 = Shift Register Empty (SRMT) generates interrupt events
0 = Shift Register Empty does not generate interrupt events

bit 6 **SPIROVEN:** Enable Interrupt Events via SPIROV bit
1 = SPIx Receive Overflow (ROV) generates an interrupt event
0 = SPIx Receive Overflow does not generate an interrupt event

bit 5 **SPIRBEN:** Enable Interrupt Events via SPIRBE bit
1 = SPIx RX buffer empty generates an interrupt event
0 = SPIx RX buffer empty does not generate an interrupt event

bit 4 **Unimplemented:** Read as '0'

bit 3 **SPITBEN:** Enable Interrupt Events via SPITBE bit
1 = SPIx transmit buffer empty generates an interrupt event
0 = SPIx transmit buffer empty does not generate an interrupt event

bit 2 **Unimplemented:** Read as '0'

bit 1 **SPITBFEN:** Enable Interrupt Events via SPITBF bit
1 = SPIx transmit buffer full generates an interrupt event
0 = SPIx transmit buffer full does not generate an interrupt event

bit 0 **SPIRBFEN:** Enable Interrupt Events via SPIRBF bit
1 = SPIx receive buffer full generates an interrupt event
0 = SPIx receive buffer full does not generate an interrupt event


© 2017-2021 Microchip Technology Inc.

**REGISTER 17-7: SPIxIMSKH: SPIx INTERRUPT MASK REGISTER HIGH**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| RXWIEN | — | RXMSK5(1) | RXMSK4(1,4) | RXMSK3(1,3) | RXMSK2(1,2) | RXMSK1(1) | RXMSK0(1) |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TXWIEN | — | TXMSK5(1) | TXMSK4(1,4) | TXMSK3(1,3) | TXMSK2(1,2) | TXMSK1(1) | TXMSK0(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **RXWIEN:** Receive Watermark Interrupt Enable bit
1 = Triggers receive buffer element watermark interrupt when RXMSK[5:0] ≤ RXELM[5:0]
0 = Disables receive buffer element watermark interrupt

bit 14 **Unimplemented:** Read as '0'

bit 13-8 **RXMSK[5:0]:** RX Buffer Mask bits(1,2,3,4)
RX mask bits; used in conjunction with the RXWIEN bit.

bit 7 **TXWIEN:** Transmit Watermark Interrupt Enable bit
1 = Triggers transmit buffer element watermark interrupt when TXMSK[5:0] = TXELM[5:0]
0 = Disables transmit buffer element watermark interrupt

bit 6 **Unimplemented:** Read as '0'

bit 5-0 **TXMSK[5:0]:** TX Buffer Mask bits(1,2,3,4)
TX mask bits; used in conjunction with the TXWIEN bit.

**Note 1:** Mask values higher than FIFODEPTH are not valid. The module will not trigger a match for any value in this case.
**2:** RXMSK2 and TXMSK2 bits are only present when FIFODEPTH = 8 or higher.
**3:** RXMSK3 and TXMSK3 bits are only present when FIFODEPTH = 16 or higher.
**4:** RXMSK4 and TXMSK4 bits are only present when FIFODEPTH = 32.

**FIGURE 17-3: SPIx HOST/CLIENT CONNECTION (STANDARD MODE)**

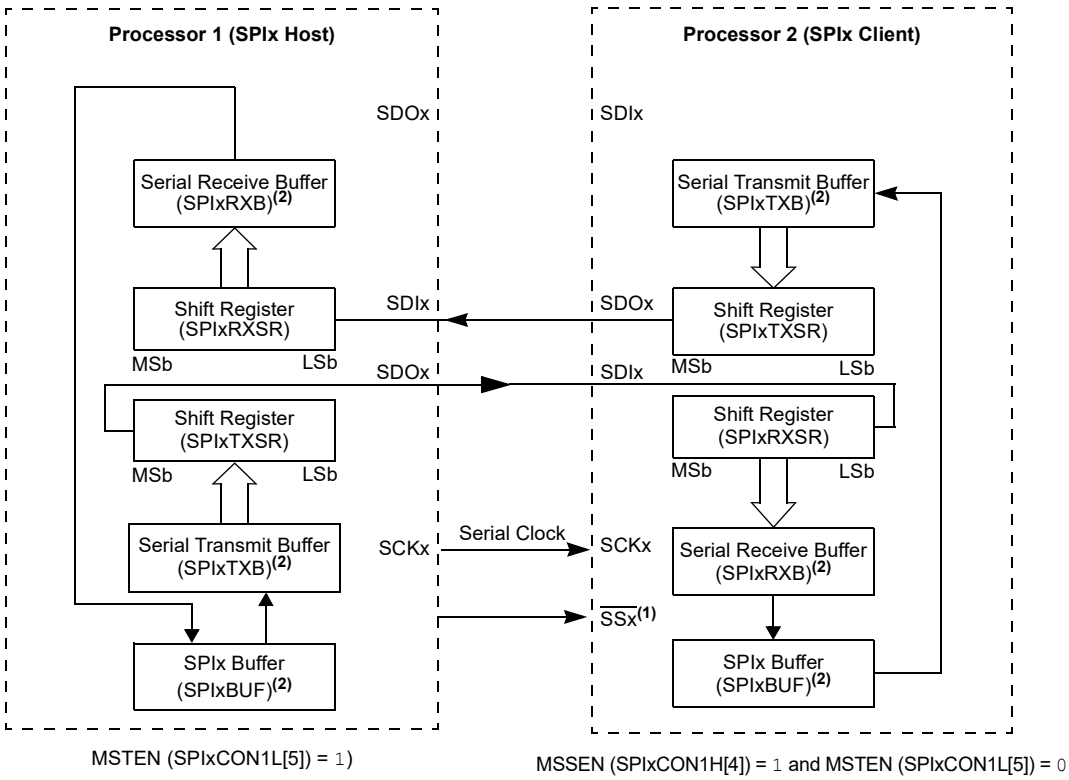


**Note 1:** Using the $\overline{SSx}$ pin in Client mode of operation is optional.

**2:** User must write transmit data to read the received data from SPIxBUF. The SPIxTXB and SPIxRXB registers are memory-mapped to SPIxBUF.


© 2017-2021 Microchip Technology Inc.

**FIGURE 17-4: SPIx HOST/CLIENT CONNECTION (ENHANCED BUFFER MODES)**

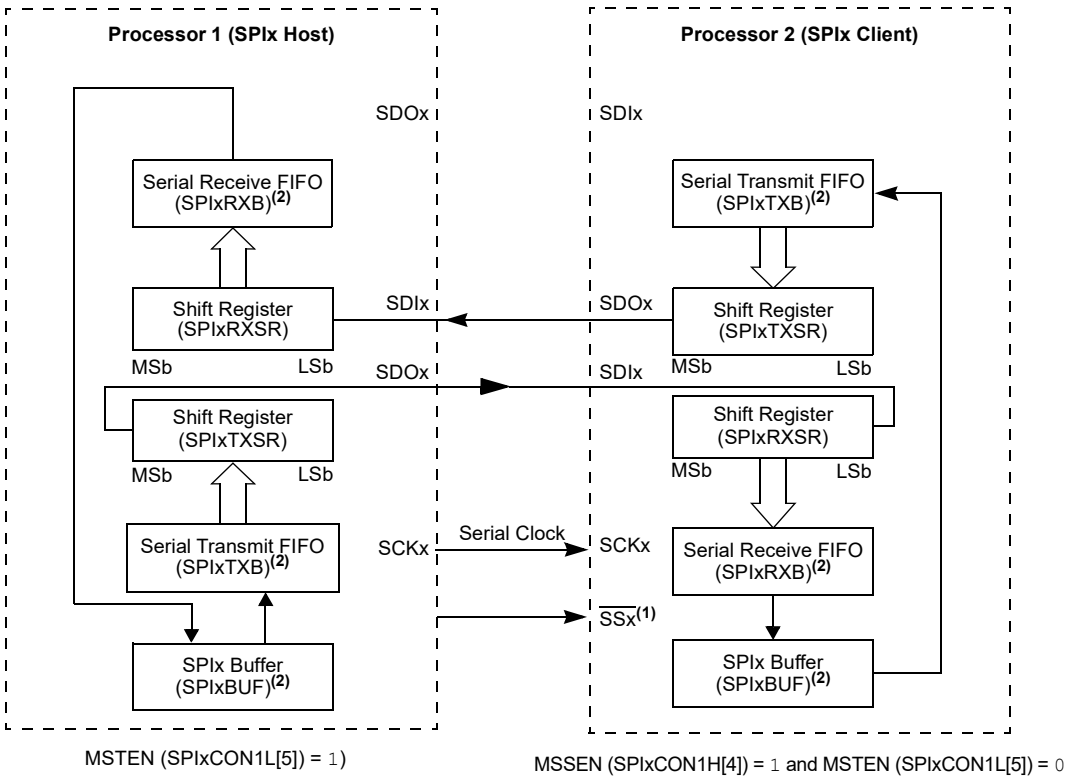


**Note 1:** Using the $\overline{SSx}$ pin in Client mode of operation is optional.

**2:** User must write transmit data to read the received data from SPIxBUF. The SPIxTXB and SPIxRXB registers are memory-mapped to SPIxBUF.

**FIGURE 17-5: SPIx HOST, FRAME HOST CONNECTION DIAGRAM**

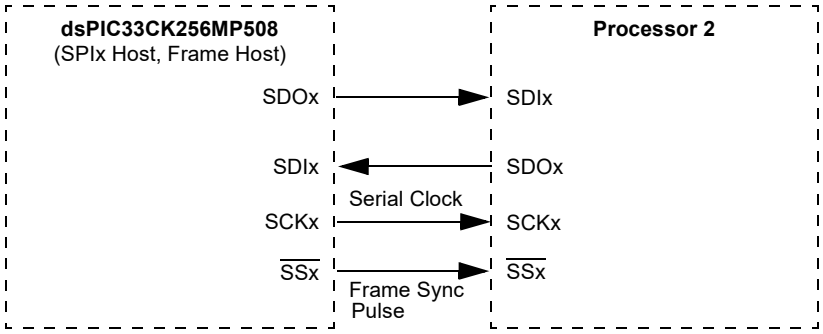

**FIGURE 17-6: SPIx HOST, FRAME CLIENT CONNECTION DIAGRAM**

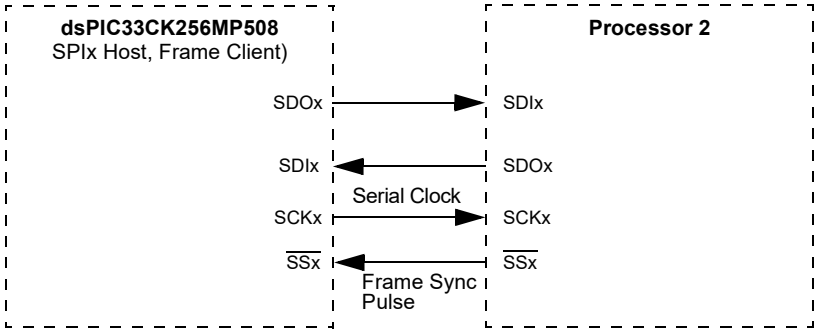


**FIGURE 17-7: SPIx CLIENT, FRAME HOST CONNECTION DIAGRAM**

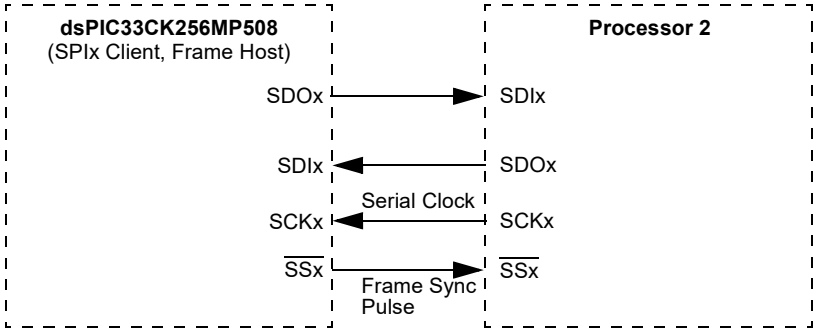


**FIGURE 17-8: SPIx CLIENT, FRAME CLIENT CONNECTION DIAGRAM**

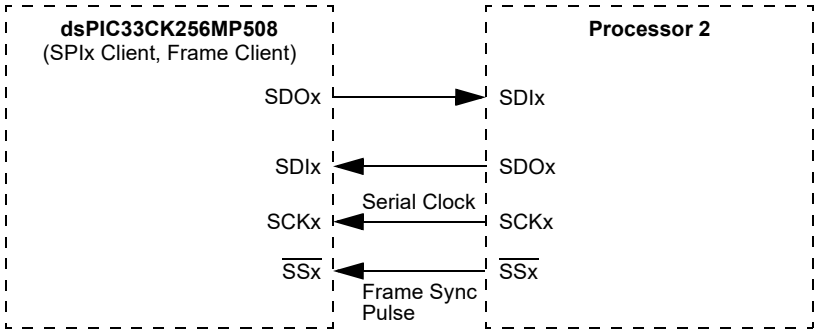


**EQUATION 17-1: RELATIONSHIP BETWEEN DEVICE AND SPIx CLOCK SPEED**

$$Baud\ Rate = \frac{FPB}{(2 * (SPIxBRG + 1))}$$

Where:

FPB is the Peripheral Bus Clock Frequency.


© 2017-2021 Microchip Technology Inc.

## 18.0 INTER-INTEGRATED CIRCUIT ($I^2C$)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. For more information, refer to **"Inter-Integrated Circuit ($I^2C$)"** (www.microchip.com/DS70000195) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The Inter-Integrated Circuit ($I^2C$) module is a serial interface useful for communicating with other peripheral or microcontroller devices. These peripheral devices may be serial EEPROMs, display drivers, A/D Converters, etc.

The $I^2C$ module supports these features:

- Independent Host and Client Logic
- 7-Bit and 10-Bit Device Addresses
- General Call Address as Defined in the $I^2C$ Protocol
- Clock Stretching to Provide Delays for the Processor to Respond to a Client Data Request
- Both 100 kHz and 400 kHz Bus Specifications
- Configurable Address Masking
- Multi-Host modes to Prevent Loss of Messages in Arbitration
- Bus Repeater mode, Allowing the Acceptance of All Messages as a Client, regardless of the Address
- Automatic SCL
- SMBus Compatible Voltage Thresholds

A block diagram of the module is shown in Figure 18-1.

### 18.1 Communicating as a Host in a Single Host Environment

The details of sending a message in Host mode depends on the communication protocol for the device being communicated with. Typically, the sequence of events is as follows:

1. Assert a Start condition on SDAx and SCLx.
2. Send the $I^2C$ device address byte to the Client with a write indication.
3. Wait for and verify an Acknowledge from the Client.
4. Send the first data byte (sometimes known as the command) to the Client.
5. Wait for and verify an Acknowledge from the Client.
6. Send the serial memory address low byte to the Client.
7. Repeat Steps 4 and 5 until all data bytes are sent.
8. Assert a Repeated Start condition on SDAx and SCLx.
9. Send the device address byte to the Client with a read indication.
10. Wait for and verify an Acknowledge from the Client.
11. Enable Host reception to receive serial memory data.
12. Generate an ACK or NACK condition at the end of a received byte of data.
13. Generate a Stop condition on SDAx and SCLx.

**FIGURE 18-1: I2Cx BLOCK DIAGRAM**

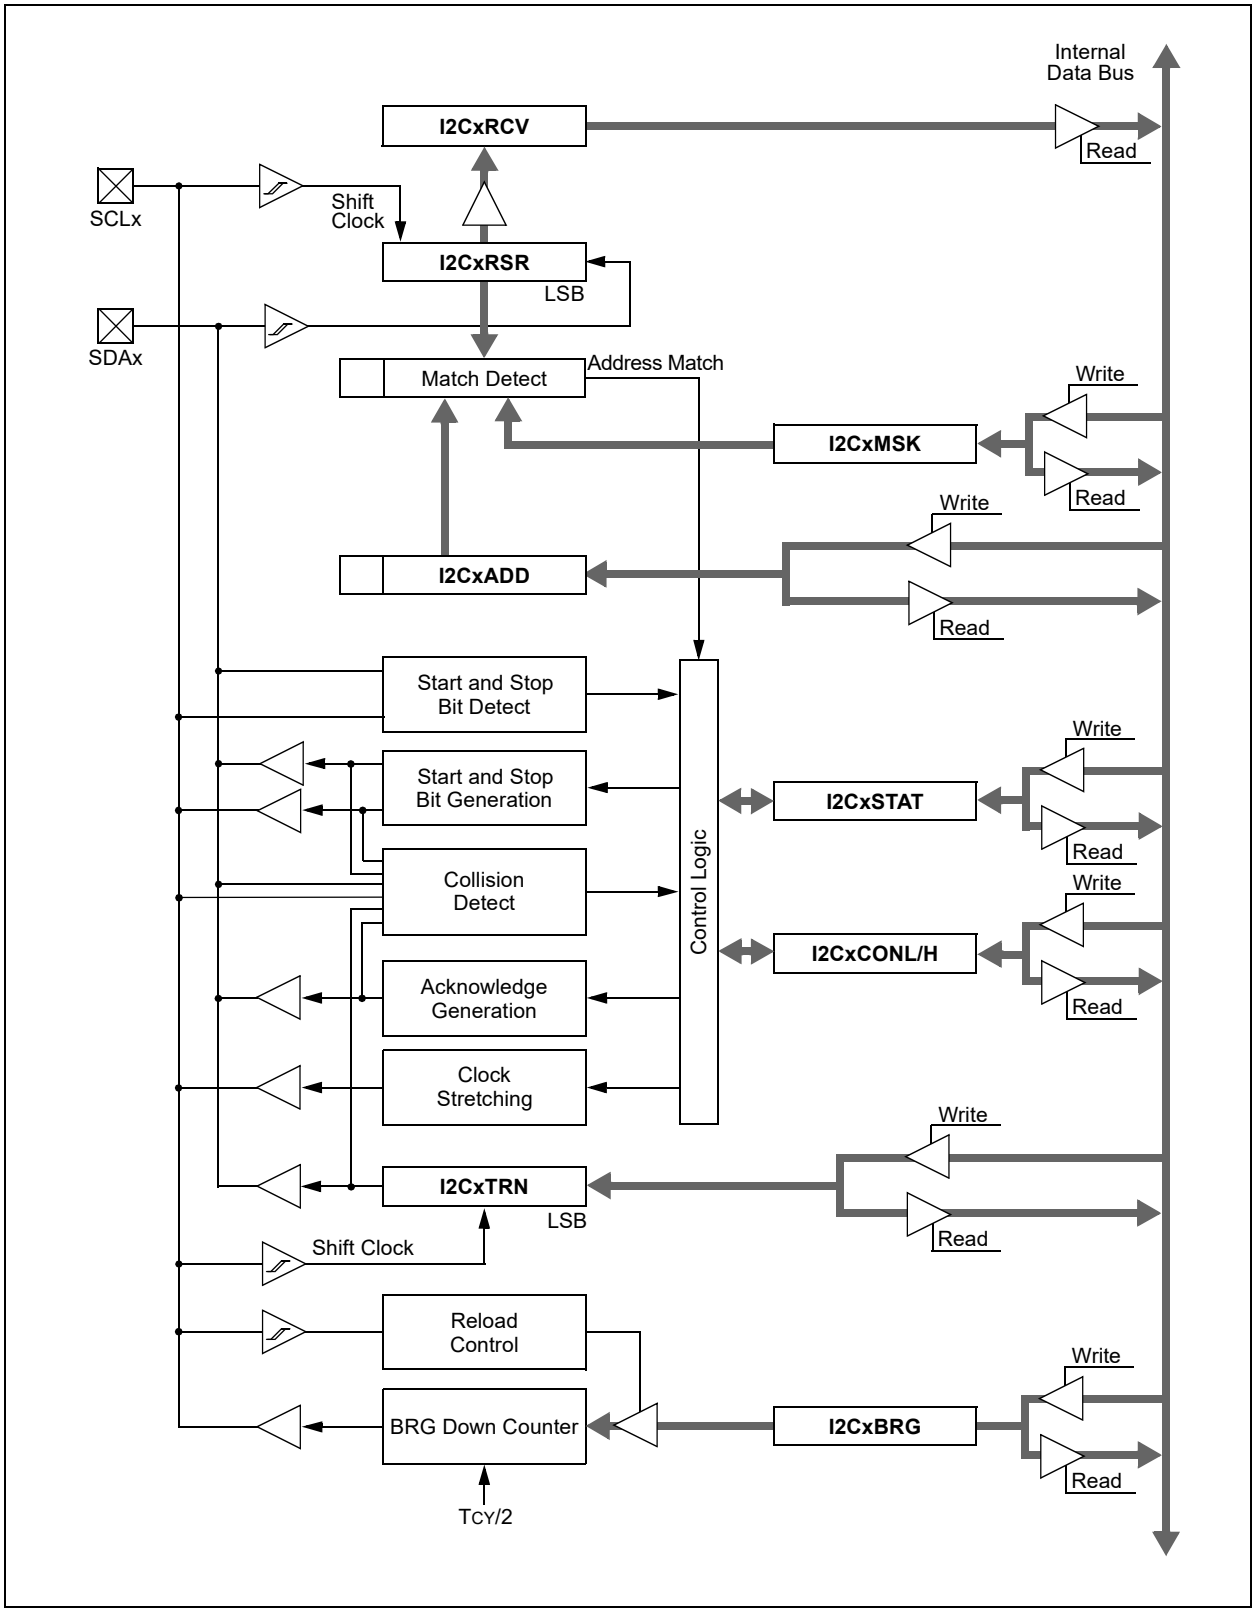



© 2017-2021 Microchip Technology Inc.

## 18.2 Setting Baud Rate When Operating as a Bus Host

To compute the Baud Rate Generator reload value, use Equation 18-1.

**EQUATION 18-1: COMPUTING BAUD RATE RELOAD VALUE(1,2,3)**

$$I2CxBRG = ((1/(2 \bullet FSCL) - Delay) \bullet FP) - 2$$

**Note 1:** These clock rate values are for guidance only. The actual clock rate should be measured in its intended application.

**2:** Typical value of delay varies from 110 ns to 150 ns.

**3:** I2CxBRG values of 0 to 3 are expressly forbidden. The user should never program the I2CxBRG with a value of 0x0, 0x1, 0x2 or 0x3 as indeterminate results may occur.

## 18.3 Client Address Masking

The I2CxMSK register (Register 18-4) designates address bit positions as “don’t care” for both 7-Bit and 10-Bit Addressing modes. Setting a particular bit location (= 1) in the I2CxMSK register causes the Client module to respond, whether the corresponding address bit value is a ‘0’ or a ‘1’. For example, when I2CxMSK is set to ‘0010000000’, the Client module will detect both addresses, ‘0000000000’ and ‘0010000000’.

To enable address masking, the Intelligent Peripheral Management Interface (IPMI) must be disabled by clearing the STRICT bit (I2CxCONL[11]).

**Note:** As a result of changes in the $I^2C$ protocol, the addresses in Table 18-2 are reserved and will not be Acknowledged in Client mode. This includes any address mask settings that include any of these addresses.

**TABLE 18-1: I2Cx CLOCK RATES(1,2)**

| FCY | FSCL | I2CxBRG Value | |
|---|---|---|---|
| | | Decimal | Hexadecimal |
| 100 MHz | 1 MHz | 41 | 29 |
| 100 MHz | 400 kHz | 116 | 74 |
| 100 MHz | 100 kHz | 491 | 1EB |
| 80 MHz | 1 MHz | 32 | 20 |
| 80 MHz | 400 kHz | 92 | 5C |
| 80 MHz | 100 kHz | 392 | 188 |
| 60 MHz | 1 MHz | 24 | 18 |
| 60 MHz | 400 kHz | 69 | 45 |
| 60 MHz | 100 kHz | 294 | 126 |
| 40 MHz | 1 MHz | 15 | 0F |
| 40 MHz | 400 kHz | 45 | 2D |
| 40 MHz | 100 kHz | 195 | C3 |
| 20 MHz | 1 MHz | 7 | 7 |
| 20 MHz | 400 kHz | 22 | 16 |
| 20 MHz | 100 kHz | 97 | 61 |

**Note 1:** Based on FCY = FOSC/2; Doze mode and PLL are disabled.

**2:** These clock rate values are for guidance only. The actual clock rate can be affected by various system-level parameters. The actual clock rate should be measured in its intended application.

**TABLE 18-2: I2Cx RESERVED ADDRESSES(1)**

| Client Address | R/$\overline{W}$ Bit | Description |
|---|---|---|
| 0000 000 | 0 | General Call Address(2) |
| 0000 000 | 1 | Start Byte |
| 0000 001 | x | Cbus Address |
| 0000 01x | x | Reserved |
| 0000 1xx | x | HS Mode Host Code |
| 1111 0xx | x | 10-Bit Client Upper Byte(3) |
| 1111 1xx | x | Reserved |

**Note 1:** The address bits listed here will never cause an address match independent of address mask settings.

**2:** This address will be Acknowledged only if GCEN = 1.

**3:** A match on this address can only occur on the upper byte in 10-Bit Addressing mode.

## 18.4 SMBus Support

The dsPIC33CK256MP508 family devices have support for SMBus through options in the input voltage thresholds. There are two control bits to select one of three options: SMEN (I2CxCONL[8]) and Configuration bit, SMBEN (FDEVOPT[10]). Table 18-3 details the setting of these control bits.

**TABLE 18-3: $I^2C$ PIN VOLTAGE THRESHOLD**

| | SMEN SFR Bit (I2CxCONL[8]) | SMBEN Configuration Bit (FDEVOPT[10]) |
|---|---|---|
| $I^2C$ (default) | 0 | x |
| SMBus 2.0 | 1 | 0 |
| SMBus 3.0 | 1 | 1 |


© 2017-2021 Microchip Technology Inc.

## 18.5 I²C Control Registers

**REGISTER 18-1: I2CxCONL: I2Cx CONTROL REGISTER LOW**

| R/W-0 | U-0 | HC/R/W-0 | R/W-1 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| I2CEN | — | I2CSIDL | SCLREL(1) | STRICT | A10M | DISSLW | SMEN |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | HC/R/W-0 | HC/R/W-0 | HC/R/W-0 | HC/R/W-0 | HC/R/W-0 |
|---|---|---|---|---|---|---|---|
| GCEN | STREN | ACKDT | ACKEN | RCEN | PEN | RSEN | SEN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HC = Hardware Clearable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **I2CEN:** I2Cx Enable bit (writable from software only)
1 = Enables the I2Cx module, and configures the SDAx and SCLx pins as serial port pins
0 = Disables the I2Cx module; all I²C pins are controlled by port functions

bit 14 **Unimplemented:** Read as '0'

bit 13 **I2CSIDL:** I2Cx Stop in Idle Mode bit
1 = Discontinues module operation when device enters Idle mode
0 = Continues module operation in Idle mode

bit 12 **SCLREL:** SCLx Release Control bit (I²C Client mode only)(1)
1 = Releases the SCLx clock
0 = Holds the SCLx clock low (clock stretch)
If STREN = 1:(2)
User software may write '0' to initiate a clock stretch and write '1' to release the clock. Hardware clears at the beginning of every Client data byte transmission. Hardware clears at the end of every Client address byte reception. Hardware clears at the end of every Client data byte reception.
If STREN = 0:
User software may only write '1' to release the clock. Hardware clears at the beginning of every Client data byte transmission. Hardware clears at the end of every Client address byte reception.

bit 11 **STRICT:** I2Cx Strict Reserved Address Rule Enable bit
1 = Strict reserved addressing is enforced; for reserved addresses, refer to Table 18-2.
(In Client Mode) – The device doesn't respond to reserved address space and addresses falling in that category are NACKed.
(In Host Mode) – The device is allowed to generate addresses with reserved address space.
0 = Reserved addressing would be Acknowledged.
(In Client Mode) – The device will respond to an address falling in the reserved address space. When there is a match with any of the reserved addresses, the device will generate an ACK.
(In Host Mode) – Reserved.

bit 10 **A10M:** 10-Bit Client Address Flag bit
1 = I2CxADD is a 10-bit Client address
0 = I2CxADD is a 7-bit Client address

bit 9 **DISSLW:** Slew Rate Control Disable bit
1 = Slew rate control is disabled for Standard Speed mode (100 kHz, also disabled for 1 MHz mode)
0 = Slew rate control is enabled for High-Speed mode (400 kHz)

**Note 1:** Automatically cleared to '0' at the beginning of Client transmission; automatically cleared to '0' at the end of Client reception.
**2:** Automatically cleared to '0' at the beginning of Client transmission.

**REGISTER 18-1: I2CxCONL: I2Cx CONTROL REGISTER LOW (CONTINUED)**

bit 8 **SMEN:** SMBus Input Levels Enable bit
1 = Enables input logic so thresholds are compliant with the SMBus specification
0 = Disables SMBus-specific inputs

bit 7 **GCEN:** General Call Enable bit ($I^2C$ Client mode only)
1 = Enables interrupt when a general call address is received in I2CxRSR; module is enabled for reception
0 = General call address is disabled.

bit 6 **STREN:** SCLx Clock Stretch Enable bit
In $I^2C$ Client mode only; used in conjunction with the SCLREL bit.
1 = Enables clock stretching
0 = Disables clock stretching

bit 5 **ACKDT:** Acknowledge Data bit
In $I^2C$ Host mode during Host Receive mode. The value that will be transmitted when the user initiates an Acknowledge sequence at the end of a receive.
In $I^2C$ Client mode when AHEN = 1 or DHEN = 1. The value that the Client will transmit when it initiates an Acknowledge sequence at the end of an address or data reception.
1 = NACK is sent
0 = ACK is sent

bit 4 **ACKEN:** Acknowledge Sequence Enable bit
In $I^2C$ Host mode only; applicable during Host Receive mode.
1 = Initiates Acknowledge sequence on SDAx and SCLx pins, and transmits ACKDT data bit
0 = Acknowledge sequence is Idle

bit 3 **RCEN:** Receive Enable bit ($I^2C$ Host mode only)
1 = Enables Receive mode for $I^2C$; automatically cleared by hardware at end of 8-bit receive data byte
0 = Receive sequence is not in progress

bit 2 **PEN:** Stop Condition Enable bit ($I^2C$ Host mode only)
1 = Initiates Stop condition on SDAx and SCLx pins
0 = Stop condition is Idle

bit 1 **RSEN:** Restart Condition Enable bit ($I^2C$ Host mode only)
1 = Initiates Restart condition on SDAx and SCLx pins
0 = Restart condition is Idle

bit 0 **SEN:** Start Condition Enable bit ($I^2C$ Host mode only)
1 = Initiates Start condition on SDAx and SCLx pins
0 = Start condition is Idle

**Note 1:** Automatically cleared to '0' at the beginning of Client transmission; automatically cleared to '0' at the end of Client reception.
**2:** Automatically cleared to '0' at the beginning of Client transmission.


© 2017-2021 Microchip Technology Inc.

**REGISTER 18-2: I2CxCONH: I2Cx CONTROL REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | PCIE | SCIE | BOEN | SDAHT | SBCDE | AHEN | DHEN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-7 **Unimplemented:** Read as '0'

bit 6 **PCIE:** Stop Condition Interrupt Enable bit ($I^2C$ Client mode only).
1 = Enables interrupt on detection of Stop condition
0 = Stop detection interrupts are disabled

bit 5 **SCIE:** Start Condition Interrupt Enable bit ($I^2C$ Client mode only)
1 = Enables interrupt on detection of Start or Restart conditions
0 = Start detection interrupts are disabled

bit 4 **BOEN:** Buffer Overwrite Enable bit ($I^2C$ Client mode only)
1 = I2CxRCV is updated and an ACK is generated for a received address/data byte, ignoring the state of the I2COV bit only if RBF bit = 0
0 = I2CxRCV is only updated when I2COV is clear

bit 3 **SDAHT:** SDAx Hold Time Selection bit
1 = Minimum of 300 ns hold time on SDAx after the falling edge of SCLx
0 = Minimum of 100 ns hold time on SDAx after the falling edge of SCLx

bit 2 **SBCDE:** Client Mode Bus Collision Detect Enable bit ($I^2C$ Client mode only)
If, on the rising edge of SCLx, SDAx is sampled low when the module is outputting a high state, the BCL bit is set and the bus goes Idle. This Detection mode is only valid during data and ACK transmit sequences.
1 = Enables Client bus collision interrupts
0 = Client bus collision interrupts are disabled

bit 1 **AHEN:** Address Hold Enable bit ($I^2C$ Client mode only)
1 = Following the 8th falling edge of SCLx for a matching received address byte; SCLREL bit (I2CxCONL[12]) will be cleared and the SCLx will be held low
0 = Address holding is disabled

bit 0 **DHEN:** Data Hold Enable bit ($I^2C$ Client mode only)
1 = Following the 8th falling edge of SCLx for a received data byte; Client hardware clears the SCLREL bit (I2CxCONL[12]) and SCLx is held low
0 = Data holding is disabled

**REGISTER 18-3: I2CxSTAT: I2Cx STATUS REGISTER**

| HSC/R-0 | HSC/R-0 | HSC/R-0 | U-0 | U-0 | HSC/R/C-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| ACKSTAT | TRSTAT | ACKTIM | — | — | BCL | GCSTAT | ADD10 |
| bit 15 | | | | | | | bit 8 |

| HS/R/C-0 | HS/R/C-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| IWCOL | I2COV | D/$\overline{A}$ | P | S | R/$\overline{W}$ | RBF | TBF |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | HSC = Hardware Settable/Clearable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | HS = Hardware Settable bit |

bit 15 **ACKSTAT:** Acknowledge Status bit (updated in all Host and Client modes)
1 = Acknowledge was not received from Client
0 = Acknowledge was received from Client

bit 14 **TRSTAT:** Transmit Status bit (when operating as $I^2C$ Host; applicable to Host transmit operation)
1 = Host transmit is in progress (8 bits + ACK)
0 = Host transmit is not in progress

bit 13 **ACKTIM:** Acknowledge Time Status bit (valid in $I^2C$ Client mode only)
1 = Indicates $I^2C$ bus is in an Acknowledge sequence, set on 8th falling edge of SCLx clock
0 = Not an Acknowledge sequence, cleared on 9th rising edge of SCLx clock

bit 12-11 **Unimplemented:** Read as '0'

bit 10 **BCL:** Bus Collision Detect bit (Host/Client mode; cleared when $I^2C$ module is disabled, I2CEN = 0)
1 = A bus collision has been detected during a Host or Client transmit operation
0 = No bus collision has been detected

bit 9 **GCSTAT:** General Call Status bit (cleared after Stop detection)
1 = General call address was received
0 = General call address was not received

bit 8 **ADD10:** 10-Bit Address Status bit (cleared after Stop detection)
1 = 10-bit address was matched
0 = 10-bit address was not matched

bit 7 **IWCOL:** I2Cx Write Collision Detect bit
1 = An attempt to write to the I2CxTRN register failed because the $I^2C$ module is busy; must be cleared in software
0 = No collision

bit 6 **I2COV:** I2Cx Receive Overflow Flag bit
1 = A byte was received while the I2CxRCV register is still holding the previous byte; I2COV is a "don't care" in Transmit mode, must be cleared in software
0 = No overflow

bit 5 **D/$\overline{A}$:** Data/$\overline{\text{Address}}$ bit (when operating as $I^2C$ Client)
1 = Indicates that the last byte received was data
0 = Indicates that the last byte received or transmitted was an address

bit 4 **P:** I2Cx Stop bit
Updated when Start, Reset or Stop is detected; cleared when the $I^2C$ module is disabled, I2CEN = 0.
1 = Indicates that a Stop bit has been detected last
0 = Stop bit was not detected last


© 2017-2021 Microchip Technology Inc.

**REGISTER 18-3: I2CxSTAT: I2Cx STATUS REGISTER (CONTINUED)**

bit 3 **S:** I2Cx Start bit
Updated when Start, Reset or Stop is detected; cleared when the $I^2C$ module is disabled, I2CEN = 0.
1 = Indicates that a Start (or Repeated Start) bit has been detected last
0 = Start bit was not detected last

bit 2 **R/$\overline{W}$:** Read/$\overline{Write}$ Information bit (when operating as $I^2C$ Client)
1 = Read: Indicates the data transfer is output from the Client
0 = Write: Indicates the data transfer is input to the Client

bit 1 **RBF:** Receive Buffer Full Status bit
1 = Receive is complete, I2CxRCV is full
0 = Receive is not complete, I2CxRCV is empty

bit 0 **TBF:** Transmit Buffer Full Status bit
1 = Transmit is in progress, I2CxTRN is full (8 bits of data)
0 = Transmit is complete, I2CxTRN is empty

**REGISTER 18-4: I2CxMSK: I2Cx CLIENT MODE ADDRESS MASK REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | MSK[9:8] | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| MSK[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-10 **Unimplemented:** Read as '0'

bit 9-0 **MSK[9:0]:** I2Cx Mask for Address Bit x Select bits
1 = Enables masking for bit x of the incoming message address; bit match is not required in this position
0 = Disables masking for bit x; bit match is required in this position

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 19.0 PARALLEL MASTER PORT (PMP)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Parallel Master Port (PMP)"** (www.microchip.com/DS70005344) in the *"dsPIC33/PIC24 Family Reference Manual"*.

**2:** Not all device variants include the PMP. Refer to Table 1 and Table 2 for availability.

The Parallel Master Port (PMP) is a parallel 8-bit/16-bit I/O module specifically designed to communicate with a wide variety of parallel devices, such as communication peripherals, LCDs, external memory devices and microcontrollers. Because the interfaces to parallel peripherals vary significantly, the PMP module is highly configurable. The key features of the PMP module include:

- Host and Client Operating modes
- Up to 16 Programmable Address Lines
- Up to Two Chip Select Lines
- Programmable Strobe Options:
  - Individual read and write strobes or read/write strobe with enable strobe
- Address Auto-Increment/Auto-Decrement
- Programmable Address/Data Multiplexing
- Programmable Polarity on Control Signals
- Legacy Parallel Client Port Support
- Enhanced Parallel Client Support:
  - Address support
  - Four bytes deep, auto-incrementing buffer
- Schmitt Trigger or TTL Input Buffers
- Programmable Wait States
- Dual Buffer Mode with Separate Read and Write Registers
- Read Initiate Control

**FIGURE 19-1: PMP MODULE PINOUT AND CONNECTIONS TO EXTERNAL DEVICES**

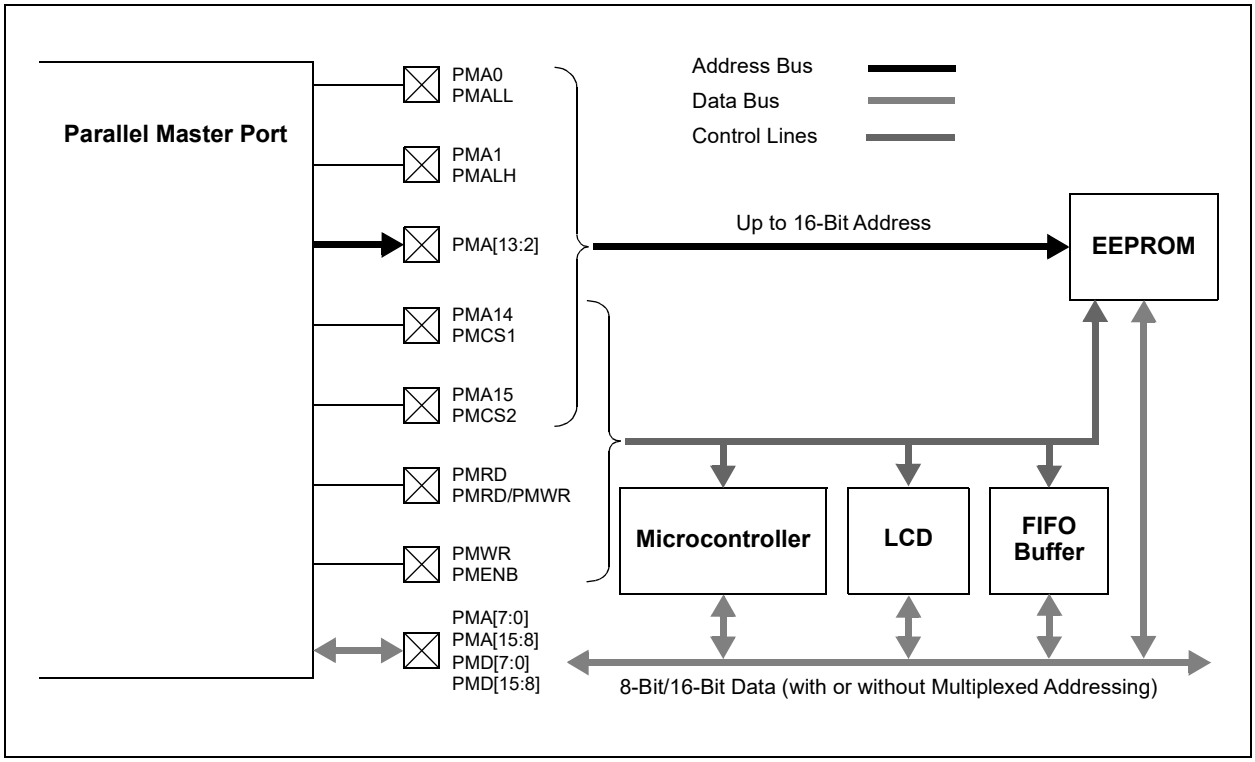

## 19.1 PMP Control Registers

**REGISTER 19-1: PMCON: PMP CONTROL REGISTER**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ON | — | SIDL | ADRMUX1 | ADRMUX0 | PMPTTL | PTWREN | PTRDEN |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CSF1(1) | CSF0(1) | ALP(1) | CS2P(1) | CS1P(1) | — | WRSP | RDSP |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **ON:** PMP Enable bit
1 = PMP is enabled
0 = PMP is disabled, no off-chip access performed

bit 14 **Unimplemented:** Read as '0'

bit 13 **SIDL:** PMP Stop in Idle Mode bit
1 = Discontinues module operation when device enters Idle mode
0 = Continues module operation in Idle mode

bit 12-11 **ADRMUX[1:0]:** Address/Data Multiplexing Selection bits
11 = All 16 bits of address are multiplexed with the 16 bits of data (PMPA[15:0]/PMPD[15:0]) using two phases
10 = All 16 bits of address are multiplexed with the lower 8 bits of data (PMPA[15:8]/PMPA[7:0]/PMPD[7:0]) using three phases
01 = Lower 8 bits of address are multiplexed with lower 8 bits of data (PMPA[7:0]/PMPD[7:0])
00 = Address and data appear on separate pins

bit 10 **PMPTTL:** PMP Module TTL Input Buffer Select bit
1 = PMP module uses TTL input buffers
0 = PMP module uses Schmitt Trigger input buffers

bit 9 **PTWREN:** PMP Write Enable Strobe Port Enable bit
1 = PMWR/PMENB port is enabled
0 = PMWR/PMENB port is disabled

bit 8 **PTRDEN:** PMP Read/Write Strobe Port Enable bit
1 = PMRD/PMWR port is enabled
0 = PMRD/PMWR port is disabled

bit 7-6 **CSF[1:0]:** Chip Select Function bits(1)
11 = Reserved
10 = PMCS2 and PMCS1 function as Chip Select
01 = PMCS2 functions as Chip Select, PMCS1 functions as address bit
00 = PMCS2 and PMCS1 function as address bits

bit 5 **ALP:** Address Latch Polarity bit(1)
1 = Active-high ($\overline{PMALL}$ and $\overline{PMALH}$)
0 = Active-low (PMALL and PMALH)

bit 4 **CS2P:** Chip Select 2 Polarity bit(1)
1 = Active-high
0 = Active-low

**Note 1:** These bits have no effect when their corresponding pins are used as address lines.


© 2017-2021 Microchip Technology Inc.

**REGISTER 19-1: PMCON: PMP CONTROL REGISTER (CONTINUED)**

bit 3 **CS1P:** Chip Select 1 Polarity bit(1)
1 = Active-high
0 = Active-low

bit 2 **Unimplemented:** Read as '0'

bit 1 **WRSP:** Write Strobe Polarity bit
For Client Modes and Host Mode 2 (MODE[1:0] (PMMODE[9:8]) = 00, 01, 10):
1 = Write strobe is active-high (PMWR)
0 = Write strobe is active-low ($\overline{\text{PMWR}}$)
For Host Mode 1 (MODE[1:0] (PMMODE[9:8]) = 11):
1 = Enables strobe active-high (PMENB)
0 = Enables strobe active-low ($\overline{\text{PMENB}}$)

bit 0 **RDSP:** Read Strobe Polarity bit
For Client Modes and Host Mode 2 (MODE[1:0] (PMMODE[9:8]) = 00, 01, 10):
1 = Read strobe is active-high (PMRD)
0 = Read strobe is active-low ($\overline{\text{PMRD}}$)
For Host Mode 1 (MODE[1:0] (PMMODE[9:8]) = 11):
1 = Read/write strobe is active-high (PMRD/$\overline{\text{PMWR}}$)
0 = Read/write strobe is active-low ($\overline{\text{PMRD}}$/PMWR)

**Note 1:** These bits have no effect when their corresponding pins are used as address lines.

**REGISTER 19-2: PMCONH: PMP CONTROL HIGH REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W/HC-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | U-0 |
|---|---|---|---|---|---|---|---|
| RDSTART(1) | — | — | — | — | — | DUALBUF | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HC = Hardware Clearable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7 **RDSTART:** Start a Read on PMP Bus bit(1)
- 1 = Starts a read cycle on the PMP bus
- 0 = No effect

bit 6-2 **Unimplemented:** Read as '0'

bit 1 **DUALBUF:** PMP Dual Read/Write Buffers Enable bit (valid in Host mode only)
- 1 = PMP uses separate registers for reads and writes (PMRADDR, PMDINx, PMWADDR, PMDOUTx)
- 0 = PMP uses legacy registers (PMADDR, PMDINx)

bit 0 **Unimplemented:** Read as '0'

**Note 1:** This bit is cleared by HW at the end of the read cycle when BUSY (PMMODE[15]) = 0.


© 2017-2021 Microchip Technology Inc.

**REGISTER 19-3: PMMODE: PMP MODE REGISTER**

| R/HS/HC-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| BUSY | IRQM1 | IRQM0 | INCM1 | INCM0 | MODE16 | MODE1 | MODE0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| WAITB1(1) | WAITB0(1) | WAITM3(1) | WAITM2(1) | WAITM1(1) | WAITM0(1) | WAITE1(1) | WAITE0(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HC = Hardware Clearable bit | HS = Hardware Settable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **BUSY:** Busy bit (Host mode only)
1 = Port is busy
0 = Port is not busy

bit 14-13 **IRQM[1:0]:** Interrupt Request Mode bits
11 = Reserved, do not use
10 = Interrupt generated when Read Buffer 3 is read or Write Buffer 3 is written (Buffered PSP mode), or on a read or write operation when PMA[1:0] = 11 (Addressable Client mode only)
01 = Interrupt generated at the end of the read/write cycle
00 = No Interrupt generated

bit 12-11 **INCM[1:0]:** Increment Mode bits
11 = Client mode read and write buffers auto-increment (MODE[1:0] (PMMODE[9:8]) = 00 only)
10 = Decrements ADDR[15:0] by 1 every read/write cycle(2,4)
01 = Increments ADDR[15:0] by 1 every read/write cycle(2,4)
00 = No increment or decrement of address

bit 10 **MODE16:** 8/16-Bit Mode bit
1 = 16-Bit Mode: A read or write to the Data register invokes a single 16-bit transfer
0 = 8-Bit Mode: A read or write to the Data register invokes a single 8-bit transfer

bit 9-8 **MODE[1:0]:** PMP Mode Select bits
11 = Host Mode 1 (PMCSx, PMRD/PMWR, PMENB, PMA[x:0], PMD[7:0] and PMD[8:15](3))
10 = Host Mode 2 (PMCSx, PMRD, PMWR, PMA[x:0], PMD[7:0] and PMD[8:15](3))
01 = Enhanced Client mode, controls signals (PMRD, PMWR, PMCS, PMD[7:0] and PMA[1:0])
00 = Legacy Parallel Client Port, controls signals (PMRD, PMWR, PMCS and PMD[7:0])

bit 7-6 **WAITB[1:0]:** Data Setup to Read/Write Strobe Wait States bits(1)
11 = Data Wait of 4 TP; multiplexed address phase of 4 TP
10 = Data Wait of 3 TP; multiplexed address phase of 3 TP
01 = Data Wait of 2 TP; multiplexed address phase of 2 TP
00 = Data Wait of 1 TP; multiplexed address phase of 1 TP **(default)**

**Note 1:** When WAITM[3:0] = 0000, the WAITBx and WAITEx bits are ignored and forced to 1 TP (peripheral clock) cycle for a write operation; WAITBx = 1 TP cycle, WAITEx = 0 TP cycles for a read operation.
**2:** Address bits, A15 and A14, are not subject to auto-increment/decrement if configured as Chip Select, CS2 and CS1.
**3:** These pins are active when MODE16 = 1 (16-bit mode).
**4:** The PMADDR register is always incremented/decremented by 1 regardless of the transfer data width.

**REGISTER 19-3: PMMODE: PMP MODE REGISTER (CONTINUED)**

bit 5-2 **WAITM[3:0]:** Data Read/Write Strobe Wait States bits(1)
1111 = Wait of 16 TP
•
•
•
0001 = Wait of 2 TP
0000 = Wait of 1 TP **(default)**

bit 1-0 **WAITE[1:0]:** Data Hold After Read/Write Strobe Wait States bits(1)
11 = Wait of 4 TP
10 = Wait of 3 TP
01 = Wait of 2 TP
00 = Wait of 1 TP **(default)**
For Read Operations:
11 = Wait of 3 TP
10 = Wait of 2 TP
01 = Wait of 1 TP
00 = Wait of 0 TP **(default)**

**Note 1:** When WAITM[3:0] = 0000, the WAITBx and WAITEx bits are ignored and forced to 1 TP (peripheral clock) cycle for a write operation; WAITBx = 1 TP cycle, WAITEx = 0 TP cycles for a read operation.
**2:** Address bits, A15 and A14, are not subject to auto-increment/decrement if configured as Chip Select, CS2 and CS1.
**3:** These pins are active when MODE16 = 1 (16-bit mode).
**4:** The PMADDR register is always incremented/decremented by 1 regardless of the transfer data width.


© 2017-2021 Microchip Technology Inc.

**REGISTER 19-4: PMADDR: PMP ADDRESS REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CS2(1) | CS1(1) | ADDR[13:8] | | | | | |
| ADDR15(1) | ADDR14(1) | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ADDR[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15 **CS2:** Chip Select 2 bit(1)
1 = Chip Select 2 is active
0 = Chip Select 2 is inactive (ADDR15 function is selected)

bit 15 **ADDR15:** Target Address bit 15(1)

bit 14 **CS1:** Chip Select 1 bit(1)
1 = Chip Select 1 is active
0 = Chip Select 1 is inactive (ADDR14 function is selected)

bit 14 **ADDR14:** Target Address bit 14(1)

bit 13-0 **ADDR[13:0]:** Target Address bits

**Note 1:** The use of these pins as PMA15/PMA14 or CS2/CS1 is selected by the CSF[1:0] bits (PMCON[7:6]).

**REGISTER 19-5: PMDOUT1: PMP DATA OUTPUT LOW REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATAOUT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATAOUT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **DATAOUT[15:0]:** Output Data Port bits
These bits are for 8-bit read operations in Client mode and write operations for Dual Buffer Host mode.

**REGISTER 19-6: PMDOUT2: PMP DATA OUTPUT HIGH REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATAOUT[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATAOUT[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **DATAOUT[31:16]:** Output Data Port bits
These bits are for 8-bit write operations in Client mode.


© 2017-2021 Microchip Technology Inc.

**REGISTER 19-7: PMDIN1: PMP DATA INPUT/OUTPUT LOW REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATAIN[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATAIN[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **DATAIN[15:0]:** Input/Output Data Port bits
These bits are for 8-bit or 16-bit read/write operations in Host mode and are the input data port for 8-bit write operations in Client mode.

**REGISTER 19-8: PMDIN2: PMP DATA INPUT/OUTPUT HIGH REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATAIN[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATAIN[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **DATAIN[31:16]:** Input/Output Data Port bits
These bits are for 8-bit write operations in Client mode.

**REGISTER 19-9: PMAEN: PMP PIN ENABLE REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTEN[15:14] | | PTEN[13:8] | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTEN[7:2] | | | | | | PTEN[1:0] | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **PTEN[15:14]:** PMCSx Strobe Enable bits
1 = PMA15 and PMA14 function as either PMA[15:14] or PMCS2 and PMCS1(1)
0 = PMA15 and PMA14 function as port I/Os

bit 13-2 **PTEN[13:2]:** PMP Address Port Enable bits
1 = PMA[13:2] function as PMP address lines
0 = PMA[13:2] function as port I/Os

bit 1-0 **PTEN[1:0]:** PMALH/PMALL Strobe Enable bits
1 = PMA1 and PMA0 function as either PMA[1:0] or PMALH and PMALL(2)
0 = PMA1 and PMA0 pads function as port I/Os

**Note 1:** The use of these pins as address or Chip Select lines is selected by the CSF[1:0] bits (PMCON[7:6]).
**2:** The use of these pins as PMA1/PMA0 or PMALH/PMALL depends on the Address/Data Multiplex mode selected by the ADRMUX[1:0] bits in the PMCON register.


© 2017-2021 Microchip Technology Inc.

**REGISTER 19-10: PMSTAT: PMP STATUS REGISTER (CLIENT MODES ONLY)**

| R-0 | R/W-0 | U-0 | U-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| IBF | IBOV | — | — | IB3F | IB2F | IB1F | IB0F |
| bit 15 | | | | | | | bit 8 |

| R-1 | R/W-0 | U-0 | U-0 | R-1 | R-1 | R-1 | R-1 |
|---|---|---|---|---|---|---|---|
| OBE | OBUF | — | — | OB3E | OB2E | OB1E | OB0E |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **IBF:** Input Buffer Full Status bit
1 = All writable Input Buffer registers are full
0 = Some or all of the writable Input Buffer registers are empty

bit 14 **IBOV:** Input Buffer Overflow Status bit
1 = A write attempt to a full input byte buffer occurred (must be cleared in software)
0 = No overflow occurred
This bit is set (= 1) in hardware; it can only be cleared (= 0) in software.

bit 13-12 **Unimplemented:** Read as '0'

bit 11-8 **IB[3:0]F:** Input Buffer x Status Full bits
1 = Input buffer contains data that have not been read (reading buffer will clear this bit)
0 = Input buffer does not contain any unread data

bit 7 **OBE:** Output Buffer Empty Status bit
1 = All readable Output Buffer registers are empty
0 = Some or all of the readable Output Buffer registers are full

bit 6 **OBUF:** Output Buffer Underflow Status bit
1 = A read occurred from an empty output byte buffer (must be cleared in software)
0 = No underflow occurred
This bit is set (= 1) in hardware; it can only be cleared (= 0) in software.

bit 5-4 **Unimplemented:** Read as '0'

bit 3-0 **OB[3:0]E:** Output Buffer x Status Empty bits
1 = Output buffer is empty (writing data to the buffer will clear this bit)
0 = Output buffer contains data that have not been transmitted

**REGISTER 19-11: PMWADDR: PMP WRITE ADDRESS REGISTER(2)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| WCS2(1) | WCS1(1) | WADDR[13:8] | | | | | |
| WADDR15(1) | WADDR14(1) | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| WADDR[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **WCS2:** Chip Select 2 bit(1)
1 = Chip Select 2 is active
0 = Chip Select 2 is inactive (WADDR15 function is selected)

bit 15 **WADDR15:** Target Write Address bit 15(1)

bit 14 **WCS1:** Chip Select 1 bit(1)
1 = Chip Select 1 is active
0 = Chip Select 1 is inactive (WADDR14 function is selected)

bit 14 **WADDR14:** Target Write Address bit 14(1)

bit 13-0 **WADDR[13:0]:** Target Write Address bits

**Note 1:** The use of these pins as PMA15/PMA14 or WCS2/WCS1 is selected by the CSF[1:0] bits (PMCON[7:6]).
**2:** This register is only used when the DUALBUF bit (PMCONH[1]) is set to '1'.


© 2017-2021 Microchip Technology Inc.

**REGISTER 19-12: PMRADDR: PMP READ ADDRESS REGISTER(2)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| RCS2(1) | RCS1(1) | RADDR[13:8] | | | | | |
| RADDR15(1) | RADDR14(1) | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| RADDR[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **RCS2:** Chip Select 2 bit(1)
1 = Chip Select 2 is active
0 = Chip Select 2 is inactive (RADDR15 function is selected)

bit 15 **RADDR15:** Target Read Address bit 15(1)

bit 14 **RCS1:** Chip Select 1 bit(1)
1 = Chip Select 1 is active
0 = Chip Select 1 is inactive (RADDR14 function is selected)

bit 14 **RADDR14:** Target Read Address bit 14(1)

bit 13-0 **RADDR[13:0]:** Target Read Address bits

**Note 1:** The use of these pins as PMA15/PMA14 or RCS2/RCS1 is selected by the CSF[1:0] bits (PMCON[7:6]).
**2:** This register is only used when the DUALBUF bit (PMCONH[1]) is set to '1'.

**REGISTER 19-13: PMRDIN: PMP READ INPUT DATA REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| RDATAIN[15:8](2) | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| RDATAIN[7:0](2) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **RDATAIN[15:0]:** Port Read Input Data bits(2)

**Note 1:** This register is only used when the DUALBUF bit (PMCONH[1]) is set to '1' and exclusively for reads. If the DUALBUF bit is '0', the PMDIN1 register (Register 19-7) is used for reads instead of PMRDIN.

**2:** Only used when MODE16 = 1.


© 2017-2021 Microchip Technology Inc.

## 20.0 SINGLE-EDGE NIBBLE TRANSMISSION (SENT)

**Note 1:** This data sheet summarizes the features of this group of dsPIC33CK256MP508 family devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Single-Edge Nibble Transmission (SENT) Module"** (www.microchip.com/DS70005145) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The Single-Edge Nibble Transmission (SENT) module is based on the SAE J2716, *"SENT – Single-Edge Nibble Transmission for Automotive Applications"*. The SENT protocol is a one-way, single wire time modulated serial communication, based on successive falling edges. It is intended for use in applications where high-resolution sensor data need to be communicated from a sensor to an Engine Control Unit (ECU).

The SENTx module has the following major features:

- Selectable Transmit or Receive mode
- Synchronous or Asynchronous Transmit modes
- Automatic Data Rate Synchronization
- Optional Automatic Detection of CRC Errors in Receive mode
- Optional Hardware Calculation of CRC in Transmit mode
- Support for Optional Pause Pulse Period
- Data Buffering for One Message Frame
- Selectable Data Length for Transmit/Receive, Up to Six Nibbles
- Automatic Detection of Framing Errors

SENT protocol timing is based on a predetermined time unit, TTICK. Both the transmitter and receiver must be preconfigured for TTICK, which can vary from 3 to 90 µs. A SENT message frame starts with a Sync pulse. The purpose of the Sync pulse is to allow the receiver to calculate the data rate of the message encoded by the transmitter. The SENT specification allows messages to be validated with up to a 20% variation in TTICK. This allows for the transmitter and receiver to run from different clocks that may be inaccurate, and drift with time and temperature. The data nibbles are 4 bits in length and are encoded as the data value + 12 ticks. This yields a 0 value of 12 ticks and the maximum value, 0xF, of 27 ticks.

A SENT message consists of the following:

- A synchronization/calibration period of 56 tick times
- A status nibble of 12-27 tick times
- Up to six data nibbles of 12-27 tick times
- A CRC nibble of 12-27 tick times
- An optional pause pulse period of 12-768 tick times

Figure 20-1 shows a block diagram of the SENTx module.

Figure 20-2 shows the construction of a typical 6-nibble data frame, with the numbers representing the minimum or maximum number of tick times for each section.

**FIGURE 20-1: SENTx MODULE BLOCK DIAGRAM**

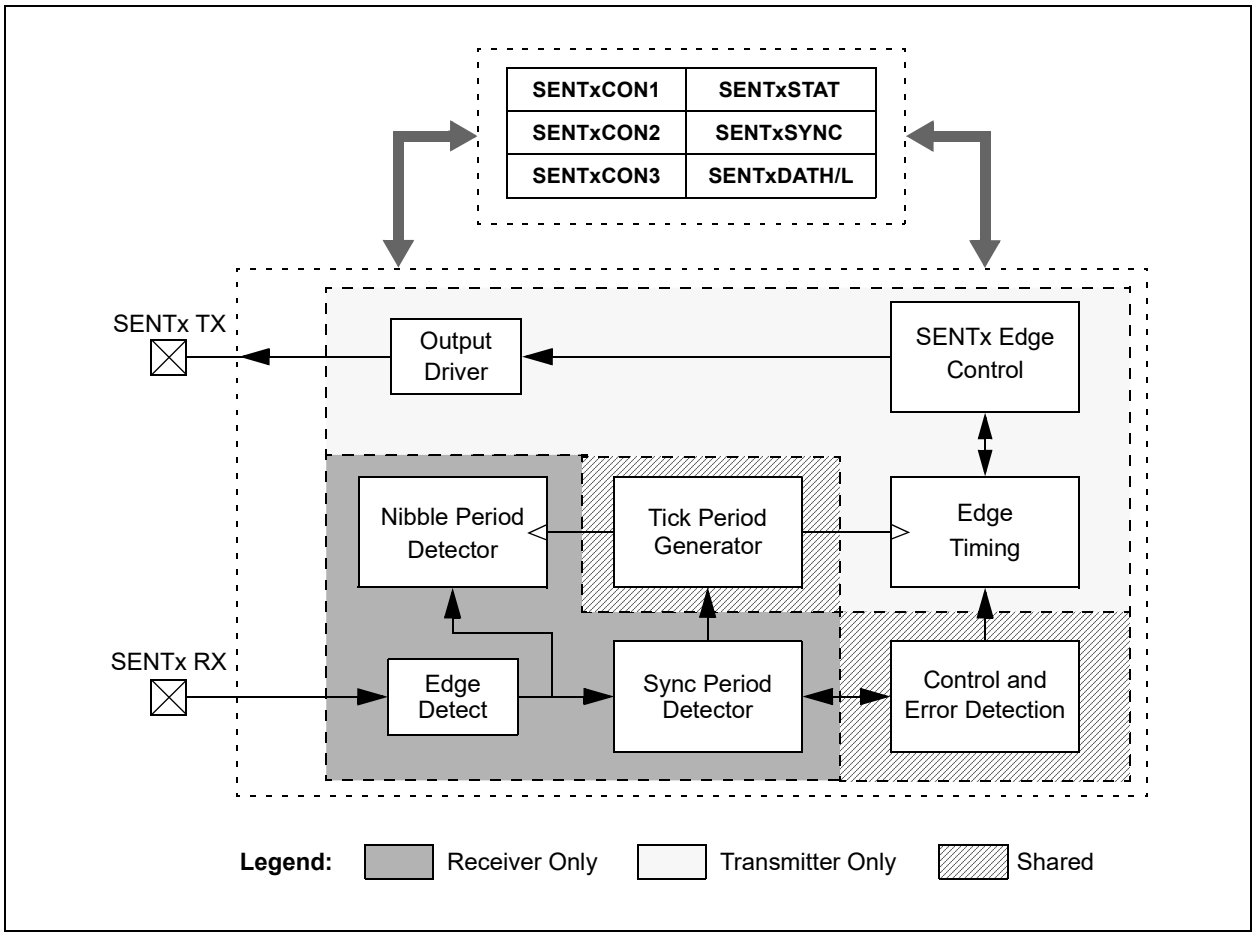


**FIGURE 20-2: SENTx PROTOCOL DATA FRAMES**

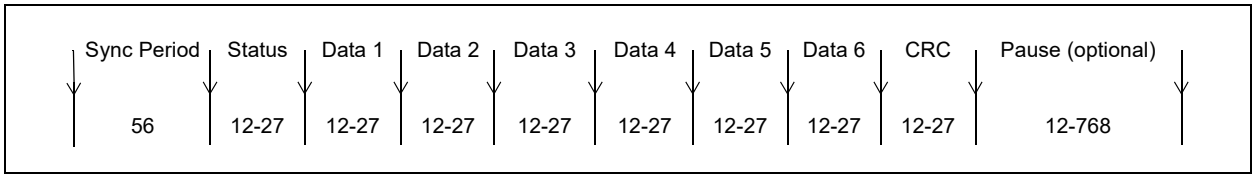



© 2017-2021 Microchip Technology Inc.

## 20.1 Transmit Mode

By default, the SENTx module is configured for transmit operation. The module can be configured for continuous asynchronous message frame transmission, or alternatively, for Synchronous mode triggered by software. When enabled, the transmitter will send a Sync, followed by the appropriate number of data nibbles, an optional CRC and optional pause pulse. The tick period used by the SENTx transmitter is set by writing a value to the TICKTIME[15:0] (SENTxCON2[15:0]) bits. The tick period calculations are shown in Equation 20-1.

**EQUATION 20-1: TICK PERIOD CALCULATION**

$$TICKTIME[15:0] = \frac{T_{TICK}}{T_{CLK}} - 1$$

An optional pause pulse can be used in Asynchronous mode to provide a fixed message frame time period. The frame period used by the SENTx transmitter is set by writing a value to the FRAMETIME[15:0] (SENTxCON3[15:0]) bits. The formulas used to calculate the value of frame time are shown in Equation 20-2.

**EQUATION 20-2: FRAME TIME CALCULATIONS**

$$FRAMETIME[15:0] = T_{TICK}/T_{FRAME}$$

$$FRAMETIME[15:0] \geq 122 + 27N$$

$$FRAMETIME[15:0] \geq 848 + 12N$$

Where:

$T_{FRAME}$ = Total time of the message from ms

$N$ = The number of data nibbles in message, 1-6

| **Note:** | The module will not produce a pause period with less than 12 ticks, regardless of the FRAMETIME[15:0] value. FRAMETIME[15:0] values beyond 2047 will have no effect on the length of a data frame. |
|---|---|

### 20.1.1 TRANSMIT MODE CONFIGURATION

#### 20.1.1.1 Initializing the SENTx Module

Perform the following steps to initialize the module:

1. Write RCVEN (SENTxCON1[11]) = 0 for Transmit mode.
2. Write TXM (SENTxCON1[10]) = 0 for Asynchronous Transmit mode or TXM = 1 for Synchronous mode.
3. Write NIBCNT[2:0] (SENTxCON1[2:0]) for the desired data frame length.
4. Write CRCEN (SENTxCON1[8]) for hardware or software CRC calculation.
5. Write PPP (SENTxCON1[7]) for optional pause pulse.
6. If PPP = 1, write TFRAME to SENTxCON3.
7. Write SENTxCON2 with the appropriate value for the desired tick period.
8. Enable interrupts and set interrupt priority.
9. Write initial status and data values to SENTxDATH/L.
10. If CRCEN = 0, calculate CRC and write the value to CRC[3:0] (SENTxDATL[3:0]).
11. Set the SNTEN (SENTxCON1[15]) bit to enable the module.

User software updates to SENTxDATH/L must be performed after the completion of the CRC and before the next message frame's status nibble. The recommended method is to use the message frame completion interrupt to trigger data writes.

## 20.2 Receive Mode

The module can be configured for receive operation by setting the RCVEN (SENTxCON1[11]) bit. The time between each falling edge is compared to SYNCMIN[15:0] (SENTxCON3[15:0]) and SYNCMAX[15:0] (SENTxCON2[15:0]), and if the measured time lies between the minimum and maximum limits, the module begins to receive data. The validated Sync time is captured in the SENTxSYNC register and the tick time is calculated. Subsequent falling edges are verified to be within the valid data width and the data are stored in the SENTxDATL/H registers. An interrupt event is generated at the completion of the message and the user software should read the SENTx Data registers before the reception of the next nibble. The equation for SYNCMIN[15:0] and SYNCMAX[15:0] is shown in Equation 20-3.

**EQUATION 20-3: SYNCMIN[15:0] AND SYNCMAX[15:0] CALCULATIONS**

$$T_{TICK} = T_{CLK} \bullet (TICKTIME[15:0] + 1)$$

$$FRAMETIME[15:0] = T_{TICK}/T_{FRAME}$$

$$SyncCount = 8 \times F_{RCV} \times T_{TICK}$$

$$SYNCMIN[15:0] = 0.8 \times SyncCount$$

$$SYNCMAX[15:0] = 1.2 \times SyncCount$$

$$FRAMETIME[15:0] \geq 122 + 27N$$

$$FRAMETIME[15:0] \geq 848 + 12N$$

Where:

$T_{FRAME}$ = Total time of the message from ms

$N$ = The number of data nibbles in message, 1-6

$F_{RCV}$ = FCY x Prescaler

$T_{CLK}$ = FCY/Prescaler

For TTICK = 3.0 µs and FCLK = 4 MHz, SYNCMIN[15:0] = 76.

**Note:** To ensure a Sync period can be identified, the value written to SYNCMIN[15:0] must be less than the value written to SYNCMAX[15:0].

### 20.2.1 RECEIVE MODE CONFIGURATION

#### 20.2.1.1 Initializing the SENTx Module

Perform the following steps to initialize the module:

1. Write RCVEN (SENTxCON1[11]) = 1 for Receive mode.
2. Write NIBCNT[2:0] (SENTxCON1[2:0]) for the desired data frame length.
3. Write CRCEN (SENTxCON1[8]) for hardware or software CRC validation.
4. Write PPP (SENTxCON1[7]) = 1 if pause pulse is present.
5. Write SENTxCON2 with the value of SYNCMAXx (Nominal Sync Period + 20%).
6. Write SENTxCON3 with the value of SYNCMINx (Nominal Sync Period – 20%).
7. Enable interrupts and set interrupt priority.
8. Set the SNTEN (SENTxCON1[15]) bit to enable the module.

The data should be read from the SENTxDATL/H registers after the completion of the CRC and before the next message frame's status nibble. The recommended method is to use the message frame completion interrupt trigger.


© 2017-2021 Microchip Technology Inc.

## 20.3 SENT Control Registers

**REGISTER 20-1: SENTxCON1: SENTx CONTROL REGISTER 1**

| R/W-0 | U-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| SNTEN | — | SNTSIDL | — | RCVEN | TXM(1) | TXPOL(1) | CRCEN |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | U-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PPP | SPCEN(2) | — | PS | — | NIBCNT2 | NIBCNT1 | NIBCNT0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **SNTEN:** SENTx Enable bit
1 = SENTx is enabled
0 = SENTx is disabled

bit 14 **Unimplemented:** Read as '0'

bit 13 **SNTSIDL:** SENTx Stop in Idle Mode bit
1 = Discontinues module operation when the device enters Idle mode
0 = Continues module operation in Idle mode

bit 12 **Unimplemented:** Read as '0'

bit 11 **RCVEN:** SENTx Receive Enable bit
1 = SENTx operates as a receiver
0 = SENTx operates as a transmitter (sensor)

bit 10 **TXM:** SENTx Transmit Mode bit(1)
1 = SENTx transmits data frame only when triggered using the SYNCTXEN status bit
0 = SENTx transmits data frames continuously while SNTEN = 1

bit 9 **TXPOL:** SENTx Transmit Polarity bit(1)
1 = SENTx data output pin is low in the Idle state
0 = SENTx data output pin is high in the Idle state

bit 8 **CRCEN:** CRC Enable bit
Module in Receive Mode (RCVEN = 1):
1 = SENTx performs CRC verification on received data using the preferred J2716 method
0 = SENTx does not perform CRC verification on received data
Module in Transmit Mode (RCVEN = 1):
1 = SENTx automatically calculates CRC using the preferred J2716 method
0 = SENTx does not calculate CRC

bit 7 **PPP:** Pause Pulse Present bit
1 = SENTx is configured to transmit/receive SENT messages with pause pulse
0 = SENTx is configured to transmit/receive SENT messages without pause pulse

bit 6 **SPCEN:** Short PWM Code Enable bit(2)
1 = SPC control from external source is enabled
0 = SPC control from external source is disabled

bit 5 **Unimplemented:** Read as '0'

**Note 1:** This bit has no function in Receive mode (RCVEN = 1).
**2:** This bit has no function in Transmit mode (RCVEN = 0).

**REGISTER 20-1: SENTxCON1: SENTx CONTROL REGISTER 1 (CONTINUED)**

bit 4 **PS:** SENTx Module Clock Prescaler (divider) bits
1 = Divide-by-4
0 = Divide-by-1

bit 3 **Unimplemented:** Read as '0'

bit 2-0 **NIBCNT[2:0]:** Nibble Count Control bits
111 = Reserved; do not use
110 = Module transmits/receives six data nibbles in a SENT data packet
101 = Module transmits/receives five data nibbles in a SENT data packet
100 = Module transmits/receives four data nibbles in a SENT data packet
011 = Module transmits/receives three data nibbles in a SENT data packet
010 = Module transmits/receives two data nibbles in a SENT data packet
001 = Module transmits/receives one data nibble in a SENT data packet
000 = Reserved; do not use

**Note 1:** This bit has no function in Receive mode (RCVEN = 1).
**2:** This bit has no function in Transmit mode (RCVEN = 0).


© 2017-2021 Microchip Technology Inc.

**REGISTER 20-2: SENTxSTAT: SENTx STATUS REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R/C-0 | R/C-0 | R-0 | HC/R/W-0 |
|---|---|---|---|---|---|---|---|
| PAUSE | NIB2 | NIB1 | NIB0 | CRCERR | FRMERR | RXIDLE | SYNCTXEN(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | HC = Hardware Clearable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7 **PAUSE:** Pause Period Status bit
1 = The module is transmitting/receiving a pause period
0 = The module is not transmitting/receiving a pause period

bit 6-4 **NIB[2:0]:** Nibble Status bits
Module in Transmit Mode (RCVEN = 0):
111 = Module is transmitting a CRC nibble
110 = Module is transmitting Data Nibble 6
101 = Module is transmitting Data Nibble 5
100 = Module is transmitting Data Nibble 4
011 = Module is transmitting Data Nibble 3
010 = Module is transmitting Data Nibble 2
001 = Module is transmitting Data Nibble 1
000 = Module is transmitting a status nibble or pause period, or is not transmitting
Module in Receive Mode (RCVEN = 1):
111 = Module is receiving a CRC nibble or was receiving this nibble when an error occurred
110 = Module is receiving Data Nibble 6 or was receiving this nibble when an error occurred
101 = Module is receiving Data Nibble 5 or was receiving this nibble when an error occurred
100 = Module is receiving Data Nibble 4 or was receiving this nibble when an error occurred
011 = Module is receiving Data Nibble 3 or was receiving this nibble when an error occurred
010 = Module is receiving Data Nibble 2 or was receiving this nibble when an error occurred
001 = Module is receiving Data Nibble 1 or was receiving this nibble when an error occurred
000 = Module is receiving a status nibble or waiting for Sync

bit 3 **CRCERR:** CRC Status bit (Receive mode only)
1 = A CRC error has occurred for the 1-6 data nibbles in SENTxDATL/H
0 = A CRC error has not occurred

bit 2 **FRMERR:** Framing Error Status bit (Receive mode only)
1 = A data nibble was received with less than 12 tick periods or greater than 27 tick periods
0 = Framing error has not occurred

bit 1 **RXIDLE:** SENTx Receiver Idle Status bit (Receive mode only)
1 = The SENTx data bus has been Idle (high) for a period of SYNCMAX[15:0] or greater
0 = The SENTx data bus is not Idle

**Note 1:** In Receive mode (RCVEN = 1), the SYNCTXEN bit is read-only.

**REGISTER 20-2: SENTxSTAT: SENTx STATUS REGISTER (CONTINUED)**

bit 0 **SYNCTXEN:** SENTx Synchronization Period Status/Transmit Enable bit(1)

Module in Receive Mode (RCVEN = 1):

1 = A valid synchronization period was detected; the module is receiving nibble data

0 = No synchronization period has been detected; the module is not receiving nibble data

Module in Asynchronous Transmit Mode (RCVEN = 0, TXM = 0):

The bit always reads as '1' when the module is enabled, indicating the module transmits SENTx data frames continuously. The bit reads '0' when the module is disabled.

Module in Synchronous Transmit Mode (RCVEN = 0, TXM = 1):

1 = The module is transmitting a SENTx data frame

0 = The module is not transmitting a data frame, user software may set SYNCTXEN to start another data frame transmission

**Note 1:** In Receive mode (RCVEN = 1), the SYNCTXEN bit is read-only.


© 2017-2021 Microchip Technology Inc.

**REGISTER 20-3: SENTxDATL: SENTx RECEIVE DATA REGISTER LOW(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATA4[3:0] | | | | DATA5[3:0] | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATA6[3:0] | | | | CRC[3:0] | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **DATA4[3:0]:** Data Nibble 4 Data bits

bit 11-8 **DATA5[3:0]:** Data Nibble 5 Data bits

bit 7-4 **DATA6[3:0]:** Data Nibble 6 Data bits

bit 3-0 **CRC[3:0]:** CRC Nibble Data bits

**Note 1:** Register bits are read-only in Receive mode (RCVEN = 1). In Transmit mode, the CRC[3:0] bits are read-only when automatic CRC calculation is enabled (RCVEN = 0, CRCEN = 1).

**REGISTER 20-4: SENTxDATH: SENTx RECEIVE DATA REGISTER HIGH(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| STAT[3:0] | | | | DATA1[3:0] | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| DATA2[3:0] | | | | DATA3[3:0] | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **STAT[3:0]:** Status Nibble Data bits

bit 11-8 **DATA1[3:0]:** Data Nibble 1 Data bits

bit 7-4 **DATA2[3:0]:** Data Nibble 2 Data bits

bit 3-0 **DATA3[3:0]:** Data Nibble 3 Data bits

**Note 1:** Register bits are read-only in Receive mode (RCVEN = 1). In Transmit mode, the CRC[3:0] bits are read-only when automatic CRC calculation is enabled (RCVEN = 0, CRCEN = 1).

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 21.0 TIMER1

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Timer1 Module"** (www.microchip.com/DS70005279) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The Timer1 module is a 16-bit timer that can operate as a free-running interval timer/counter.

The Timer1 module has the following unique features over other timers:

- Can be Operated in Asynchronous Counter mode
- Asynchronous Timer
- Operational during CPU Sleep mode
- Software Selectable Prescalers 1:1, 1:8, 1:64 and 1:256
- External Clock Selection Control
- The Timer1 External Clock Input (T1CK) can Optionally be Synchronized to the Internal Device Clock and the Clock Synchronization is Performed after the Prescaler

If Timer1 is used for SCCP, the timer should be running in Synchronous mode.

The Timer1 module can operate in one of the following modes:

- Timer mode
- Gated Timer mode
- Synchronous Counter mode
- Asynchronous Counter mode

A block diagram of Timer1 is shown in Figure 21-1.

**FIGURE 21-1: 16-BIT TIMER1 MODULE BLOCK DIAGRAM**

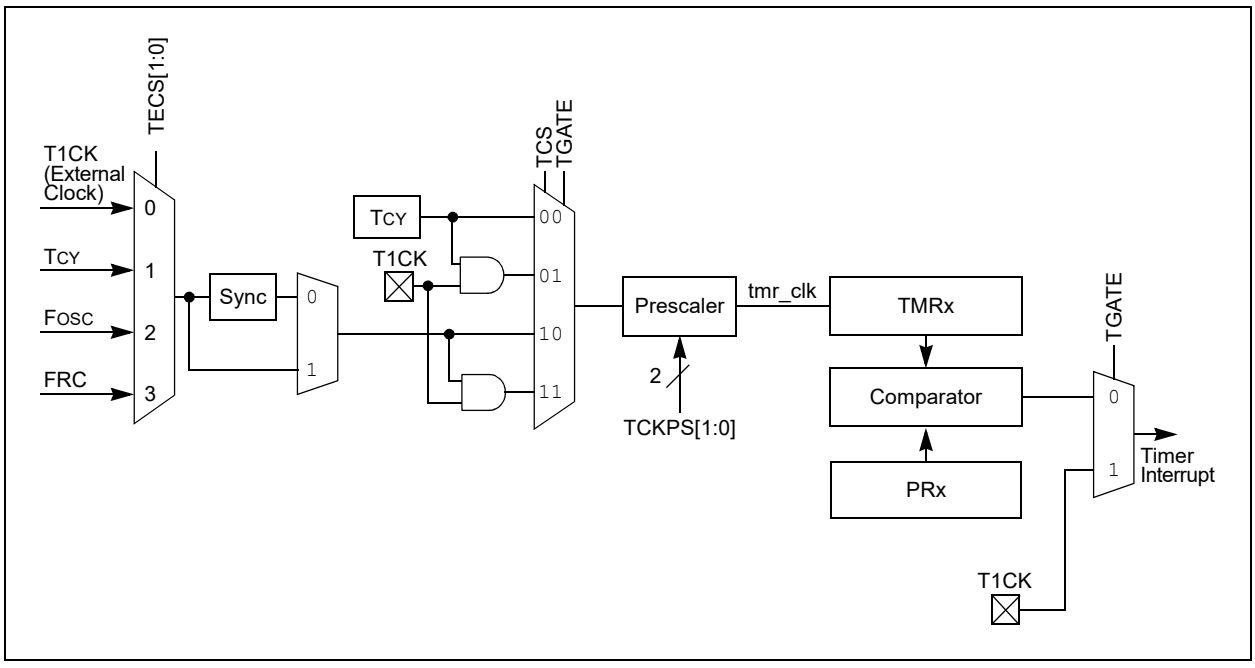

## 21.1 Timer1 Control Register

**REGISTER 21-1: T1CON: TIMER1 CONTROL REGISTER**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R-0 | R-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TON(1) | — | SIDL | TMWDIS | TMWIP | PRWIP | TECS1 | TECS0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | U-0 |
|---|---|---|---|---|---|---|---|
| TGATE | — | TCKPS1 | TCKPS0 | — | TSYNC(1) | TCS(1) | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **TON:** Timer1 On bit(1)
1 = Starts 16-bit Timer1
0 = Stops 16-bit Timer1

bit 14 **Unimplemented:** Read as '0'

bit 13 **SIDL:** Timer1 Stop in Idle Mode bit
1 = Discontinues module operation when device enters Idle mode
0 = Continues module operation in Idle mode

bit 12 **TMWDIS:** Asynchronous Timer1 Write Disable bit
1 = Timer writes are ignored while a posted write to TMR1 or PR1 is synchronized to the asynchronous clock domain
0 = Back-to-back writes are enabled in Asynchronous mode

bit 11 **TMWIP:** Asynchronous Timer1 Write in Progress bit
1 = Write to the timer in Asynchronous mode is pending
0 = Write to the timer in Asynchronous mode is complete

bit 10 **PRWIP:** Asynchronous Period Write in Progress bit
1 = Write to the Period register in Asynchronous mode is pending
0 = Write to the Period register in Asynchronous mode is complete

bit 9-8 **TECS[1:0]:** Timer1 Extended Clock Select bits
11 = FRC clock
10 = FOSC
01 = TCY
00 = External Clock comes from the T1CK pin

bit 7 **TGATE:** Timer1 Gated Time Accumulation Enable bit
When TCS = 1:
This bit is ignored.
When TCS = 0:
1 = Gated time accumulation is enabled
0 = Gated time accumulation is disabled

bit 6 **Unimplemented:** Read as '0'

**Note 1:** When Timer1 is enabled in External Synchronous Counter mode (TCS = 1, TSYNC = 1, TON = 1), any attempts by user software to write to the TMR1 register are ignored.


© 2017-2021 Microchip Technology Inc.

**REGISTER 21-1: T1CON: TIMER1 CONTROL REGISTER (CONTINUED)**

bit 5-4 **TCKPS[1:0]:** Timer1 Input Clock Prescale Select bits
11 = 1:256
10 = 1:64
01 = 1:8
00 = 1:1

bit 3 **Unimplemented:** Read as '0'

bit 2 **TSYNC:** Timer1 External Clock Input Synchronization Select bit(1)
When TCS = 1:
1 = Synchronizes the External Clock input
0 = Does not synchronize the External Clock input
When TCS = 0:
This bit is ignored.

bit 1 **TCS:** Timer1 Clock Source Select bit(1)
1 = External Clock source selected by TECS[1:0]
0 = Internal peripheral clock (FP)

bit 0 **Unimplemented:** Read as '0'

**Note 1:** When Timer1 is enabled in External Synchronous Counter mode (TCS = 1, TSYNC = 1, TON = 1), any attempts by user software to write to the TMR1 register are ignored.

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 22.0 CAPTURE/COMPARE/PWM/ TIMER MODULES (SCCP/MCCP)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. For more information on the MCCP/SCCP modules, refer to **"Capture/Compare/ PWM/Timer (MCCP and SCCP)"** (www.microchip.com/DS30003035) in the *"dsPIC33/PIC24 Family Reference Manual"*.

dsPIC33CK256MP508 family devices include eight SCCP and one MCCP Capture/Compare/PWM/Timer base modules, which provide the functionality of three different peripherals from earlier PIC24F devices. The module can operate in one of three major modes:

- General Purpose Timer
- Input Capture
- Output Compare/PWM

The module is provided in two different forms, distinguished by the number of PWM outputs that the module can generate. Single Capture/Compare/PWM (SCCP) output modules provide only one PWM output.

Multiple Capture/Compare/PWM (MCCP) output modules can provide up to six outputs and an extended range of power control features, depending on the pin count of the particular device. All other features of the modules are identical.

The SCCPx and MCCPx modules can be operated in only one of the three major modes at any time. The other modes are not available unless the module is reconfigured for the new mode.

A conceptual block diagram for the module is shown in Figure 22-1. All three modes share a time base generator and a common Timer register pair (CCPxTMRH/L); other shared hardware components are added as a particular mode requires.

Each module has a total of six control and status registers:

- CCPxCON1L (Register 22-1)
- CCPxCON1H (Register 22-2)
- CCPxCON2L (Register 22-3)
- CCPxCON2H (Register 22-4)
- CCPxCON3H (Register 22-6)
- CCPxSTATL (Register 22-7)

Each module also includes eight buffer/counter registers that serve as Timer Value registers or data holding buffers:

- CCPxTMRH/CCPxTMRL (CCPx Timer High/Low Counters)
- CCPxPRH/CCPxPRL (CCPx Timer Period High/Low)
- CCPxRA (CCPx Primary Output Compare Data Buffer)
- CCPxRB (CCPx Secondary Output Compare Data Buffer)
- CCPxBUFH/CCPxBUFL (CCPx Input Capture High/Low Buffers)

**FIGURE 22-1: SCCPx CONCEPTUAL BLOCK DIAGRAM**

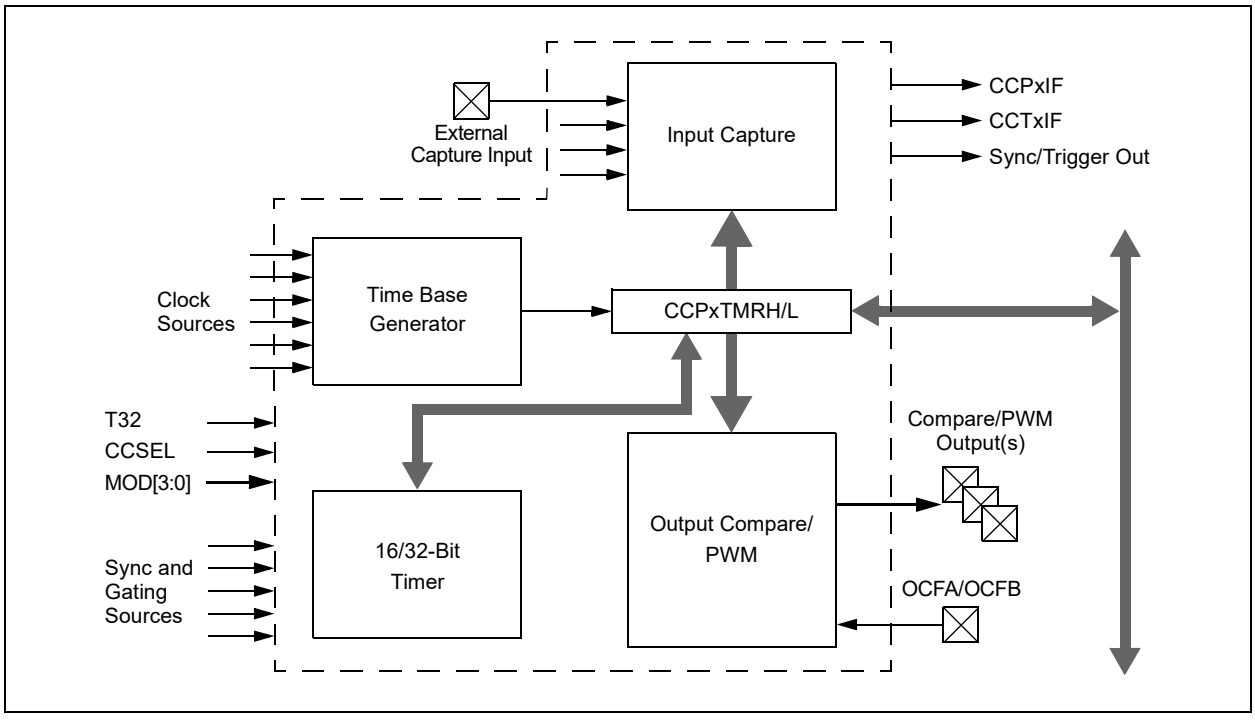

## 22.1 Time Base Generator

The Timer Clock Generator (TCG) generates a clock for the module's internal time base, using one of the clock signals already available on the microcontroller. This is used as the time reference for the module in its three major modes. The internal time base is shown in Figure 22-2.

There are eight inputs available to the clock generator, which are selected using the CLKSEL[2:0] bits (CCPxCON1L[10:8]). Available sources include the FRC and LPRC, the Secondary Oscillator and the TCLKI External Clock inputs. The system clock is the default source (CLKSEL[2:0] = 000).

**FIGURE 22-2: TIMER CLOCK GENERATOR**

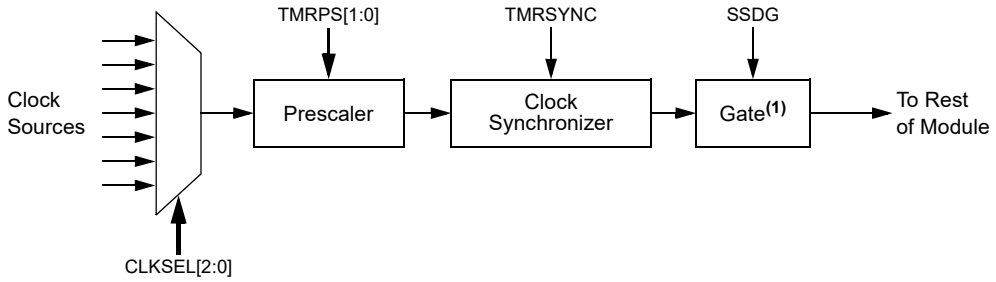


**Note 1:** Gating is available in Timer modes only.

## 22.2 General Purpose Timer

Timer mode is selected when CCSEL = 0 and MOD[3:0] = 0000. The timer can function as a 32-bit timer or a dual 16-bit timer, depending on the setting of the T32 bit (Table 22-1).

**TABLE 22-1: TIMER OPERATION MODE**

| T32 (CCPxCON1L[5]) | Operating Mode |
|---|---|
| 0 | Dual Timer Mode (16-bit) |
| 1 | Timer Mode (32-bit) |

Dual 16-Bit Timer mode provides a simple timer function with two independent 16-bit timer/counters. The primary timer uses CCPxTMRL and CCPxPRL. Only the primary timer can interact with other modules on the device. It generates the SCCPx sync out signals for use by other SCCP modules. It can also use the SYNC[4:0] bits signal generated by other modules.

The secondary timer uses CCPxTMRH and CCPxPRH. It is intended to be used only as a periodic interrupt source for scheduling CPU events. It does not generate an output sync/trigger signal like the primary time base. In Dual Timer mode, the CCPx Secondary Timer Period register, CCPxPRH, generates the SCCP compare event (CCPxIF) used by many other modules on the device.

The 32-Bit Timer mode uses the CCPxTMRL and CCPxTMRH registers, together, as a single 32-bit timer. When CCPxTMRL overflows, CCPxTMRH increments by one. This mode provides a simple timer function when it is important to track long time periods. Note that the T32 bit (CCPxCON1L[5]) should be set before the CCPxTMRL or CCPxPRH registers are written to initialize the 32-bit timer.

### 22.2.1 SYNC AND TRIGGER OPERATION

In both 16-bit and 32-bit modes, the timer can also function in either synchronization ("sync") or trigger operation. Both use the SYNC[4:0] bits (CCPxCON1H[4:0]) to determine the input signal source. The difference is how that signal affects the timer.

In sync operation, the timer Reset or clear occurs when the input selected by SYNC[4:0] is asserted. The timer immediately begins to count again from zero unless it is held for some other reason. Sync operation is used whenever the TRIGEN bit (CCPxCON1H[7]) is cleared. SYNC[4:0] can have any value, except '11111'.

In trigger operation, the timer is held in Reset until the input selected by SYNC[4:0] is asserted; when it occurs, the timer starts counting. Trigger operation is used whenever the TRIGEN bit is set. In Trigger mode, the timer will continue running after a trigger event as long as the CCPTRIG bit (CCPxSTATL[7]) is set. To clear CCPTRIG, the TRCLR bit (CCPxSTATL[5]) must be set to clear the trigger event, reset the timer and hold it at zero until another trigger event occurs. On dsPIC33CK256MP508 family devices, trigger operation can only be used when the system clock is the time base source (CLKSEL[2:0] = 000).


© 2017-2021 Microchip Technology Inc.

## 22.3 Output Compare Mode

Output Compare mode compares the Timer register value with the value of one or two Compare registers, depending on its mode of operation. The Output Compare x module, on compare match events, has the ability to generate a single output transition or a train of output pulses. Like most PIC® MCU peripherals, the Output Compare x module can also generate interrupts on a compare match event.

Table 22-2 shows the various modes available in Output Compare modes.

**TABLE 22-2: OUTPUT COMPARE x/PWMx MODES**

| MOD[3:0] (CCPxCON1L[3:0]) | T32 (CCPxCON1L[5]) | Operating Mode | |
|---|---|---|---|
| 0001 | 0 | Output High on Compare (16-bit) | Single Edge Mode |
| 0001 | 1 | Output High on Compare (32-bit) | |
| 0010 | 0 | Output Low on Compare (16-bit) | |
| 0010 | 1 | Output Low on Compare (32-bit) | |
| 0011 | 0 | Output Toggle on Compare (16-bit) | |
| 0011 | 1 | Output Toggle on Compare (32-bit) | |
| 0100 | 0 | Dual Edge Compare (16-bit) | Dual Edge Mode |
| 0101 | 0 | Dual Edge Compare (16-bit buffered) | PWM Mode |

## 22.4 Input Capture Mode

Input Capture mode is used to capture a timer value from an independent timer base, upon an event, on an input pin or other internal trigger source. The input capture features are useful in applications requiring frequency (time period) and pulse measurement.

Input Capture mode uses a dedicated 16/32-bit, synchronous, up counting timer for the capture function. The timer value is written to the FIFO when a capture event occurs. The internal value may be read (with a synchronization delay) using the CCPxTMRH/L register.

To use Input Capture mode, the CCSEL bit (CCPxCON1L[4]) must be set. The T32 and the MOD[3:0] bits are used to select the proper Capture mode, as shown in Table 22-3.

**TABLE 22-3: INPUT CAPTURE x MODES**

| MOD[3:0] (CCPxCON1L[3:0]) | T32 (CCPxCON1L[5]) | Operating Mode |
|---|---|---|
| 0000 | 0 | Edge Detect (16-bit capture) |
| 0000 | 1 | Edge Detect (32-bit capture) |
| 0001 | 0 | Every Rising (16-bit capture) |
| 0001 | 1 | Every Rising (32-bit capture) |
| 0010 | 0 | Every Falling (16-bit capture) |
| 0010 | 1 | Every Falling (32-bit capture) |
| 0011 | 0 | Every Rising/Falling (16-bit capture) |
| 0011 | 1 | Every Rising/Falling (32-bit capture) |
| 0100 | 0 | Every 4th Rising (16-bit capture) |
| 0100 | 1 | Every 4th Rising (32-bit capture) |
| 0101 | 0 | Every 16th Rising (16-bit capture) |
| 0101 | 1 | Every 16th Rising (32-bit capture) |

## 22.5 Auxiliary Output

The SCCPx modules have an auxiliary (secondary) output that provides other peripherals access to internal module signals. The auxiliary output is intended to connect to other SCCP modules, or other digital peripherals, to provide these types of functions:

- Time Base Synchronization
- Peripheral Trigger and Clock Inputs
- Signal Gating

The type of output signal is selected using the AUXOUT[1:0] control bits (CCPxCON2H[4:3]). The type of output signal is also dependent on the module operating mode.

**TABLE 22-4: AUXILIARY OUTPUT**

| AUXOUT[1:0] | CCSEL | MOD[3:0] | Comments | Signal Description |
|---|---|---|---|---|
| 00 | x | xxxx | Auxiliary output disabled | No Output |
| 01 | 0 | 0000 | Time Base modes | Time Base Period Reset or Rollover |
| 10 | | | | Special Event Trigger Output |
| 11 | | | | No Output |
| 01 | 0 | 0001 through 1111 | Output Compare modes | Time Base Period Reset or Rollover |
| 10 | | | | Output Compare Event Signal |
| 11 | | | | Output Compare Signal |
| 01 | 1 | xxxx | Input Capture modes | Time Base Period Reset or Rollover |
| 10 | | | | Reflects the Value of the ICDIS bit |
| 11 | | | | Input Capture Event Signal |


© 2017-2021 Microchip Technology Inc.

## 22.6 SCCP/MCCP Control Registers

**REGISTER 22-1: CCPxCON1L: CCPx CONTROL 1 LOW REGISTERS**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CCPON | — | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL2 | CLKSEL1 | CLKSEL0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TMRPS1 | TMRPS0 | T32 | CCSEL | MOD3 | MOD2 | MOD1 | MOD0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **CCPON:** CCPx Module Enable bit
1 = Module is enabled with an operating mode specified by the MOD[3:0] control bits
0 = Module is disabled

bit 14 **Unimplemented:** Read as '0'

bit 13 **CCPSIDL:** CCPx Stop in Idle Mode Bit
1 = Discontinues module operation when device enters Idle mode
0 = Continues module operation in Idle mode

bit 12 **CCPSLP:** CCPx Sleep Mode Enable bit
1 = Module continues to operate in Sleep modes
0 = Module does not operate in Sleep modes

bit 11 **TMRSYNC:** Time Base Clock Synchronization bit
1 = Asynchronous module time base clock is selected and synchronized to the internal system clocks (CLKSEL[2:0] ≠ 000)
0 = Synchronous module time base clock is selected and does not require synchronization (CLKSEL[2:0] = 000)

bit 10-8 **CLKSEL[2:0]:** CCPx Time Base Clock Select bits
111 = PPS TxCK input
110 = CLC4
101 = CLC3
100 = CLC2
011 = CLC1
010 = FOSC
001 = Reference Clock (REFCLKO)
000 = FOSC/2 (FP)

bit 7-6 **TMRPS[1:0]:** Time Base Prescale Select bits
11 = 1:64 Prescaler
10 = 1:16 Prescaler
01 = 1:4 Prescaler
00 = 1:1 Prescaler

bit 5 **T32:** 32-Bit Time Base Select bit
1 = Uses 32-bit time base for timer, single edge output compare or input capture function
0 = Uses 16-bit time base for timer, single edge output compare or input capture function

bit 4 **CCSEL:** Capture/Compare Mode Select bit
1 = Input Capture peripheral
0 = Output Compare/PWM/Timer peripheral (exact function is selected by the MOD[3:0] bits)

**Note 1:** Center-Aligned mode is only available in MCCP (CCP9).

**REGISTER 22-1: CCPxCON1L: CCPx CONTROL 1 LOW REGISTERS (CONTINUED)**

bit 3-0 **MOD[3:0]:** CCPx Mode Select bits

For CCSEL = 1 (Input Capture modes):

1xxx = Reserved
011x = Reserved
0101 = Capture every 16th rising edge
0100 = Capture every 4th rising edge
0011 = Capture every rising and falling edge
0010 = Capture every falling edge
0001 = Capture every rising edge
0000 = Capture every rising and falling edge (Edge Detect mode)

For CCSEL = 0 (Output Compare/Timer modes):

1111 = External Input mode: Pulse generator is disabled, source is selected by ICS[2:0]
1110 = Reserved
110x = Reserved
10xx = Reserved
0111 = Reserved
0110 = Center-Aligned PWM mode, buffered(1)
0101 = Dual Edge Compare mode, buffered
0100 = Dual Edge Compare mode
0011 = 16-Bit/32-Bit Single Edge mode, toggles output on compare match
0010 = 16-Bit/32-Bit Single Edge mode, drives output low on compare match
0001 = 16-Bit/32-Bit Single Edge mode, drives output high on compare match
0000 = 16-Bit/32-Bit Timer mode, output functions are disabled

**Note 1:** Center-Aligned mode is only available in MCCP (CCP9).


© 2017-2021 Microchip Technology Inc.

**REGISTER 22-2: CCPxCON1H: CCPx CONTROL 1 HIGH REGISTERS**

| R/W-0 | R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| OPSSRC(1) | RTRGEN(2) | — | — | OPS3(3) | OPS2(3) | OPS1(3) | OPS0(3) |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| TRIGEN | ONESHOT | ALTSYNC | SYNC4 | SYNC3 | SYNC2 | SYNC1 | SYNC0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **OPSSRC:** Output Postscaler Source Select bit(1)
1 = Output postscaler scales module trigger output events
0 = Output postscaler scales time base interrupt events

bit 14 **RTRGEN:** Retrigger Enable bit(2)
1 = Time base can be retriggered when TRIGEN bit = 1
0 = Time base may not be retriggered when TRIGEN bit = 1

bit 13-12 **Unimplemented:** Read as '0'

bit 11-8 **OPS3[3:0]:** CCPx Interrupt Output Postscale Select bits(3)
1111 = Interrupt every 16th time base period match
1110 = Interrupt every 15th time base period match
. . .
0100 = Interrupt every 5th time base period match
0011 = Interrupt every 4th time base period match or 4th input capture event
0010 = Interrupt every 3rd time base period match or 3rd input capture event
0001 = Interrupt every 2nd time base period match or 2nd input capture event
0000 = Interrupt after each time base period match or input capture event

bit 7 **TRIGEN:** CCPx Trigger Enable bit
1 = Trigger operation of time base is enabled
0 = Trigger operation of time base is disabled

bit 6 **ONESHOT:** One-Shot Trigger Mode Enable bit
1 = One-Shot Trigger mode is enabled; trigger duration is set by OSCNT[2:0]
0 = One-Shot Trigger mode is disabled

bit 5 **ALTSYNC:** CCPx Alternate Synchronization Output Signal Select bit
1 = An alternate signal is used as the module synchronization output signal
0 = The module synchronization output signal is the Time Base Reset/rollover event

bit 4-0 **SYNC[4:0]:** CCPx Synchronization Source Select bits
See Table 22-5 for the definition of inputs.

**Note 1:** This control bit has no function in Input Capture modes.
**2:** This control bit has no function when TRIGEN = 0.
**3:** Output postscale settings, from 1:5 to 1:16 (0100-1111), will result in a FIFO buffer overflow for Input Capture modes.

**TABLE 22-5: SYNCHRONIZATION SOURCES**

| SYNC[4:0] | Synchronization Source |
|---|---|
| 00000 | None; Timer with Rollover on CCPxPR Match or FFFFh |
| 00001 | Module's Own Timer Sync Out |
| 00010 | Sync Output SCCP2 |
| 00011 | Sync Output SCCP3 |
| 00100 | Sync Output SCCP4 |
| 00101 | Sync Output SCCP5 |
| 00110 | Sync Output SCCP6 |
| 00111 | Sync Output SCCP7 |
| 01000 | Sync Output SCCP8 |
| 01001 | INT0 |
| 01010 | INT1 |
| 01011 | INT2 |
| 01100 | UART1 RX Edge Detect |
| 01101 | UART1 TX Edge Detect |
| 01110 | UART2 RX Edge Detect |
| 01111 | UART2 TX Edge Detect |
| 10000 | CLC1 Output |
| 10001 | CLC2 Output |
| 10010 | CLC3 Output |
| 10011 | CLC4 Output |
| 10100 | UART3 RX Edge Detect |
| 10101 | UART3 TX Edge Detect |
| 10110 | Sync Output MCCP9 |
| 10111 | Comparator 1 Output |
| 11000 | Comparator 2 Output |
| 11001 | Comparator 3 Output |
| 11010-11110 | Reserved |
| 11111 | None; Timer with Auto-Rollover (FFFFh → 0000h) |


© 2017-2021 Microchip Technology Inc.

**REGISTER 22-3: CCPxCON2L: CCPx CONTROL 2 LOW REGISTERS**

| R/W-0 | R/W-0 | U-0 | R/W-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| PWMRSEN | ASDGM | — | SSDG | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ASDG[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **PWMRSEN:** CCPx PWM Restart Enable bit
1 = ASEVT bit clears automatically at the beginning of the next PWM period, after the shutdown input has ended
0 = ASEVT bit must be cleared in software to resume PWM activity on output pins

bit 14 **ASDGM:** CCPx Auto-Shutdown Gate Mode Enable bit
1 = Waits until the next Time Base Reset or rollover for shutdown to occur
0 = Shutdown event occurs immediately

bit 13 **Unimplemented:** Read as '0'

bit 12 **SSDG:** CCPx Software Shutdown/Gate Control bit
1 = Manually forces auto-shutdown, timer clock gate or input capture signal gate event (setting of ASDGM bit still applies)
0 = Normal module operation

bit 11-8 **Unimplemented:** Read as '0'

bit 7-0 **ASDG[7:0]:** CCPx Auto-Shutdown/Gating Source Enable bits
1 = ASDGx Source n is enabled (see Table 22-6 for auto-shutdown/gating sources)
0 = ASDGx Source n is disabled

**TABLE 22-6: AUTO-SHUTDOWN AND GATING SOURCES**

| ASDG[x] Bit | Auto-Shutdown/Gating Source | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | SCCP1 | SCCP2 | SCCP3 | SCCP4 | SCCP5 | SCCP6 | SCCP7 | SCCP8 | MCCP9 |
| 0 | Comparator 1 Output | | | | | | | | |
| 1 | Comparator 2 Output | | | | | | | | |
| 2 | OCFC | | | | | | | | |
| 3 | OCFD | | | | | | | | |
| 4 | ICM1(1) | ICM2(1) | ICM3(1) | ICM4(1) | ICM5(1) | ICM6(1) | ICM7(1) | ICM8(1) | ICM9(1) |
| 5 | CLC1(1) | | | | | | | | |
| 6 | OCFA(1) | | | | | | | | |
| 7 | OCFB(1) | | | | | | | | |

**Note 1:** Selected by Peripheral Pin Select (PPS).

**REGISTER 22-4: CCPxCON2H: CCPx CONTROL 2 HIGH REGISTERS**

| R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| OENSYNC | — | OCFEN(1) | OCEEN(1) | OCDEN(1) | OCCEN(1) | OCBEN(1) | OCAEN |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| ICGSM1 | ICGSM0 | — | AUXOUT1 | AUXOUT0 | ICS2 | ICS1 | ICS0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **OENSYNC:** Output Enable Synchronization bit
1 = Update by output enable bits occurs on the next Time Base Reset or rollover
0 = Update by output enable bits occurs immediately

bit 14 **Unimplemented:** Read as '0'

bit 13-8 **OC[F:A]EN:** Output Enable/Steering Control bits(1)
1 = OCMx pin is controlled by the CCPx module and produces an output compare or PWM signal
0 = OCMx pin is not controlled by the CCPx module; the pin is available to the port logic or another peripheral multiplexed on the pin

bit 7-6 **ICGSM[1:0]:** Input Capture Gating Source Mode Control bits
11 = Reserved
10 = One-Shot mode: Falling edge from gating source disables future capture events (ICDIS = 1)
01 = One-Shot mode: Rising edge from gating source enables future capture events (ICDIS = 0)
00 = Level-Sensitive mode: A high level from gating source will enable future capture events; a low level will disable future capture events

bit 5 **Unimplemented:** Read as '0'

bit 4-3 **AUXOUT[1:0]:** Auxiliary Output Signal on Event Selection bits
11 = Input capture or output compare event; no signal in Timer mode
10 = Signal output is defined by module operating mode (see Table 22-4)
01 = Time base rollover event (all modes)
00 = Disabled

bit 2-0 **ICS[2:0]:** Input Capture Source Select bits
111 = CLC4 output
110 = CLC3 output
101 = CLC2 output
100 = CLC1 output
011 = Comparator 3 output
010 = Comparator 2 output
001 = Comparator 1 output
000 = SCCP Input Capture x (ICx) pin (PPS)

**Note 1:** OCFEN through OCBEN (bits[13:9]) are implemented in the MCCP9 module only.


© 2017-2021 Microchip Technology Inc.

**REGISTER 22-5: CCPxCON3L: CCPx CONTROL 3 LOW REGISTERS(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | DT[5:0] | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-6 **Unimplemented:** Read as '0'

bit 5-0 **DT[5:0]:** CCPx Dead-Time Select bits

111111 = Inserts 63 dead-time delay periods between complementary output signals
111110 = Inserts 62 dead-time delay periods between complementary output signals
. . .
000010 = Inserts 2 dead-time delay periods between complementary output signals
000001 = Inserts 1 dead-time delay period between complementary output signals
000000 = Dead-time logic is disabled

**Note 1:** This register is implemented in the MCCP9 module only.

**REGISTER 22-6: CCPxCON3H: CCPx CONTROL 3 HIGH REGISTERS**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| OETRIG | OSCNT2 | OSCNT1 | OSCNT0 | — | OUTM2(1) | OUTM1(1) | OUTM0(1) |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | POLACE | POLBDF(1) | PSSACE1 | PSSACE0 | PSSBDF1(1) | PSSBDF0(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **OETRIG:** CCPx Dead-Time Select bit
1 = For Triggered mode (TRIGEN = 1): Module does not drive enabled output pins until triggered
0 = Normal output pin operation

bit 14-12 **OSCNT[2:0]:** One-Shot Event Count bits
111 = Extends one-shot event by seven time base periods (eight time base periods total)
110 = Extends one-shot event by six time base periods (seven time base periods total)
101 = Extends one-shot event by five time base periods (six time base periods total)
100 = Extends one-shot event by four time base periods (five time base periods total)
011 = Extends one-shot event by three time base periods (four time base periods total)
010 = Extends one-shot event by two time base periods (three time base periods total)
001 = Extends one-shot event by one time base period (two time base periods total)
000 = Does not extend one-shot Trigger event

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **OUTM[2:0]:** PWMx Output Mode Control bits(1)
111 = Reserved
110 = Output Scan mode
101 = Brush DC Output mode, forward
100 = Brush DC Output mode, reverse
011 = Reserved
010 = Half-Bridge Output mode
001 = Push-Pull Output mode
000 = Steerable Single Output mode

bit 7-6 **Unimplemented:** Read as '0'

bit 5 **POLACE:** CCPx Output Pins, OCMxA, OCMxC and OCMxE, Polarity Control bit
1 = Output pin polarity is active-low
0 = Output pin polarity is active-high

bit 4 **POLBDF:** CCPx Output Pins, OCMxB, OCMxD and OCMxF, Polarity Control bit(1)
1 = Output pin polarity is active-low
0 = Output pin polarity is active-high

bit 3-2 **PSSACE[1:0]:** PWMx Output Pins, OCMxA, OCMxC and OCMxE, Shutdown State Control bits
11 = Pins are driven active when a shutdown event occurs
10 = Pins are driven inactive when a shutdown event occurs
0x = Pins are tri-stated when a shutdown event occurs

bit 1-0 **PSSBDF[1:0]:** PWMx Output Pins, OCMxB, OCMxD, and OCMxF, Shutdown State Control bits(1)
11 = Pins are driven active when a shutdown event occurs
10 = Pins are driven inactive when a shutdown event occurs
0x = Pins are in a high-impedance state when a shutdown event occurs

**Note 1:** These bits are implemented in the MCCP9 module only.


© 2017-2021 Microchip Technology Inc.

**REGISTER 22-7: CCPxSTATL: CCPx STATUS REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | W1-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | ICGARM | — | — |
| bit 15 | | | | | | | bit 8 |

| R-0 | W1-0 | W1-0 | R/C-0 | R/C-0 | R/C-0 | R/C-0 | R/C-0 |
|---|---|---|---|---|---|---|---|
| CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | C = Clearable bit | | |
|---|---|---|---|
| R = Readable bit | W1 = Write '1' Only bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-11 **Unimplemented:** Read as '0'

bit 10 **ICGARM:** Input Capture Gate Arm bit
A write of '1' to this location will arm the input capture gating logic for a one-shot gate event when ICGSM[1:0] = 01 or 10. Bit always reads as '0'.

bit 9-8 **Unimplemented:** Read as '0'

bit 7 **CCPTRIG:** CCPx Trigger Status bit
1 = Timer has been triggered and is running
0 = Timer has not been triggered and is held in Reset

bit 6 **TRSET:** CCPx Trigger Set Request bit
Writes '1' to this location to trigger the timer when TRIGEN = 1 (location always reads as '0').

bit 5 **TRCLR:** CCPx Trigger Clear Request bit
Writes '1' to this location to cancel the timer trigger when TRIGEN = 1 (location always reads as '0').

bit 4 **ASEVT:** CCPx Auto-Shutdown Event Status/Control bit
1 = A shutdown event is in progress; CCPx outputs are in the shutdown state
0 = CCPx outputs operate normally

bit 3 **SCEVT:** Single Edge Compare Event Status bit
1 = A single edge compare event has occurred
0 = A single edge compare event has not occurred

bit 2 **ICDIS:** Input Capture x Disable bit
1 = Event on Input Capture x pin (ICx) does not generate a capture event
0 = Event on Input Capture x pin will generate a capture event

bit 1 **ICOV:** Input Capture x Buffer Overflow Status bit
1 = The Input Capture x FIFO buffer has overflowed
0 = The Input Capture x FIFO buffer has not overflowed

bit 0 **ICBNE:** Input Capture x Buffer Status bit
1 = Input Capture x buffer has data available
0 = Input Capture x buffer is empty

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 23.0 CONFIGURABLE LOGIC CELL (CLC)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. For more information, refer to **"Configurable Logic Cell (CLC)"** (www.microchip.com/DS70005298) in the *"dsPIC33/PIC24 Family Reference Manual"*. The information in this data sheet supersedes the information in the FRM.

The Configurable Logic Cell (CLC) module allows the user to specify combinations of signals as inputs to a logic function and to use the logic output to control other peripherals or I/O pins. This provides greater flexibility and potential in embedded designs, since the CLC module can operate outside the limitations of software execution, and supports a vast amount of output designs.

There are four input gates to the selected logic function. These four input gates select from a pool of up to 32 signals that are selected using four data source selection multiplexers. Figure 23-1 shows an overview of the module.

Figure 23-3 shows the details of the data source multiplexers and Figure 23-2 shows the logic input gate connections.

**FIGURE 23-1: CLCx MODULE**

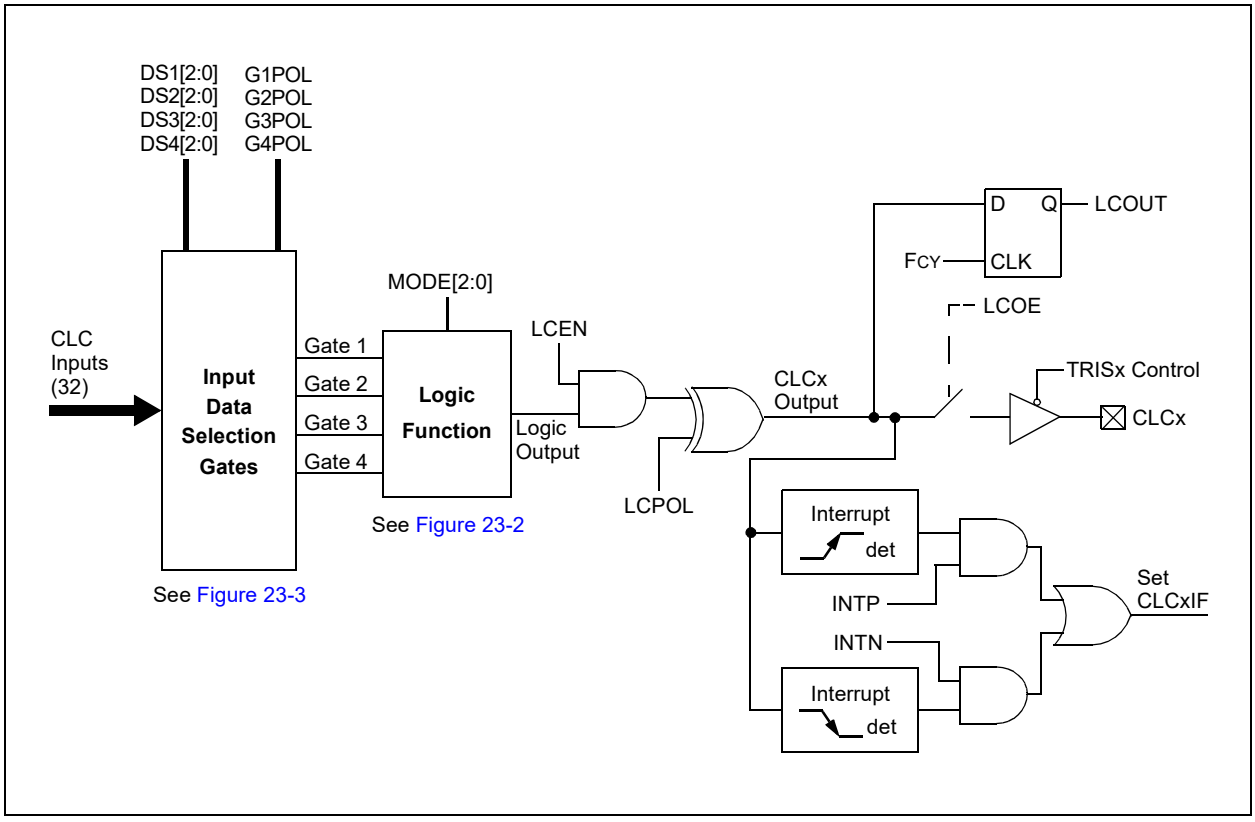

**FIGURE 23-2: CLCx LOGIC FUNCTION COMBINATORIAL OPTIONS**

**AND – OR**

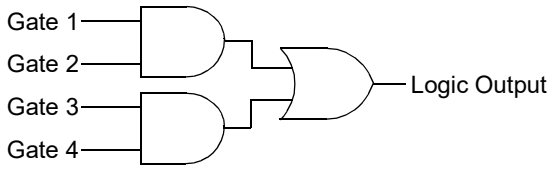


MODE[2:0] = 000

**OR – XOR**

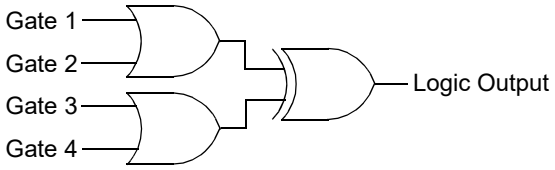


MODE[2:0] = 001

**4-Input AND**

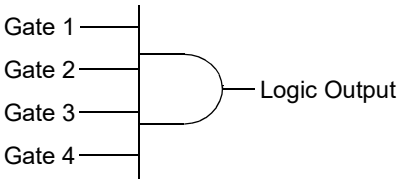


MODE[2:0] = 010

**S-R Latch**

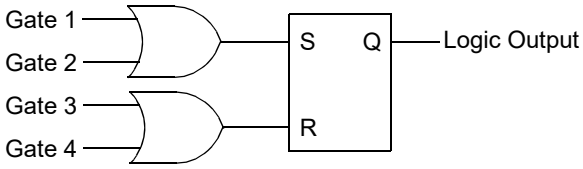


MODE[2:0] = 011

**1-Input D Flip-Flop with S and R**

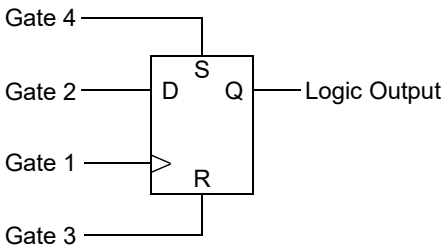


MODE[2:0] = 100

**2-Input D Flip-Flop with R**

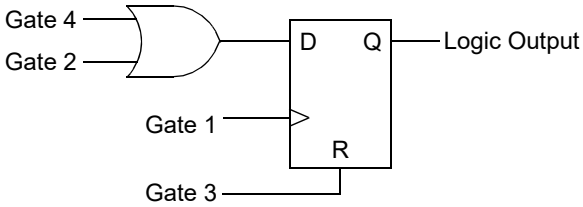


MODE[2:0] = 101

**J-K Flip-Flop with R**

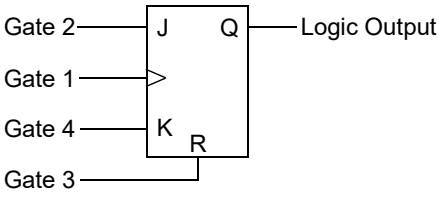


MODE[2:0] = 110

**1-Input Transparent Latch with S and R**

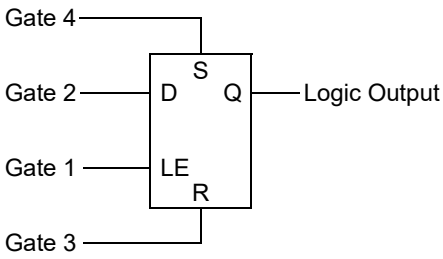


MODE[2:0] = 111


© 2017-2021 Microchip Technology Inc.

**FIGURE 23-3: CLCx INPUT SOURCE SELECTION DIAGRAM**

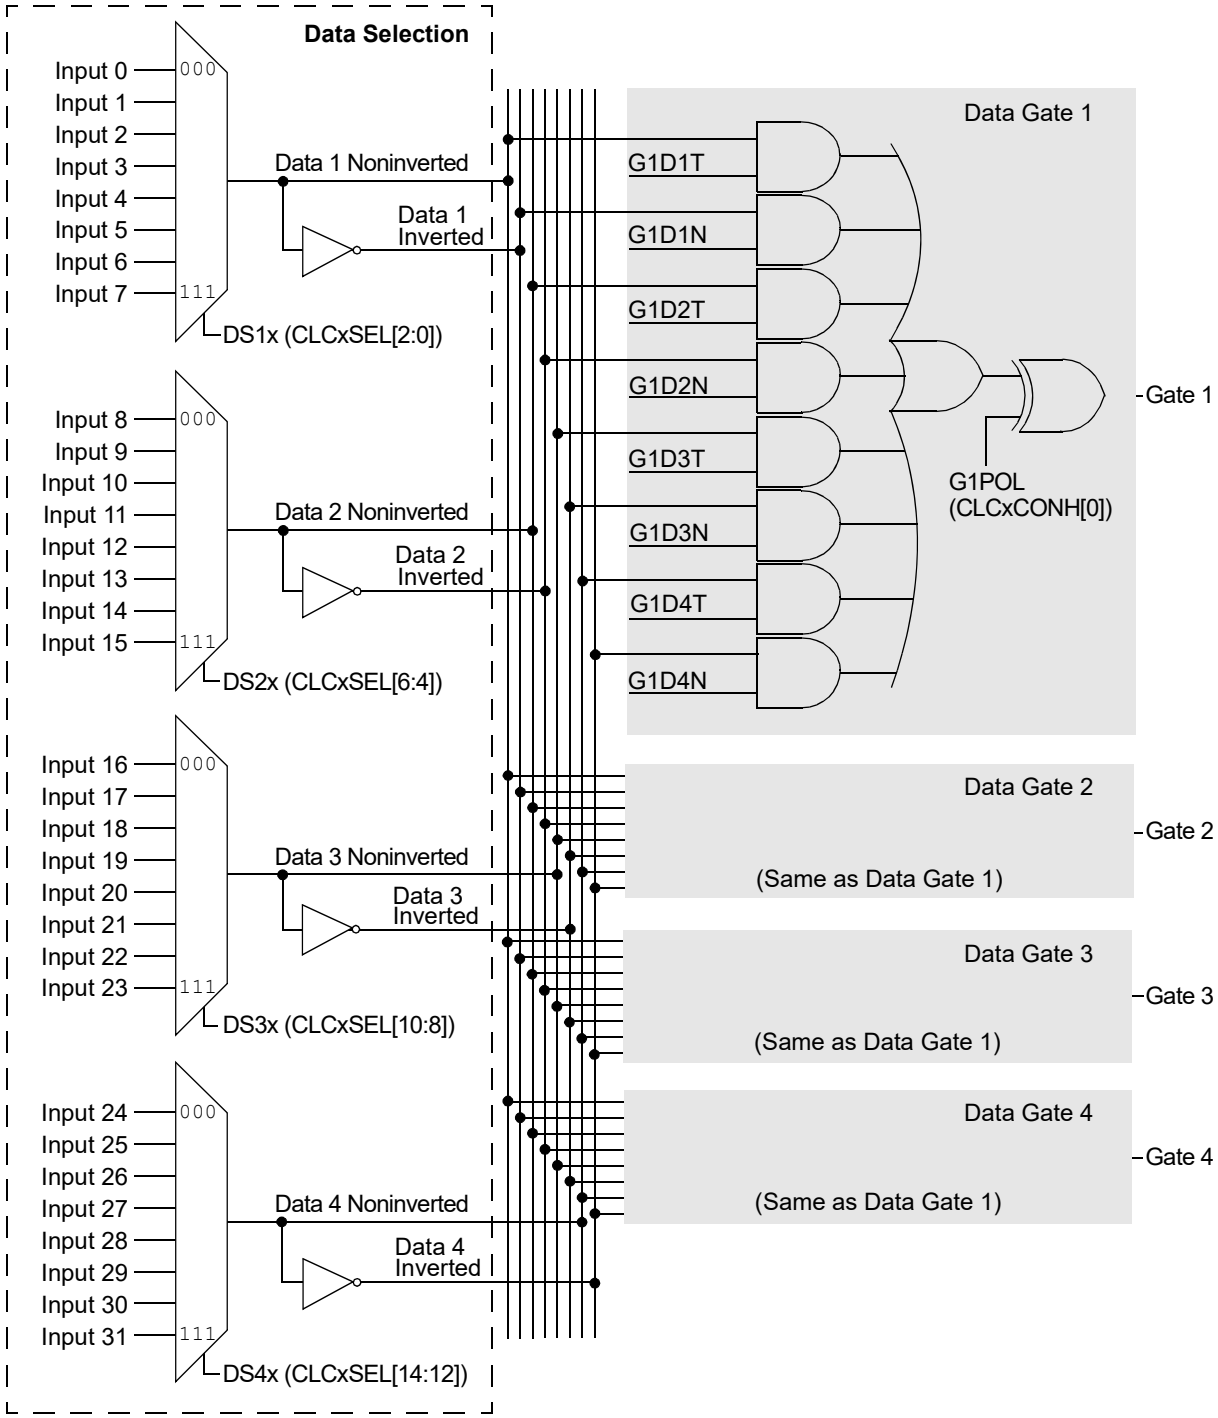


**Note:** All controls are undefined at power-up.

## 23.1 CLC Control Registers

The CLCx module is controlled by the following registers:

- CLCxCONL
- CLCxCONH
- CLCxSEL
- CLCxGLSL
- CLCxGLSH

The CLCx Control registers (CLCxCONL and CLCxCONH) are used to enable the module and interrupts, control the output enable bit, select output polarity and select the logic function. The CLCx Control registers also allow the user to control the logic polarity of not only the cell output, but also some intermediate variables.

The CLCx Input MUX Select register (CLCxSEL) allows the user to select up to four data input sources using the four data input selection multiplexers. Each multiplexer has a list of eight data sources available.

The CLCx Gate Logic Input Select registers (CLCxGLSL and CLCxGLSH) allow the user to select which outputs from each of the selection MUXes are used as inputs to the input gates of the logic cell. Each data source MUX outputs both a true and a negated version of its output. All of these eight signals are enabled, ORed together by the logic cell input gates. If no gate inputs are selected, the input to the gate will be zero or one, depending on the GxPOL bits.

**REGISTER 23-1: CLCxCONL: CLCx CONTROL REGISTER (LOW)**

| R/W-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| LCEN | — | — | — | INTP | INTN | — | — |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R/W-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| LCOE | LCOUT | LCPOL | — | — | MODE2 | MODE1 | MODE0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15 **LCEN:** CLCx Enable bit
1 = CLCx is enabled and mixing input signals
0 = CLCx is disabled and has logic zero outputs

bit 14-12 **Unimplemented:** Read as ‘0’

bit 11 **INTP:** CLCx Positive Edge Interrupt Enable bit
1 = Interrupt will be generated when a rising edge occurs on LCOUT
0 = Interrupt will not be generated

bit 10 **INTN:** CLCx Negative Edge Interrupt Enable bit
1 = Interrupt will be generated when a falling edge occurs on LCOUT
0 = Interrupt will not be generated

bit 9-8 **Unimplemented:** Read as ‘0’

bit 7 **LCOE:** CLCx Port Enable bit
1 = CLCx port pin output is enabled
0 = CLCx port pin output is disabled

bit 6 **LCOUT:** CLCx Data Output Status bit
1 = CLCx output high
0 = CLCx output low

bit 5 **LCPOL:** CLCx Output Polarity Control bit
1 = The output of the module is inverted
0 = The output of the module is not inverted

bit 4-3 **Unimplemented:** Read as ‘0’


© 2017-2021 Microchip Technology Inc.

**REGISTER 23-1: CLCxCONL: CLCx CONTROL REGISTER (LOW) (CONTINUED)**

bit 2-0 **MODE[2:0]:** CLCx Mode bits
111 = Single input transparent latch with S and R
110 = JK flip-flop with R
101 = Two-input D flip-flop with R
100 = Single input D flip-flop with S and R
011 = SR latch
010 = Four-input AND
001 = Four-input OR-XOR
000 = Four-input AND-OR

**REGISTER 23-2: CLCxCONH: CLCx CONTROL REGISTER (HIGH)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | G4POL | G3POL | G2POL | G1POL |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-4 **Unimplemented:** Read as '0'

bit 3 **G4POL:** Gate 4 Polarity Control bit
1 = Channel 4 logic output is inverted when applied to the logic cell
0 = Channel 4 logic output is not inverted

bit 2 **G3POL:** Gate 3 Polarity Control bit
1 = Channel 3 logic output is inverted when applied to the logic cell
0 = Channel 3 logic output is not inverted

bit 1 **G2POL:** Gate 2 Polarity Control bit
1 = Channel 2 logic output is inverted when applied to the logic cell
0 = Channel 2 logic output is not inverted

bit 0 **G1POL:** Gate 1 Polarity Control bit
1 = Channel 1 logic output is inverted when applied to the logic cell
0 = Channel 1 logic output is not inverted

**REGISTER 23-3: CLCxSEL: CLCx INPUT MUX SELECT REGISTER**

| U-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | DS4[2:0] | | | — | DS3[2:0] | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | DS2[2:0] | | | — | DS1[2:0] | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **Unimplemented:** Read as '0'

bit 14-12 **DS4[2:0]:** Data Selection MUX 4 Signal Selection bits
111 = SCCP3 auxiliary out
110 = SCCP1 auxiliary out
101 = CLCIND pin
100 = Reserved
011 = SPI1 Input (SDIx)(1)
010 = Comparator 3 output
001 = CLC2 output
000 = PWM Event A

bit 11 **Unimplemented:** Read as '0'

bit 10-8 **DS3[2:0]:** Data Selection MUX 3 Signal Selection bits
111 = SCCP4 output compare event
110 = SCCP3 output compare event
101 = CLC4 out
100 = UART1 RX
011 = SPI1 Output (SDOx)(1)
010 = Comparator 2 output
001 = CLC1 output
000 = CLCINC I/O pin

bit 7 **Unimplemented:** Read as '0'

bit 6-4 **DS2[2:0]:** Data Selection MUX 2 Signal Selection bits
111 = SCCP2 output compare event
110 = SCCP1 output compare event
101 = Reserved
100 = Reserved
011 = UART1 TX
010 = Comparator 1 output
001 = Reserved
000 = CLCINB I/O pin

bit 3 **Unimplemented:** Read as '0'

**Note 1:** Valid only when SPI is used on PPS.


© 2017-2021 Microchip Technology Inc.

**REGISTER 23-3: CLCxSEL: CLCx INPUT MUX SELECT REGISTER (CONTINUED)**

bit 2-0 **DS1[2:0]:** Data Selection MUX 1 Signal Selection bits
111 = SCCP4 auxiliary out
110 = SCCP2 auxiliary out
101 = Reserved
100 = REFCLKO output
011 = INTRC/LPRC clock source
010 = CLC3 out
001 = System clock (FCY)
000 = CLCINA I/O pin

**Note 1:** Valid only when SPI is used on PPS.

**REGISTER 23-4: CLCxGLSL: CLCx GATE LOGIC INPUT SELECT LOW REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| G2D4T | G2D4N | G2D3T | G2D3N | G2D2T | G2D2N | G2D1T | G2D1N |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| G1D4T | G1D4N | G1D3T | G1D3N | G1D2T | G1D2N | G1D1T | G1D1N |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **G2D4T:** Gate 2 Data Source 4 True Enable bit
1 = Data Source 4 signal is enabled for Gate 2
0 = Data Source 4 signal is disabled for Gate 2

bit 14 **G2D4N:** Gate 2 Data Source 4 Negated Enable bit
1 = Data Source 4 inverted signal is enabled for Gate 2
0 = Data Source 4 inverted signal is disabled for Gate 2

bit 13 **G2D3T:** Gate 2 Data Source 3 True Enable bit
1 = Data Source 3 signal is enabled for Gate 2
0 = Data Source 3 signal is disabled for Gate 2

bit 12 **G2D3N:** Gate 2 Data Source 3 Negated Enable bit
1 = Data Source 3 inverted signal is enabled for Gate 2
0 = Data Source 3 inverted signal is disabled for Gate 2

bit 11 **G2D2T:** Gate 2 Data Source 2 True Enable bit
1 = Data Source 2 signal is enabled for Gate 2
0 = Data Source 2 signal is disabled for Gate 2

bit 10 **G2D2N:** Gate 2 Data Source 2 Negated Enable bit
1 = Data Source 2 inverted signal is enabled for Gate 2
0 = Data Source 2 inverted signal is disabled for Gate 2

bit 9 **G2D1T:** Gate 2 Data Source 1 True Enable bit
1 = Data Source 1 signal is enabled for Gate 2
0 = Data Source 1 signal is disabled for Gate 2

bit 8 **G2D1N:** Gate 2 Data Source 1 Negated Enable bit
1 = Data Source 1 inverted signal is enabled for Gate 2
0 = Data Source 1 inverted signal is disabled for Gate 2

bit 7 **G1D4T:** Gate 1 Data Source 4 True Enable bit
1 = Data Source 4 signal is enabled for Gate 1
0 = Data Source 4 signal is disabled for Gate 1

bit 6 **G1D4N:** Gate 1 Data Source 4 Negated Enable bit
1 = Data Source 4 inverted signal is enabled for Gate 1
0 = Data Source 4 inverted signal is disabled for Gate 1

bit 5 **G1D3T:** Gate 1 Data Source 3 True Enable bit
1 = Data Source 3 signal is enabled for Gate 1
0 = Data Source 3 signal is disabled for Gate 1

bit 4 **G1D3N:** Gate 1 Data Source 3 Negated Enable bit
1 = Data Source 3 inverted signal is enabled for Gate 1
0 = Data Source 3 inverted signal is disabled for Gate 1


© 2017-2021 Microchip Technology Inc.

**REGISTER 23-4: CLCxGLSL: CLCx GATE LOGIC INPUT SELECT LOW REGISTER (CONTINUED)**

bit 3 **G1D2T:** Gate 1 Data Source 2 True Enable bit
1 = Data Source 2 signal is enabled for Gate 1
0 = Data Source 2 signal is disabled for Gate 1

bit 2 **G1D2N:** Gate 1 Data Source 2 Negated Enable bit
1 = Data Source 2 inverted signal is enabled for Gate 1
0 = Data Source 2 inverted signal is disabled for Gate 1

bit 1 **G1D1T:** Gate 1 Data Source 1 True Enable bit
1 = Data Source 1 signal is enabled for Gate 1
0 = Data Source 1 signal is disabled for Gate 1

bit 0 **G1D1N:** Gate 1 Data Source 1 Negated Enable bit
1 = Data Source 1 inverted signal is enabled for Gate 1
0 = Data Source 1 inverted signal is disabled for Gate 1

**REGISTER 23-5: CLCxGLSH: CLCx GATE LOGIC INPUT SELECT HIGH REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| G4D4T | G4D4N | G4D3T | G4D3N | G4D2T | G4D2N | G4D1T | G4D1N |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| G3D4T | G3D4N | G3D3T | G3D3N | G3D2T | G3D2N | G3D1T | G3D1N |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **G4D4T:** Gate 4 Data Source 4 True Enable bit
1 = Data Source 4 signal is enabled for Gate 4
0 = Data Source 4 signal is disabled for Gate 4

bit 14 **G4D4N:** Gate 4 Data Source 4 Negated Enable bit
1 = Data Source 4 inverted signal is enabled for Gate 4
0 = Data Source 4 inverted signal is disabled for Gate 4

bit 13 **G4D3T:** Gate 4 Data Source 3 True Enable bit
1 = Data Source 3 signal is enabled for Gate 4
0 = Data Source 3 signal is disabled for Gate 4

bit 12 **G4D3N:** Gate 4 Data Source 3 Negated Enable bit
1 = Data Source 3 inverted signal is enabled for Gate 4
0 = Data Source 3 inverted signal is disabled for Gate 4

bit 11 **G4D2T:** Gate 4 Data Source 2 True Enable bit
1 = Data Source 2 signal is enabled for Gate 4
0 = Data Source 2 signal is disabled for Gate 4

bit 10 **G4D2N:** Gate 4 Data Source 2 Negated Enable bit
1 = Data Source 2 inverted signal is enabled for Gate 4
0 = Data Source 2 inverted signal is disabled for Gate 4

bit 9 **G4D1T:** Gate 4 Data Source 1 True Enable bit
1 = Data Source 1 signal is enabled for Gate 4
0 = Data Source 1 signal is disabled for Gate 4

bit 8 **G4D1N:** Gate 4 Data Source 1 Negated Enable bit
1 = Data Source 1 inverted signal is enabled for Gate 4
0 = Data Source 1 inverted signal is disabled for Gate 4

bit 7 **G3D4T:** Gate 3 Data Source 4 True Enable bit
1 = Data Source 4 signal is enabled for Gate 3
0 = Data Source 4 signal is disabled for Gate 3

bit 6 **G3D4N:** Gate 3 Data Source 4 Negated Enable bit
1 = Data Source 4 inverted signal is enabled for Gate 3
0 = Data Source 4 inverted signal is disabled for Gate 3

bit 5 **G3D3T:** Gate 3 Data Source 3 True Enable bit
1 = Data Source 3 signal is enabled for Gate 3
0 = Data Source 3 signal is disabled for Gate 3

bit 4 **G3D3N:** Gate 3 Data Source 3 Negated Enable bit
1 = Data Source 3 inverted signal is enabled for Gate 3
0 = Data Source 3 inverted signal is disabled for Gate 3


© 2017-2021 Microchip Technology Inc.

**REGISTER 23-5: CLCxGLSH: CLCx GATE LOGIC INPUT SELECT HIGH REGISTER (CONTINUED)**

bit 3 **G3D2T:** Gate 3 Data Source 2 True Enable bit
1 = Data Source 2 signal is enabled for Gate 3
0 = Data Source 2 signal is disabled for Gate 3

bit 2 **G3D2N:** Gate 3 Data Source 2 Negated Enable bit
1 = Data Source 2 inverted signal is enabled for Gate 3
0 = Data Source 2 inverted signal is disabled for Gate 3

bit 1 **G3D1T:** Gate 3 Data Source 1 True Enable bit
1 = Data Source 1 signal is enabled for Gate 3
0 = Data Source 1 signal is disabled for Gate 3

bit 0 **G3D1N:** Gate 3 Data Source 1 Negated Enable bit
1 = Data Source 1 inverted signal is enabled for Gate 3
0 = Data Source 1 inverted signal is disabled for Gate 3

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 24.0 PERIPHERAL TRIGGER GENERATOR (PTG)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Peripheral Trigger Generator (PTG)"** (www.microchip.com/DS70000669) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The dsPIC33CK256MP508 family Peripheral Trigger Generator (PTG) module is a user-programmable sequencer that is capable of generating complex trigger signal sequences to coordinate the operation of other peripherals. The PTG module is designed to interface with the modules, such as an Analog-to-Digital Converter (ADC), output compare and PWM modules, timers and interrupt controllers.

### 24.1 Features

- Behavior is Step Command Driven:
  - Step commands are eight bits wide
- Commands are Stored in a Step Queue:
  - Queue depth is up to 32 entries
  - Programmable Step execution time (Step delay)
- Supports the Command Sequence Loop:
  - Can be nested one-level deep
  - Conditional or unconditional loop
  - Two 16-bit loop counters
- 15 Hardware Input Triggers:
  - Sensitive to either positive or negative edges, or a high or low level
- One Software Input Trigger
- Generates up to 32 Unique Output Trigger Signals
- Generates Two Types of Trigger Outputs:
  - Individual
  - Broadcast
- Strobed Output Port for Literal Data Values:
  - 5-bit literal write (literal part of a command)
  - 16-bit literal write (literal held in the PTGL0 register)
- Generates up to Ten Unique Interrupt Signals
- Two 16-Bit General Purpose Timers
- Flexible Self-Contained Watchdog Timer (WDT) to Set an Upper Limit to Trigger Wait Time
- Single-Step Command Capability in Debug mode
- Selectable Clock (System, Pulse-Width Modulator (PWM) or ADC)
- Programmable Clock Divider

**FIGURE 24-1: PTG BLOCK DIAGRAM**

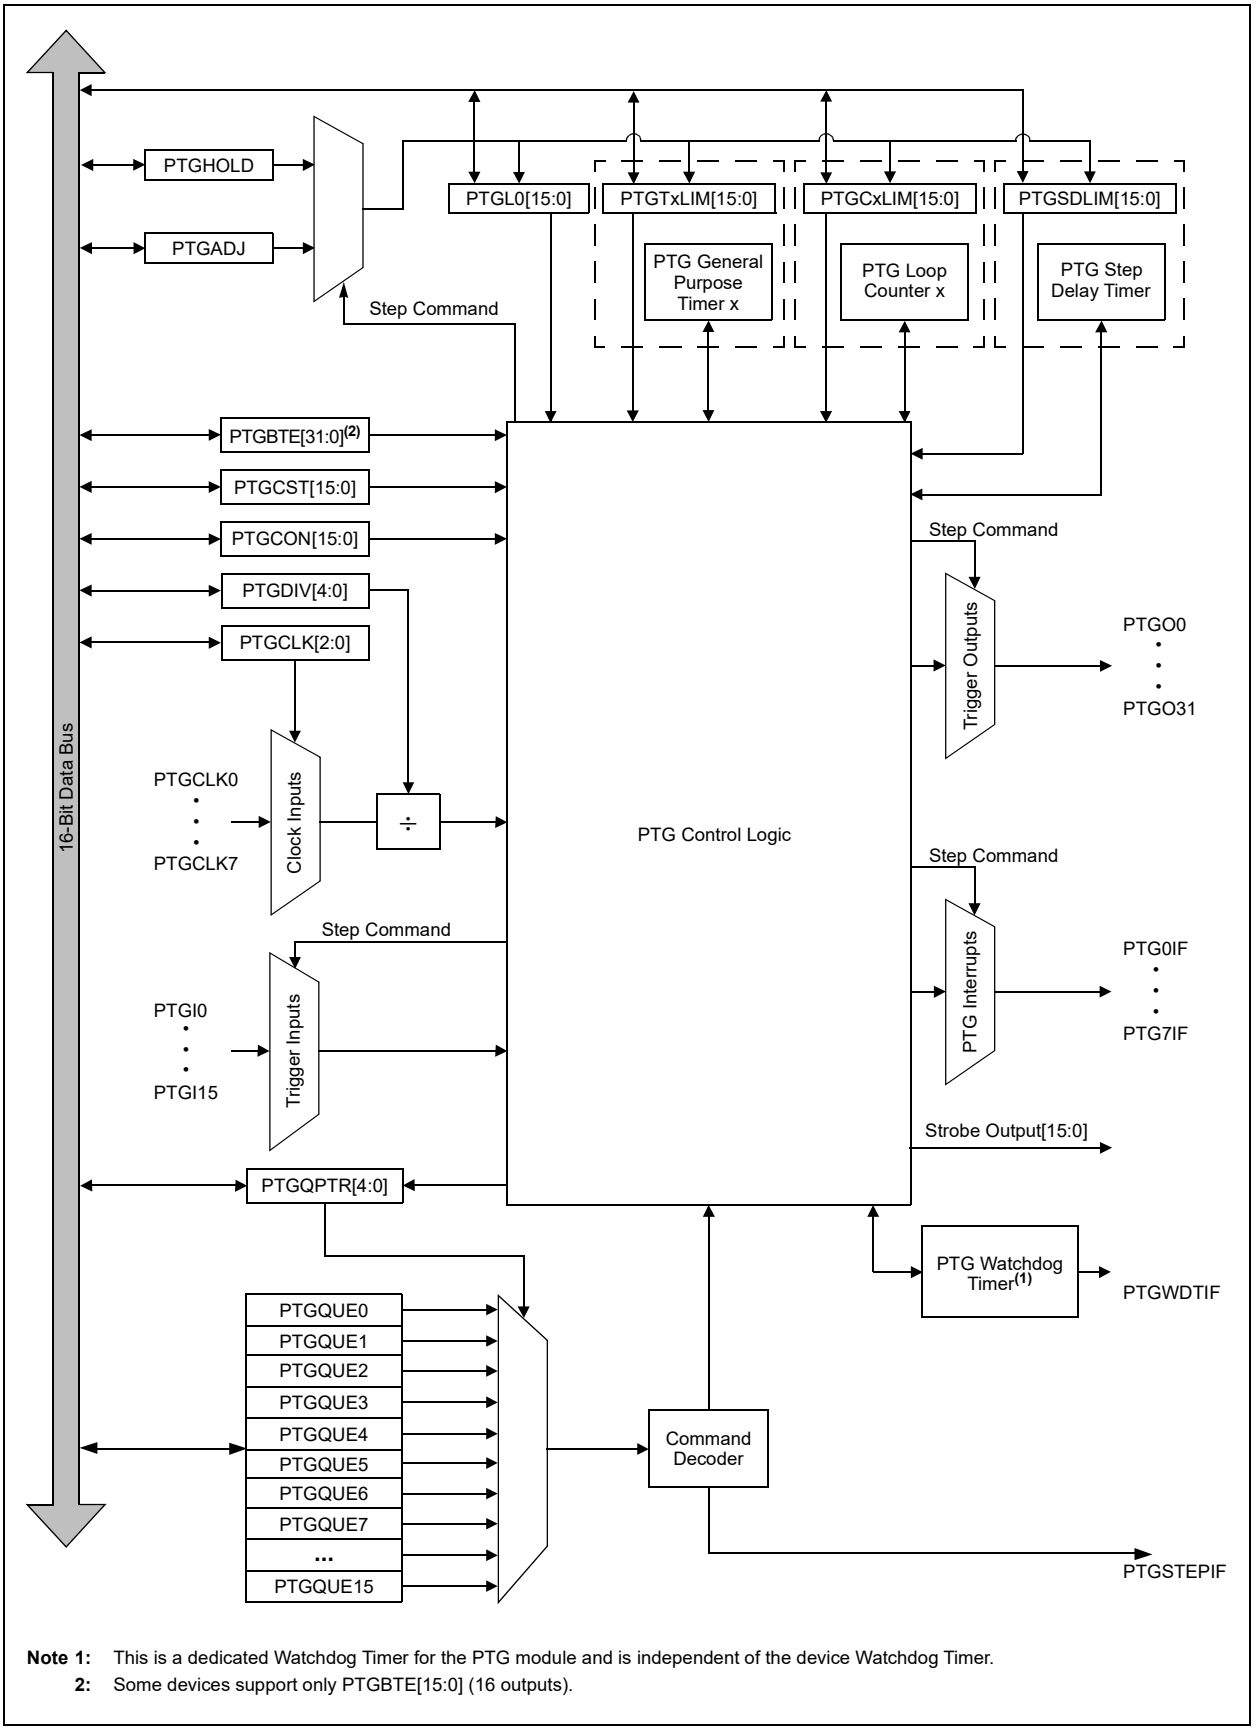


**Note 1:** This is a dedicated Watchdog Timer for the PTG module and is independent of the device Watchdog Timer.

**2:** Some devices support only PTGBTE[15:0] (16 outputs).


© 2017-2021 Microchip Technology Inc.

## 24.2 PTG Control Registers

**REGISTER 24-1: PTGCST: PTG CONTROL/STATUS LOW REGISTER**

| R/W-0 | U-0 | R/W-0 | R/W-0 | U-0 | HC/R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGEN | — | PTGSIDL | PTGTOGL | — | PTGSWT(2) | PTGSSEN(3) | PTGIVIS |
| bit 15 | | | | | | | bit 8 |

| HC/R/W-0 | HS/R/W-0 | HS/HC/R/W-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGSTRT | PTGWDTO | PTGBUSY | — | — | — | PTGITM1(1) | PTGITM0(1) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HC = Hardware Clearable bit | HS = Hardware Settable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **PTGEN:** PTG Enable bit
1 = PTG is enabled
0 = PTG is disabled

bit 14 **Unimplemented:** Read as '0'

bit 13 **PTGSIDL:** PTG Freeze in Debug Mode bit
1 = Halts PTG operation when device is Idle
0 = PTG operation continues when device is Idle

bit 12 **PTGTOGL:** PTG Toggle Trigger Output bit
1 = Toggles state of TRIG output for each execution of PTGTRIG
0 = Generates a single TRIG pulse for each execution of PTGTRIG

bit 11 **Unimplemented:** Read as '0'

bit 10 **PTGSWT:** PTG Software Trigger bit(2)
1 = If the PTG state machine is executing the "Wait for software trigger" Step command (OPTION[3:0] = 1010 or 1011), the command will complete and execution will continue
0 = No action other than to clear the bit

bit 9 **PTGSSEN:** PTG Single-Step Command bit(3)
1 = Enables single Step when in Debug mode
0 = Disables single Step

bit 8 **PTGIVIS:** PTG Counter/Timer Visibility bit
1 = Reading the PTGSDLIM, PTGCxLIM or PTGTxLIM registers returns the current values of their corresponding Counter/Timer registers (PTGSDLIM, PTGCxLIM and PTGTxLIM)
0 = Reading the PTGSDLIM, PTGCxLIM or PTGTxLIM registers returns the value of these Limit registers

bit 7 **PTGSTRT:** PTG Start Sequencer bit
1 = Starts to sequentially execute the commands (Continuous mode)
0 = Stops executing the commands

bit 6 **PTGWDTO:** PTG Watchdog Timer Time-out Status bit
1 = PTG Watchdog Timer has timed out
0 = PTG Watchdog Timer has not timed out

**Note 1:** These bits apply to the PTGWHI and PTGWLO commands only.
**2:** This bit is only used with the PTGCTRL Step command software trigger option.
**3:** The PTGSSEN bit may only be written when in Debug mode.

**REGISTER 24-1: PTGCST: PTG CONTROL/STATUS LOW REGISTER (CONTINUED)**

bit 5 **PTGBUSY:** PTG State Machine Busy bit
- 1 = PTG is running on the selected clock source; no SFR writes are allowed to PTGCLK[2:0] or PTGDIV[4:0]
- 0 = PTG state machine is not running

bit 4-2 **Unimplemented:** Read as '0'

bit 1-0 **PTGITM[1:0]:** PTG Input Trigger Operation Selection bit(1)
- 11 = Single-level detect with Step delay not executed on exit of command (regardless of the PTGCTRL command) (Mode 3)
- 10 = Single-level detect with Step delay executed on exit of command (Mode 2)
- 01 = Continuous edge detect with Step delay not executed on exit of command (regardless of the PTGCTRL command) (Mode 1)
- 00 = Continuous edge detect with Step delay executed on exit of command (Mode 0)

**Note 1:** These bits apply to the PTGWHI and PTGWLO commands only.

**2:** This bit is only used with the PTGCTRL Step command software trigger option.

**3:** The PTGSSEN bit may only be written when in Debug mode.


© 2017-2021 Microchip Technology Inc.

**REGISTER 24-2: PTGCON: PTG CONTROL/STATUS HIGH REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGCLK2 | PTGCLK1 | PTGCLK0 | PTGDIV4 | PTGDIV3 | PTGDIV2 | PTGDIV1 | PTGDIV0 |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGPWD3 | PTGPWD2 | PTGPWD1 | PTGPWD0 | — | PTGWDT2 | PTGWDT1 | PTGWDT0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-13 **PTGCLK[2:0]:** PTG Module Clock Source Selection bits
111 = CLC1
110 = PLL VCO DIV 4 output
101 = PTG module clock source will be SCCP7
100 = PTG module clock source will be SCCP8
011 = Input from Timer1 Clock pin, T1CK
010 = PTG module clock source will be ADC clock
001 = PTG module clock source will be FOSC
000 = PTG module clock source will be FOSC/2 (FP)

bit 12-8 **PTGDIV[4:0]:** PTG Module Clock Prescaler (Divider) bits
11111 = Divide-by-32
11110 = Divide-by-31
...
00001 = Divide-by-2
00000 = Divide-by-1

bit 7-4 **PTGPWD[3:0]:** PTG Trigger Output Pulse-Width (in PTG clock cycles) bits
1111 = All trigger outputs are 16 PTG clock cycles wide
1110 = All trigger outputs are 15 PTG clock cycles wide
...
0001 = All trigger outputs are 2 PTG clock cycles wide
0000 = All trigger outputs are 1 PTG clock cycle wide

bit 3 **Unimplemented:** Read as ‘0’

bit 2-0 **PTGWDT[2:0]:** PTG Watchdog Timer Time-out Selection bits
111 = Watchdog Timer will time out after 512 PTG clocks
110 = Watchdog Timer will time out after 256 PTG clocks
101 = Watchdog Timer will time out after 128 PTG clocks
100 = Watchdog Timer will time out after 64 PTG clocks
011 = Watchdog Timer will time out after 32 PTG clocks
010 = Watchdog Timer will time out after 16 PTG clocks
001 = Watchdog Timer will time out after 8 PTG clocks
000 = Watchdog Timer is disabled

**REGISTER 24-3: PTGBTE: PTG BROADCAST TRIGGER ENABLE LOW REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGBTE[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGBTE[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PTGBTE[15:0]:** PTG Broadcast Trigger Enable bits
1 = Generates trigger when the broadcast command is executed
0 = Does not generate trigger when the broadcast command is executed

**Note 1:** These bits are read-only when the module is executing Step commands.

**REGISTER 24-4: PTGBTEH: PTG BROADCAST TRIGGER ENABLE HIGH REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGBTE[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGBTE[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PTGBTE[31:16]:** PTG Broadcast Trigger Enable bits
1 = Generates trigger when the broadcast command is executed
0 = Does not generate trigger when the broadcast command is executed

**Note 1:** These bits are read-only when the module is executing Step commands.


© 2017-2021 Microchip Technology Inc.

**REGISTER 24-5: PTGHOLD: PTG HOLD REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGHOLD[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGHOLD[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PTGHOLD[15:0]:** PTG General Purpose Hold Register bits
This register holds the user-supplied data to be copied to the PTGTxLIM, PTGCxLIM, PTGSDLIM or PTGL0 register using the `PTGCOPY` command.

**Note 1:** These bits are read-only when the module is executing Step commands.

**REGISTER 24-6: PTGT0LIM: PTG TIMER0 LIMIT REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGT0LIM[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGT0LIM[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PTGT0LIM[15:0]:** PTG Timer0 Limit Register bits
General Purpose Timer0 Limit register.

**Note 1:** These bits are read-only when the module is executing Step commands.

**REGISTER 24-7: PTGT1LIM: PTG TIMER1 LIMIT REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGT1LIM[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGT1LIM[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PTGT1LIM[15:0]:** PTG Timer1 Limit Register bits
General Purpose Timer1 Limit register.

**Note 1:** These bits are read-only when the module is executing Step commands.

**REGISTER 24-8: PTGSDLIM: PTG STEP DELAY LIMIT REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGSDLIM[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGSDLIM[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PTGSDLIM[15:0]:** PTG Step Delay Limit Register bits
This register holds a PTG Step delay value representing the number of additional PTG clocks between the start of a Step command and the completion of a Step command.

**Note 1:** These bits are read-only when the module is executing Step commands.


© 2017-2021 Microchip Technology Inc.

**REGISTER 24-9: PTGC0LIM: PTG COUNTER 0 LIMIT REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGC0LIM[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGC0LIM[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PTGC0LIM[15:0]:** PTG Counter 0 Limit Register bits
This register is used to specify the loop count for the `PTGJMPC0` Step command or as a Limit register for the General Purpose Counter 0.

**Note 1:** These bits are read-only when the module is executing Step commands.

**REGISTER 24-10: PTGC1LIM: PTG COUNTER 1 LIMIT REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGC1LIM[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGC1LIM[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PTGC1LIM[15:0]:** PTG Counter 1 Limit Register bits
This register is used to specify the loop count for the `PTGJMPC1` Step command or as a Limit register for the General Purpose Counter 1.

**Note 1:** These bits are read-only when the module is executing Step commands.

**REGISTER 24-11: PTGADJ: PTG ADJUST REGISTER(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGADJ[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGADJ[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PTGADJ[15:0]:** PTG Adjust Register bits
This register holds the user-supplied data to be added to the PTGTxLIM, PTGCxLIM, PTGSDLIM or PTGL0 register using the `PTGADD` command.

**Note 1:** These bits are read-only when the module is executing Step commands.

**REGISTER 24-12: PTGL0: PTG LITERAL 0 REGISTER(1,2)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGL0[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| PTGL0[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PTGL0[15:0]:** PTG Literal 0 Register bits
This register holds the 6-bit value to be written to the CNVCHSEL[5:0] bits (ADCON3L[5:0]) with the `PTGCTRL` Step command.

**Note 1:** These bits are read-only when the module is executing Step commands.
**2:** The PTG strobe output is typically connected to the ADC Channel Select register. This allows the PTG to directly control ADC channel switching. See the specific device data sheet for connections of the PTG output.


© 2017-2021 Microchip Technology Inc.

**REGISTER 24-13: PTGQPTR: PTG STEP QUEUE POINTER REGISTER(1)**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | PTGQPTR[4:0] | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-5 **Unimplemented:** Read as '0'

bit 4-0 **PTGQPTR[4:0]:** PTG Step Queue Pointer Register bits
This register points to the currently active Step command in the Step queue.

**Note 1:** These bits are read-only when the module is executing Step commands.

**REGISTER 24-14: PTGQUEn: PTG STEP QUEUE n POINTER REGISTER (n = 0-15)(1)**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| STEP2n+1[7:0](2) | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| STEP2n[7:0](2) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **STEP2n+1[7:0]:** PTG Command 2n+1 bits(2)
A queue location for storage of the STEP2n+1 command byte, where 'n' is from PTGQUEn.

bit **STEP2n[7:0]:** PTG Command 2n bits(2)
A queue location for storage of the STEP2n command byte, where 'n' is the odd numbered Step Queue Pointers.

**Note 1:** These bits are read-only when the module is executing Step commands.
**2:** Refer to Table 24-1 for the Step command encoding.

**TABLE 24-1: PTG STEP COMMAND FORMAT AND DESCRIPTION**

| Step Command Byte | | | | | | | |
|---|---|---|---|---|---|---|---|
| STEPx[7:0] | | | | | | | |
| CMD[3:0] | | | | OPTION[3:0] | | | |
| bit 7 | | | bit 4 | bit 3 | | | bit 0 |

| bit 7-4 | Step Command | CMD[3:0] | Command Description |
|---|---|---|---|
| | PTGCTRL | 0000 | Execute the control command as described by the OPTION[3:0] bits. |
| | PTGADD | 0001 | Add contents of the PTGADJ register to the target register as described by the OPTION[3:0] bits. |
| | PTGCOPY | | Copy contents of the PTGHOLD register to the target register as described by the OPTION[3:0] bits. |
| | PTGSTRB | 001x | Copy the values contained in the bits, CMD[0]:OPTION[3:0] to the strobe output bits [4:0]. |
| | PTGWHI | 0100 | Wait for a low-to-high edge input from a selected PTG trigger input as described by the OPTION[3:0] bits. |
| | PTGWLO | 0101 | Wait for a high-to-low edge input from a selected PTG trigger input as described by the OPTION[3:0] bits. |
| | — | 0110 | Reserved; do not use.(1) |
| | PTGIRQ | 0111 | Generate individual interrupt request as described by the OPTION[3:0] bits. |
| | PTGTRIG | 100x | Generate individual trigger output as described by the bits, CMD[0]:OPTION[3:0]. |
| | PTGJMP | 101x | Copy the values contained in the bits, CMD[0]:OPTION[3:0] to the PTGQPTR register, and jump to that Step queue. |
| | PTGJMPC0 | 110x | PTGC0 = PTGC0LIM: Increment the PTGQPTR register. |
| | | | PTGC0 ≠ PTGC0LIM: Increment Counter 0 (PTGC0) and copy the values contained in the bits, CMD[0]:OPTION[3:0] to the PTGQPTR register, and jump to that Step queue. |
| | PTGJMPC1 | 111x | PTGC1 = PTGC1LIM: Increment the PTGQPTR register. |
| | | | PTGC1 ≠ PTGC1LIM: Increment Counter 1 (PTGC1) and copy the values contained in the bits, CMD[0]:OPTION[3:0] to the PTGQPTR register, and jump to that Step queue. |

**Note 1:** All reserved commands or options will execute, but they do not have any affect (i.e., execute as a NOP instruction).


© 2017-2021 Microchip Technology Inc.

**TABLE 24-2: PTG COMMAND OPTIONS**

| bit 3-0 | Step Command | OPTION[3:0] | Command Description |
|---|---|---|---|
| | PTGCTRL(1) | 0000 | NOP. |
| | | 0001 | Reserved; do not use. |
| | | 0010 | Disable Step delay timer (PTGSD). |
| | | 0011 | Reserved; do not use. |
| | | 0100 | Reserved; do not use. |
| | | 0101 | Reserved; do not use. |
| | | 0110 | Enable Step delay timer (PTGSD). |
| | | 0111 | Reserved; do not use. |
| | | 1000 | Start and wait for the PTG Timer0 to match the PTGT0LIM register. |
| | | 1001 | Start and wait for the PTG Timer1 to match the PTGT1LIM register. |
| | | 1010 | Wait for the software trigger (level, PTGSWT = 1). |
| | | 1011 | Wait for the software trigger (positive edge, PTGSWT = 0 to 1). |
| | | 1100 | Copy the PTGC0LIM register contents to the strobe output. |
| | | 1101 | Copy the PTGC1LIM register contents to the strobe output. |
| | | 1110 | Copy the PTGL0 register contents to the strobe output. |
| | | 1111 | Generate the triggers indicated in the PTGBTE register. |
| | PTGADD(1) | 0000 | Add the PTGADJ register contents to the PTGC0LIM register. |
| | | 0001 | Add the PTGADJ register contents to the PTGC1LIM register. |
| | | 0010 | Add the PTGADJ register contents to the PTGT0LIM register. |
| | | 0011 | Add the PTGADJ register contents to the PTGT1LIM register. |
| | | 0100 | Add the PTGADJ register contents to the PTGSDLIM register. |
| | | 0101 | Add the PTGADJ register contents to the PTGL0 register. |
| | | 0110 | Reserved; do not use. |
| | | 0111 | Reserved; do not use. |
| | PTGCOPY(1) | 1000 | Copy the PTGHOLD register contents to the PTGC0LIM register. |
| | | 1001 | Copy the PTGHOLD register contents to the PTGC1LIM register. |
| | | 1010 | Copy the PTGHOLD register contents to the PTGT0LIM register. |
| | | 1011 | Copy the PTGHOLD register contents to the PTGT1LIM register. |
| | | 1100 | Copy the PTGHOLD register contents to the PTGSDLIM register. |
| | | 1101 | Copy the PTGHOLD register contents to the PTGL0 register. |
| | | 1110 | Reserved; do not use. |
| | | 1111 | Reserved; do not use. |

**Note 1:** All reserved commands or options will execute, but they do not have any affect (i.e., execute as a NOP instruction).

**TABLE 24-2: PTG COMMAND OPTIONS (CONTINUED)**

| bit 3-0 | Step Command | OPTION[3:0] | Option Description |
|---|---|---|---|
| | PTGWHI[(1)] or PTGWLO[(1)] | 0000 | PTGI0 (see Table 24-3 for input assignments). |
| | | • • • | • • • |
| | | 1111 | PTGI15 (see Table 24-3 for input assignments). |
| | PTGIRQ[(1)] | 0000 | Generate PTG Interrupt 0. |
| | | • • • | • • • |
| | | 0111 | Generate PTG Interrupt 7. |
| | | 1000 | Reserved; do not use. |
| | | • • • | • • • |
| | | 1111 | Reserved; do not use. |
| | PTGTRIG | 00000 | PTGO0 (see Table 24-4 for output assignments). |
| | | 00001 | PTGO1 (see Table 24-4 for output assignments). |
| | | • • • | • • • |
| | | 11110 | PTGO30 (see Table 24-4 for output assignments). |
| | | 11111 | PTGO31 (see Table 24-4 for output assignments). |
| | PTGWHI[(1)] or PTGWLO[(1)] | 0000 | PTGI0 (see specific device data sheet for input assignments). |
| | | • • • | • • • |
| | | 1111 | PTGI15 (see specific device data sheet for input assignments). |
| | PTGIRQ[(1)] | 0000 | Generate PTG Interrupt 0 (see specific device data sheet for interrupt assignments). |
| | | • • • | • • • |
| | | 0111 | Generate PTG Interrupt 7 (see specific device data sheet for interrupt assignments). |
| | | 1000 | Reserved; do not use. |
| | | • • • | • • • |
| | | 1111 | Reserved; do not use. |
| | PTGTRIG | 00000 | PTGO0 (see specific device data sheet for assignments). |
| | | 00001 | PTGO1 (see specific device data sheet for assignments). |

**Note 1:** All reserved commands or options will execute, but they do not have any affect (i.e., execute as a NOP instruction).


© 2017-2021 Microchip Technology Inc.

**TABLE 24-3: PTG INPUT DESCRIPTIONS**

| PTG Input Number | PTG Input Description |
|---|---|
| PTG Trigger Input 0 | Trigger Input from PWM1 ADC Trigger 2 |
| PTG Trigger Input 1 | Trigger Input from PWM2 ADC Trigger 2 |
| PTG Trigger Input 2 | Trigger Input from PWM3 ADC Trigger 2 |
| PTG Trigger Input 3 | Trigger Input from PWM4 ADC Trigger 2 |
| PTG Trigger Input 4 | Trigger Input from PWM5 ADC Trigger 2 |
| PTG Trigger Input 5 | Trigger Input from PWM6 ADC Trigger 2 |
| PTG Trigger Input 6 | Trigger Input from PWM7 ADC Trigger 2 |
| PTG Trigger Input 7 | Trigger Input from SCCP4 |
| PTG Trigger Input 8 | Trigger Input from SCCP5 |
| PTG Trigger Input 9 | Trigger Input from Comparator 1 |
| PTG Trigger Input 10 | Trigger Input from Comparator 2 |
| PTG Trigger Input 11 | Trigger Input from Comparator 3 |
| PTG Trigger Input 12 | Trigger Input from CLC1 |
| PTG Trigger Input 13 | Trigger Input from ADC Done Group Interrupt |
| PTG Trigger Input 14 | Reserved |
| PTG Trigger Input 15 | Trigger Input from INT2 PPS |

**TABLE 24-4: PTG OUTPUT DESCRIPTIONS**

| PTG Output Number | PTG Output Description |
|---|---|
| PTGO0 to PTGO11 | Reserved |
| PTGO12 | ADC TRGSRC[30] |
| PTGO13 to PTGO23 | Reserved |
| PTGO24 | PPS Output RP46 |
| PTGO25 | PPS Output RP47 |
| PTGO26 | PPS Input RP6 |
| PTGO27 | PPS Input RP7 |
| PTGO28 to PTGO31 | Reserved |

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 25.0 32-BIT PROGRAMMABLE CYCLIC REDUNDANCY CHECK (CRC) GENERATOR

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. For more information, refer to **"32-Bit Programmable Cyclic Redundancy Check (CRC)"** (www.microchip.com/DS30009729) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The 32-bit programmable CRC generator provides a hardware implemented method of quickly generating checksums for various networking and security applications. It offers the following features:

- User-Programmable CRC Polynomial Equation, up to 32 Bits
- Programmable Shift Direction (little or big-endian)
- Independent Data and Polynomial Lengths
- Configurable Interrupt Output
- Data FIFO

A simple version of the CRC shift engine is displayed in Figure 25-1.

**FIGURE 25-1: CRC MODULE BLOCK DIAGRAM**

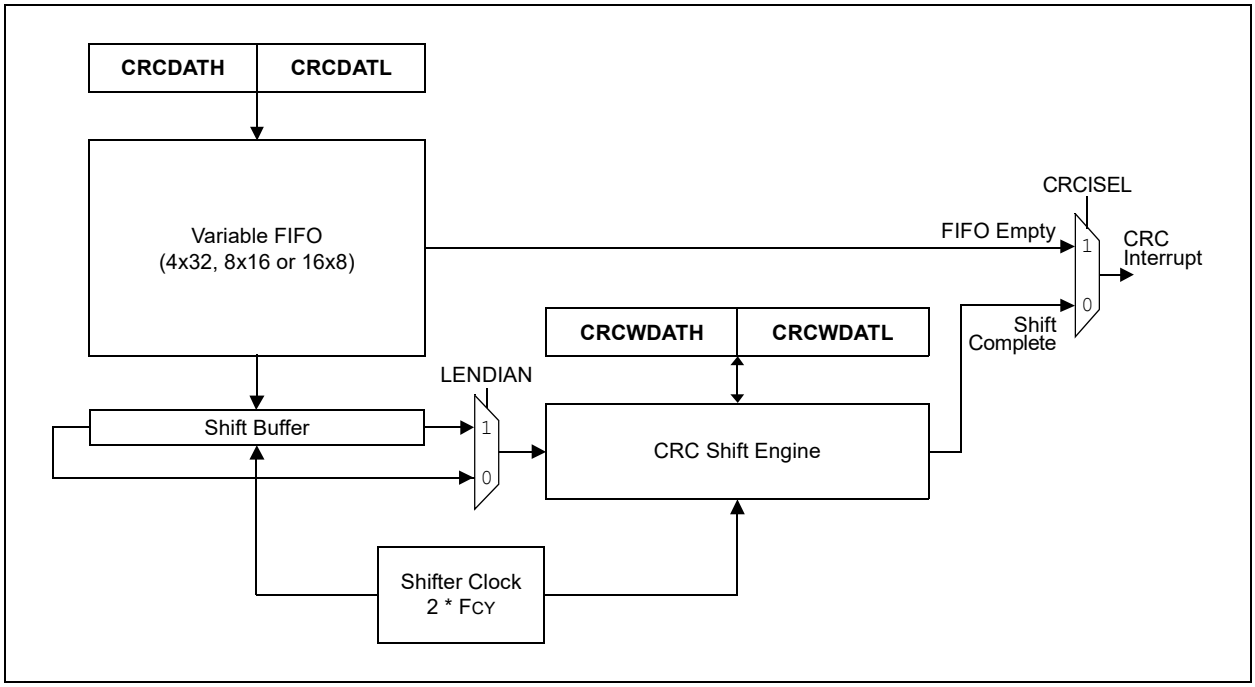

## 25.1 CRC Control Registers

**REGISTER 25-1: CRCCONL: CRC CONTROL REGISTER LOW**

| R/W-0 | U-0 | R/W-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 | HSC/R-0 |
|---|---|---|---|---|---|---|---|
| CRCEN | — | CSIDL | VWORD4 | VWORD3 | VWORD2 | VWORD1 | VWORD0 |
| bit 15 | | | | | | | bit 8 |

| HSC/R-0 | HSC/R-1 | R/W-0 | HC/R/W-0 | R/W-0 | R/W-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| CRCFUL | CRCMPT | CRCISEL | CRCGO | LENDIAN | MOD | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HC = Hardware Clearable bit | HSC = Hardware Settable/Clearable bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **CRCEN:** CRC Enable bit
1 = Enables module
0 = Disables module

bit 14 **Unimplemented:** Read as '0'

bit 13 **CSIDL:** CRC Stop in Idle Mode bit
1 = Discontinues module operation when device enters Idle mode
0 = Continues module operation in Idle mode

bit 12-8 **VWORD[4:0]:** Pointer Value bits
Indicates the number of valid words in the FIFO. Has a maximum value of 8 when PLEN[4:0] ≥ 7 or 16 when PLEN[4:0] ≤ 7.

bit 7 **CRCFUL:** CRC FIFO Full bit
1 = FIFO is full
0 = FIFO is not full

bit 6 **CRCMPT:** CRC FIFO Empty bit
1 = FIFO is empty
0 = FIFO is not empty

bit 5 **CRCISEL:** CRC Interrupt Selection bit
1 = Interrupt on FIFO is empty; the final word of data is still shifting through the CRC
0 = Interrupt on shift is complete and results are ready

bit 4 **CRCGO:** CRC Start bit
1 = Starts CRC serial shifter
0 = CRC serial shifter is turned off

bit 3 **LENDIAN:** Data Shift Direction Select bit
1 = Data word is shifted into the FIFO, starting with the LSb (little-endian)
0 = Data word is shifted into the FIFO, starting with the MSb (big-endian)

bit 2 **MOD:** CRC Calculation Mode bit
1 = Alternate mode
0 = Legacy mode bit

bit 1-0 **Unimplemented:** Read as '0'


© 2017-2021 Microchip Technology Inc.

**REGISTER 25-2: CRCCONH: CRC CONTROL REGISTER HIGH**

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | DWIDTH[4:0] | | | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | PLEN[4:0] | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-13 **Unimplemented:** Read as ‘0’

bit 12-8 **DWIDTH[4:0]:** Data Word Width Configuration bits
Configures the width of the data word (Data Word Width – 1).

bit 7-5 **Unimplemented:** Read as ‘0’

bit 4-0 **PLEN[4:0]:** Polynomial Length Configuration bits
Configures the length of the polynomial (Polynomial Length – 1).

**REGISTER 25-3: CRCXORL: CRC XOR POLYNOMIAL REGISTER, LOW**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| X[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 |
|---|---|---|---|---|---|---|---|
| X[7:1] | | | | | | | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-1 **X[15:1]:** XOR of Polynomial Term $x^n$ Enable bits

bit 0 **Unimplemented:** Read as '0'

**REGISTER 25-4: CRCXORH: CRC XOR POLYNOMIAL REGISTER, HIGH**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| X[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| X[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **X[31:16]:** XOR of Polynomial Term $x^n$ Enable bits


© 2017-2021 Microchip Technology Inc.

## 26.0 CURRENT BIAS GENERATOR (CBG)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Current Bias Generator (CBG)"** (www.microchip.com/DS70005253) in the *"dsPIC33/PIC24 Family Reference Manual"*.

**2:** Some registers and associated bits described in this section may not be available on all devices. Refer to Table 26-1 for CBG channel availability on package variants.

The Current Bias Generator (CBG) consists of two classes of current sources: 10 µA and 50 µA sources. The major features of each current source are:

- 10 µA Current Sources:
  - Current sourcing only
  - Up to four independent sources
- 50 µA Current Sources:
  - Selectable current sourcing or sinking
  - Selectable current mirroring for sourcing and sinking

A simplified block diagram of the CBG module is shown in Figure 26-1.

**TABLE 26-1: CBG CHANNEL AVAILABILITY**

| Package Type | ISRCx | IBIASx |
|---|---|---|
| 28-pin | — | 0,3 |
| 36-pin | 0,1 | 0,2,3 |
| 48-pin | 0,1,2,3 | 0,1,2,3 |
| 64-pin | 0,1,2,3 | 0,1,2,3 |
| 80-pin | 0,1,2,3 | 0,1,2,3 |

**FIGURE 26-1: CONSTANT-CURRENT SOURCE MODULE BLOCK DIAGRAM(2)**

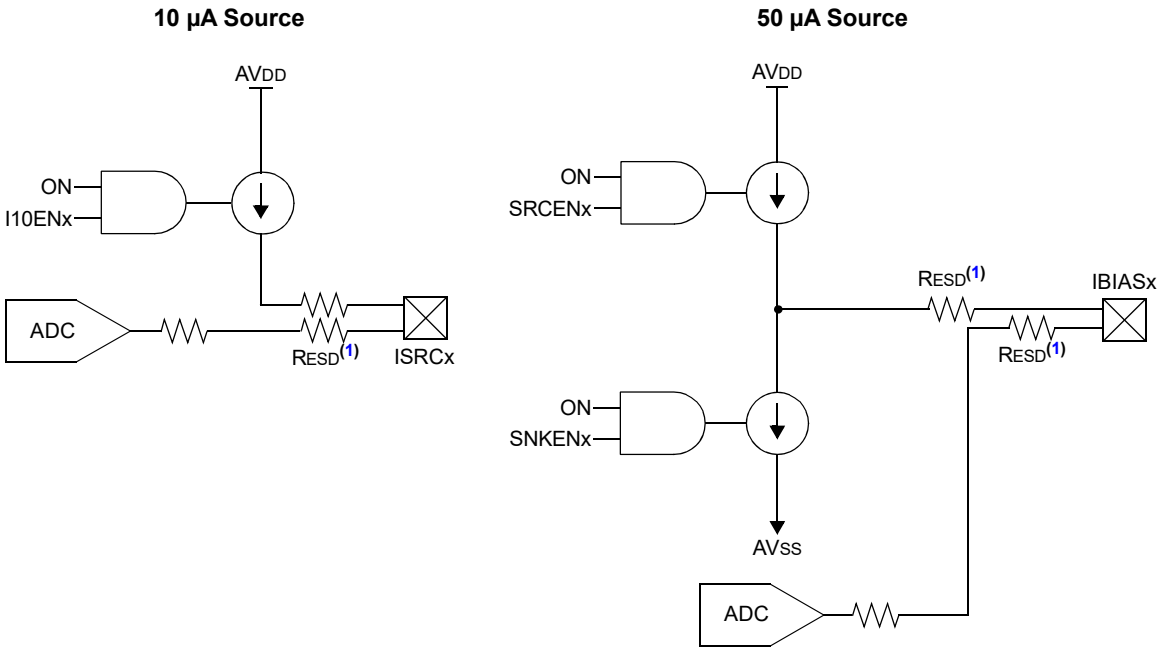


**Note 1:** RESD is typically 350 Ohms.

**2:** In Figure 26-1, the ADC analog input is shown for clarity. Each analog peripheral connected to the pin has a separate Electrostatic Discharge (ESD) resistor.

## 26.1 Current Bias Generator Control Registers

**REGISTER 26-1: BIASCON: CURRENT BIAS GENERATOR CONTROL REGISTER**

| R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| ON | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | I10EN3 | I10EN2 | I10EN1 | I10EN0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **ON:** Current Bias Module Enable bit
1 = Module is enabled
0 = Module is disabled

bit 14-4 **Unimplemented:** Read as '0'

bit 3 **I10EN3:** 10 µA Enable for Output 3 bit
1 = 10 µA output is enabled
0 = 10 µA output is disabled

bit 2 **I10EN2:** 10 µA Enable for Output 2 bit
1 = 10 µA output is enabled
0 = 10 µA output is disabled

bit 1 **I10EN1:** 10 µA Enable for Output 1 bit
1 = 10 µA output is enabled
0 = 10 µA output is disabled

bit 0 **I10EN0:** 10 µA Enable for Output 0 bit
1 = 10 µA output is enabled
0 = 10 µA output is disabled


© 2017-2021 Microchip Technology Inc.

**REGISTER 26-2: IBIASCONH: CURRENT BIAS GENERATOR 50 µA CURRENT SOURCE CONTROL HIGH REGISTER**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | SHRSRCEN3 | SHRSNKEN3 | GENSRCEN3 | GENSNKEN3 | SRCEN3 | SNKEN3 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | SHRSRCEN2 | SHRSNKEN2 | GENSRCEN2 | GENSNKEN2 | SRCEN2 | SNKEN2 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13 **SHRSRCEN3:** Share Source Enable for Output #3 bit
1 = Sourcing Current Mirror mode is enabled (uses reference from another source)
0 = Sourcing Current Mirror mode is disabled

bit 12 **SHRSNKEN3:** Share Sink Enable for Output #3 bit
1 = Sinking Current Mirror mode is enabled (uses reference from another source)
0 = Sinking Current Mirror mode is disabled

bit 11 **GENSRCEN3:** Generated Source Enable for Output #3 bit
1 = Source generates the current source mirror reference
0 = Source does not generate the current source mirror reference

bit 10 **GENSNKEN3:** Generated Sink Enable for Output #3 bit
1 = Source generates the current sink mirror reference
0 = Source does not generate the current sink mirror reference

bit 9 **SRCEN3:** Source Enable for Output #3 bit
1 = Current source is enabled
0 = Current source is disabled

bit 8 **SNKEN3:** Sink Enable for Output #3 bit
1 = Current sink is enabled
0 = Current sink is disabled

bit 7-6 **Unimplemented:** Read as '0'

bit 5 **SHRSRCEN2:** Share Source Enable for Output #2 bit
1 = Sourcing Current Mirror mode is enabled (uses reference from another source)
0 = Sourcing Current Mirror mode is disabled

bit 4 **SHRSNKEN2:** Share Sink Enable for Output #2 bit
1 = Sinking Current Mirror mode is enabled (uses reference from another source)
0 = Sinking Current Mirror mode is disabled

bit 3 **GENSRCEN2:** Generated Source Enable for Output #2 bit
1 = Source generates the current source mirror reference
0 = Source does not generate the current source mirror reference

bit 2 **GENSNKEN2:** Generated Sink Enable for Output #2 bit
1 = Source generates the current sink mirror reference
0 = Source does not generate the current sink mirror reference

bit 1 **SRCEN2:** Source Enable for Output #2 bit
1 = Current source is enabled
0 = Current source is disabled

bit 0 **SNKEN2:** Sink Enable for Output #2 bit
1 = Current sink is enabled
0 = Current sink is disabled

**REGISTER 26-3: IBIASCONL: CURRENT BIAS GENERATOR 50 µA CURRENT SOURCE CONTROL LOW REGISTER**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | SHRSRCEN1 | SHRSNKEN1 | GENSRCEN1 | GENSNKEN1 | SRCEN1 | SNKEN1 |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | SHRSRCEN0 | SHRSNKEN0 | GENSRCEN0 | GENSNKEN0 | SRCEN0 | SNKEN0 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13 **SHRSRCEN1:** Share Source Enable for Output #1 bit
1 = Sourcing Current Mirror mode is enabled (uses reference from another source)
0 = Sourcing Current Mirror mode is disabled

bit 12 **SHRSNKEN1:** Share Sink Enable for Output #1 bit
1 = Sinking Current Mirror mode is enabled (uses reference from another source)
0 = Sinking Current Mirror mode is disabled

bit 11 **GENSRCEN1:** Generated Source Enable for Output #1 bit
1 = Source generates the current source mirror reference
0 = Source does not generate the current source mirror reference

bit 10 **GENSNKEN1:** Generated Sink Enable for Output #1 bit
1 = Source generates the current sink mirror reference
0 = Source does not generate the current sink mirror reference

bit 9 **SRCEN1:** Source Enable for Output #1 bit
1 = Current source is enabled
0 = Current source is disabled

bit 8 **SNKEN1:** Sink Enable for Output #1 bit
1 = Current sink is enabled
0 = Current sink is disabled

bit 7-6 **Unimplemented:** Read as '0'

bit 5 **SHRSRCEN0:** Share Source Enable for Output #0 bit
1 = Sourcing Current Mirror mode is enabled (uses reference from another source)
0 = Sourcing Current Mirror mode is disabled

bit 4 **SHRSNKEN0:** Share Sink Enable for Output #0 bit
1 = Sinking Current Mirror mode is enabled (uses reference from another source)
0 = Sinking Current Mirror mode is disabled

bit 3 **GENSRCEN0:** Generated Source Enable for Output #0 bit
1 = Source generates the current source mirror reference
0 = Source does not generate the current source mirror reference

bit 2 **GENSNKEN0:** Generated Sink Enable for Output #0 bit
1 = Source generates the current sink mirror reference
0 = Source does not generate the current sink mirror reference

bit 1 **SRCEN0:** Source Enable for Output #0 bit
1 = Current source is enabled
0 = Current source is disabled

bit 0 **SNKEN0:** Sink Enable for Output #0 bit
1 = Current sink is enabled
0 = Current sink is disabled


© 2017-2021 Microchip Technology Inc.

## 27.0 OPERATIONAL AMPLIFIER

| | |
|---|---|
| **Note:** | Some device variants support only two op amp instances. Refer to Table 1 and Table 2 for availability. |

The dsPIC33CK256MP508 family implements three instances of operational amplifiers (op amps). The op amps can be used for a wide variety of purposes, including signal conditioning and filtering. The three op amps are functionally identical. The block diagram for a single amplifier is shown in Figure 27-1.

**FIGURE 27-1: SINGLE OPERATIONAL AMPLIFIER BLOCK DIAGRAM**

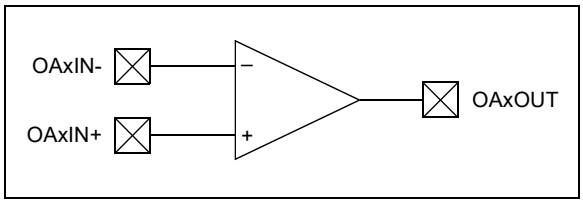


The op amps are controlled by two SFR registers: AMPCON1L and AMPCON1H. They remain in a low-power state until the AMPON bit is set. Each op amp can then be enabled independently by setting the corresponding AMPENx bit (x = 1, 2, 3).

The NCHDISx bit provides some flexibility regarding input range versus Integral Nonlinearity (INL). When NCHDISx = 0 (default), the op amps have a wider input voltage range (see Table 33-41 in **Section 33.0 "Electrical Characteristics"**). When NCHDISx = 1, the wider input range is traded for improved INL performance (lower INL).

## 27.1 Operational Amplifier Control Registers

**REGISTER 27-1: AMPCON1L: OP AMP CONTROL REGISTER LOW**

| R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| AMPON | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | AMPEN3 | AMPEN2 | AMPEN1 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **AMPON:** Op Amp Enable/On bit
1 = Enables op amp modules if their respective AMPENx bits are also asserted
0 = Disables all op amp modules

bit 14-3 **Unimplemented:** Read as '0'

bit 2 **AMPEN3:** Op Amp #3 Enable bit
1 = Enables Op Amp #3 if the AMPON bit is also asserted
0 = Disables Op Amp #3

bit 1 **AMPEN2:** Op Amp #2 Enable bit
1 = Enables Op Amp #2 if the AMPON bit is also asserted
0 = Disables Op Amp #2

bit 0 **AMPEN1:** Op Amp #1 Enable bit
1 = Enables Op Amp #1 if the AMPON bit is also asserted
0 = Disables Op Amp #1


© 2017-2021 Microchip Technology Inc.

**REGISTER 27-2: AMPCON1H: OP AMP CONTROL REGISTER HIGH**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | NCHDIS3 | NCHDIS2 | NCHDIS1 |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-3 **Unimplemented:** Read as '0'

bit 2 **NCHDIS3:** Op Amp #3 N Channel Disable bit
1 = Disables Op Amp #3 N channels input stage; reduced INL, but lowered input voltage range
0 = Wide input range for Op Amp #3

bit 1 **NCHDIS2:** Op Amp #2 N Channel Disable bit
1 = Disables Op Amp #2 N channels input stage; reduced INL, but lowered input voltage range
0 = Wide input range for Op Amp #2

bit 0 **NCHDIS1:** Op Amp #1 N Channel Disable bit
1 = Disables Op Amp #1 N channels input stage; reduced INL, but lowered input voltage range
0 = Wide input range for Op Amp #1

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 28.0 DEADMAN TIMER (DMT)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Deadman Timer (DMT)"** (www.microchip.com/DS70005155) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The primary function of the Deadman Timer (DMT) is to interrupt the processor in the event of a software malfunction. The DMT, which works on the system clock, is a free-running instruction fetch timer, which is clocked whenever an instruction fetch occurs, until a count match occurs. Instructions are not fetched when the processor is in Sleep mode.

DMT can be enabled in the Configuration fuse or by software in the DMTCON register by setting the ON bit. The DMT consists of a 32-bit counter with a time-out count match value, as specified by the two 16-bit Configuration Fuse registers: FDMTCNTL and FDMTCNTH.

A DMT is typically used in mission-critical and safety-critical applications, where any single failure of the software functionality and sequencing must be detected.

Figure 28-1 shows a block diagram of the Deadman Timer module.

**FIGURE 28-1: DEADMAN TIMER BLOCK DIAGRAM**

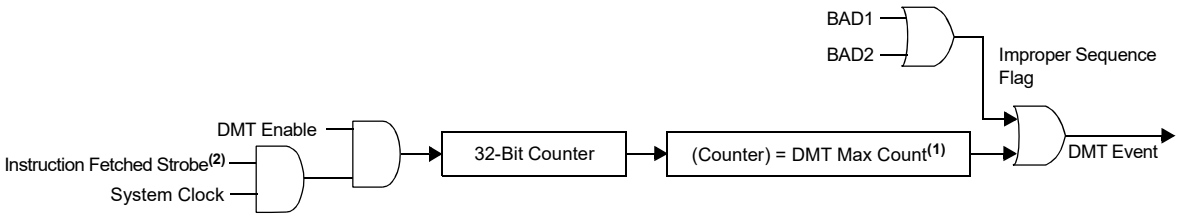


**Note 1:** DMT Max Count is controlled by the initial value of the FDMTCNTL and FDMTCNTH Configuration registers.
**2:** DMT window interval is controlled by the value of the FDMTIVTL and FDMTIVTH Configuration registers.

## 28.1 Deadman Timer Control Registers

**REGISTER 28-1: DMTCON: DEADMAN TIMER CONTROL REGISTER**

| SO-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| ON(1) | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | SO = Settable Only bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **ON:** DMT Module Enable bit(1)
1 = Deadman Timer module is enabled
0 = Deadman Timer module is not enabled

bit 14-0 **Unimplemented:** Read as '0'

**Note 1:** This bit has control only when DMTDIS = 0 in the FDMT register.

**REGISTER 28-2: DMTPRECLR: DEADMAN TIMER PRECLEAR REGISTER**

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| STEP1[7:0] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **STEP1[7:0]:** DMT Preclear Enable bits
01000000 = Enables the Deadman Timer preclear (Step 1)
All Other Write Patterns = Sets the BAD1 flag; these bits are cleared when a DMT Reset event occurs. STEP1[7:0] bits are also cleared if the STEP2[7:0] bits are loaded with the correct value in the correct sequence.

bit 7-0 **Unimplemented:** Read as '0'


© 2017-2021 Microchip Technology Inc.

**REGISTER 28-3: DMTCLR: DEADMAN TIMER CLEAR REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| STEP2[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7-0 **STEP2[7:0]:** DMT Clear Timer bits

00001000 = Clears STEP1[7:0], STEP2[7:0] and the Deadman Timer if preceded by the correct loading of the STEP1[7:0] bits in the correct sequence. The write to these bits may be verified by reading the DMTCNTL/H register and observing the counter being reset.

All Other Write Patterns = Sets the BAD2 bit; the value of STEP1[7:0] will remain unchanged and the new value being written to STEP2[7:0] will be captured. These bits are cleared when a DMT Reset event occurs.

**REGISTER 28-4: DMTSTAT: DEADMAN TIMER STATUS REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| HC/R-0 | HC/R-0 | HC/R-0 | U-0 | U-0 | U-0 | U-0 | R-0 |
|---|---|---|---|---|---|---|---|
| BAD1 | BAD2 | DMTEVENT | — | — | — | — | WINOPN |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HC = Hardware Clearable bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-8 **Unimplemented:** Read as '0'

bit 7 **BAD1:** Deadman Timer Bad STEP1[7:0] Value Detect bit
1 = Incorrect STEP1[7:0] value was detected
0 = Incorrect STEP1[7:0] value was not detected

bit 6 **BAD2:** Deadman Timer Bad STEP2[7:0] Value Detect bit
1 = Incorrect STEP2[7:0] value was detected
0 = Incorrect STEP2[7:0] value was not detected

bit 5 **DMTEVENT:** Deadman Timer Event bit
1 = Deadman Timer event was detected (counter expired, or bad STEP1[7:0] or STEP2[7:0] value was entered prior to counter increment)
0 = Deadman Timer event was not detected

bit 4-1 **Unimplemented:** Read as '0'

bit 0 **WINOPN:** Deadman Timer Clear Window bit
1 = Deadman Timer clear window is open
0 = Deadman Timer clear window is not open


© 2017-2021 Microchip Technology Inc.

**REGISTER 28-5: DMTCNTL: DEADMAN TIMER COUNT REGISTER LOW**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| COUNTER[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| COUNTER[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **COUNTER[15:0]:** Read Current Contents of Lower DMT Counter bits

**REGISTER 28-6: DMTCNTH: DEADMAN TIMER COUNT REGISTER HIGH**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| COUNTER[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| COUNTER[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **COUNTER[31:16]:** Read Current Contents of Higher DMT Counter bits

**REGISTER 28-7: DMTPSCNTL: DMT POST-CONFIGURE COUNT STATUS REGISTER LOW**

| R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
|---|---|---|---|---|---|---|---|
| PSCNT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| Ry | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
|---|---|---|---|---|---|---|---|
| PSCNT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | y = Value from Configuration bit on POR | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PSCNT[15:0]:** Lower DMT Instruction Count Value Configuration Status bits
This is always the value of the FDMTCNTL Configuration register.

**REGISTER 28-8: DMTPSCNTH: DMT POST-CONFIGURE COUNT STATUS REGISTER HIGH**

| R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
|---|---|---|---|---|---|---|---|
| PSCNT[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
|---|---|---|---|---|---|---|---|
| PSCNT[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | y = Value from Configuration bit on POR | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PSCNT[31:16]:** Higher DMT Instruction Count Value Configuration Status bits
This is always the value of the FDMTCNTH Configuration register.


© 2017-2021 Microchip Technology Inc.

**REGISTER 28-9: DMTPSINTVL: DMT POST-CONFIGURE INTERVAL STATUS REGISTER LOW**

| R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
|---|---|---|---|---|---|---|---|
| PSINTV[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
|---|---|---|---|---|---|---|---|
| PSINTV[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | y = Value from Configuration bit on POR | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PSINTV[15:0]:** Lower DMT Window Interval Configuration Status bits
This is always the value of the FDMTIVTL Configuration register.

**REGISTER 28-10: DMTPSINTVH: DMT POST-CONFIGURE INTERVAL STATUS REGISTER HIGH**

| R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
|---|---|---|---|---|---|---|---|
| PSINTV[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
|---|---|---|---|---|---|---|---|
| PSINTV[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | y = Value from Configuration bit on POR | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **PSINTV[31:16]:** Higher DMT Window Interval Configuration Status bits
This is always the value of the FDMTIVTH Configuration register.

**REGISTER 28-11: DMTHOLDREG: DMT HOLD REGISTER(1)**

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| UPRCNT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 | R-0 |
|---|---|---|---|---|---|---|---|
| UPRCNT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **UPRCNT[15:0]:** DMTCNTH Register Value when DMTCNTL and DMTCNTH were Last Read bits

**Note 1:** The DMTHOLDREG register is initialized to '0' on Reset, and is only loaded when the DMTCNTL and DMTCNTH registers are read.


© 2017-2021 Microchip Technology Inc.

## 29.0 POWER-SAVING FEATURES

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Watchdog Timer and Power-Saving Modes"** (www.microchip.com/DS70615) in the *"dsPIC33/PIC24 Family Reference Manual"*.

The dsPIC33CK256MP508 family devices provide the ability to manage power consumption by selectively managing clocking to the CPU and the peripherals. In general, a lower clock frequency and a reduction in the number of peripherals being clocked constitutes lower consumed power.

dsPIC33CK256MP508 family devices can manage power consumption in four ways:

- Clock Frequency
- Instruction-Based Sleep and Idle modes
- Software-Controlled Doze mode
- Selective Peripheral Control in Software

Combinations of these methods can be used to selectively tailor an application's power consumption while still maintaining critical application features, such as timing-sensitive communications.

### 29.1 Clock Frequency and Clock Switching

The dsPIC33CK256MP508 family devices allow a wide range of clock frequencies to be selected under application control. If the system clock configuration is not locked, users can choose low-power or high-precision oscillators by simply changing the NOSCx bits (OSCCON[10:8]). The process of changing a system clock during operation, as well as limitations to the process, are discussed in more detail in **Section 9.0 "Oscillator with High-Frequency PLL"**.

### 29.2 Instruction-Based Power-Saving Modes

The dsPIC33CK256MP508 family devices have two special power-saving modes that are entered through the execution of a special `PWRSAV` instruction. Sleep mode stops clock operation and halts all code execution. Idle mode halts the CPU and code execution, but allows peripheral modules to continue operation. The assembler syntax of the `PWRSAV` instruction is shown in Example 29-1.

**Note:** `SLEEP_MODE` and `IDLE_MODE` are constants defined in the assembler include file for the selected device.

Sleep and Idle modes can be exited as a result of an enabled interrupt, WDT time-out or a device Reset. When the device exits these modes, it is said to "wake-up".

**EXAMPLE 29-1: `PWRSAV` INSTRUCTION SYNTAX IN ASSEMBLY**

```
PWRSAV  #SLEEP_MODE     ; Put the device into Sleep mode
PWRSAV  #IDLE_MODE      ; Put the device into Idle mode
```

**EXAMPLE 29-2: `PWRSAV` INSTRUCTION SYNTAX IN C LANGUAGE**

```
Sleep()     // Put the device into Sleep mode
Idle ()     // Put the device into Idle mode
```

### 29.2.1 SLEEP MODE

The following occurs in Sleep mode:

- The system clock source is shut down. If an on-chip oscillator is used, it is turned off.
- The device current consumption is reduced to a minimum, provided that no I/O pin is sourcing current.
- The Fail-Safe Clock Monitor does not operate, since the system clock source is disabled.
- The LPRC clock continues to run in Sleep mode if the WDT is enabled.
- The WDT, if enabled, is automatically cleared prior to entering Sleep mode.
- Some device features or peripherals can continue to operate. This includes items such as the Input Change Notification on the I/O ports or peripherals that use an External Clock input.
- Any peripheral that requires the system clock source for its operation is disabled.

The device wakes up from Sleep mode on any of the these events:

- Any interrupt source that is individually enabled
- Any form of device Reset
- A WDT time-out

On wake-up from Sleep mode, the processor restarts with the same clock source that was active when Sleep mode was entered.

For optimal power savings, the regulators can be configured to go into standby when Sleep mode is entered by clearing the VREGS (RCON[8]) bit (default configuration).

If the application requires a faster wake-up time, and can accept higher current requirements, the VREGS (RCON[8]) bit can be set to keep the regulators active during Sleep mode. The available Low-Power Sleep modes are shown in Table 29-1. Additional regulator information is available in **Section 30.4 "On-Chip Voltage Regulators"**.

**TABLE 29-1: LOW-POWER SLEEP MODES**

| Relative Power | LPWREN | VREGS | MODE |
|---|---|---|---|
| Highest | 0 | 1 | Full power, active |
| — | 0 | 0 | Full power, standby |
| — | 1(1) | 1 | Low power, active |
| Lowest | 1(1) | 0 | Low power, standby |

**Note 1:** Low-Power modes, when LPWREN = 1, can only be used in the industrial temperature range.

### 29.2.2 IDLE MODE

The following occurs in Idle mode:

- The CPU stops executing instructions.
- The WDT is automatically cleared.
- The system clock source remains active. By default, all peripheral modules continue to operate normally from the system clock source, but can also be selectively disabled (see **Section 29.4 "Peripheral Module Disable"**).
- If the WDT or FSCM is enabled, the LPRC also remains active.

The device wakes from Idle mode on any of these events:

- Any interrupt that is individually enabled
- Any device Reset
- A WDT time-out

On wake-up from Idle mode, the clock is reapplied to the CPU and instruction execution will begin (2-4 clock cycles later), starting with the instruction following the PWRSAV instruction or the first instruction in the ISR.

All peripherals also have the option to discontinue operation when Idle mode is entered to allow for increased power savings. This option is selectable in the control register of each peripheral; for example, the SIDL bit in the Timer1 Control register (T1CON[13]).

### 29.2.3 INTERRUPTS COINCIDENT WITH POWER SAVE INSTRUCTIONS

Any interrupt that coincides with the execution of a PWRSAV instruction is held off until entry into Sleep or Idle mode has completed. The device then wakes up from Sleep or Idle mode.


© 2017-2021 Microchip Technology Inc.

## 29.3 Doze Mode

The preferred strategies for reducing power consumption are changing clock speed and invoking one of the power-saving modes. In some circumstances, this cannot be practical. For example, it may be necessary for an application to maintain uninterrupted synchronous communication, even while it is doing nothing else. Reducing system clock speed can introduce communication errors, while using a power-saving mode can stop communications completely.

Doze mode is a simple and effective alternative method to reduce power consumption while the device is still executing code. In this mode, the system clock continues to operate from the same source and at the same speed. Peripheral modules continue to be clocked at the same speed, while the CPU clock speed is reduced. Synchronization between the two clock domains is maintained, allowing the peripherals to access the SFRs while the CPU executes code at a slower rate.

Doze mode is enabled by setting the DOZEN bit (CLKDIV[11]). The ratio between peripheral and core clock speed is determined by the DOZE[2:0] bits (CLKDIV[14:12]). There are eight possible configurations, from 1:1 to 1:128, with 1:1 being the default setting.

Programs can use Doze mode to selectively reduce power consumption in event-driven applications. This allows clock-sensitive functions, such as synchronous communications, to continue without interruption while the CPU Idles, waiting for something to invoke an interrupt routine. An automatic return to full-speed CPU operation on interrupts can be enabled by setting the ROI bit (CLKDIV[15]). By default, interrupt events have no effect on Doze mode operation.

## 29.4 Peripheral Module Disable

The Peripheral Module Disable (PMD) registers provide a method to disable a peripheral module by stopping all clock sources supplied to that module. When a peripheral is disabled using the appropriate PMD control bit, the peripheral is in a minimum power consumption state. The control and status registers associated with the peripheral are also disabled, so writes to those registers do not have any effect and read values are invalid.

A peripheral module is enabled only if both the associated bit in the PMD register is cleared and the peripheral is supported by the specific dsPIC® DSC variant. If the peripheral is present in the device, it is enabled in the PMD register by default.

| | |
|---|---|
| **Note 1:** | If a PMD bit is set, the corresponding module is disabled after a delay of one instruction cycle. Similarly, if a PMD bit is cleared, the corresponding module is enabled after a delay of one instruction cycle (assuming the module control registers are already configured to enable module operation). |

## 29.5 Power-Saving Resources

Many useful resources are provided on the main product page of the Microchip website for the devices listed in this data sheet. This product page contains the latest updates and additional information.

### 29.5.1 KEY RESOURCES

- **“Watchdog Timer and Power-Saving Modes”** (DS70615) in the *“dsPIC33/PIC24 Family Reference Manual”*
- Code Samples
- Application Notes
- Software Libraries
- Webinars
- All related *“dsPIC33/PIC24 Family Reference Manual”* Sections
- Development Tools

**REGISTER 29-1: PMD1: PERIPHERAL MODULE DISABLE 1 CONTROL REGISTER**

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | T1MD | QEI1MD | PWMMD | — |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| I2C1MD | U2MD | U1MD | SPI2MD | SPI1MD | — | C1MD(1) | ADC1MD |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **Unimplemented:** Read as '0'

bit 11 **T1MD:** Timer1 Module Disable bit
1 = Timer1 module is disabled
0 = Timer1 module is enabled

bit 10 **QEI1MD:** QEI1 Module Disable bit
1 = QEI1 module is disabled
0 = QEI1 module is enabled

bit 9 **PWMMD:** PWM Module Disable bit
1 = PWM module is disabled
0 = PWM module is enabled

bit 8 **Unimplemented:** Read as '0'

bit 7 **I2C1MD:** I2C1 Module Disable bit
1 = I2C1 module is disabled
0 = I2C1 module is enabled

bit 6 **U2MD:** UART2 Module Disable bit
1 = UART2 module is disabled
0 = UART2 module is enabled

bit 5 **U1MD:** UART1 Module Disable bit
1 = UART1 module is disabled
0 = UART1 module is enabled

bit 4 **SPI2MD:** SPI2 Module Disable bit
1 = SPI2 module is disabled
0 = SPI2 module is enabled

bit 3 **SPI1MD:** SPI1 Module Disable bit
1 = SPI1 module is disabled
0 = SPI1 module is enabled

bit 2 **Unimplemented:** Read as '0'

bit 1 **C1MD:** CAN1 Module Disable bit(1)
1 = CAN1 module is disabled
0 = CAN1 module is enabled

bit 0 **ADC1MD:** ADC Module Disable bit
1 = ADC module is disabled
0 = ADC module is enabled

**Note 1:** Availability is dependent on the supported peripherals, refer to Table 1 and Table 2.


© 2017-2021 Microchip Technology Inc.

**REGISTER 29-2: PMD2: PERIPHERAL MODULE DISABLE 2 CONTROL REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | CCP9MD |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| CCP8MD | CCP7MD | CCP6MD | CCP5MD | CCP4MD | CCP3MD | CCP2MD | CCP1MD |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-9 **Unimplemented:** Read as '0'

bit 8 **CCP9MD:** MCCP9 Module Disable bit
1 = MCCP9 module is disabled
0 = MCCP9 module is enabled

bit 7 **CCP8MD:** SCCP8 Module Disable bit
1 = SCCP8 module is disabled
0 = SCCP8 module is enabled

bit 6 **CCP7MD:** SCCP7 Module Disable bit
1 = SCCP7 module is disabled
0 = SCCP7 module is enabled

bit 5 **CCP6MD:** SCCP6 Module Disable bit
1 = SCCP6 module is disabled
0 = SCCP6 module is enabled

bit 4 **CCP5MD:** SCCP5 Module Disable bit
1 = SCCP5 module is disabled
0 = SCCP5 module is enabled

bit 3 **CCP4MD:** SCCP4 Module Disable bit
1 = SCCP4 module is disabled
0 = SCCP4 module is enabled

bit 2 **CCP3MD:** SCCP3 Module Disable bit
1 = SCCP3 module is disabled
0 = SCCP3 module is enabled

bit 1 **CCP2MD:** SCCP2 Module Disable bit
1 = SCCP2 module is disabled
0 = SCCP2 module is enabled

bit 0 **CCP1MD:** SCCP1 Module Disable bit
1 = SCCP1 module is disabled
0 = SCCP1 module is enabled

**REGISTER 29-3: PMD3: PERIPHERAL MODULE DISABLE 3 CONTROL REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | PMPMD(1) |
| bit 15 | | | | | | | bit 8 |

| R/W-0 | U-0 | R/W-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | U-0 |
|---|---|---|---|---|---|---|---|
| CRCMD | — | QEI2MD | — | U3MD | I2C3MD | I2C2MD | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-9 **Unimplemented:** Read as '0'

bit 8 **PMPMD:** PMP Module Disable bit(1)
- 1 = PMP module is disabled
- 0 = PMP module is enabled

bit 7 **CRCMD:** CRC Module Disable bit
- 1 = CRC module is disabled
- 0 = CRC module is enabled

bit 6 **Unimplemented:** Read as '0'

bit 5 **QEI2MD:** QEI2 Module Disable bit
- 1 = QEI2 module is disabled
- 0 = QEI2 module is enabled

bit 4 **Unimplemented:** Read as '0'

bit 3 **U3MD:** UART3 Module Disable bit
- 1 = UART3 module is disabled
- 0 = UART3 module is enabled

bit 2 **I2C3MD:** I2C3 Module Disable bit
- 1 = I2C3 module is disabled
- 0 = I2C3 module is enabled

bit 1 **I2C2MD:** I2C2 Module Disable bit
- 1 = I2C2 module is disabled
- 0 = I2C2 module is enabled

bit 0 **Unimplemented:** Read as '0'

**Note 1:** Availability is dependent on the supported peripherals, refer to Table 1 and Table 2.


© 2017-2021 Microchip Technology Inc.

**REGISTER 29-4: PMD4: PERIPHERAL MODULE DISABLE 4 CONTROL REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | REFOMD | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 15-4 **Unimplemented:** Read as ‘0’

bit 3 **REFOMD:** Reference Clock Module Disable bit
1 = Reference clock module is disabled
0 = Reference clock module is enabled

bit 2-0 **Unimplemented:** Read as ‘0’

**REGISTER 29-5: PMD6: PERIPHERAL MODULE DISABLE 6 CONTROL REGISTER**

| U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | DMA3MD | DMA2MD | DMA1MD | DMA0MD |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | SPI3MD |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-12 **Unimplemented:** Read as '0'

bit 11 **DMA3MD:** DMA3 Module Disable bit
1 = DMA3 module is disabled
0 = DMA3 module is enabled

bit 10 **DMA2MD:** DMA2 Module Disable bit
1 = DMA2 module is disabled
0 = DMA2 module is enabled

bit 9 **DMA1MD:** DMA1 Module Disable bit
1 = DMA1 module is disabled
0 = DMA1 module is enabled

bit 8 **DMA0MD:** DMA0 Module Disable bit
1 = DMA0 module is disabled
0 = DMA0 module is enabled

bit 7-1 **Unimplemented:** Read as '0'

bit 0 **SPI3MD:** SPI3 Module Disable bit
1 = SPI3 module is disabled
0 = SPI3 module is enabled


© 2017-2021 Microchip Technology Inc.

**REGISTER 29-6: PMD7: PERIPHERAL MODULE DISABLE 7 CONTROL REGISTER**

| U-0 | U-0 | U-0 | U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | CMP3MD | CMP2MD | CMP1MD |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | U-0 | U-0 | R/W-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | PTGMD | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-11 **Unimplemented:** Read as '0'

bit 10 **CMP3MD:** Comparator 3 Module Disable bit
1 = Comparator 3 module is disabled
0 = Comparator 3 module is enabled

bit 9 **CMP2MD:** Comparator 2 Module Disable bit
1 = Comparator 2 module is disabled
0 = Comparator 2 module is enabled

bit 8 **CMP1MD:** Comparator 1 Module Disable bit
1 = Comparator 1 module is disabled
0 = Comparator 1 module is enabled

bit 7-4 **Unimplemented:** Read as '0'

bit 3 **PTGMD**: PTG Module Disable bit
1 = PTG module is disabled
0 = PTG module is enabled

bit 2-0 **Unimplemented:** Read as '0'

**REGISTER 29-7: PMD8: PERIPHERAL MODULE DISABLE 8 CONTROL REGISTER**

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | U-0 | U-0 | R/W-0 |
|---|---|---|---|---|---|---|---|
| — | — | OPAMPMD | SENT2MD | SENT1MD | — | — | DMTMD |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | U-0 |
|---|---|---|---|---|---|---|---|
| — | — | CLC4MD | CLC3MD | CLC2MD | CLC1MD | BIASMD | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-14 **Unimplemented:** Read as '0'

bit 13 **OPAMPMD:** Op Amp Module Disable bit
1 = Op amp modules are disabled
0 = Op amp modules are enabled

bit 12 **SENT2MD:** SENT2 Module Disable bit
1 = SENT2 module is disabled
0 = SENT2 module is enabled

bit 11 **SENT1MD:** SENT1 Module Disable bit
1 = SENT1 module is disabled
0 = SENT1 module is enabled

bit 10-9 **Unimplemented:** Read as '0'

bit 8 **DMTMD:** Deadman Timer Module Disable bit
1 = DMT module is disabled
0 = DMT module is enabled

bit 7-6 **Unimplemented:** Read as '0'

bit 5 **CLC4MD:** CLC4 Module Disable bit
1 = CLC4 module is disabled
0 = CLC4 module is enabled

bit 4 **CLC3MD**: CLC3 Module Disable bit
1 = CLC3 module is disabled
0 = CLC3 module is enabled

bit 3 **CLC2MD:** CLC2 Module Disable bit
1 = CLC2 module is disabled
0 = CLC2 module is enabled

bit 2 **CLC1MD:** CLC1 Module Disable bit
1 = CLC1 module is disabled
0 = CLC1 module is enabled

bit 1 **BIASMD:** Constant-Current Source Module Disable bit
1 = Constant-current source module is disabled
0 = Constant-current source module is enabled

bit 0 **Unimplemented:** Read as '0'


© 2017-2021 Microchip Technology Inc.

© 2017-2021 Microchip Technology Inc.

**TABLE 29-2: PMD REGISTERS**

| Register | Bit 15 | Bit14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| PMD1 | — | — | — | — | T1MD | QEIMD | PWMMD | — | I2C1MD | U2MD | U1MD | SPI2MD | SPI1MD |
| PMD2 | — | — | — | — | — | — | — | CCP9MD | CCP8MD | CCP7MD | CCP6MD | CCP5MD | CCP4MD |
| PMD3 | — | — | — | — | — | — | — | PMPMD | CRCMD | — | QEI2MD | — | U3MD |
| PMD4 | — | — | — | — | — | — | — | — | — | — | — | — | REFOMD |
| PMD6 | — | — | — | — | DMA3MD | DMA2MD | DMA1MD | DMA0MD | — | — | — | — | — |
| PMD7 | — | — | — | — | — | CMP3MD | CMP2MD | CMP1MD | — | — | — | — | PTGMD |
| PMD8 | — | — | OPAMPMD | SENT2MD | SENT1MD | — | — | DMTMD | — | — | CLC4MD | CLC3MD | CLC2MD |

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 30.0 SPECIAL FEATURES

**Note:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the related section of the *"dsPIC33/PIC24 Family Reference Manual"*, which is available from the Microchip website (www.microchip.com).

The dsPIC33CK256MP508 family devices include several features intended to maximize application flexibility and reliability, and minimize cost through elimination of external components. These are:

- Flexible Configuration
- Watchdog Timer (WDT)
- Code Protection and CodeGuard™ Security
- JTAG Boundary Scan Interface
- In-Circuit Serial Programming™ (ICSP™)
- In-Circuit Emulation
- Brown-out Reset (BOR)

### 30.1 Configuration Bits

In dsPIC33CK256MP508 family devices, the Configuration Words are implemented as volatile memory. This means that configuration data will get loaded to volatile memory (from the Flash Configuration Words) each time the device is powered up. Configuration data are stored at the end of the on-chip program memory space, known as the Flash Configuration Words. Their specific locations are shown in Table 30-1. The configuration data are automatically loaded from the Flash Configuration Words to the proper Configuration Shadow registers during device Resets. The BSEQx bits (FBTSEQ[11:0]) determine which panel is the Active Partition at start-up and the Configuration Words from that panel are loaded into the Configuration Shadow registers.

**Note:** Configuration data are reloaded on all types of device Resets.

When creating applications for these devices, users should always specifically allocate the location of the Flash Configuration Words for configuration data in their code for the compiler. This is to make certain that program code is not stored in this address when the code is compiled. Program code executing out of configuration space will cause a device Reset.

**Note:** Performing a page erase operation on the last page of program memory clears the Flash Configuration Words.

**TABLE 30-1: dsPIC33CKXXXMPX0X CONFIGURATION ADDRESSES**

| Register Name | Single Partition | | Dual Partition, Active | | Dual Partition, Inactive | |
|---|---|---|---|---|---|---|
| | 256k | 128k | 256k | 128k | 256k | 128k |
| FSEC(2) | 0x02BF00 | 0x015F00 | 0x015F00 | 0x00AF00 | 0x415F00 | 0x40AF00 |
| FBSLIM(2) | 0x02BF10 | 0x015F10 | 0x015F10 | 0x00AF10 | 0x415F10 | 0x40AF10 |
| FSIGN(2) | 0x02BF14 | 0x015F14 | 0x015F14 | 0x00AF14 | 0x415F14 | 0x40AF14 |
| FOSCSEL | 0x02BF18 | 0x015F18 | 0x015F18 | 0x00AF18 | 0x415F18 | 0x40AF18 |
| FOSC | 0x02BF1C | 0x015F1C | 0x015F1C | 0x00AF1C | 0x415F1C | 0x40AF1C |
| FWDT | 0x02BF20 | 0x015F20 | 0x015F20 | 0x00AF20 | 0x415F20 | 0x40AF20 |
| FPOR | 0x02BF24 | 0x015F24 | 0x015F24 | 0x00AF24 | 0x415F24 | 0x40AF24 |
| FICD | 0x02BF28 | 0x015F28 | 0x015F28 | 0x00AF28 | 0x415F28 | 0x40AF28 |
| FDMTIVTL | 0x02BF2C | 0x015F2C | 0x015F2C | 0x00AF2C | 0x415F2C | 0x40AF2C |
| FDMTIVTH | 0x02BF30 | 0x015F30 | 0x015F30 | 0x00AF30 | 0x415F30 | 0x40AF30 |
| FDMTCNTL | 0x02BF34 | 0x015F34 | 0x015F34 | 0x00AF34 | 0x415F34 | 0x40AF34 |
| FDMTCNTH | 0x02BF38 | 0x015F38 | 0x015F38 | 0x00AF38 | 0x415F38 | 0x40AF38 |
| FDMT | 0x02BF3C | 0x015F3C | 0x015F3C | 0x00AF3C | 0x415F3C | 0x40AF3C |
| FDEVOPT | 0x02BF40 | 0x015F40 | 0x015F40 | 0x00AF40 | 0x415F40 | 0x40AF40 |
| FALTREG | 0x02BF44 | 0x015F44 | 0x015F44 | 0x00AF44 | 0x415F44 | 0x40AF44 |
| FBTSEQ | 0x02BFFC | 0x015FFC | 0x015FFC | 0x00AFFC | 0x415FFC | 0x40AFFC |
| FBOOT(1) | 0x801800 | | | | | |

**Note 1:** FBOOT resides in calibration memory space.

**2:** Changes to the Inactive Partition Configuration Words affect how the Active Partition accesses the Inactive Partition.

**TABLE 30-2: dsPIC33CKXXMPX0X CONFIGURATION ADDRESSES**

| Register Name | Single Partition | | Dual Partition, Active | | Dual Partition, Inactive | |
|---|---|---|---|---|---|---|
| | 64k | 32k | 64k | 32k | 64k | 32k |
| FSEC(2) | 0x00AF00 | 0x005F00 | 0x005700 | 0x002F00 | 0x405700 | 0x402F00 |
| FBSLIM(2) | 0x00AF10 | 0x005F10 | 0x005710 | 0x002F10 | 0x405710 | 0x402F10 |
| FSIGN(2) | 0x00AF14 | 0x005F14 | 0x005714 | 0x002F14 | 0x405714 | 0x402F14 |
| FOSCSEL | 0x00AF18 | 0x005F18 | 0x005718 | 0x002F18 | 0x405718 | 0x402F18 |
| FOSC | 0x00AF1C | 0x005F1C | 0x00571C | 0x002F1C | 0x40571C | 0x402F1C |
| FWDT | 0x00AF20 | 0x005F20 | 0x005720 | 0x002F20 | 0x405720 | 0x402F20 |
| FPOR | 0x00AF24 | 0x005F24 | 0x005724 | 0x002F24 | 0x405724 | 0x402F24 |
| FICD | 0x00AF28 | 0x005F28 | 0x005728 | 0x002F28 | 0x405728 | 0x402F28 |
| FDMTIVTL | 0x00AF2C | 0x005F2C | 0x00572C | 0x002F2C | 0x40572C | 0x402F2C |
| FDMTIVTH | 0x00AF30 | 0x005F30 | 0x005730 | 0x002F30 | 0x405730 | 0x402F30 |
| FDMTCNTL | 0x00AF34 | 0x005F34 | 0x005734 | 0x002F34 | 0x405734 | 0x402F34 |
| FDMTCNTH | 0x00AF38 | 0x005F38 | 0x005738 | 0x002F38 | 0x405738 | 0x402F38 |
| FDMT | 0x00AF3C | 0x005F3C | 0x00573C | 0x002F3C | 0x40573C | 0x402F3C |
| FDEVOPT | 0x00AF40 | 0x005F40 | 0x005740 | 0x002F40 | 0x405740 | 0x402F40 |
| FALTREG | 0x00AF44 | 0x005F44 | 0x005744 | 0x002F44 | 0x405744 | 0x402F44 |
| FBTSEQ | 0x00AFFC | 0x005FFC | 0x0057FC | 0x002FFC | 0x4057FC | 0x402FFC |
| FBOOT(1) | 0x801800 | | | | | |

**Note 1:** FBOOT resides in calibration memory space.

**2:** Changes to the Inactive Partition Configuration Words affect how the Active Partition accesses the Inactive Partition.


© 2017-2021 Microchip Technology Inc.

© 2017-2021 Microchip Technology Inc.

## TABLE 30-3: CONFIGURATION REGISTERS MAP

| Register Name | Bits 23-16 | Bit 15 | Bit 14 | Bit 13 | Bit 12 | Bit 11 | Bit 10 | Bit 9 | Bit 8 | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FSEC | — | AIVTDIS | — | — | — | CSS[2:0] | | | CWRP | GSS[1:0] | | GWRP | — | BSEN |
| FBSLIM | — | — | — | — | BSLIM[12:0] | | | | | | | | | |
| FSIGN | — | r(2) | — | — | — | — | — | — | — | — | — | — | — | — |
| FOSCSEL | — | — | — | — | — | — | — | — | — | IESO | — | — | — | — |
| FOSC | — | — | — | — | XTBST | XTCFG[1:0] | | — | PLLKEN | FCKSM[1:0] | | — | — | — |
| FWDT | — | FWDTEN | SWDTPS[4:0] | | | | | WDTWIN[1:0] | | WINDIS | RCLKSEL[1:0] | | | F |
| FPOR | — | — | — | — | — | — | r(1) | — | — | — | BISTDIS | r(1) | r(1) | — |
| FICD | — | NOBTSWP | — | — | — | — | — | — | — | r(1) | — | JTAGEN | — | — |
| FDMTIVTL | — | DMTIVT[15:0] | | | | | | | | | | | | |
| FDMTIVTH | — | DMTIVT[31:16] | | | | | | | | | | | | |
| FDMTCNTL | — | DMTCNT[15:0] | | | | | | | | | | | | |
| FDMTCNTH | — | DMTCNT[31:16] | | | | | | | | | | | | |
| FDMT | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| FDEVOPT | — | — | — | SPI2PIN | — | — | SMBEN | r(2) | r(2) | r(1) | — | ALTI2C3 | ALTI2C2 | ALTI2C1 |
| FALTREG | — | — | CTXT4[2:0] | | | — | CTXT3[2:0] | | | — | CTXT2[2:0] | | | — |
| FBTSEQ | IBSEQ[11:4] | IBSEQ[3:0] | | | | BSEQ[11:0] | | | | | | | | |
| FBOOT | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

**Legend:** — = unimplemented bit, read as '1'; r = reserved bit.

**Note 1:** Bit reserved, maintain as '1'.

**2:** Bit reserved, maintain as '0'.

**REGISTER 30-1: FSEC CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| R/PO-1 | U-1 | U-1 | U-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| AIVTDIS | — | — | — | CSS[2:0] | | | CWRP |
| bit 15 | | | | | | | bit 8 |

| R/PO-1 | R/PO-1 | R/PO-1 | U-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| GSS[1:0] | | GWRP | — | BSEN | BSS[1:0] | | BWRP |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 23-16 **Unimplemented:** Read as '1'

bit 15 **AIVTDIS:** Alternate Interrupt Vector Table Disable bit
1 = Disables AIVT
0 = Enables AIVT

bit 14-12 **Unimplemented:** Read as '1'

bit 11-9 **CSS[2:0]:** Configuration Segment Code Flash Protection Level bits
111 = No protection (other than CWRP write protection)
110 = Standard security
10x = Enhanced security
0xx = High security

bit 8 **CWRP:** Configuration Segment Write-Protect bit
1 = Configuration Segment is not write-protected
0 = Configuration Segment is write-protected

bit 7-6 **GSS[1:0]:** General Segment Code Flash Protection Level bits
11 = No protection (other than GWRP write protection)
10 = Standard security
0x = High security

bit 5 **GWRP:** General Segment Write-Protect bit
1 = User program memory is not write-protected
0 = User program memory is write-protected

bit 4 **Unimplemented:** Read as '1'

bit 3 **BSEN:** Boot Segment Control bit
1 = No Boot Segment
0 = Boot Segment size is determined by BSLIM[12:0]

bit 2-1 **BSS[1:0]:** Boot Segment Code Flash Protection Level bits
11 = No protection (other than BWRP write protection)
10 = Standard security
0x = High security

bit 0 **BWRP:** Boot Segment Write-Protect bit
1 = User program memory is not write-protected
0 = User program memory is write-protected


© 2017-2021 Microchip Technology Inc.

**REGISTER 30-2: FBSLIM CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| U-1 | U-1 | U-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | BSLIM[12:8] | | | | |
| bit 15 | | | | | | | bit 8 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| BSLIM[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 23-13 **Unimplemented:** Read as ‘1’

bit 12-0 **BSLIM[12:0]:** Boot Segment Code Flash Page Address Limit bits

Contains the page address of the first active General Segment page. The value to be programmed is the inverted page address, such that programming additional ‘0’s can only increase the Boot Segment size.

**REGISTER 30-3: FSIGN CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| r-0 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | PO = Program Once bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 23-16 **Unimplemented:** Read as ‘1’

bit 15 **Reserved:** Maintain as ‘0’

bit 14-0 **Unimplemented:** Read as ‘1’

**REGISTER 30-4: FOSCSEL CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| R/PO-1 | U-1 | U-1 | U-1 | U-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| IESO | — | — | — | — | FNOSC[2:0] | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 23-8 **Unimplemented:** Read as ‘1’

bit 7 **IESO:** Internal External Switchover bit
1 = Internal External Switchover mode is enabled (Two-Speed Start-up is enabled)
0 = Internal External Switchover mode is disabled (Two-Speed Start-up is disabled)

bit 6-3 **Unimplemented:** Read as ‘1’

bit 2-0 **FNOSC[2:0]:** Initial Oscillator Source Selection bits
111 = Internal Fast RC (FRC) Oscillator with Postscaler
110 = Backup Fast RC (BFRC)
101 = LPRC Oscillator
100 = Reserved
011 = Primary Oscillator with PLL (XTPLL, HSPLL, ECPLL)
010 = Primary (XT, HS, EC) Oscillator
001 = Internal Fast RC Oscillator with PLL (FRCPLL)
000 = Fast RC (FRC) Oscillator


© 2017-2021 Microchip Technology Inc.

**REGISTER 30-5: FOSC CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| U-1 | U-1 | U-1 | R/PO-1 | R/PO-1 | R/PO-1 | U-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | XTBST | XTCFG[1:0] | | — | PLLKEN(1) |
| bit 15 | | | | | | | bit 8 |

| R/PO-1 | R/PO-1 | U-1 | U-1 | U-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| FCKSM[1:0] | | — | — | — | OSCIOFNC | POSCMD[1:0] | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 23-13 **Unimplemented:** Read as '1'

bit 12 **XTBST:** Oscillator Kick-Start Programmability bit
1 = Boosts the kick-start
0 = Default kick-start

bit 11-10 **XTCFG[1:0]:** Crystal Oscillator Drive Select bits
Current gain programmability for oscillator (output drive).
11 = Gain3 (use for 24-32 MHz crystals)
10 = Gain2 (use for 16-24 MHz crystals)
01 = Gain1 (use for 8-16 MHz crystals)
00 = Gain0 (use for 4-8 MHz crystals)

bit 9 **Unimplemented:** Read as '1'

bit 8 **PLLKEN:** PLL Lock Status Control bit(1)
1 = PLL lock signal will be used to disable PLL clock output if lock is lost
0 = PLL lock signal is not used; the PLL clock output will not be disabled if lock is lost

bit 7-6 **FCKSM[1:0]:** Clock Switching Mode bits
1x = Clock switching is disabled, Fail-Safe Clock Monitor is disabled
01 = Clock switching is enabled, Fail-Safe Clock Monitor is disabled
00 = Clock switching is enabled, Fail-Safe Clock Monitor is enabled

bit 5-3 **Unimplemented:** Read as '1'

bit 2 **OSCIOFNC:** OSCO Pin Function bit (except in XT and HS modes)
1 = OSCO is the clock output
0 = OSCO is the general purpose digital I/O pin

bit 1-0 **POSCMD[1:0]:** Primary Oscillator Mode Select bits
11 = Primary Oscillator is disabled
10 = HS Crystal Oscillator mode (10 MHz-32 MHz)
01 = XT Crystal Oscillator mode (3.5 MHz-10 MHz)
00 = EC (External Clock) mode

**Note 1:** A time-out period will occur when the system clock switching logic requests the PLL clock source and the PLL is not already enabled.

**REGISTER 30-6: FWDT CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| FWDTEN | SWDTPS[4:0] | | | | | WDTWIN[1:0] | |
| bit 15 | | | | | | | bit 8 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| WINDIS | RCLKSEL[1:0] | | RWDTPS[4:0] | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 23-16 **Unimplemented:** Read as '1'

bit 15 **FWDTEN:** Watchdog Timer Enable bit
1 = WDT is enabled in hardware
0 = WDT controller via the ON bit (WDTCONL[15])

bit 14-10 **SWDTPS[4:0]:** Sleep Mode Watchdog Timer Period Select bits
11111 = Divide by 2 ^ 31 = 214,7483,648
11110 = Divide by 2 ^ 30 = 1,073,741,824
...
00001 = Divide by 2 ^ 1, 2
00000 = Divide by 2 ^ 0, 1

bit 9-8 **WDTWIN[1:0]:** Watchdog Timer Window Select bits
11 = WDT window is 25% of the WDT period
10 = WDT window is 37.5% of the WDT period
01 = WDT window is 50% of the WDT period
00 = WDT Window is 75% of the WDT period

bit 7 **WINDIS:** Watchdog Timer Window Enable bit
1 = Watchdog Timer is in Non-Window mode
0 = Watchdog Timer is in Window mode

bit 6-5 **RCLKSEL[1:0]:** Watchdog Timer Clock Select bits
11 = LPRC clock
10 = Uses FRC when WINDIS = 0, system clock is not INTOSC/LPRC and device is not in Sleep; otherwise, uses INTOSC/LPRC
01 = Uses peripheral clock when system clock is not INTOSC/LPRC and device is not in Sleep; otherwise, uses INTOSC/LPRC
00 = Reserved

bit 4-0 **RWDTPS[4:0]:** Run Mode Watchdog Timer Period Select bits
11111 = Divide by 2 ^ 31 = 2,147,483,648
11110 = Divide by 2 ^ 30 = 1,073,741,824
...
00001 = Divide by 2 ^ 1, 2
00000 = Divide by 2 ^ 0, 1


© 2017-2021 Microchip Technology Inc.

**REGISTER 30-7: FPOR CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| U-1 | U-1 | U-1 | U-1 | U-1 | r-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-1 | R/PO-1 | r-1 | r-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | BISTDIS(1) | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | r = Reserved bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 23-11 **Unimplemented:** Read as '1'

bit 10 **Reserved:** Maintain as '1'

bit 9-7 **Unimplemented:** Read as '1'

bit 6 **BISTDIS:** Memory BIST Feature Disable bit(1)
1 = MBIST on Reset feature is disabled
0 = MBIST on Reset feature is enabled

bit 5-4 **Reserved:** Maintain as '0b11'

bit 3-0 **Unimplemented:** Read as '1'

**Note 1:** Applies to a Power-on Reset (POR) only.

**REGISTER 30-8: FICD CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| R/PO-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| NOBTSWP | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| r-1 | U-1 | R/PO-1 | U-1 | U-1 | U-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| — | — | JTAGEN | — | — | — | ICS[1:0] | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | r = Reserved bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 23-16 **Unimplemented:** Read as '1'

bit 15 **NOBTSWP:** BOOTSWP Instruction Disable bit
1 = BOOTSWP instruction is disabled
0 = BOOTSWP instruction is enabled

bit 14-8 **Unimplemented:** Read as '1'

bit 7 **Reserved:** Maintain as '1'

bit 6 **Unimplemented:** Read as '1'

bit 5 **JTAGEN:** JTAG Enable bit
1 = JTAG port is enabled
0 = JTAG port is disabled

bit 4-2 **Unimplemented:** Read as '1'

bit 1-0 **ICS[1:0]:** ICD Communication Channel Select bits
11 = Communicates on PGC1 and PGD1
10 = Communicates on PGC2 and PGD2
01 = Communicates on PGC3 and PGD3
00 = Reserved, do not use


© 2017-2021 Microchip Technology Inc.

**REGISTER 30-9: FDMTIVTL CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| DMTIVT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| DMTIVT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 23-16 **Unimplemented:** Read as ‘1’

bit 15-0 **DMTIVT[15:0]:** DMT Window Interval Lower 16 bits

**REGISTER 30-10: FDMTIVTH CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| DMTIVT[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| DMTIVT[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 23-16 **Unimplemented:** Read as ‘1’

bit 15-0 **DMTIVT[31:16]:** DMT Window Interval Higher 16 bits

**REGISTER 30-11: FDMTCNTL CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| DMTCNT[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| DMTCNT[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 23-16 **Unimplemented:** Read as '1'

bit 15-0 **DMTCNT[15:0]:** DMT Instruction Count Time-out Value Lower 16 bits

**REGISTER 30-12: FDMTCNTH CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| DMTCNT[31:24] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| DMTCNT[23:16] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 23-16 **Unimplemented:** Read as '1'

bit 15-0 **DMTCNT[31:16]:** DMT Instruction Count Time-out Value Upper 16 bits


© 2017-2021 Microchip Technology Inc.

**REGISTER 30-13: FDMT CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | DMTDIS |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as ‘0’ | |
| -n = Value at POR | ‘1’ = Bit is set | ‘0’ = Bit is cleared | x = Bit is unknown |

bit 23-1 **Unimplemented:** Read as ‘1’

bit 0 **DMTDIS:** DMT Disable bit
1 = DMT is disabled
0 = DMT is enabled

**REGISTER 30-14: FDEVOPT CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| U-1 | U-1 | R/PO-1 | U-1 | U-1 | R/PO-1 | r-0 | r-0 |
|---|---|---|---|---|---|---|---|
| — | — | SPI2PIN(1) | — | — | SMBEN | — | — |
| bit 15 | | | | | | | bit 8 |

| r-1 | U-1 | R/PO-1 | R/PO-1 | R/PO-1 | r-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | ALTI2C3 | ALTI2C2 | ALTI2C1 | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | r = Reserved bit | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 23-14 **Unimplemented:** Read as '1'

bit 13 **SPI2PIN:** Host SPI #2 Fast I/O Pad Disable bit(1)
1 = Host SPI2 uses PPS (I/O remap) to make connections with device pins
0 = Host SPI2 uses direct connections with specified device pins

bit 12-11 **Unimplemented:** Read as '1'

bit 10 **SMBEN:** Select Input Voltage Threshold for $I^2C$ Pads to be SMBus 3.0 Compliant bit
1 = Enables SMBus 3.0 input threshold voltage
0 = $I^2C$ pad input buffer operation

bit 9-8 **Reserved:** Maintain as '0'

bit 7 **Reserved:** Maintain as '1'

bit 6 **Unimplemented:** Read as '1'

bit 5 **ALTI2C3:** Alternate I2C3 Pin Mapping bit
1 = Default location for SCL3/SDA3 pins
0 = Alternate location for SCL3/SDA3 pins (ASCL3/ASDA3)

bit 4 **ALTI2C2:** Alternate I2C2 Pin Mapping bit
1 = Default location for SCL2/SDA2 pins
0 = Alternate location for SCL2/SDA2 pins (ASCL2/ASDA2)

bit 3 **ALTI2C1:** Alternate I2C1 Pin Mapping bit
1 = Default location for SCL1/SDA1 pins
0 = Alternate location for SCL1/SDA1 pins (ASCL1/ASDA1)

bit 2 **Reserved:** Maintain as '1'

bit 1-0 **Unimplemented:** Read as '1'

**Note 1:** Fixed pin option is only available for higher pin packages (48-pin, 64-pin and 80-pin).


© 2017-2021 Microchip Technology Inc.

**REGISTER 30-15: FALTREG CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| U-1 | R/PO-1 | R/PO-1 | R/PO-1 | U-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| — | CTXT4[2:0] | | | — | CTXT3[2:0] | | |
| bit 15 | | | | | | | bit 8 |

| U-1 | R/PO-1 | R/PO-1 | R/PO-1 | U-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| — | CTXT2[2:0] | | | — | CTXT1[2:0] | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 23-15 **Unimplemented:** Read as '1'

bit 14-12 **CTXT4[2:0]:** Specifies the Alternate Working Register Set #4 with Interrupt Priority Levels (IPL) bits
111 = Not assigned
110 = Alternate Register Set #4 is assigned to IPL Level 7
101 = Alternate Register Set #4 is assigned to IPL Level 6
100 = Alternate Register Set #4 is assigned to IPL Level 5
011 = Alternate Register Set #4 is assigned to IPL Level 4
010 = Alternate Register Set #4 is assigned to IPL Level 3
001 = Alternate Register Set #4 is assigned to IPL Level 2
000 = Alternate Register Set #4 is assigned to IPL Level 1

bit 11 **Unimplemented:** Read as '1'

bit 10-8 **CTXT3[2:0]:** Specifies the Alternate Working Register Set #3 with Interrupt Priority Levels (IPL) bits
111 = Not assigned
110 = Alternate Register Set #3 is assigned to IPL Level 7
101 = Alternate Register Set #3 is assigned to IPL Level 6
100 = Alternate Register Set #3 is assigned to IPL Level 5
011 = Alternate Register Set #3 is assigned to IPL Level 4
010 = Alternate Register Set #3 is assigned to IPL Level 3
001 = Alternate Register Set #3 is assigned to IPL Level 2
000 = Alternate Register Set #3 is assigned to IPL Level 1

bit 7 **Unimplemented:** Read as '1'

bit 6-4 **CTXT2[2:0]:** Specifies the Alternate Working Register Set #2 with Interrupt Priority Levels (IPL) bits
111 = Not assigned
110 = Alternate Register Set #2 is assigned to IPL Level 7
101 = Alternate Register Set #2 is assigned to IPL Level 6
100 = Alternate Register Set #2 is assigned to IPL Level 5
011 = Alternate Register Set #2 is assigned to IPL Level 4
010 = Alternate Register Set #2 is assigned to IPL Level 3
001 = Alternate Register Set #2 is assigned to IPL Level 2
000 = Alternate Register Set #2 is assigned to IPL Level 1

bit 3 **Unimplemented:** Read as '1'

**REGISTER 30-15: FALTREG CONFIGURATION REGISTER (CONTINUED)**

bit 2-0 **CTXT1[2:0]:** Specifies the Alternate Working Register Set #1 with Interrupt Priority Levels (IPL) bits
111 = Not assigned
110 = Alternate Register Set #1 is assigned to IPL Level 7
101 = Alternate Register Set #1 is assigned to IPL Level 6
100 = Alternate Register Set #1 is assigned to IPL Level 5
011 = Alternate Register Set #1 is assigned to IPL Level 4
010 = Alternate Register Set #1 is assigned to IPL Level 3
001 = Alternate Register Set #1 is assigned to IPL Level 2
000 = Alternate Register Set #1 is assigned to IPL Level 1

**REGISTER 30-16: FBTSEQ CONFIGURATION REGISTER**

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| IBSEQ[11:4] | | | | | | | |
| bit 23 | | | | | | | bit 16 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| IBSEQ[3:0] | | | | BSEQ[11:8] | | | |
| bit 15 | | | | | | | bit 8 |

| R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| BSEQ[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '1' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 23-12 **IBSEQ[11:0]:** Inverse Boot Sequence Number bits (Dual Partition modes only)
The one's complement of BSEQ[11:0]; must be calculated by the user and written into device programming.

bit 11-0 **BSEQ[11:0]:** Boot Sequence Number bits (Dual Partition modes only)
Relative value defining which partition will be active after a device Reset; the partition containing a lower boot number will be active.


© 2017-2021 Microchip Technology Inc.

**REGISTER 30-17: FBOOT CONFIGURATION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | R/PO-1 | R/PO-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | BTMODE[1:0] | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | PO = Program Once bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '1' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-2 **Unimplemented:** Read as '1'

bit 1-0 **BTMODE[1:0]:** Device Partition Mode Configuration Status bits

11 = Single Partition mode
10 = Dual Partition mode
01 = Protected Dual Partition mode (Partition 1 is write-protected when inactive)
00 = Reserved; do not use

## 30.2 Device Calibration and Identification

The dsPIC33CK256MP508 devices have two Identification registers, near the end of configuration memory space, that store the Device ID (DEVID) and Device Revision (DEVREV). These registers are used to determine the mask, variant and manufacturing information about the device. These registers are read-only and are shown in Register 30-18 and Register 30-19.

**REGISTER 30-18: DEVREV: DEVICE REVISION REGISTER**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| r-0 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-1 | U-1 | U-1 | U-1 | R | R | R | R |
|---|---|---|---|---|---|---|---|
| — | — | — | — | DEVREV[3:0] | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | R = Read-only bit | r = Reserved bit | U = Unimplemented bit |
|---|---|---|---|

bit 23-16 **Unimplemented:** Read as '1'
bit 15 **Reserved:** Maintain as '0'
bit 14-4 **Unimplemented:** Read as '1'
bit 3-0 **DEVREV[3:0]:** Device Revision bits

**REGISTER 30-19: DEVID: DEVICE ID REGISTERS**

| U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 | U-1 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 23 | | | | | | | bit 16 |

| R | R | R | R | R | R | R | R |
|---|---|---|---|---|---|---|---|
| FAMID[7:0] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| R | R | R | R | R | R | R | R |
|---|---|---|---|---|---|---|---|
| DEV[7:0](1) | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | R = Read-only bit | U = Unimplemented bit |
|---|---|---|

bit 23-16 **Unimplemented:** Read as '1'
bit 15-8 **FAMID[7:0]:** Device Family Identifier bits
0111 1100 = dsPIC33CK256MP508 family
bit 7-0 **DEV[7:0]:** Individual Device Identifier bits(1)

**Note 1:** See Table 30-4 for the list of Device Identifier bits.


© 2017-2021 Microchip Technology Inc.

**TABLE 30-4: DEVICE IDs FOR THE dsPIC33CK256MP508 FAMILY**

| Device | DEVID |
|---|---|
| **Device IDs for dsPIC33CK256MP508 Family with CAN FD** | |
| dsPIC33CK256MP508 | 0x7C74 |
| dsPIC33CK256MP506 | 0x7C73 |
| dsPIC33CK256MP505 | 0x7C72 |
| dsPIC33CK256MP503 | 0x7C71 |
| dsPIC33CK256MP502 | 0x7C70 |
| dsPIC33CK128MP508 | 0x7C64 |
| dsPIC33CK128MP506 | 0x7C63 |
| dsPIC33CK128MP505 | 0x7C62 |
| dsPIC33CK128MP503 | 0x7C61 |
| dsPIC33CK128MP502 | 0x7C60 |
| dsPIC33CK64MP508 | 0x7C54 |
| dsPIC33CK64MP506 | 0x7C53 |
| dsPIC33CK64MP505 | 0x7C52 |
| dsPIC33CK64MP503 | 0x7C51 |
| dsPIC33CK64MP502 | 0x7C50 |
| dsPIC33CK32MP506 | 0x7C43 |
| dsPIC33CK32MP505 | 0x7C42 |
| dsPIC33CK32MP503 | 0x7C41 |
| dsPIC33CK32MP502 | 0x7C40 |
| **Device IDs for dsPIC33CK256MP508 Family without CAN FD** | |
| dsPIC33CK256MP208 | 0x7C34 |
| dsPIC33CK256MP206 | 0x7C33 |
| dsPIC33CK256MP205 | 0x7C32 |
| dsPIC33CK256MP203 | 0x7C31 |
| dsPIC33CK256MP202 | 0x7C30 |
| dsPIC33CK128MP208 | 0x7C24 |
| dsPIC33CK128MP206 | 0x7C23 |
| dsPIC33CK128MP205 | 0x7C22 |
| dsPIC33CK128MP203 | 0x7C21 |
| dsPIC33CK128MP202 | 0x7C20 |
| dsPIC33CK64MP208 | 0x7C14 |
| dsPIC33CK64MP206 | 0x7C13 |
| dsPIC33CK64MP205 | 0x7C12 |
| dsPIC33CK64MP203 | 0x7C11 |
| dsPIC33CK64MP202 | 0x7C10 |
| dsPIC33CK32MP206 | 0x7C03 |
| dsPIC33CK32MP205 | 0x7C02 |
| dsPIC33CK32MP203 | 0x7C01 |
| dsPIC33CK32MP202 | 0x7C00 |

## 30.3 User OTP Memory

The dsPIC33CK256MP508 family devices contain 64 One-Time-Programmable (OTP) double words, located at addresses, 801700h through 8017FEh. Each 48-bit OTP double word can only be written one time. The OTP Words can be used for storing checksums, code revisions, manufacturing dates, manufacturing lot numbers or any other application-specific information.

The OTP area is not cleared by any erase command. This memory can be written only once.

## 30.4 On-Chip Voltage Regulators

The dsPIC33CK256MP508 family devices have a capacitorless internal voltage regulator to supply power to the core at 1.2V (typical).

The regulators have Low-Power and Standby modes for use in Sleep modes. For additional information about Sleep, see **Section 29.2.1 “Sleep Mode”**.

When the regulators are in Low-Power mode (LPWREN = 1), the power available to the core is limited. Before the LPWREN bit is set, the device should be placed into a lower power state by disabling peripherals and lowering CPU frequency (e.g., 8 MHz FRC without PLL).


© 2017-2021 Microchip Technology Inc.

**REGISTER 30-20: VREGCON: VOLTAGE REGULATOR CONTROL REGISTER**

| R/W-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 | U-0 |
|---|---|---|---|---|---|---|---|
| LPWREN(1) | — | — | — | — | — | — | — |
| bit 15 | | | | | | | bit 8 |

| U-0 | U-0 | r-0 | r-0 | r-0 | r-0 | r-0 | r-0 |
|---|---|---|---|---|---|---|---|
| — | — | — | — | — | — | — | — |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | r = Reserved bit | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **LPWREN:** Low-Power Mode Enable bit(1)
1 = Voltage regulators are in Low-Power mode
0 = Voltage regulators are in Full-Power mode

bit 14-6 **Unimplemented:** Read as '1'

bit 5-0 **Reserved:** Maintain as '0'

**Note 1:** Low-Power mode can only be used within the industrial temperature range. The CPU should be run at slow speed (8 MHz or less) before setting this bit.

## 30.5 Brown-out Reset (BOR)

The Brown-out Reset (BOR) module is based on an internal voltage reference circuit that monitors the regulated supply voltage. The main purpose of the BOR module is to generate a device Reset when a brown-out condition occurs. Brown-out conditions are generally caused by glitches on the AC mains (for example, missing portions of the AC cycle waveform due to bad power transmission lines or voltage sags due to excessive current draw when a large inductive load is turned on).

A BOR generates a Reset pulse which resets the device. The BOR selects the clock source based on the device Configuration bit selections.

If an Oscillator mode is selected, the BOR activates the Oscillator Start-up Timer (OST). The system clock is held until OST expires. If the PLL is used, the clock is held until the LOCK bit (OSCCON[5]) is '1'.

The BOR status bit (RCON[1]) is set to indicate that a BOR has occurred. The BOR circuit continues to operate while in Sleep or Idle mode and resets the device should VDD fall below the BOR threshold voltage.

## 30.6 Dual Watchdog Timer (WDT)

**Note 1:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to **"Dual Watchdog Timer",** (DS70005250) in the *"dsPIC33/PIC24 Family Reference Manual"*, which is available from the Microchip website (www.microchip.com).

The dsPIC33 dual Watchdog Timer (WDT) is described in this section. Refer to Figure 30-1 for a block diagram of the WDT.

The WDT, when enabled, operates from the internal Low-Power RC (LPRC) Oscillator clock source or a selectable clock source in Run mode. The WDT can be used to detect system software malfunctions by resetting the device if the WDT is not cleared periodically in software. The WDT can be configured in Windowed mode or Non-Windowed mode. Various WDT time-out periods can be selected using the WDT postscaler. The WDT can also be used to wake the device from Sleep or Idle mode (Power Save mode). If the WDT expires and issues a device Reset, the WTDO bit in RCON (Register 6-1) will be set.

The following are some of the key features of the WDT modules:

- Configuration or Software Controlled
- Separate User-Configurable Time-out Periods for Run and Sleep/Idle
- Can Wake the Device from Sleep or Idle
- User-Selectable Clock Source in Run mode
- Operates from LPRC in Sleep/Idle mode

**FIGURE 30-1: WATCHDOG TIMER BLOCK DIAGRAM**

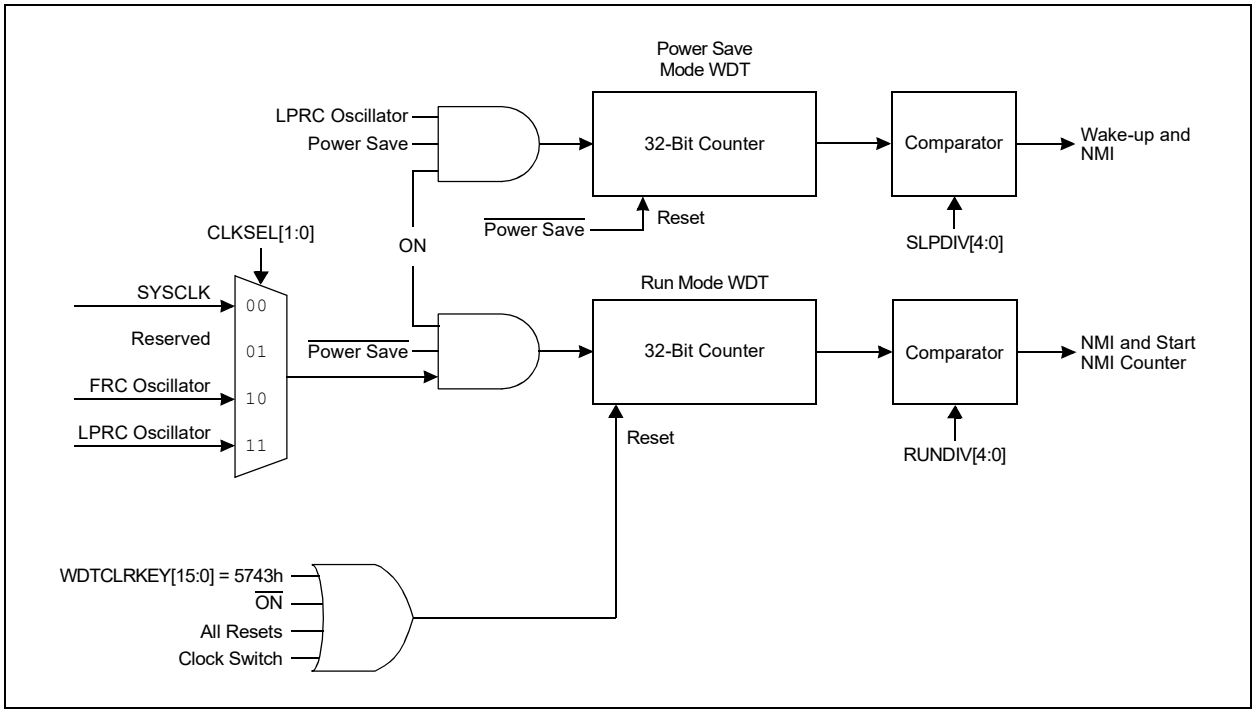



© 2017-2021 Microchip Technology Inc.

**REGISTER 30-21: WDTCONL: WATCHDOG TIMER CONTROL REGISTER LOW**

| R/W-0 | U-0 | U-0 | R-y | R-y | R-y | R-y | R-y |
|---|---|---|---|---|---|---|---|
| ON(1,2) | — | — | RUNDIV4(3) | RUNDIV3(3) | RUNDIV2(3) | RUNDIV1(3) | RUNDIV0(3) |
| bit 15 | | | | | | | bit 8 |

| R | R | R-y | R-y | R-y | R-y | R-y | HS/R/W-0 |
|---|---|---|---|---|---|---|---|
| CLKSEL1(3,5) | CLKSEL0(3,5) | SLPDIV4(3) | SLPDIV3(3) | SLPDIV2(3) | SLPDIV1(3) | SLPDIV0(3) | WDTWINEN(4) |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | HS = Hardware Settable bit | y = Value from Configuration bit on POR | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15 **ON:** Watchdog Timer Enable bit(1,2)
1 = Enables the Watchdog Timer if it is not enabled by the device configuration
0 = Disables the Watchdog Timer if it was enabled in software

bit 14-13 **Unimplemented:** Read as '0'

bit 12-8 **RUNDIV[4:0]:** WDT Run Mode Postscaler Status bits(3)
11111 = Divide by 2 ^ 31 = 2,147,483,648
11110 = Divide by 2 ^ 30 = 1,073,741,824
. . .
00001 = Divide by 2 ^ 1, 2
00000 = Divide by 2 ^ 0, 1

bit 7-6 **CLKSEL[1:0]:** WDT Run Mode Clock Select Status bits(3,5)
11 = LPRC Oscillator
10 = FRC Oscillator
01 = Reserved
00 = SYSCLK

bit 5-1 **SLPDIV[4:0]:** Sleep and Idle Mode WDT Postscaler Status bits(3)
11111 = Divide by 2 ^ 31 = 2,147,483,648
11110 = Divide by 2 ^ 30 = 1,073,741,824
. . .
00001 = Divide by 2 ^ 1, 2
00000 = Divide by 2 ^ 0, 1

bit 0 **WDTWINEN:** Watchdog Timer Window Enable bit(4)
1 = Enables Window mode
0 = Disables Window mode

**Note 1:** A read of this bit will result in a '1' if the WDT is enabled by the device configuration or by software.
**2:** The user's software should not read or write the peripheral's SFRs in the SYSCLK cycle immediately following the instruction that clears the module's ON bit.
**3:** These bits reflect the value of the Configuration bits.
**4:** The WDTWINEN bit reflects the status of the Configuration bit if the bit is set. If the bit is cleared, the value is controlled by software.
**5:** The available clock sources are device-dependent.

**REGISTER 30-22: WDTCONH: WATCHDOG TIMER CONTROL REGISTER HIGH**

| W-0 | W-0 | W-0 | W-0 | W-0 | W-0 | W-0 | W-0 |
|---|---|---|---|---|---|---|---|
| WDTCLRKEY[15:8] | | | | | | | |
| bit 15 | | | | | | | bit 8 |

| W-0 | W-0 | W-0 | W-0 | W-0 | W-0 | W-0 | W-0 |
|---|---|---|---|---|---|---|---|
| WDTCLRKEY[7:0] | | | | | | | |
| bit 7 | | | | | | | bit 0 |

| **Legend:** | | | |
|---|---|---|---|
| R = Readable bit | W = Writable bit | U = Unimplemented bit, read as '0' | |
| -n = Value at POR | '1' = Bit is set | '0' = Bit is cleared | x = Bit is unknown |

bit 15-0 **WDTCLRKEY[15:0]:** Watchdog Timer Clear Key bits

To clear the Watchdog Timer to prevent a time-out, software must write the value, 0x5743, to this location using a single 16-bit write.


© 2017-2021 Microchip Technology Inc.

## 30.7 JTAG Interface

The dsPIC33CK256MP508 family devices implement a JTAG interface, which supports boundary scan device testing. Programming is not supported through the JTAG interface; only boundary scan is supported.

**Note:** Refer to **"Programming and Diagnostics"** (DS70608) in the *"dsPIC33/PIC24 Family Reference Manual"* for further information on usage, configuration and operation of the JTAG interface.

## 30.8 In-Circuit Serial Programming™ (ICSP™)

The dsPIC33CK256MP508 family devices can be serially programmed while in the end application circuit. This is done with two lines for clock and data, and three other lines for power, ground and the programming sequence. Serial programming allows customers to manufacture boards with unprogrammed devices and then program the device just before shipping the product. Serial programming also allows the most recent firmware or a custom firmware to be programmed. Refer to the *"dsPIC33CK256MP508 Family Flash Programming Specification"* (DS70005300) for details about In-Circuit Serial Programming (ICSP).

Any of the three pairs of programming clock/data pins can be used:

- PGC1 and PGD1
- PGC2 and PGD2
- PGC3 and PGD3

## 30.9 In-Circuit Debugger

When MPLAB® ICD 3 or the REAL ICE™ emulator is selected as a debugger, the in-circuit debugging functionality is enabled. This function allows simple debugging functions when used with MPLAB IDE. Debugging functionality is controlled through the PGCx (Emulation/Debug Clock) and PGDx (Emulation/Debug Data) pin functions.

Any of the three pairs of debugging clock/data pins can be used:

- PGC1 and PGD1
- PGC2 and PGD2
- PGC3 and PGD3

To use the in-circuit debugger function of the device, the design must implement ICSP connections to $\overline{\text{MCLR}}$, $V_{DD}$, $V_{SS}$ and the PGCx/PGDx pin pair. In addition, when the feature is enabled, some of the resources are not available for general use. These resources include the first 80 bytes of data RAM and two I/O pins (PGCx and PGDx).

## 30.10 Code Protection and CodeGuard™ Security

dsPIC33CK256MP508 family devices offer multiple levels of security for protecting individual intellectual property. The program Flash protection can be broken up into three segments: Boot Segment (BS), General Segment (GS) and Configuration Segment (CS). Boot Segment has the highest security privilege and can be thought to have limited restrictions when accessing other segments. General Segment has the least security and is intended for the end user system code. Configuration Segment contains only the device user configuration data, which are located at the end of the program memory space.

The code protection features are controlled by the Configuration registers, FSEC and FBSLIM. The FSEC register controls the code-protect level for each segment and if that segment is write-protected. The size of BS and GS will depend on the BSLIM[12:0] bits setting and if the Alternate Interrupt Vector Table (AIVT) is enabled. The BSLIM[12:0] bits define the number of pages for BS with each page containing 1024 IW. The smallest BS size is one page, which will consist of the Interrupt Vector Table (IVT) and 512 IW of code protection.

If the AIVT is enabled, the last page of BS will contain the AIVT and will not contain any BS code. With AIVT enabled, the smallest BS size is now two pages (2048 IW), with one page for the IVT and BS code, and the other page for the AIVT. Write protection of the BS does not cover the AIVT. The last page of BS can always be programmed or erased by BS code. The General Segment will start at the next page and will consume the rest of program Flash, except for the Flash Configuration Words. The IVT will assume GS security only if BS is not enabled. The IVT is protected from being programmed or page erased when either security segment has enabled write protection.

The different device security segments are shown in Figure 30-2. Here, all three segments are shown, but are not required. If only basic code protection is required, then GS can be enabled independently or combined with CS, if desired.

**FIGURE 30-2: SECURITY SEGMENTS EXAMPLE**

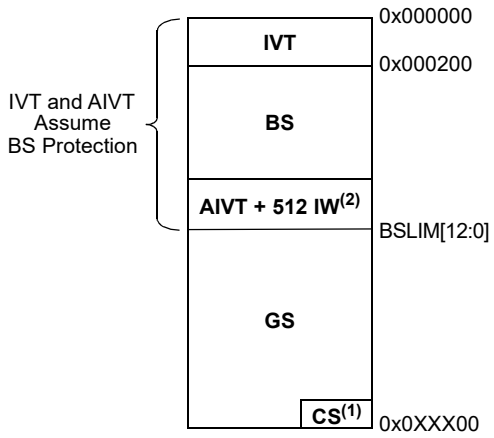


**Note 1:** If CS is write-protected, the last page (GS + CS) of program memory will be protected from an erase condition.

**2:** The last half (256 IW) of the last page of BS is unusable program memory.

The dsPIC33CK256MP508 family can be operated in Dual Partition mode, where security is required for each partition. When operating in Dual Partition mode, the Active and Inactive Partitions both contain unique copies of the Reset vector and Interrupt Vector Tables (IVT, if enabled). Both partitions have the three security segments described previously. Code may not be executed from the Inactive Partition, but it may be programmed by, and read from, the Active Partition, subject to defined code protection. Figure 30-3 shows the different security segments for a device operating in Dual Partition mode.

The device may also operate in a Protected Dual Partition mode or in Privileged Dual Partition mode. In Protected Dual Partition mode, Partition 1 is permanently erase/write-protected. This implementation allows for a “Factory Default” mode, which provides a fail-safe backup image to be stored in Partition 1. For example, a fail-safe bootloader can be placed in Partition 1, along with a fail-safe backup code image, which can be used or rewritten into Partition 2 in the event of a failed Flash update to Partition 2.

Privileged Dual Partition mode performs the same function as Protected Dual Partition mode, except additional constraints are applied in an effort to prevent code in the Boot Segment and General Segment from being used against each other.

**FIGURE 30-3: SECURITY SEGMENTS EXAMPLE (DUAL PARTITION MODES)**

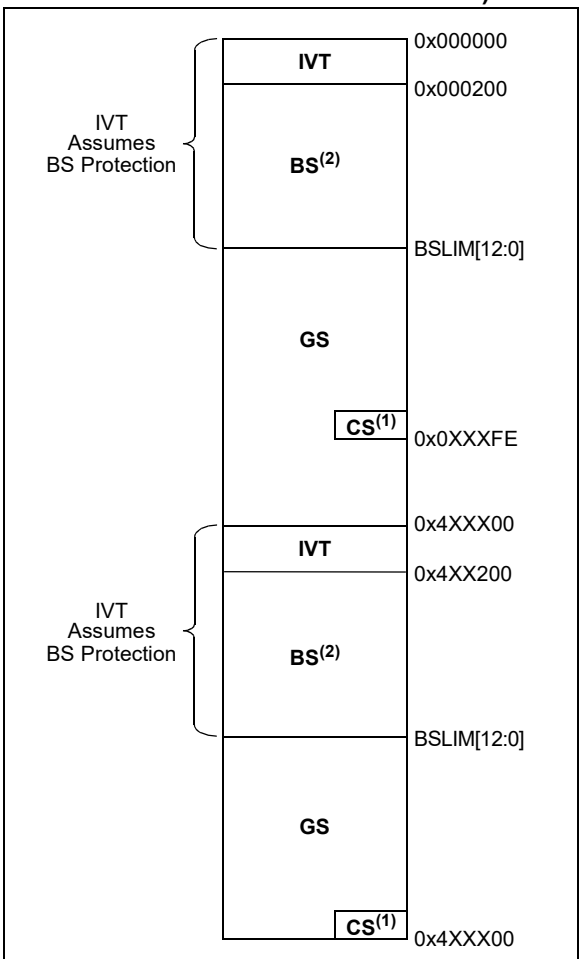


**Note 1:** If CS is write-protected, the last page (GS + CS) of program memory will be protected from an erase condition.

**2:** The last half (512 IW) of the last page of BS is unusable program memory.


© 2017-2021 Microchip Technology Inc.

## 31.0 INSTRUCTION SET SUMMARY

**Note:** This data sheet summarizes the features of the dsPIC33CK256MP508 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to the *"16-Bit MCU and DSC Programmer's Reference Manual"* (www.microchip.com/DS70000157), which is available from the Microchip website.

The dsPIC33CK256MP508 family instruction set is almost identical to that of the dsPIC30F and dsPIC33F.

Most instructions are a single program memory word (24 bits). Only three instructions require two program memory locations.

Each single-word instruction is a 24-bit word, divided into an 8-bit opcode, which specifies the instruction type and one or more operands, which further specify the operation of the instruction.

The instruction set is highly orthogonal and is grouped into five basic categories:

- Word or byte-oriented operations
- Bit-oriented operations
- Literal operations
- DSP operations
- Control operations

Table 31-1 lists the general symbols used in describing the instructions.

The dsPIC33 instruction set summary in Table 31-2 lists all the instructions, along with the status flags affected by each instruction.

Most word or byte-oriented W register instructions (including barrel shift instructions) have three operands:

- The first source operand, which is typically a register 'Wb' without any address modifier
- The second source operand, which is typically a register 'Ws' with or without an address modifier
- The destination of the result, which is typically a register 'Wd' with or without an address modifier

However, word or byte-oriented file register instructions have two operands:

- The file register specified by the value 'f'
- The destination, which could be either the file register 'f' or the W0 register, which is denoted as 'WREG'

Most bit-oriented instructions (including simple rotate/shift instructions) have two operands:

- The W register (with or without an address modifier) or file register (specified by the value of 'Ws' or 'f')
- The bit in the W register or file register (specified by a literal value or indirectly by the contents of register 'Wb')

The literal instructions that involve data movement can use some of the following operands:

- A literal value to be loaded into a W register or file register (specified by 'k')
- The W register or file register where the literal value is to be loaded (specified by 'Wb' or 'f')

However, literal instructions that involve arithmetic or logical operations use some of the following operands:

- The first source operand, which is a register 'Wb' without any address modifier
- The second source operand, which is a literal value
- The destination of the result (only if not the same as the first source operand), which is typically a register 'Wd' with or without an address modifier

The MAC class of DSP instructions can use some of the following operands:

- The accumulator (A or B) to be used (required operand)
- The W registers to be used as the two operands
- The X and Y address space prefetch operations
- The X and Y address space prefetch destinations
- The accumulator write-back destination

The other DSP instructions do not involve any multiplication and can include:

- The accumulator to be used (required)
- The source or destination operand (designated as Wso or Wdo, respectively) with or without an address modifier
- The amount of shift specified by a W register 'Wn' or a literal value

The control instructions can use some of the following operands:

- A program memory address
- The mode of the Table Read and Table Write instructions

Most instructions are a single word. Certain double-word instructions are designed to provide all the required information in these 48 bits. In the second word, the eight MSbs are '0's. If this second word is executed as an instruction (by itself), it executes as a NOP.

The double-word instructions execute in two instruction cycles.

Most single-word instructions are executed in a single instruction cycle, unless a conditional test is true or the Program Counter is changed as a result of the instruction, or a PSV or Table Read is performed. In these cases, the execution takes multiple instruction cycles, with the additional instruction cycle(s) executed as a NOP. Certain instructions that involve skipping over the subsequent instruction require either two or three cycles if the skip is performed, depending on whether the instruction being skipped is a single-word or two-word instruction. Moreover, double-word moves require two cycles.

**Note:** In dsPIC33CK256MP508 devices, read and Read-Modify-Write operations on non-CPU Special Function Registers require an additional cycle when compared to dsPIC30F, dsPIC33F, PIC24F and PIC24H devices.

**Note:** For more details on the instruction set, refer to the *"16-Bit MCU and DSC Programmer's Reference Manual"* (DS70000157).

**TABLE 31-1: SYMBOLS USED IN OPCODE DESCRIPTIONS**

| Field | Description |
|---|---|
| #text | Means literal defined by "text" |
| (text) | Means "content of text" |
| [text] | Means "the location addressed by text" |
| { } | Optional field or operation |
| a ∈ {b, c, d} | a is selected from the set of values b, c, d |
| [n:m] | Register bit field |
| .b | Byte mode selection |
| .d | Double-Word mode selection |
| .S | Shadow register select |
| .w | Word mode selection (default) |
| Acc | One of two accumulators {A, B} |
| AWB | Accumulator Write-Back Destination Address register ∈ {W13, [W13]+ = 2} |
| bit4 | 4-bit bit selection field (used in word-addressed instructions) ∈ {0...15} |
| C, DC, N, OV, Z | MCU Status bits: Carry, Digit Carry, Negative, Overflow, Sticky Zero |
| Expr | Absolute address, label or expression (resolved by the linker) |
| f | File register address ∈ {0x0000...0x1FFF} |
| lit1 | 1-bit unsigned literal ∈ {0,1} |
| lit4 | 4-bit unsigned literal ∈ {0...15} |
| lit5 | 5-bit unsigned literal ∈ {0...31} |
| lit8 | 8-bit unsigned literal ∈ {0...255} |
| lit10 | 10-bit unsigned literal ∈ {0...255} for Byte mode, {0:1023} for Word mode |
| lit14 | 14-bit unsigned literal ∈ {0...16384} |
| lit16 | 16-bit unsigned literal ∈ {0...65535} |
| lit23 | 23-bit unsigned literal ∈ {0...8388608}; LSb must be '0' |
| None | Field does not require an entry, can be blank |
| OA, OB, SA, SB | DSP Status bits: ACCA Overflow, ACCB Overflow, ACCA Saturate, ACCB Saturate |
| PC | Program Counter |
| Slit10 | 10-bit signed literal ∈ {-512...511} |
| Slit16 | 16-bit signed literal ∈ {-32768...32767} |
| Slit6 | 6-bit signed literal ∈ {-16...16} |
| Wb | Base W register ∈ {W0...W15} |
| Wd | Destination W register ∈ { Wd, [Wd], [Wd++], [Wd--], [++Wd], [--Wd] } |
| Wdo | Destination W register ∈<br>{ Wnd, [Wnd], [Wnd++], [Wnd--], [++Wnd], [--Wnd], [Wnd+Wb] } |
| Wm,Wn | Dividend, Divisor Working register pair (direct addressing) |


© 2017-2021 Microchip Technology Inc.

**TABLE 31-1: SYMBOLS USED IN OPCODE DESCRIPTIONS (CONTINUED)**

| Field | Description |
|---|---|
| Wm*Wm | Multiplicand and Multiplier Working register pair for Square instructions ∈ {W4 * W4,W5 * W5,W6 * W6,W7 * W7} |
| Wm*Wn | Multiplicand and Multiplier Working register pair for DSP instructions ∈ {W4 * W5,W4 * W6,W4 * W7,W5 * W6,W5 * W7,W6 * W7} |
| Wn | One of 16 Working registers ∈ {W0...W15} |
| Wnd | One of 16 Destination Working registers ∈ {W0...W15} |
| Wns | One of 16 Source Working registers ∈ {W0...W15} |
| WREG | W0 (Working register used in file register instructions) |
| Ws | Source W register ∈ { Ws, [Ws], [Ws++], [Ws--], [++Ws], [--Ws] } |
| Wso | Source W register ∈ { Wns, [Wns], [Wns++], [Wns--], [++Wns], [--Wns], [Wns+Wb] } |
| Wx | X Data Space Prefetch Address register for DSP instructions ∈ {[W8] + = 6, [W8] + = 4, [W8] + = 2, [W8], [W8] - = 6, [W8] - = 4, [W8] - = 2, [W9] + = 6, [W9] + = 4, [W9] + = 2, [W9], [W9] - = 6, [W9] - = 4, [W9] - = 2, [W9 + W12], none} |
| Wxd | X Data Space Prefetch Destination register for DSP instructions ∈ {W4...W7} |
| Wy | Y Data Space Prefetch Address register for DSP instructions ∈ {[W10] + = 6, [W10] + = 4, [W10] + = 2, [W10], [W10] - = 6, [W10] - = 4, [W10] - = 2, [W11] + = 6, [W11] + = 4, [W11] + = 2, [W11], [W11] - = 6, [W11] - = 4, [W11] - = 2, [W11 + W12], none} |
| Wyd | Y Data Space Prefetch Destination register for DSP instructions ∈ {W4...W7} |

**TABLE 31-2: INSTRUCTION SET OVERVIEW**

| Base Instr # | Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles(1) | Status Flags Affected |
|---|---|---|---|---|---|---|---|
| 1 | ADD | ADD | Acc | Add Accumulators | 1 | 1 | OA,OB,SA,SB |
| | | ADD | f | f = f + WREG | 1 | 1 | C,DC,N,OV,Z |
| | | ADD | f,WREG | WREG = f + WREG | 1 | 1 | C,DC,N,OV,Z |
| | | ADD | #lit10,Wn | Wd = lit10 + Wd | 1 | 1 | C,DC,N,OV,Z |
| | | ADD | Wb,Ws,Wd | Wd = Wb + Ws | 1 | 1 | C,DC,N,OV,Z |
| | | ADD | Wb,#lit5,Wd | Wd = Wb + lit5 | 1 | 1 | C,DC,N,OV,Z |
| | | ADD | Wso,#Slit4,Acc | 16-bit Signed Add to Accumulator | 1 | 1 | OA,OB,SA,SB |
| 2 | ADDC | ADDC | f | f = f + WREG + (C) | 1 | 1 | C,DC,N,OV,Z |
| | | ADDC | f,WREG | WREG = f + WREG + (C) | 1 | 1 | C,DC,N,OV,Z |
| | | ADDC | #lit10,Wn | Wd = lit10 + Wd + (C) | 1 | 1 | C,DC,N,OV,Z |
| | | ADDC | Wb,Ws,Wd | Wd = Wb + Ws + (C) | 1 | 1 | C,DC,N,OV,Z |
| | | ADDC | Wb,#lit5,Wd | Wd = Wb + lit5 + (C) | 1 | 1 | C,DC,N,OV,Z |
| 3 | AND | AND | f | f = f .AND. WREG | 1 | 1 | N,Z |
| | | AND | f,WREG | WREG = f .AND. WREG | 1 | 1 | N,Z |
| | | AND | #lit10,Wn | Wd = lit10 .AND. Wd | 1 | 1 | N,Z |
| | | AND | Wb,Ws,Wd | Wd = Wb .AND. Ws | 1 | 1 | N,Z |
| | | AND | Wb,#lit5,Wd | Wd = Wb .AND. lit5 | 1 | 1 | N,Z |
| 4 | ASR | ASR | f | f = Arithmetic Right Shift f | 1 | 1 | C,N,OV,Z |
| | | ASR | f,WREG | WREG = Arithmetic Right Shift f | 1 | 1 | C,N,OV,Z |
| | | ASR | Ws,Wd | Wd = Arithmetic Right Shift Ws | 1 | 1 | C,N,OV,Z |
| | | ASR | Wb,Wns,Wnd | Wnd = Arithmetic Right Shift Wb by Wns | 1 | 1 | N,Z |
| | | ASR | Wb,#lit5,Wnd | Wnd = Arithmetic Right Shift Wb by lit5 | 1 | 1 | N,Z |
| 5 | BCLR | BCLR | f,#bit4 | Bit Clear f | 1 | 1 | None |
| | | BCLR | Ws,#bit4 | Bit Clear Ws | 1 | 1 | None |
| 6 | BFEXT | BFEXT | bit4,wid5,Ws,Wb | Bit Field Extract from Ws to Wb | 2 | 2 | None |
| | | BFEXT | bit4,wid5,f,Wb | Bit Field Extract from f to Wb | 2 | 2 | None |
| 7 | BFINS | BFINS | bit4,wid5,Wb,Ws | Bit Field Insert from Wb into Ws | 2 | 2 | None |
| | | BFINS | bit4,wid5,Wb,f | Bit Field Insert from Wb into f | 2 | 2 | None |
| | | BFINS | bit4,wid5,lit8,Ws | Bit Field Insert from #lit8 to Ws | 2 | 2 | None |
| 8 | BOOTSWP | BOOTSWP | | Swap the Active and Inactive Program Flash Space | 1 | 2 | None |

**Note 1:** Read and Read-Modify-Write (e.g., bit operations and logical operations) on non-CPU SFRs incur an additional instruction cycle.

**2:** The divide instructions must be preceded with a "REPEAT #5" instruction, such that they are executed six consecutive times.


© 2017-2021 Microchip Technology Inc.

**TABLE 31-2: INSTRUCTION SET OVERVIEW (CONTINUED)**

| Base Instr # | Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles(1) | Status Flags Affected |
|---|---|---|---|---|---|---|---|
| 9 | BRA | BRA | C,Expr | Branch if Carry | 1 | 1 (4) | None |
| | | BRA | GE,Expr | Branch if Greater Than or Equal | 1 | 1 (4) | None |
| | | BRA | GEU,Expr | Branch if unsigned Greater Than or Equal | 1 | 1 (4) | None |
| | | BRA | GT,Expr | Branch if Greater Than | 1 | 1 (4) | None |
| | | BRA | GTU,Expr | Branch if Unsigned Greater Than | 1 | 1 (4) | None |
| | | BRA | LE,Expr | Branch if Less Than or Equal | 1 | 1 (4) | None |
| | | BRA | LEU,Expr | Branch if Unsigned Less Than or Equal | 1 | 1 (4) | None |
| | | BRA | LT,Expr | Branch if Less Than | 1 | 1 (4) | None |
| | | BRA | LTU,Expr | Branch if Unsigned Less Than | 1 | 1 (4) | None |
| | | BRA | N,Expr | Branch if Negative | 1 | 1 (4) | None |
| | | BRA | NC,Expr | Branch if Not Carry | 1 | 1 (4) | None |
| | | BRA | NN,Expr | Branch if Not Negative | 1 | 1 (4) | None |
| | | BRA | NOV,Expr | Branch if Not Overflow | 1 | 1 (4) | None |
| | | BRA | NZ,Expr | Branch if Not Zero | 1 | 1 (4) | None |
| | | BRA | OA,Expr | Branch if Accumulator A Overflow | 1 | 1 (4) | None |
| | | BRA | OB,Expr | Branch if Accumulator B Overflow | 1 | 1 (4) | None |
| | | BRA | OV,Expr | Branch if Overflow | 1 | 1 (4) | None |
| | | BRA | SA,Expr | Branch if Accumulator A Saturated | 1 | 1 (4) | None |
| | | BRA | SB,Expr | Branch if Accumulator B Saturated | 1 | 1 (4) | None |
| | | BRA | Expr | Branch Unconditionally | 1 | 4 | None |
| | | BRA | Z,Expr | Branch if Zero | 1 | 1 (4) | None |
| | | BRA | Wn | Computed Branch | 1 | 4 | None |
| 10 | BREAK | BREAK | | Stop User Code Execution | 1 | 1 | None |
| 11 | BSET | BSET | f,#bit4 | Bit Set f | 1 | 1 | None |
| | | | Ws,#bit4 | Bit Set Ws | 1 | 1 | None |
| 12 | BSW | BSW.C | Ws,Wb | Write C bit to Ws[Wb] | 1 | 1 | None |
| | | BSW.Z | Ws,Wb | Write Z bit to Ws[Wb] | 1 | 1 | None |
| 13 | BTG | BTG | f,#bit4 | Bit Toggle f | 1 | 1 | None |
| | | BTG | Ws,#bit4 | Bit Toggle Ws | 1 | 1 | None |
| 14 | BTSC | BTSC | f,#bit4 | Bit Test f, Skip if Clear | 1 | 1 (2 or 3) | None |
| | | BTSC | Ws,#bit4 | Bit Test Ws, Skip if Clear | 1 | 1 (2 or 3) | None |
| 15 | BTSS | BTSS | f,#bit4 | Bit Test f, Skip if Set | 1 | 1 (2 or 3) | None |
| | | BTSS | Ws,#bit4 | Bit Test Ws, Skip if Set | 1 | 1 (2 or 3) | None |
| 16 | BTST | BTST | f,#bit4 | Bit Test f | 1 | 1 | Z |
| | | BTST.C | Ws,#bit4 | Bit Test Ws to C | 1 | 1 | C |
| | | BTST.Z | Ws,#bit4 | Bit Test Ws to Z | 1 | 1 | Z |
| | | BTST.C | Ws,Wb | Bit Test Ws[Wb] to C | 1 | 1 | C |
| | | BTST.Z | Ws,Wb | Bit Test Ws[Wb] to Z | 1 | 1 | Z |
| 17 | BTSTS | BTSTS | f,#bit4 | Bit Test then Set f | 1 | 1 | Z |
| | | BTSTS.C | Ws,#bit4 | Bit Test Ws to C, then Set | 1 | 1 | C |
| | | BTSTS.Z | Ws,#bit4 | Bit Test Ws to Z, then Set | 1 | 1 | Z |
| 18 | CALL | CALL | lit23 | Call Subroutine | 2 | 4 | SFA |
| | | CALL | Wn | Call Indirect Subroutine | 1 | 4 | SFA |
| | | CALL.L | Wn | Call Indirect Subroutine (long address) | 1 | 4 | SFA |
| 19 | CLR | CLR | f | f = 0x0000 | 1 | 1 | None |
| | | CLR | WREG | WREG = 0x0000 | 1 | 1 | None |
| | | CLR | Ws | Ws = 0x0000 | 1 | 1 | None |
| | | CLR | Acc,Wx,Wxd,Wy,Wyd,AWB | Clear Accumulator | 1 | 1 | OA,OB,SA,SB |

**Note 1:** Read and Read-Modify-Write (e.g., bit operations and logical operations) on non-CPU SFRs incur an additional instruction cycle.

**2:** The divide instructions must be preceded with a "REPEAT #5" instruction, such that they are executed six consecutive times.

**TABLE 31-2: INSTRUCTION SET OVERVIEW (CONTINUED)**

| Base Instr # | Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles(1) | Status Flags Affected |
|---|---|---|---|---|---|---|---|
| 20 | CLRWDT | CLRWDT | | Clear Watchdog Timer | 1 | 1 | WDTO,Sleep |
| 21 | COM | COM | f | f = $\overline{f}$ | 1 | 1 | N,Z |
| | | COM | f,WREG | WREG = $\overline{f}$ | 1 | 1 | N,Z |
| | | COM | Ws,Wd | Wd = $\overline{Ws}$ | 1 | 1 | N,Z |
| 22 | CP | CP | f | Compare f with WREG | 1 | 1 | C,DC,N,OV,Z |
| | | CP | Wb,#lit8 | Compare Wb with lit8 | 1 | 1 | C,DC,N,OV,Z |
| | | CP | Wb,Ws | Compare Wb with Ws (Wb – Ws) | 1 | 1 | C,DC,N,OV,Z |
| 23 | CP0 | CP0 | f | Compare f with 0x0000 | 1 | 1 | C,DC,N,OV,Z |
| | | CP0 | Ws | Compare Ws with 0x0000 | 1 | 1 | C,DC,N,OV,Z |
| 24 | CPB | CPB | f | Compare f with WREG, with Borrow | 1 | 1 | C,DC,N,OV,Z |
| | | CPB | Wb,#lit8 | Compare Wb with lit8, with Borrow | 1 | 1 | C,DC,N,OV,Z |
| | | CPB | Wb,Ws | Compare Wb with Ws, with Borrow (Wb – Ws – $\overline{C}$) | 1 | 1 | C,DC,N,OV,Z |
| 25 | CPSEQ | CPSEQ | Wb,Wn | Compare Wb with Wn, Skip if = | 1 | 1 (2 or 3) | None |
| | CPBEQ | CPBEQ | Wb,Wn,Expr | Compare Wb with Wn, Branch if = | 1 | 1 (5) | None |
| 26 | CPSGT | CPSGT | Wb,Wn | Compare Wb with Wn, Skip if > | 1 | 1 (2 or 3) | None |
| | CPBGT | CPBGT | Wb,Wn,Expr | Compare Wb with Wn, Branch if > | 1 | 1 (5) | None |
| 27 | CPSLT | CPSLT | Wb,Wn | Compare Wb with Wn, Skip if < | 1 | 1 (2 or 3) | None |
| | | CPBLT | Wb,Wn,Expr | Compare Wb with Wn, Branch if < | 1 | 1 (5) | None |
| 28 | CPSNE | CPSNE | Wb,Wn | Compare Wb with Wn, Skip if ≠ | 1 | 1 (2 or 3) | None |
| | | CPBNE | Wb,Wn,Expr | Compare Wb with Wn, Branch if ≠ | 1 | 1 (5) | None |
| 29 | CTXTSWP | CTXTSWP | #lit3 | Switch CPU Register Context to Context Defined by lit3 | 1 | 2 | None |
| 30 | CTXTSWP | CTXTSWP | Wn | Switch CPU Register Context to Context Defined by Wn | 1 | 2 | None |
| 31 | DAW.B | DAW.B | Wn | Wn = Decimal Adjust Wn | 1 | 1 | C |
| 32 | DEC | DEC | f | f = f – 1 | 1 | 1 | C,DC,N,OV,Z |
| | | DEC | f,WREG | WREG = f – 1 | 1 | 1 | C,DC,N,OV,Z |
| | | DEC | Ws,Wd | Wd = Ws – 1 | 1 | 1 | C,DC,N,OV,Z |
| 33 | DEC2 | DEC2 | f | f = f – 2 | 1 | 1 | C,DC,N,OV,Z |
| | | DEC2 | f,WREG | WREG = f – 2 | 1 | 1 | C,DC,N,OV,Z |
| | | DEC2 | Ws,Wd | Wd = Ws – 2 | 1 | 1 | C,DC,N,OV,Z |
| 34 | DISI | DISI | #lit14 | Disable Interrupts for k Instruction Cycles | 1 | 1 | None |
| 35 | DIVF | DIVF | Wm,Wn | Signed 16/16-bit Fractional Divide | 1 | 18 | N,Z,C,OV |
| 36 | DIV.S(2) | DIV.S | Wm,Wn | Signed 16/16-bit Integer Divide | 1 | 18 | N,Z,C,OV |
| | | DIV.SD | Wm,Wn | Signed 32/16-bit Integer Divide | 1 | 18 | N,Z,C,OV |
| 37 | DIV.U(2) | DIV.U | Wm,Wn | Unsigned 16/16-bit Integer Divide | 1 | 18 | N,Z,C,OV |
| | | DIV.UD | Wm,Wn | Unsigned 32/16-bit Integer Divide | 1 | 18 | N,Z,C,OV |
| 38 | DIVF2(2) | DIVF2 | Wm,Wn | Signed 16/16-bit Fractional Divide (W1:W0 preserved) | 1 | 6 | N,Z,C,OV |
| 39 | DIV2.S(2) | DIV2.S | Wm,Wn | Signed 16/16-bit Integer Divide (W1:W0 preserved) | 1 | 6 | N,Z,C,OV |
| | | DIV2.SD | Wm,Wn | Signed 32/16-bit Integer Divide (W1:W0 preserved) | 1 | 6 | N,Z,C,OV |
| 40 | DIV2.U(2) | DIV2.U | Wm,Wn | Unsigned 16/16-bit Integer Divide (W1:W0 preserved) | 1 | 6 | N,Z,C,OV |
| | | DIV2.UD | Wm,Wn | Unsigned 32/16-bit Integer Divide (W1:W0 preserved) | 1 | 6 | N,Z,C,OV |
| 41 | DO | DO | #lit15,Expr | Do Code to PC + Expr, lit15 + 1 Times | 2 | 2 | None |
| | | DO | Wn,Expr | Do code to PC + Expr, (Wn) + 1 Times | 2 | 2 | None |

**Note 1:** Read and Read-Modify-Write (e.g., bit operations and logical operations) on non-CPU SFRs incur an additional instruction cycle.

**2:** The divide instructions must be preceded with a "REPEAT #5" instruction, such that they are executed six consecutive times.


© 2017-2021 Microchip Technology Inc.

**TABLE 31-2: INSTRUCTION SET OVERVIEW (CONTINUED)**

| Base Instr # | Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles(1) | Status Flags Affected |
|---|---|---|---|---|---|---|---|
| 42 | ED | ED | Wm*Wm,Acc,Wx,Wy,Wxd | Euclidean Distance (no accumulate) | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| 43 | EDAC | EDAC | Wm*Wm,Acc,Wx,Wy,Wxd | Euclidean Distance | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| 44 | EXCH | EXCH | Wns,Wnd | Swap Wns with Wnd | 1 | 1 | None |
| 46 | FBCL | FBCL | Ws,Wnd | Find Bit Change from Left (MSb) Side | 1 | 1 | C |
| 47 | FF1L | FF1L | Ws,Wnd | Find First One from Left (MSb) Side | 1 | 1 | C |
| 48 | FF1R | FF1R | Ws,Wnd | Find First One from Right (LSb) Side | 1 | 1 | C |
| 49 | FLIM | FLIM | Wb, Ws | Force Data (Upper and Lower) Range Limit without Limit Excess Result | 1 | 1 | N,Z,OV |
| | | FLIM.V | Wb, Ws, Wd | Force Data (Upper and Lower) Range Limit with Limit Excess Result | 1 | 1 | N,Z,OV |
| 50 | GOTO | GOTO | Expr | Go to Address | 2 | 4 | None |
| | | GOTO | Wn | Go to Indirect | 1 | 4 | None |
| | | GOTO.L | Wn | Go to Indirect (long address) | 1 | 4 | None |
| 51 | INC | INC | f | f = f + 1 | 1 | 1 | C,DC,N,OV,Z |
| | | INC | f,WREG | WREG = f + 1 | 1 | 1 | C,DC,N,OV,Z |
| | | INC | Ws,Wd | Wd = Ws + 1 | 1 | 1 | C,DC,N,OV,Z |
| 52 | INC2 | INC2 | f | f = f + 2 | 1 | 1 | C,DC,N,OV,Z |
| | | INC2 | f,WREG | WREG = f + 2 | 1 | 1 | C,DC,N,OV,Z |
| | | INC2 | Ws,Wd | Wd = Ws + 2 | 1 | 1 | C,DC,N,OV,Z |
| 53 | IOR | IOR | f | f = f .IOR. WREG | 1 | 1 | N,Z |
| | | IOR | f,WREG | WREG = f .IOR. WREG | 1 | 1 | N,Z |
| | | IOR | #lit10,Wn | Wd = lit10 .IOR. Wd | 1 | 1 | N,Z |
| | | IOR | Wb,Ws,Wd | Wd = Wb .IOR. Ws | 1 | 1 | N,Z |
| | | IOR | Wb,#lit5,Wd | Wd = Wb .IOR. lit5 | 1 | 1 | N,Z |
| 54 | LAC | LAC | Wso,#Slit4,Acc | Load Accumulator | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| | | LAC.D | Wso, #Slit4, Acc | Load Accumulator Double | 1 | 2 | OA,SA,OB,SB |
| 56 | LNK | LNK | #lit14 | Link Frame Pointer | 1 | 1 | SFA |
| 57 | LSR | LSR | f | f = Logical Right Shift f | 1 | 1 | C,N,OV,Z |
| | | LSR | f,WREG | WREG = Logical Right Shift f | 1 | 1 | C,N,OV,Z |
| | | LSR | Ws,Wd | Wd = Logical Right Shift Ws | 1 | 1 | C,N,OV,Z |
| | | LSR | Wb,Wns,Wnd | Wnd = Logical Right Shift Wb by Wns | 1 | 1 | N,Z |
| | | LSR | Wb,#lit5,Wnd | Wnd = Logical Right Shift Wb by lit5 | 1 | 1 | N,Z |
| 58 | MAC | MAC | Wm*Wn,Acc,Wx,Wxd,Wy,Wyd, AWB | Multiply and Accumulate | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| | | MAC | Wm*Wm,Acc,Wx,Wxd,Wy,Wyd | Square and Accumulate | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| 59 | MAX | MAX | Acc | Force Data Maximum Range Limit | 1 | 1 | N,OV,Z |
| | | MAX.V | Acc, Wnd | Force Data Maximum Range Limit with Result | 1 | 1 | N,OV,Z |
| 60 | MIN | MIN | Acc | If Accumulator A Less than B Load Accumulator with B or vice versa | 1 | 1 | N,OV,Z |
| | | MIN.V | Acc, Wd | If Accumulator A Less than B Accumulator Force Minimum Data Range Limit with Limit Excess Result | 1 | 1 | N,OV,Z |
| | | MINZ | Acc | Accumulator Force Minimum Data Range Limit | 1 | 1 | N,OV,Z |
| | | MINZ.V | Acc, Wd | Accumulator Force Minimum Data Range Limit with Limit Excess Result | 1 | 1 | N,OV,Z |

**Note 1:** Read and Read-Modify-Write (e.g., bit operations and logical operations) on non-CPU SFRs incur an additional instruction cycle.

**2:** The divide instructions must be preceded with a "REPEAT #5" instruction, such that they are executed six consecutive times.

**TABLE 31-2: INSTRUCTION SET OVERVIEW (CONTINUED)**

| Base Instr # | Assembly Mnemonic | Assembly Syntax | Description | # of Words | # of Cycles(1) | Status Flags Affected |
|---|---|---|---|---|---|---|
| 61 | MOV | MOV f,Wn | Move f to Wn | 1 | 1 | None |
| | | MOV f | Move f to f | 1 | 1 | None |
| | | MOV f,WREG | Move f to WREG | 1 | 1 | None |
| | | MOV #lit16,Wn | Move 16-bit Literal to Wn | 1 | 1 | None |
| | | MOV.b #lit8,Wn | Move 8-bit Literal to Wn | 1 | 1 | None |
| | | MOV Wn,f | Move Wn to f | 1 | 1 | None |
| | | MOV Wso,Wdo | Move Ws to Wd | 1 | 1 | None |
| | | MOV WREG,f | Move WREG to f | 1 | 1 | None |
| | | MOV.D Wns,Wd | Move Double from W(ns):W(ns + 1) to Wd | 1 | 2 | None |
| | | MOV.D Ws,Wnd | Move Double from Ws to W(nd + 1):W(nd) | 1 | 2 | None |
| 62 | MOVPAG | MOVPAG #lit10,DSRPAG | Move 10-bit Literal to DSRPAG | 1 | 1 | None |
| | | MOVPAG #lit8,TBLPAG | Move 8-bit Literal to TBLPAG | 1 | 1 | None |
| | | MOVPAG Ws, DSRPAG | Move Ws[9:0] to DSRPAG | 1 | 1 | None |
| | | MOVPAG Ws, TBLPAG | Move Ws[7:0] to TBLPAG | 1 | 1 | None |
| 64 | MOVSAC | MOVSAC Acc,Wx,Wxd,Wy,Wyd,AWB | Prefetch and Store Accumulator | 1 | 1 | None |
| 65 | MPY | MPY Wm*Wn,Acc,Wx,Wxd,Wy,Wyd | Multiply Wm by Wn to Accumulator | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| | | MPY Wm*Wm,Acc,Wx,Wxd,Wy,Wyd | Square Wm to Accumulator | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| 66 | MPY.N | MPY.N Wm*Wn,Acc,Wx,Wxd,Wy,Wyd | -(Multiply Wm by Wn) to Accumulator | 1 | 1 | None |
| 67 | MSC | MSC Wm*Wm,Acc,Wx,Wxd,Wy,Wyd, AWB | Multiply and Subtract from Accumulator | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| 68 | MUL | MUL.SS Wb,Ws,Wnd | {Wnd + 1, Wnd} = Signed(Wb) * Signed(Ws) | 1 | 1 | None |
| | | MUL.SS Wb,Ws,Acc | Accumulator = Signed(Wb) * Signed(Ws) | 1 | 1 | None |
| | | MUL.SU Wb,Ws,Wnd | {Wnd + 1, Wnd} = Signed(Wb) * Unsigned(Ws) | 1 | 1 | None |
| | | MUL.SU Wb,Ws,Acc | Accumulator = Signed(Wb) * Unsigned(Ws) | 1 | 1 | None |
| | | MUL.SU Wb,#lit5,Acc | Accumulator = Signed(Wb) * Unsigned(lit5) | 1 | 1 | None |
| | | MUL.US Wb,Ws,Wnd | {Wnd + 1, Wnd} = Unsigned(Wb) * Signed(Ws) | 1 | 1 | None |
| | | MUL.US Wb,Ws,Acc | Accumulator = Unsigned(Wb) * Signed(Ws) | 1 | 1 | None |
| | | MUL.UU Wb,Ws,Wnd | {Wnd + 1, Wnd} = Unsigned(Wb) * Unsigned(Ws) | 1 | 1 | None |
| | | MUL.UU Wb,#lit5,Acc | Accumulator = Unsigned(Wb) * Unsigned(lit5) | 1 | 1 | None |
| | | MUL.UU Wb,Ws,Acc | Accumulator = Unsigned(Wb) * Unsigned(Ws) | 1 | 1 | None |
| | | MULW.SS Wb,Ws,Wnd | Wnd = Signed(Wb) * Signed(Ws) | 1 | 1 | None |
| | | MULW.SU Wb,Ws,Wnd | Wnd = Signed(Wb) * Unsigned(Ws) | 1 | 1 | None |
| | | MULW.US Wb,Ws,Wnd | Wnd = Unsigned(Wb) * Signed(Ws) | 1 | 1 | None |
| | | MULW.UU Wb,Ws,Wnd | Wnd = Unsigned(Wb) * Unsigned(Ws) | 1 | 1 | None |
| | | MUL.SU Wb,#lit5,Wnd | {Wnd + 1, Wnd} = Signed(Wb) * Unsigned(lit5) | 1 | 1 | None |
| | | MUL.SU Wb,#lit5,Wnd | Wnd = Signed(Wb) * Unsigned(lit5) | 1 | 1 | None |
| | | MUL.UU Wb,#lit5,Wnd | {Wnd + 1, Wnd} = Unsigned(Wb) * Unsigned(lit5) | 1 | 1 | None |
| | | MUL.UU Wb,#lit5,Wnd | Wnd = Unsigned(Wb) * Unsigned(lit5) | 1 | 1 | None |
| | | MUL f | W3:W2 = f * WREG | 1 | 1 | None |

**Note 1:** Read and Read-Modify-Write (e.g., bit operations and logical operations) on non-CPU SFRs incur an additional instruction cycle.

**2:** The divide instructions must be preceded with a "REPEAT #5" instruction, such that they are executed six consecutive times.


© 2017-2021 Microchip Technology Inc.

**TABLE 31-2: INSTRUCTION SET OVERVIEW (CONTINUED)**

| Base Instr # | Assembly Mnemonic | Assembly Syntax | Description | # of Words | # of Cycles(1) | Status Flags Affected |
|---|---|---|---|---|---|---|
| 69 | NEG | NEG Acc | Negate Accumulator | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| | | NEG f | f = $\bar{f}$ + 1 | 1 | 1 | C,DC,N,OV,Z |
| | | NEG f,WREG | WREG = $\bar{f}$ + 1 | 1 | 1 | C,DC,N,OV,Z |
| | | NEG Ws,Wd | Wd = $\overline{Ws}$ + 1 | 1 | 1 | C,DC,N,OV,Z |
| 70 | NOP | NOP | No Operation | 1 | 1 | None |
| | | NOPR | No Operation | 1 | 1 | None |
| 71 | NORM | NORM Acc, Wd | Normalize Accumulator | 1 | 1 | N,OV,Z |
| 72 | POP | POP f | Pop f from Top-of-Stack (TOS) | 1 | 1 | None |
| | | POP Wdo | Pop from Top-of-Stack (TOS) to Wdo | 1 | 1 | None |
| | | POP.D Wnd | Pop from Top-of-Stack (TOS) to W(nd):W(nd + 1) | 1 | 2 | None |
| | | POP.S | Pop Shadow Registers | 1 | 1 | All |
| 73 | PUSH | PUSH f | Push f to Top-of-Stack (TOS) | 1 | 1 | None |
| | | PUSH Wso | Push Wso to Top-of-Stack (TOS) | 1 | 1 | None |
| | | PUSH.D Wns | Push W(ns):W(ns + 1) to Top-of-Stack (TOS) | 1 | 2 | None |
| | | PUSH.S | Push Shadow Registers | 1 | 1 | None |
| 74 | PWRSAV | PWRSAV #lit1 | Go into Sleep or Idle mode | 1 | 1 | WDTO,Sleep |
| 75 | RCALL | RCALL Expr | Relative Call | 1 | 4 | SFA |
| | | RCALL Wn | Computed Call | 1 | 4 | SFA |
| 76 | REPEAT | REPEAT #lit15 | Repeat Next Instruction lit15 + 1 times | 1 | 1 | None |
| | | REPEAT Wn | Repeat Next Instruction (Wn) + 1 times | 1 | 1 | None |
| 77 | RESET | RESET | Software Device Reset | 1 | 1 | None |
| 78 | RETFIE | RETFIE | Return from Interrupt | 1 | 6 (5) | SFA |
| 79 | RETLW | RETLW #lit10,Wn | Return with Literal in Wn | 1 | 6 (5) | SFA |
| 80 | RETURN | RETURN | Return from Subroutine | 1 | 6 (5) | SFA |
| 81 | RLC | RLC f | f = Rotate Left through Carry f | 1 | 1 | C,N,Z |
| | | RLC f,WREG | WREG = Rotate Left through Carry f | 1 | 1 | C,N,Z |
| | | RLC Ws,Wd | Wd = Rotate Left through Carry Ws | 1 | 1 | C,N,Z |
| 82 | RLNC | RLNC f | f = Rotate Left (No Carry) f | 1 | 1 | N,Z |
| | | RLNC f,WREG | WREG = Rotate Left (No Carry) f | 1 | 1 | N,Z |
| | | RLNC Ws,Wd | Wd = Rotate Left (No Carry) Ws | 1 | 1 | N,Z |
| 83 | RRC | RRC f | f = Rotate Right through Carry f | 1 | 1 | C,N,Z |
| | | RRC f,WREG | WREG = Rotate Right through Carry f | 1 | 1 | C,N,Z |
| | | RRC Ws,Wd | Wd = Rotate Right through Carry Ws | 1 | 1 | C,N,Z |
| 84 | RRNC | RRNC f | f = Rotate Right (No Carry) f | 1 | 1 | N,Z |
| | | RRNC f,WREG | WREG = Rotate Right (No Carry) f | 1 | 1 | N,Z |
| | | RRNC Ws,Wd | Wd = Rotate Right (No Carry) Ws | 1 | 1 | N,Z |
| 85 | SAC | SAC Acc,#Slit4,Wdo | Store Accumulator | 1 | 1 | None |
| | | SAC.R Acc,#Slit4,Wdo | Store Rounded Accumulator | 1 | 1 | None |
| 86 | SE | SE Ws,Wnd | Wnd = Sign-Extended Ws | 1 | 1 | C,N,Z |
| 87 | SETM | SETM f | f = 0xFFFF | 1 | 1 | None |
| | | SETM WREG | WREG = 0xFFFF | 1 | 1 | None |
| | | SETM Ws | Ws = 0xFFFF | 1 | 1 | None |
| 88 | SFTAC | SFTAC Acc,Wn | Arithmetic Shift Accumulator by (Wn) | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| | | SFTAC Acc,#Slit6 | Arithmetic Shift Accumulator by Slit6 | 1 | 1 | OA,OB,OAB, SA,SB,SAB |

**Note 1:** Read and Read-Modify-Write (e.g., bit operations and logical operations) on non-CPU SFRs incur an additional instruction cycle.

**2:** The divide instructions must be preceded with a "REPEAT #5" instruction, such that they are executed six consecutive times.

**TABLE 31-2: INSTRUCTION SET OVERVIEW (CONTINUED)**

| Base Instr # | Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles(1) | Status Flags Affected |
|---|---|---|---|---|---|---|---|
| 89 | SL | SL | f | f = Left Shift f | 1 | 1 | C,N,OV,Z |
| | | SL | f,WREG | WREG = Left Shift f | 1 | 1 | C,N,OV,Z |
| | | SL | Ws,Wd | Wd = Left Shift Ws | 1 | 1 | C,N,OV,Z |
| | | SL | Wb,Wns,Wnd | Wnd = Left Shift Wb by Wns | 1 | 1 | N,Z |
| | | SL | Wb,#lit5,Wnd | Wnd = Left Shift Wb by lit5 | 1 | 1 | N,Z |
| 91 | SUB | SUB | Acc | Subtract Accumulators | 1 | 1 | OA,OB,OAB, SA,SB,SAB |
| | | SUB | f | f = f – WREG | 1 | 1 | C,DC,N,OV,Z |
| | | SUB | f,WREG | WREG = f – WREG | 1 | 1 | C,DC,N,OV,Z |
| | | SUB | #lit10,Wn | Wn = Wn – lit10 | 1 | 1 | C,DC,N,OV,Z |
| | | SUB | Wb,Ws,Wd | Wd = Wb – Ws | 1 | 1 | C,DC,N,OV,Z |
| | | SUB | Wb,#lit5,Wd | Wd = Wb – lit5 | 1 | 1 | C,DC,N,OV,Z |
| 92 | SUBB | SUBB | f | f = f – WREG – ($\overline{C}$) | 1 | 1 | C,DC,N,OV,Z |
| | | SUBB | f,WREG | WREG = f – WREG – ($\overline{C}$) | 1 | 1 | C,DC,N,OV,Z |
| | | SUBB | #lit10,Wn | Wn = Wn – lit10 – ($\overline{C}$) | 1 | 1 | C,DC,N,OV,Z |
| | | SUBB | Wb,Ws,Wd | Wd = Wb – Ws – ($\overline{C}$) | 1 | 1 | C,DC,N,OV,Z |
| | | SUBB | Wb,#lit5,Wd | Wd = Wb – lit5 – ($\overline{C}$) | 1 | 1 | C,DC,N,OV,Z |
| 93 | SUBR | SUBR | f | f = WREG – f | 1 | 1 | C,DC,N,OV,Z |
| | | SUBR | f,WREG | WREG = WREG – f | 1 | 1 | C,DC,N,OV,Z |
| | | SUBR | Wb,Ws,Wd | Wd = Ws – Wb | 1 | 1 | C,DC,N,OV,Z |
| | | SUBR | Wb,#lit5,Wd | Wd = lit5 – Wb | 1 | 1 | C,DC,N,OV,Z |
| 94 | SUBBR | SUBBR | f | f = WREG – f – ($\overline{C}$) | 1 | 1 | C,DC,N,OV,Z |
| | | SUBBR | f,WREG | WREG = WREG – f – ($\overline{C}$) | 1 | 1 | C,DC,N,OV,Z |
| | | SUBBR | Wb,Ws,Wd | Wd = Ws – Wb – ($\overline{C}$) | 1 | 1 | C,DC,N,OV,Z |
| | | SUBBR | Wb,#lit5,Wd | Wd = lit5 – Wb – ($\overline{C}$) | 1 | 1 | C,DC,N,OV,Z |
| 95 | SWAP | SWAP.b | Wn | Wn = Nibble Swap Wn | 1 | 1 | None |
| | | SWAP | Wn | Wn = Byte Swap Wn | 1 | 1 | None |
| 96 | TBLRDH | TBLRDH | Ws,Wd | Read Prog[23:16] to Wd[7:0] | 1 | 5 | None |
| 97 | TBLRDL | TBLRDL | Ws,Wd | Read Prog[15:0] to Wd | 1 | 5 | None |
| 98 | TBLWTH | TBLWTH | Ws,Wd | Write Ws[7:0] to Prog[23:16] | 1 | 2 | None |
| 99 | TBLWTL | TBLWTL | Ws,Wd | Write Ws to Prog[15:0] | 1 | 2 | None |
| 101 | ULNK | ULNK | | Unlink Frame Pointer | 1 | 1 | SFA |
| 104 | XOR | XOR | f | f = f .XOR. WREG | 1 | 1 | N,Z |
| | | XOR | f,WREG | WREG = f .XOR. WREG | 1 | 1 | N,Z |
| | | XOR | #lit10,Wn | Wd = lit10 .XOR. Wd | 1 | 1 | N,Z |
| | | XOR | Wb,Ws,Wd | Wd = Wb .XOR. Ws | 1 | 1 | N,Z |
| | | XOR | Wb,#lit5,Wd | Wd = Wb .XOR. lit5 | 1 | 1 | N,Z |
| 105 | ZE | ZE | Ws,Wnd | Wnd = Zero-Extend Ws | 1 | 1 | C,Z,N |

**Note 1:** Read and Read-Modify-Write (e.g., bit operations and logical operations) on non-CPU SFRs incur an additional instruction cycle.

**2:** The divide instructions must be preceded with a "REPEAT #5" instruction, such that they are executed six consecutive times.


© 2017-2021 Microchip Technology Inc.

## 32.0 DEVELOPMENT SUPPORT

Move a design from concept to production in record time with Microchip's award-winning development tools. Microchip tools work together to provide state of the art debugging for any project with easy-to-use Graphical User Interfaces (GUIs) in our free MPLAB® X and Atmel Studio Integrated Development Environments (IDEs), and our code generation tools. Providing the ultimate ease-of-use experience, Microchip's line of programmers, debuggers and emulators work seamlessly with our software tools. Microchip development boards help evaluate the best silicon device for an application, while our line of third party tools round out our comprehensive development tool solutions.

Microchip's MPLAB X and Atmel Studio ecosystems provide a variety of embedded design tools to consider, which support multiple devices, such as PIC® MCUs, AVR® MCUs, SAM MCUs and dsPIC® DSCs. MPLAB X tools are compatible with Windows®, Linux® and Mac® operating systems while Atmel Studio tools are compatible with Windows.

Go to the following website for more information and details:

https://www.microchip.com/development-tools/

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 33.0 ELECTRICAL CHARACTERISTICS

This section provides an overview of the dsPIC33CK256MP508 family electrical characteristics. Additional information will be provided in future revisions of this document as it becomes available.

Absolute maximum ratings for the dsPIC33CK256MP508 family are listed below. Exposure to these maximum rating conditions for extended periods may affect device reliability. Functional operation of the device at these, or any other conditions above the parameters indicated in the operation listings of this specification, is not implied.

### Absolute Maximum Ratings(1)

Ambient temperature under bias ..... -40°C to +125°C
Storage temperature ..... -65°C to +150°C
Voltage on $V_{DD}$ with respect to $V_{SS}$ ..... -0.3V to +4.0V
Voltage on any pin that is not 5V tolerant with respect to $V_{SS}$(3) ..... -0.3V to ($V_{DD}$ + 0.3V)
Voltage on any 5V tolerant pin with respect to $V_{SS}$ when $V_{DD} \geq 3.0V$(3) ..... -0.3V to +5.5V
Voltage on any 5V tolerant pin with respect to Vss when $V_{DD} < 3.0V$(3) ..... -0.3V to +3.6V
Maximum current out of $V_{SS}$ pin ..... 300 mA
Maximum current into $V_{DD}$ pin(2) ..... 300 mA
Maximum current sunk/sourced by any 4x I/O pin ..... 15 mA
Maximum current sunk/sourced by any 8x I/O pin ..... 25 mA
Maximum current sunk by a group of I/Os between two $V_{SS}$ pins(4) ..... 75 mA
Maximum current sourced by a group of I/Os between two $V_{DD}$ pins(4) ..... 75 mA
Maximum current sunk by all I/Os(2,5) ..... 200 mA
Maximum current sourced by all I/Os(2,5) ..... 200 mA

**Note 1:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those, or any other conditions above those indicated in the operation listings of this specification, is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**2:** Maximum allowable current is a function of device maximum power dissipation (see Table 33-2).

**3:** See the **“Pin Diagrams”** section for the 5V tolerant pins.

**4:** Not applicable to $AV_{DD}$ and $AV_{SS}$ pins.

**5:** For 28-pin packages, the maximum current sunk/sourced by all I/Os is limited by 150 mA.

## 33.1 DC Characteristics

**TABLE 33-1: OPERATING MIPS vs. VOLTAGE**

| VDD Range | Temperature Range | Maximum CPU Clock Frequency |
|---|---|---|
| 3.0V to 3.6V | -40°C to +85°C | 100 |
| 3.0V to 3.6V | -40°C to +125°C | 100 |

**TABLE 33-2: THERMAL OPERATING CONDITIONS**

| Rating | Symbol | Min. | Max. | Unit |
|---|---|---|---|---|
| Industrial Temperature Devices | | | | |
| Operating Junction Temperature Range | $T_J$ | -40 | +125 | °C |
| Operating Ambient Temperature Range | $T_A$ | -40 | +85 | °C |
| Extended Temperature Devices | | | | |
| Operating Junction Temperature Range | $T_J$ | -40 | +140 | °C |
| Operating Ambient Temperature Range | $T_A$ | -40 | +125 | °C |
| Power Dissipation:<br>Internal Chip Power Dissipation:<br>$P_{INT} = V_{DD} \times (I_{DD} - \Sigma I_{OH})$<br>I/O Pin Power Dissipation:<br>$I/O = \Sigma (\{V_{DD} - V_{OH}\} \times I_{OH}) + \Sigma (V_{OL} \times I_{OL})$ | $P_D$ | $P_{INT} + P_{I/O}$ | | W |
| Maximum Allowed Power Dissipation | $P_{DMAX}$ | $(T_J - T_A)/\theta_{JA}$ | | W |

**TABLE 33-3: THERMAL PACKAGING CHARACTERISTICS(1)**

| Characteristic | Symbol | Typ. | Unit |
|---|---|---|---|
| Package Thermal Resistance, 80-Pin TQFP 12x12x1 mm | $\theta_{JA}$ | 50.67 | °C/W |
| Package Thermal Resistance, 64-Pin TQFP 10x10x1.0 mm | $\theta_{JA}$ | 45.7 | °C/W |
| Package Thermal Resistance, 64-Pin QFN 9x9 mm | $\theta_{JA}$ | 18.7 | °C/W |
| Package Thermal Resistance, 48-Pin TQFP 7x7 mm | $\theta_{JA}$ | 62.76 | °C/W |
| Package Thermal Resistance, 48-Pin UQFN 6x6 mm | $\theta_{JA}$ | 27.6 | °C/W |
| Package Thermal Resistance, 36-Pin UQFN 5x5 mm | $\theta_{JA}$ | 29.2 | °C/W |
| Package Thermal Resistance, 28-Pin UQFN 6x6 mm | $\theta_{JA}$ | 22.41 | °C/W |
| Package Thermal Resistance, 28-Pin SSOP 5.30 mm | $\theta_{JA}$ | 52.84 | °C/W |

**Note 1:** Junction to ambient thermal resistance, Theta-JA ($\theta_{JA}$) numbers are achieved by package simulations.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-4: OPERATING VOLTAGE SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**[1]<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Typ.** | **Max.** | **Units** | **Conditions** |
| **Operating Voltage** | | | | | | | |
| DC10 | VDD | **Supply Voltage** | 3.0 | — | 3.6 | V | |
| DC11 | AVDD | **Supply Voltage** | Greater of: VDD – 0.3 or 3.0 | — | Lesser of: VDD + 0.3 or 3.6 | V | The difference between AVDD supply and VDD supply must not exceed ±300 mV at all times, including during device power-up |
| DC16 | VPOR | **VDD Start Voltage** to Ensure Internal Power-on Reset Signal | — | — | VSS | V | |
| DC17 | SVDD | **VDD Rise Rate** to Ensure Internal Power-on Reset Signal | 0.03 | — | — | V/ms | 0V-3V in 100 ms |
| BO10 | VBOR | **BOR Event on VDD Transition** High-to-Low[2] | 2.68 | 2.84 | 2.99 | V | |

**Note 1:** Device is functional at VBORMIN < VDD < VDDMIN. Analog modules (ADC and comparators) may have degraded performance.

**2:** Parameters are characterized but not tested.

**TABLE 33-5: OPERATING CURRENT (IDD)(2)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.(1)** | **Max.** | **Units** | **Conditions** | | |
| DC20 | 7.76 | 10.7 | mA | -40°C | 3.3V | 10 MIPS (N1 = 1, N2 = 5, N3 = 2, M = 50, FVCO = 400 MHz, FPLLO = 40 MHz) |
| | 7.49 | 10 | mA | +25°C | | |
| | 7.82 | 15.5 | mA | +85°C | | |
| | 10.32 | 23.5 | mA | +125°C | | |
| DC21 | 10.36 | 13.1 | mA | -40°C | 3.3V | 20 MIPS (N1 = 1, N2 = 5, N3 = 1, M = 50, FVCO = 400 MHz, FPLLO = 80 MHz) |
| | 10.09 | 12.45 | mA | +25°C | | |
| | 10.42 | 17.5 | mA | +85°C | | |
| | 12.89 | 25.5 | mA | +125°C | | |
| DC22 | 14.54 | 17.45 | mA | -40°C | 3.3V | 40 MIPS (N1 = 1, N2 = 3, N3 = 1, M = 60, FVCO = 480 MHz, FPLLO = 160 MHz) |
| | 14.26 | 16.7 | mA | +25°C | | |
| | 14.58 | 22 | mA | +85°C | | |
| | 17.06 | 30 | mA | +125°C | | |
| DC23 | 22.2 | 25.4 | mA | -40°C | 3.3V | 70 MIPS (N1 = 1, N2 = 2, N3 = 1, M = 70, FVCO = 560 MHz, FPLLO = 280 MHz) |
| | 21.91 | 24.9 | mA | +25°C | | |
| | 22.21 | 30.75 | mA | +85°C | | |
| | 24.65 | 37.5 | mA | +125°C | | |
| DC24 | 27.36 | 30.7 | mA | -40°C | 3.3V | 90 MIPS (N1 = 1, N2 = 2, N3 = 1, M = 90, FVCO = 720 MHz, FPLLO = 360 MHz) |
| | 26.96 | 30.5 | mA | +25°C | | |
| | 26.68 | 35 | mA | +85°C | | |
| | 29.01 | 42 | mA | +125°C | | |
| DC25 | 27.14 | 30.9 | mA | -40°C | 3.3V | 100 MIPS (N1 = 1, N2 = 1, N3 = 1, M = 50, FVCO = 400 MHz, FPLLO = 400 MHz) |
| | 26.54 | 30.1 | mA | +25°C | | |
| | 26.79 | 35 | mA | +85°C | | |
| | 29.23 | 42.5 | mA | +125°C | | |

**Note 1:** Data in the “Typ.” column are for design guidance only and are not tested.

**2:** Base Run current (IDD) is measured as follows:

- Oscillator is switched to EC+PLL mode in software
- OSC1 pin is driven with external 8 MHz square wave with levels from 0.3V to VDD – 0.3V
- OSC2 is configured as an I/O in the Configuration Words (OSCIOFNC (FOSC[2]) = `0`)
- FSCM is disabled (FCKSM[1:0] (FOSC[7:6]) = `01`)
- Watchdog Timer is disabled (FWDT[15] = `0` and WDTCONL[15] = `0`)
- All I/O pins (except OSC1) are configured as outputs and driving low
- No peripheral modules are operating or being clocked (defined PMDx bits are all ‘`1`’s)
- JTAG is disabled (JTAGEN (FICD[5]) = `0`)
- `NOP` instructions are executed in `while(1)` loop


© 2017-2021 Microchip Technology Inc.

**TABLE 33-6: IDLE CURRENT (IIDLE)(2)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.(1)** | **Max.** | **Units** | **Conditions** | | |
| DC40 | 6.41 | 8.47 | mA | -40°C | 3.3V | 10 MIPS (N1 = 1, N2 = 5, N3 = 2, M = 50, FVCO = 400 MHz, FPLLO = 40 MHz) |
| | 6.15 | 7.57 | mA | +25°C | | |
| | 6.45 | 13 | mA | +85°C | | |
| | 8.95 | 22 | mA | +125°C | | |
| DC41 | 7.31 | 10.1 | mA | -40°C | 3.3V | 20 MIPS (N1 = 1, N2 = 5, N3 = 1, M = 50, FVCO = 400 MHz, FPLLO = 80 MHz) |
| | 7.04 | 9.1 | mA | +25°C | | |
| | 7.36 | 14.75 | mA | +85°C | | |
| | 9.83 | 22.75 | mA | +125°C | | |
| DC42 | 9.4 | 12.3 | mA | -40°C | 3.3V | 40 MIPS (N1 = 1, N2 = 3, N3 = 1, M = 60, FVCO = 480 MHz, FPLLO = 160 MHz) |
| | 9.13 | 11.2 | mA | +25°C | | |
| | 9.45 | 16.5 | mA | +85°C | | |
| | 11.92 | 25 | mA | +125°C | | |
| DC43 | 12.39 | 15.3 | mA | -40°C | 3.3V | 70 MIPS (N1 = 1, N2 = 2, N3 = 1, M = 70, FVCO = 560 MHz, FPLLO = 280 MHz) |
| | 12.11 | 14.3 | mA | +25°C | | |
| | 12.43 | 19.75 | mA | +85°C | | |
| | 14.89 | 28.25 | mA | +125°C | | |
| DC44 | 14.78 | 17.85 | mA | -40°C | 3.3V | 90 MIPS (N1 = 1, N2 = 2, N3 = 1, M = 90, FVCO = 720 MHz, FPLLO = 360 MHz) |
| | 14.5 | 16.9 | mA | +25°C | | |
| | 14.81 | 22.5 | mA | +85°C | | |
| | 17.26 | 29.5 | mA | +125°C | | |
| DC45 | 14.44 | 17.55 | mA | -40°C | 3.3V | 100 MIPS (N1 = 1, N2 = 1, N3 = 1, M = 50, FVCO = 400 MHz, FPLLO = 400 MHz) |
| | 14.15 | 16.5 | mA | +25°C | | |
| | 14.46 | 22.25 | mA | +85°C | | |
| | 16.9 | 30 | mA | +125°C | | |

**Note 1:** Data in the “Typ.” column are for design guidance only and are not tested.

**2:** Base Idle current (IIDLE) is measured as follows:

- Oscillator is switched to EC+PLL mode in software
- OSC1 pin is driven with external 8 MHz square wave with levels from 0.3V to VDD – 0.3V
- OSC2 is configured as an I/O in the Configuration Words (OSCIOFNC (FOSC[2]) = 0)
- FSCM is disabled (FCKSM[1:0] (FOSC[7:6]) = 01)
- Watchdog Timer is disabled (FWDT[15] = 0 and WDTCONL[15] = 0)
- All I/O pins (except OSC1) are configured as outputs and driving low
- No peripheral modules are operating or being clocked (defined PMDx bits are all ‘1’s)
- JTAG is disabled (JTAGEN (FICD[5]) = 0)
- Flash in standby with NVMSIDL (NVMCON[12]) = 1

**TABLE 33-7: POWER-DOWN CURRENT (IPD)(2)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Characteristic** | **Typ.(1)** | **Max.** | **Units** | **Conditions** | |
| DC60 | Base Power-Down Current | 270 | 650 | µA | -40°C | 3.3V |
| | | 418.99 | 1000 | µA | +25°C | |
| | | 939.53 | 7250 | µA | +85°C | |
| | | 5.59 | 18.5 | mA | +125°C(3) | |

**Note 1:** Data in the "Typ." column are for design guidance only and are not tested.

**2:** Base Sleep current (IPD) is measured as follows:

- OSC1 pin is driven with external 8 MHz square wave with levels from 0.3V to VDD – 0.3V
- OSC2 is configured as an I/O in the Configuration Words (OSCIOFNC (FOSC[2]) = 0)
- FSCM is disabled (FCKSM[1:0] (FOSC[7:6]) = 01)
- Watchdog Timer is disabled (FWDT[15] = 0 and WDTCONL[15] = 0)
- All I/O pins (except OSC1) are configured as outputs and driving low
- No peripheral modules are operating or being clocked (defined PMDx bits are all '1's)
- JTAG is disabled (JTAGEN (FICD[5]) = 0)
- The regulators are in Standby mode (VREGS (RCON[8]) = 0
- The regulators are in Low-Power mode (LPWREN (VREGCON[15]) = 1

**3:** The regulators are in High-Power mode (LPWREN (VREGCON[15]) = 0.

**TABLE 33-8: DOZE CURRENT (IDOZE)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.(1)** | **Max.** | **Doze Ratio** | **Units** | **Conditions** | | |
| DC70 | 18.19 | 20 | 1:2 | mA | -40°C | 3.3V | 70 MIPS (N = 1, N2 = 2, N3 = 1, M = 70, FVCO = 560 MHz, FPLLO = 280 MHz) |
| | 12.66 | 15 | 1:128 | mA | | | |
| | 17.54 | 20.15 | 1:2 | mA | +25°C | | |
| | 12.39 | 14.7 | 1:128 | mA | | | |
| | 17.85 | 25 | 1:2 | mA | +85°C | | |
| | 12.7 | 20 | 1:128 | mA | | | |
| | 20.32 | 32.5 | 1:2 | mA | +125°C | | |
| | 15.17 | 28.5 | 1:128 | mA | | | |
| DC71 | 22.3 | 25.55 | 1:2 | mA | -40°C | 3.3V | 100 MIPS (N = 1, N2 = 1, N3 = 1, M = 50, FVCO = 400 MHz, FPLLO = 400 MHz) |
| | 14.83 | 17.25 | 1:128 | mA | | | |
| | 21.86 | 25.05 | 1:2 | mA | +25°C | | |
| | 14.55 | 16.95 | 1:128 | mA | | | |
| | 22.16 | 30 | 1:2 | mA | +85°C | | |
| | 14.86 | 22 | 1:128 | mA | | | |
| | 24.62 | 36.5 | 1:2 | mA | +125°C | | |
| | 17.31 | 30 | 1:128 | mA | | | |

**Note 1:** Data in the "Typ." column are for design guidance only and are not tested.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-9: WATCHDOG TIMER DELTA CURRENT (ΔIWDT)(1)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | |
|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions** | |
| DC61 | 0.75 | 5 | µA | -40°C | 3.3V |
| | 2.0 | 12 | µA | +25°C | |
| | 3.88 | 24 | µA | +85°C | |
| | 5.69 | 40 | µA | +125°C | |

**Note 1:** The ΔIWDT current is the additional current consumed when the module is enabled. This current should be added to the base IPD current. All parameters are characterized but not tested during manufacturing.

**TABLE 33-10: PWM DELTA CURRENT(1)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions** | | |
| DC100 | 5.96 | 6.6 | mA | -40°C | 3.3V | PWM Output Frequency = 500 kHz, PWM Input (AFPLLO = 500 MHz) (AVCO = 1000 MHz, PLLFBD = 125, APLLDIV1 = 2) |
| | 5.99 | 6.7 | mA | +25°C | | |
| | 5.92 | 6.9 | mA | +85°C | | |
| | 5.47 | 7 | mA | +125°C | | |
| DC101 | 4.89 | 5.4 | mA | -40°C | 3.3V | PWM Output Frequency = 500 kHz, PWM Input (AFPLLO = 400 MHz), (AVCO = 400 MHz, PLLFBD = 50, APLLDIV1 = 1) |
| | 4.91 | 5.5 | mA | +25°C | | |
| | 4.85 | 5.7 | mA | +85°C | | |
| | 4.42 | 5.7 | mA | +125°C | | |
| DC102 | 2.77 | 3.7 | mA | -40°C | 3.3V | PWM Output Frequency = 500 kHz, PWM Input (AFPLLO = 200 MHz), (AVCO = 400 MHz, PLLFBD = 50, APLLDIV1 = 2) |
| | 2.75 | 3.7 | mA | +25°C | | |
| | 2.7 | 3.7 | mA | +85°C | | |
| | 2.26 | 3.7 | mA | +125°C | | |
| DC103 | 1.67 | 2 | mA | -40°C | 3.3V | PWM Output Frequency = 500 kHz, PWM Input (AFPLLO = 100 MHz), (AVCO = 400 MHz, PLLFBD = 50, APLLDIV1 = 4) |
| | 1.66 | 2.2 | mA | +25°C | | |
| | 1.63 | 2.3 | mA | +85°C | | |
| | 1.17 | 2.3 | mA | +125°C | | |

**Note 1:** APLL current is not included. The APLL current will be the same if more than one PWM is running. Listed delta currents are for only one PWM instance when HREN = 0 (PGxCONL[7]). All parameters are characterized but not tested during manufacturing.

**TABLE 33-11: APLL DELTA CURRENT**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions[1]** | | |
| DC110 | 5.93 | 6.6 | mA | -40°C | 3.3V | AFPLLO = 500 MHz<br>(AVCO = 1000 MHz, PLLFBD = 125,<br>APLLDIV1 = 2) |
| | 5.95 | 7 | mA | +25°C | | |
| | 6.15 | 7.6 | mA | +85°C | | |
| | 7.15 | 9 | mA | +125°C | | |
| DC111 | 2.72 | 3.3 | mA | -40°C | 3.3V | AFPLLO = 400 MHz<br>(AVCO = 400 MHz, PLLFBD = 50,<br>APLLDIV1 = 1) |
| | 2.74 | 3.7 | mA | +25°C | | |
| | 2.92 | 4.3 | mA | +85°C | | |
| | 3.87 | 5.6 | mA | +125°C | | |
| DC112 | 1.39 | 2.7 | mA | -40°C | 3.3V | AFPLLO = 200 MHz<br>(AVCO = 400 MHz, PLLFBD = 50,<br>APLLDIV1 = 2) |
| | 1.49 | 2.7 | mA | +25°C | | |
| | 1.65 | 3 | mA | +85°C | | |
| | 2.6 | 4.4 | mA | +125°C | | |
| DC113 | 0.79 | 1.1 | mA | -40°C | 3.3V | AFPLLO = 100 MHz<br>(AVCO = 400 MHz, PLLFBD = 50,<br>APLLDIV1 = 4) |
| | 0.84 | 1.4 | mA | +25°C | | |
| | 0.96 | 2.3 | mA | +85°C | | |
| | 1.93 | 3.6 | mA | +125°C | | |

**Note 1:** The APLL current will be the same if more than one PWM or DAC is run to the APLL clock. All parameters are characterized but not tested during manufacturing.

**TABLE 33-12: ADC DELTA CURRENT[1]**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions** | | |
| DC120 | 3.61 | 4 | mA | -40°C | 3.3V | TAD = 14.3 ns<br>(3.5 Msps conversion rate) |
| | 3.68 | 4.1 | mA | +25°C | | |
| | 3.69 | 4.2 | mA | +85°C | | |
| | 3.89 | 4.6 | mA | +125°C | | |

**Note 1:** Shared core continuous conversion. TAD = 14.3 nS (3.5 Msps conversion rate). Listed delta currents are for only one ADC core. All parameters are characterized but not tested during manufacturing.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-13: COMPARATOR + DAC DELTA CURRENT**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions** | | |
| DC130 | 1.2 | 1.35 | mA | -40°C | 3.3V | AFPLLO @ 500 MHz[1] |
| | 1.23 | 1.65 | mA | +25°C | | |
| | 1.23 | 1.65 | mA | +85°C | | |
| | 1.24 | 1.65 | mA | +125°C | | |

**Note 1:** APLL current is not included. Listed delta currents are for only one comparator + DAC instance. All parameters are characterized but not tested during manufacturing.

**TABLE 33-14: OP AMP DELTA CURRENT[1]**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | |
|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions** | |
| DC140 | 0.25 | 1 | mA | -40°C | 3.3V |
| | 0.27 | 1.1 | mA | +25°C | |
| | 0.32 | 1.4 | mA | +85°C | |
| | 0.46 | 1.7 | mA | +125°C | |

**Note 1:** Listed delta currents are for only one op amp instance. All parameters are characterized but not tested during manufacturing.

**TABLE 33-15: I/O PIN INPUT SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.(5)** | **Typ.(1)** | **Max.(6)** | **Units** | **Conditions** |
| DI10 | VIL | **Input Low Voltage** | | | | | |
| | | Any I/O Pin and $\overline{MCLR}$ | VSS | — | 0.2 VDD | V | |
| | | I/O Pins with SDAx, SCLx | VSS | — | 0.3 VDD | V | SMBus disabled |
| | | I/O Pins with SDAx, SCLx | VSS | — | 0.8 | V | SMBus enabled |
| | | I/O Pins with SDAx, SCLx | VSS | — | 0.8 | V | SMBus 3.0 enabled |
| DI20 | VIH | **Input High Voltage** | | | | | |
| | | I/O Pins Not 5V Tolerant(3) | 0.8 VDD | — | VDD | V | |
| | | 5V Tolerant I/O Pins and $\overline{MCLR}$(3) | 0.8 VDD | — | 5.5 | V | |
| | | 5V Tolerant I/O Pins with SDAx, SCLx(3) | 0.8 VDD | — | 5.5 | V | SMBus disabled |
| | | 5V Tolerant I/O Pins with SDAx, SCLx(3) | 2.1 | — | 5.5 | V | SMBus enabled |
| | | I/O Pins with SDAx, SCLx Not 5V Tolerant(3) | 0.8 VDD | — | VDD | V | SMBus disabled |
| | | I/O Pins with SDAx, SCLx Not 5V Tolerant(3) | 2.1 | — | VDD | V | SMBus enabled |
| | | I/O Pins with SDAx, SCLx Not 5V Tolerant | 1.35 | — | VDD | V | SMBus 3.0 enabled |
| DI30 | ICNPU | **Input Change Notification Pull-up Current(2,4)** | 175 | 360 | 545 | µA | VDD = 3.6V, VPIN = VSS |
| DI31 | ICNPD | **Input Change Notification Pull-Down Current(4)** | 65 | 215 | 360 | µA | VDD = 3.6V, VPIN = VDD |
| DI50 | IIL | **Input Leakage Current(2)** | | | | | |
| | | I/O Pins 5V Tolerant(3) | -700 | — | 700 | nA | |
| | | I/O Pins Not 5V Tolerant(3) | -700 | — | 700 | nA | |
| | | $\overline{MCLR}$ | -700 | — | 700 | nA | |
| | | OSCI | -700 | — | 700 | nA | XT and HS modes |

**Note 1:** Data in the "Typ." column are at 3.3V, +25°C unless otherwise stated.

**2:** Negative current is defined as current sourced by the pin.

**3:** See the **"Pin Diagrams"** section for the 5V tolerant I/O pins.

**4:** Characterized but not tested.

**5:** VPIN = VSS.

**6:** VPIN = VDD.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-16: I/O PIN INPUT INJECTION CURRENT SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | |
|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Max.** | **Units** | **Conditions** |
| DI60a | IICL | **Input Low Injection Current** | 0 | -5(1,4) | mA | All pins |
| DI60b | IICH | **Input High Injection Current** | 0 | +5(2,3,4) | mA | All pins, except all 5V tolerant pins and SOSCI |
| DI60c | ∑IICT | **Total Input Injection Current (sum of all I/O and control pins)(5)** | -20 | +20 | mA | Absolute instantaneous sum of all ± input injection currents from all I/O pins ( \| IICL \| + \| IICH \| ) ≤ ∑IICT |

**Note 1:** VIL Source < (VSS – 0.3).

**2:** VIH Source > (VDD + 0.3) for non-5V tolerant pins only.

**3:** 5V tolerant pins do not have an internal high-side diode to VDD, and therefore, cannot tolerate any "positive" input injection current.

**4:** Injection currents can affect the ADC results.

**5:** Any number and/or combination of I/O pins, not excluded under IICL or IICH conditions, are permitted in the sum.

**TABLE 33-17: I/O PIN OUTPUT SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param.** | **Symbol** | **Characteristic** | **Min.** | **Typ.** | **Max.** | **Units** | **Conditions** |
| DO10 | VOL | **Output Low Voltage**<br>4x Sink Driver Pins | — | — | 0.42 | V | VDD = 3.6V, IOL < 9 mA |
| | | **Output Low Voltage**<br>8x Sink Driver Pins(1) | — | — | 0.4 | V | VDD = 3.6V, IOL < 11 mA |
| DO20 | VOH | **Output High Voltage**<br>4x Source Driver Pins | 2.4 | — | — | V | VDD = 3.6V, IOH > -8 mA |
| | | **Output High Voltage**<br>8x Source Driver Pins(1) | 2.4 | — | — | V | VDD = 3.6V, IOH > -12 mA |

**Note 1:** The 8x sink/source pins are RB1, RC8, RC9 and RD8.

**TABLE 33-18: PROGRAM MEMORY**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | |
|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Max.** | **Units** | **Conditions** |
| | | **Program Flash Memory** | | | | |
| D130 | EP | Cell Endurance | 10,000 | — | E/W | -40°C to +125°C |
| D131 | VPR | VDD for Read | 3.0 | 3.6 | V | |
| D132b | VPEW | VDD for Self-Timed Write | 3.0 | 3.6 | V | |
| D134 | TRETD | Characteristic Retention | 20 | — | Year | Provided no other specifications are violated, -40°C to +125°C |
| D137a | TPE | Page Erase Time | 15.3 | 16.82 | ms | TPE = 128,454 FRC cycles **(Note 1)** |
| D138a | TWW | Word Write Time | 47.7 | 52.3 | µs | TWW = 400 FRC cycles **(Note 1)** |
| D139a | TRW | Row Write Time | 2.0 | 2.2 | ms | TRW = 16,782 FRC cycles **(Note 1)** |

**Note 1:** Other conditions: FRC = 8 MHz, TUN[5:0] = `011111` (for Minimum), TUN[5:0] = `100000` (for Maximum). This parameter depends on the FRC accuracy (see Table 33-22) and the value of the FRC Oscillator Tuning register (see Register 9-4). For complete details on calculating the Minimum and Maximum time, see **Section 5.3 "Programming Operations"**.


© 2017-2021 Microchip Technology Inc.

## 33.2 AC Characteristics and Timing Parameters

**FIGURE 33-1: LOAD CONDITIONS FOR I/O SPECIFICATIONS**

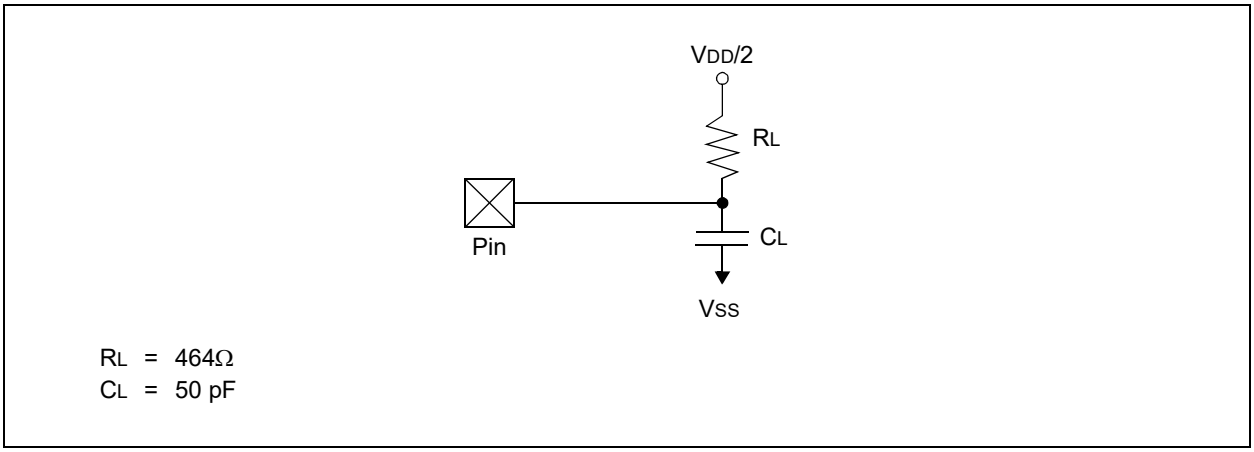

**FIGURE 33-2: EXTERNAL CLOCK TIMING**

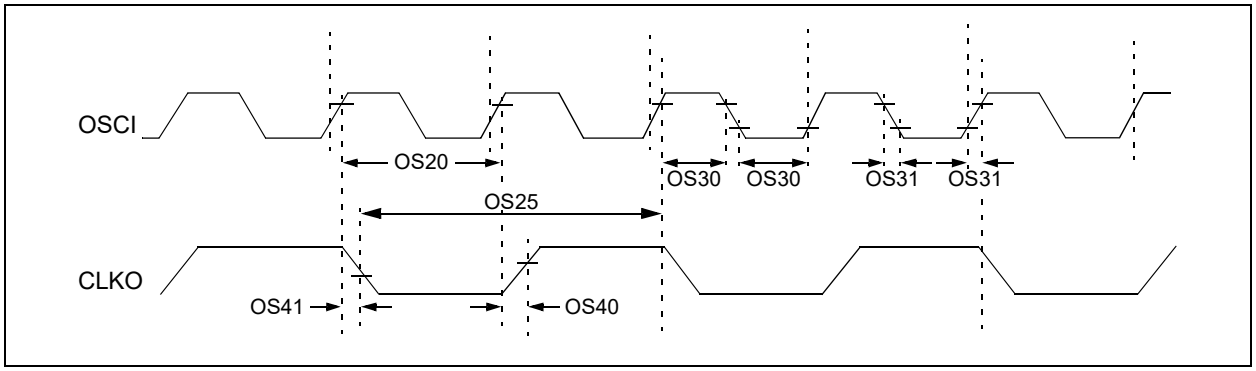


**TABLE 33-19: EXTERNAL CLOCK TIMING REQUIREMENTS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Sym** | **Characteristic** | **Min.** | **Typ.(1)** | **Max.** | **Units** | **Conditions** |
| OS10 | FIN | External CLKI Frequency | DC | — | 64 | MHz | |
| | | Oscillator Crystal Frequency | 3.5 | — | 10 | MHz | XT |
| | | | 10 | — | 32 | MHz | HS |
| OS20 | TOSCI | External Clock Period | 15.63 | — | DC | ns | |
| OS25 | TCY | Instruction Cycle Time | 10 | — | DC | ns | |
| OS30 | TosL, TosH | External Clock in (OSCI) High or Low Time | 0.45 x TOSC | — | 0.55 x TOSC | ns | |
| OS31 | TosR, TosF | External Clock in (OSCI) Rise or Fall Time | — | — | 5.2 | ns | When FIN = 64 MHz |
| OS40 | TckR | CLKO Rise Time(2,3) | — | 5.4 | — | ns | |
| OS41 | TckF | CLKO Fall Time(2,3) | — | 6.4 | — | ns | |
| OS42 | GM | External Oscillator Transconductance(3) | 2.7 | — | 4 | mA/V | XTCFG[1:0] = 00, XTBST = 0 |
| | | | 4 | — | 7 | mA/V | XTCFG[1:0] = 00, XTBST = 1 |
| | | | 4.5 | — | 7 | mA/V | XTCFG[1:0] = 01, XTBST = 0 |
| | | | 6 | — | 11.9 | mA/V | XTCFG[1:0] = 01, XTBST = 1 |
| | | | 5.9 | — | 9.7 | mA/V | XTCFG[1:0] = 10, XTBST = 0 |
| | | | 6.9 | — | 15.9 | mA/V | XTCFG[1:0] = 10, XTBST = 1 |
| | | | 6.7 | — | 12 | mA/V | XTCFG[1:0] = 11, XTBST = 0 |
| | | | 7.5 | — | 19 | mA/V | XTCFG[1:0] = 11, XTBST = 1 |

**Note 1:** Data in the “Typ.” column are at 3.3V, +25°C unless otherwise stated.

**2:** Measurements are taken in EC mode. The CLKO signal is measured on the OSCO pin.

**3:** This parameter is characterized but not tested in manufacturing.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-20: PLL TIMING SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Typ.(1)** | **Max.** | **Units** | **Conditions** |
| OS50 | FPLLI | PLL Voltage Controlled Oscillator (VCO) Input Frequency Range | 8(2) | — | 64 | MHz | ECPLL, XTPLL modes |
| OS51 | FVCO | On-Chip VCO System Frequency | 400 | — | 1600 | MHz | |
| OS52 | TLOCK | PLL Start-up Time (Lock Time) | — | 125 | — | µs | |

**Note 1:** Data in the "Typ." column are at 3.3V, +25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**2:** Inclusive of FRC Tolerance Specification F20a.

**TABLE 33-21: AUXILIARY PLL TIMING SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Typ.(1)** | **Max.** | **Units** | **Conditions** |
| OS50 | AFPLLI | APLL Voltage Controlled Oscillator (VCO) Input Frequency Range | 8(2) | — | 64 | MHz | ECPLL, XTPLL modes |
| OS51 | AFVCO | On-Chip VCO System Frequency | 400 | — | 1600 | MHz | |
| OS52 | TLOCK | APLL Start-up Time (Lock Time) | — | 125 | — | µs | |

**Note 1:** Data in the "Typ." column are at 3.3V, +25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

**2:** Inclusive of FRC Tolerance Specification F20a.

**TABLE 33-22: INTERNAL FRC ACCURACY**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | |
|---|---|---|---|---|---|
| **Param No.** | **Characteristic** | **Min.** | **Max.** | **Units** | **Conditions** |
| **Internal FRC Accuracy @ FRC Frequency = 8 MHz(1)** | | | | | |
| F20a | FRC | -2(2) | +2 | % | -40°C ≤ TA ≤ -5°C |
| | | -1.5 | +1.5 | % | -5°C ≤ TA ≤ +85°C |
| | | -2 | +2 | % | +85°C ≤ TA ≤ +125°C |
| F22 | BFRC | -17 | +17 | % | -40°C ≤ TA ≤ +125°C |

**Note 1:** Frequency is calibrated at +25°C and 3.3V.

**2:** Due to the effect of aging, this value may drift by an additional -0.5% over the lifetime of the device.

**TABLE 33-23: INTERNAL LPRC ACCURACY**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | |
|---|---|---|---|---|---|
| **Param No.** | **Characteristic** | **Min.** | **Max.** | **Units** | **Conditions** |
| **LPRC @ 32 kHz** | | | | | |
| F21 | LPRC | -25 | +25 | % | -40°C ≤ TA ≤ 0°C |
| | | -10 | +10 | % | 0°C ≤ TA ≤ +85°C |
| | | -15 | +15 | % | +85°C ≤ TA ≤ +125°C |


© 2017-2021 Microchip Technology Inc.

**FIGURE 33-3: I/O TIMING CHARACTERISTICS**

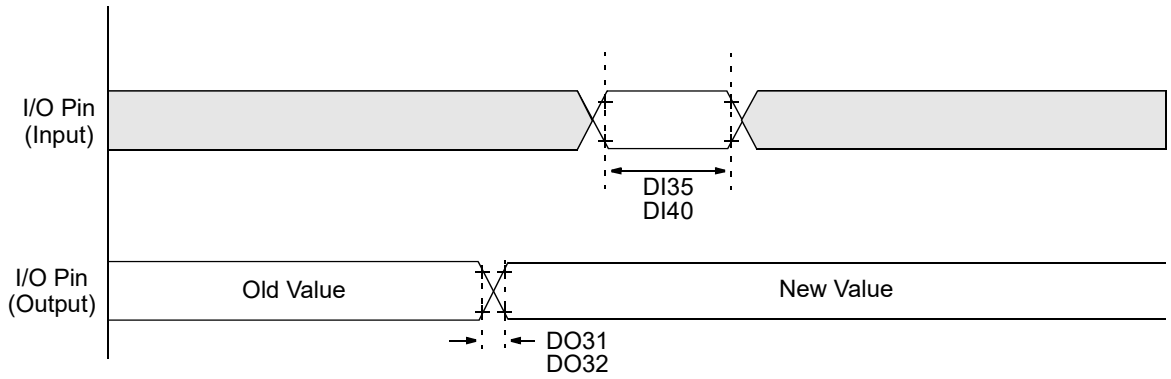


**Note:** Refer to Figure 33-1 for load conditions.

**TABLE 33-24: I/O TIMING REQUIREMENTS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Typ.(1)** | **Max.** | **Units** | **Conditions** |
| DO31 | TIOR | Port Output Rise Time(2) | — | 6.5 | 9.7 | ns | |
| DO32 | TIOF | Port Output Fall Time(2) | — | 3.2 | 4.2 | ns | |
| DI35 | TINP | INTx Pin High or Low Time (input) | 20 | — | — | ns | |
| DI40 | TRBP | CNx High or Low Time (input) | 2 | — | — | TCY | |

**Note 1:** Data in the "Typ." column are at 3.3V, +25°C unless otherwise stated.

**2:** This parameter is characterized but not tested in manufacturing.

**FIGURE 33-4: BOR AND MASTER CLEAR RESET TIMING CHARACTERISTICS**

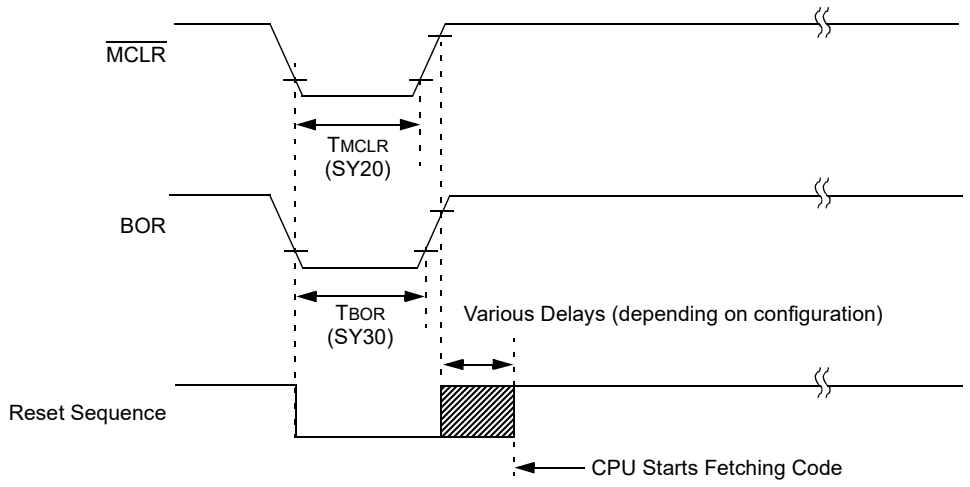

**TABLE 33-25: RESET, WATCHDOG TIMER, OSCILLATOR START-UP TIMER, TIMING REQUIREMENTS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic(1)** | **Min.** | **Typ.(2)** | **Max.** | **Units** | **Conditions** |
| SY00 | TPU | Power-up Period | — | 200 | — | µs | FNOSC[2:0] are FRC |
| SY10 | TOST | Oscillator Start-up Time | — | 1024 TOSC | — | — | TOSC = OSCI period |
| SY13 | TIOZ | I/O High-Impedance from $\overline{\text{MCLR}}$ Low or Watchdog Timer Reset | — | 1.5 | — | µs | |
| SY20 | TMCLR | $\overline{\text{MCLR}}$ Pulse Width (low) | 2 | — | — | µs | |
| SY30 | TBOR | BOR Pulse Width (low) | 1 | — | — | µs | |
| SY35 | TFSCM | Fail-Safe Clock Monitor Delay | — | — | 40 | µs | Clock fail to BFRC switch |
| SY37 | TOSCDFRC | FRC Oscillator Start-up Delay | — | — | 15 | µs | From POR event |
| SY38 | TOSCDLPRC | LPRC Oscillator Start-up Delay | — | — | 50 | µs | From Reset event |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**2:** Data in the “Typ.” column are at 3.3V, +25°C unless otherwise stated.


© 2017-2021 Microchip Technology Inc.

**FIGURE 33-5: HIGH-SPEED PWMx MODULE FAULT TIMING CHARACTERISTICS**

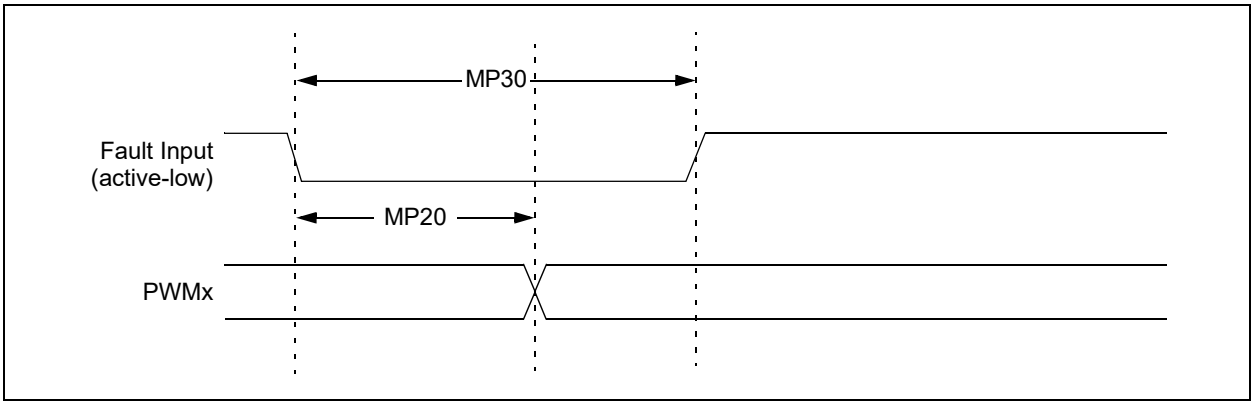


**FIGURE 33-6: HIGH-SPEED PWMx MODULE TIMING CHARACTERISTICS**

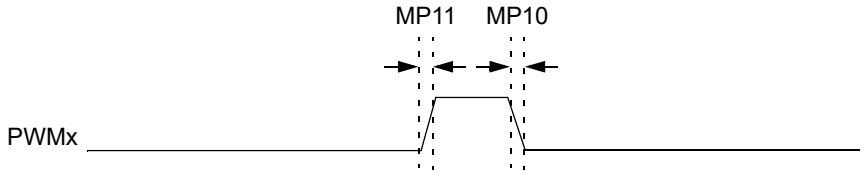


**Note:** Refer to Figure 33-1 for load conditions.

**TABLE 33-26: HIGH-SPEED PWMx MODULE TIMING REQUIREMENTS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | |
|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic(1)** | **Min.** | **Max.** | **Units** | **Conditions** |
| MP00 | FIN | PWM Input Frequency | 450 | 500 | MHz | **Note 2** |
| MP10 | TFPWM | PWMx Output Fall Time | — | — | ns | See Parameter DO32 |
| MP11 | TRPWM | PWMx Output Rise Time | — | — | ns | See Parameter DO31 |
| MP20 | TFD | Fault Input to PWMx I/O Change | — | 26 | ns | PCI Inputs 19 through 22 |
| MP30 | TFH | Fault Input Pulse Width | 8 | — | ns | |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**2:** Input frequency of 500 MHz is recommended for High-Resolution mode.

**TABLE 33-27: SPIx MAXIMUM DATA/CLOCK RATE SUMMARY**

| SPI Host Transmit Only (Half-Duplex) | SPI Host Transmit/Receive (Full-Duplex) | SPI Client Transmit/Receive (Full-Duplex) | CKE |
|---|---|---|---|
| Figure 33-7<br>Table 33-28 | — | — | 0 |
| Figure 33-8<br>Table 33-28 | — | — | 1 |
| — | Figure 33-9<br>Table 33-29 | — | 0 |
| — | Figure 33-10<br>Table 33-30 | — | 1 |
| — | — | Figure 33-11<br>Table 33-32 | 0 |
| — | — | Figure 33-12<br>Table 33-33 | 1 |

**FIGURE 33-7: SPIx HOST MODE (HALF-DUPLEX, TRANSMIT ONLY, CKE = 0) TIMING CHARACTERISTICS**

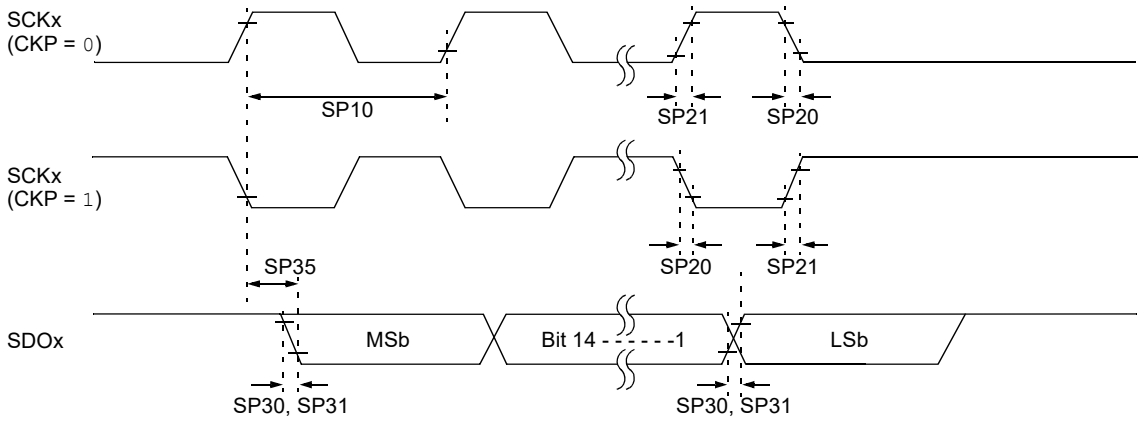


**Note:** Refer to Figure 33-1 for load conditions.


© 2017-2021 Microchip Technology Inc.

**FIGURE 33-8: SPIx HOST MODE (HALF-DUPLEX, TRANSMIT ONLY, CKE = 1) TIMING CHARACTERISTICS**

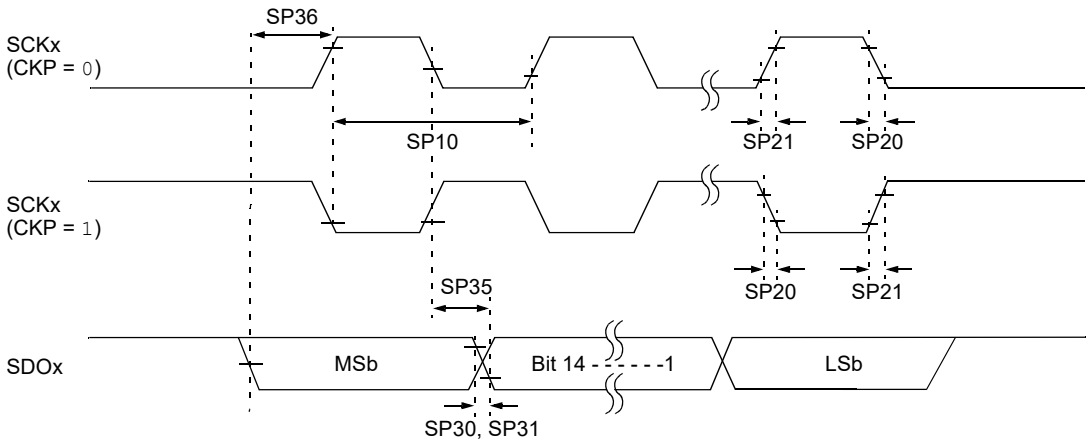


**Note:** Refer to Figure 33-1 for load conditions.

**TABLE 33-28: SPIx HOST MODE (HALF-DUPLEX, TRANSMIT ONLY) TIMING REQUIREMENTS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic(1)** | **Min.** | **Typ.(2)** | **Max.** | **Units** | **Conditions** |
| SP10 | FscP | Maximum SCKx Frequency | — | — | 15 | MHz | Using PPS pins |
| | | | — | — | 40 | MHz | SPIx dedicated pins |
| SP20 | TscF | SCKx Output Fall Time | — | — | — | ns | See Parameter DO32 |
| SP21 | TscR | SCKx Output Rise Time | — | — | — | ns | See Parameter DO31 |
| SP30 | TdoF | SDOx Data Output Fall Time | — | — | — | ns | See Parameter DO32 |
| SP31 | TdoR | SDOx Data Output Rise Time | — | — | — | ns | See Parameter DO31 |
| SP35 | TscH2doV, TscL2doV | SDOx Data Output Valid After SCKx Edge | — | 6 | 20 | ns | |
| SP36 | TdiV2scH, TdiV2scL | SDOx Data Output Setup to First SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 3 | — | — | ns | SPIx dedicated pins |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**2:** Data in the “Typ.” column are at 3.3V, +25°C unless otherwise stated.

**FIGURE 33-9: SPIx HOST MODE (FULL-DUPLEX, CKE = 1, CKP = x, SMP = 1) TIMING CHARACTERISTICS**

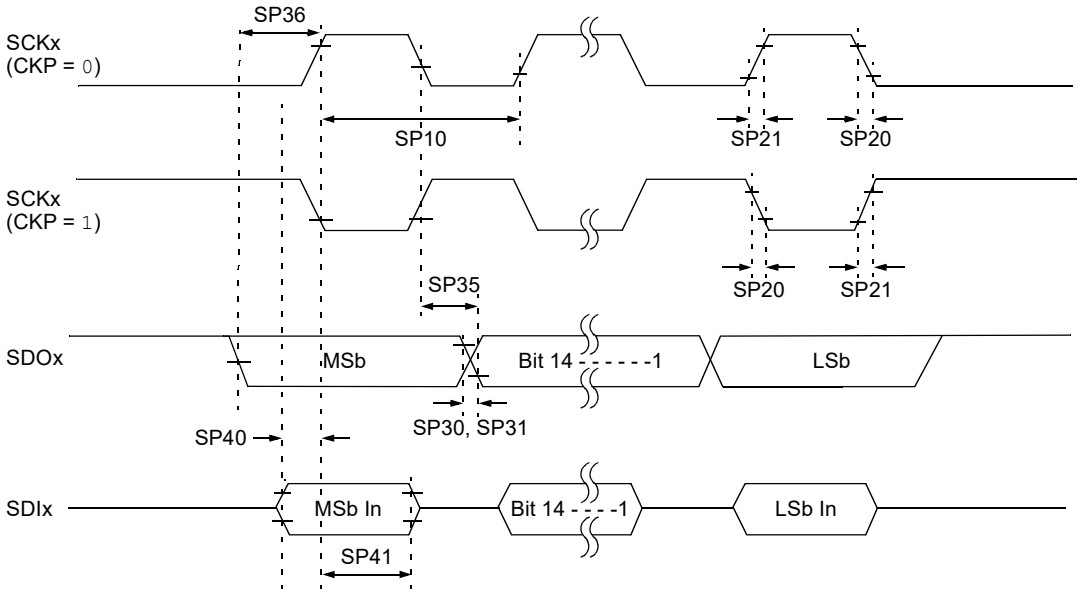


**Note:** Refer to Figure 33-1 for load conditions.

**TABLE 33-29: SPIx HOST MODE (FULL-DUPLEX, CKE = 1, CKP = x, SMP = 1) TIMING REQUIREMENTS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic(1)** | **Min.** | **Typ.(2)** | **Max.** | **Units** | **Conditions** |
| SP10 | FscP | Maximum SCKx Frequency | — | — | 15 | MHz | Using PPS pins |
| | | | — | — | 40 | MHz | SPIx dedicated pins |
| SP20 | TscF | SCKx Output Fall Time | — | — | — | ns | See Parameter DO32 |
| SP21 | TscR | SCKx Output Rise Time | — | — | — | ns | See Parameter DO31 |
| SP30 | TdoF | SDOx Data Output Fall Time | — | — | — | ns | See Parameter DO32 |
| SP31 | TdoR | SDOx Data Output Rise Time | — | — | — | ns | See Parameter DO31 |
| SP35 | TscH2doV, TscL2doV | SDOx Data Output Valid After SCKx Edge | — | 6 | 20 | ns | |
| SP36 | TdoV2sc, TdoV2scL | SDOx Data Output Setup to First SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 3 | — | — | ns | SPIx dedicated pins |
| SP40 | TdiV2scH, TdiV2scL | Setup Time of SDIx Data Input to SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 10 | — | — | ns | SPIx dedicated pins |
| SP41 | TscH2diL, TscL2diL | Hold Time of SDIx Data Input to SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 15 | — | — | ns | SPIx dedicated pins |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**2:** Data in the "Typ." column are at 3.3V, +25°C unless otherwise stated.


© 2017-2021 Microchip Technology Inc.

**FIGURE 33-10: SPIx HOST MODE (FULL-DUPLEX, CKE = 0, CKP = x, SMP = 1) TIMING CHARACTERISTICS**

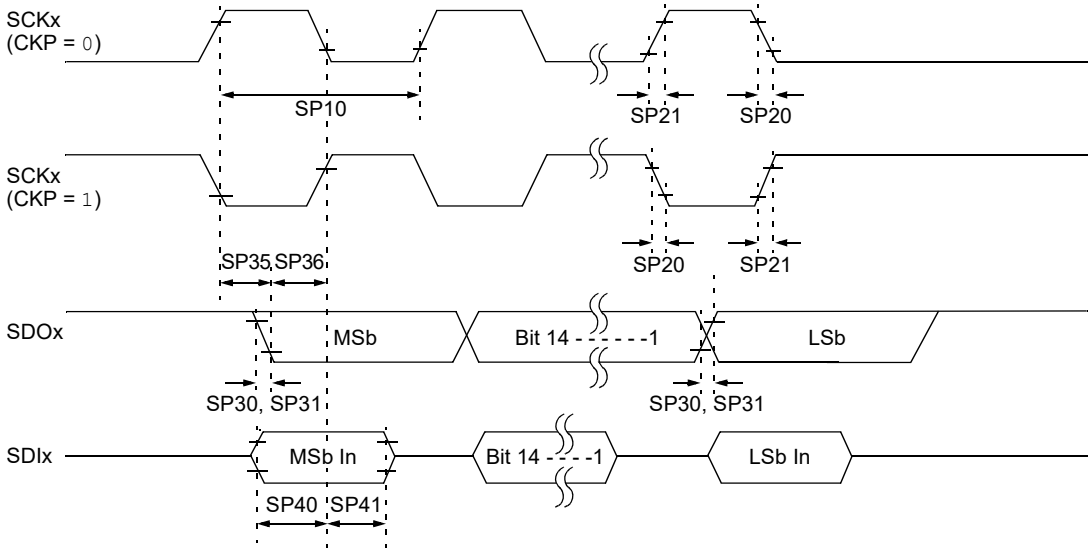


**Note:** Refer to Figure 33-1 for load conditions.

**TABLE 33-30: SPIx HOST MODE (FULL-DUPLEX, CKE = 0, CKP = x, SMP = 1) TIMING REQUIREMENTS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic(1)** | **Min.** | **Typ.(2)** | **Max.** | **Units** | **Conditions** |
| SP10 | FscP | Maximum SCKx Frequency | — | — | 15 | MHz | Using PPS pins |
| | | | — | — | 40 | MHz | SPIx dedicated pins |
| SP20 | TscF | SCKx Output Fall Time | — | — | — | ns | See Parameter DO32 |
| SP21 | TscR | SCKx Output Rise Time | — | — | — | ns | See Parameter DO31 |
| SP30 | TdoF | SDOx Data Output Fall Time | — | — | — | ns | See Parameter DO32 |
| SP31 | TdoR | SDOx Data Output Rise Time | — | — | — | ns | See Parameter DO31 |
| SP35 | TscH2doV, TscL2doV | SDOx Data Output Valid After SCKx Edge | — | 6 | 20 | ns | |
| SP36 | TdoV2scH, TdoV2scL | SDOx Data Output Setup to First SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 20 | — | — | ns | SPIx dedicated pins |
| SP40 | TdiV2scH, TdiV2scL | Setup Time of SDIx Data Input to SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 10 | — | — | ns | SPIx dedicated pins |
| SP41 | TscH2diL, TscL2diL | Hold Time of SDIx Data Input to SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 15 | — | — | ns | SPIx dedicated pins |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**2:** Data in the “Typ.” column are at 3.3V, +25°C unless otherwise stated.

**FIGURE 33-11: SPIx CLIENT MODE (FULL-DUPLEX, CKE = 0, CKP = x, SMP = 0) TIMING CHARACTERISTICS**

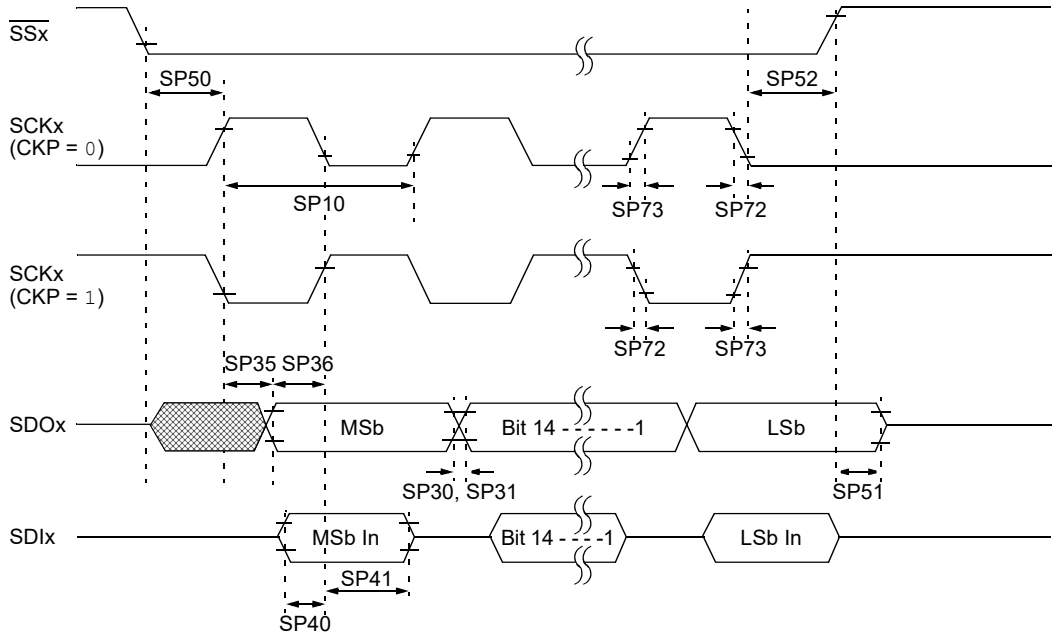


**Note:** Refer to Figure 33-1 for load conditions.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-31: SPIx CLIENT MODE (FULL-DUPLEX, CKE = 0, CKP = x, SMP = 0) TIMING REQUIREMENTS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic(1)** | **Min.** | **Typ.(2)** | **Max.** | **Units** | **Conditions** |
| SP10 | FscP | Maximum SCKx Input Frequency | — | — | 15 | MHz | Using PPS pins |
| | | | — | — | 40 | MHz | SPIx dedicated pins |
| SP72 | TscF | SCKx Input Fall Time | — | — | — | ns | See Parameter DO32 |
| SP73 | TscR | SCKx Input Rise Time | — | — | — | ns | See Parameter DO31 |
| SP30 | TdoF | SDOx Data Output Fall Time | — | — | — | ns | See Parameter DO32 |
| SP31 | TdoR | SDOx Data Output Rise Time | — | — | — | ns | See Parameter DO31 |
| SP35 | TscH2doV, TscL2doV | SDOx Data Output Valid After SCKx Edge | — | 6 | 20 | ns | |
| SP36 | TdoV2scH, TdoV2scL | SDOx Data Output Setup to First SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 20 | — | — | ns | SPIx dedicated pins |
| SP40 | TdiV2scH, TdiV2scL | Setup Time of SDIx Data Input to SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 10 | — | — | ns | SPIx dedicated pins |
| SP41 | TscH2diL, TscL2diL | Hold Time of SDIx Data Input to SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 15 | — | — | ns | SPIx dedicated pins |
| SP50 | TssL2scH, TssL2scL | $\overline{SSx}$ ↓ to SCKx ↑ or SCKx ↓ Input | 120 | — | — | ns | |
| SP51 | TssH2doZ | $\overline{SSx}$ ↑ to SDOx Output High-Impedance | 8 | — | 50 | ns | |
| SP52 | TscH2ssH, TscL2ssH | $\overline{SSx}$ ↑ After SCKx Edge | 1.5 TCY + 40 | — | — | ns | |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**2:** Data in the "Typ." column are at 3.3V, +25°C unless otherwise stated.

**FIGURE 33-12: SPIx CLIENT MODE (FULL-DUPLEX, CKE = 1, CKP = x, SMP = 0) TIMING CHARACTERISTICS**

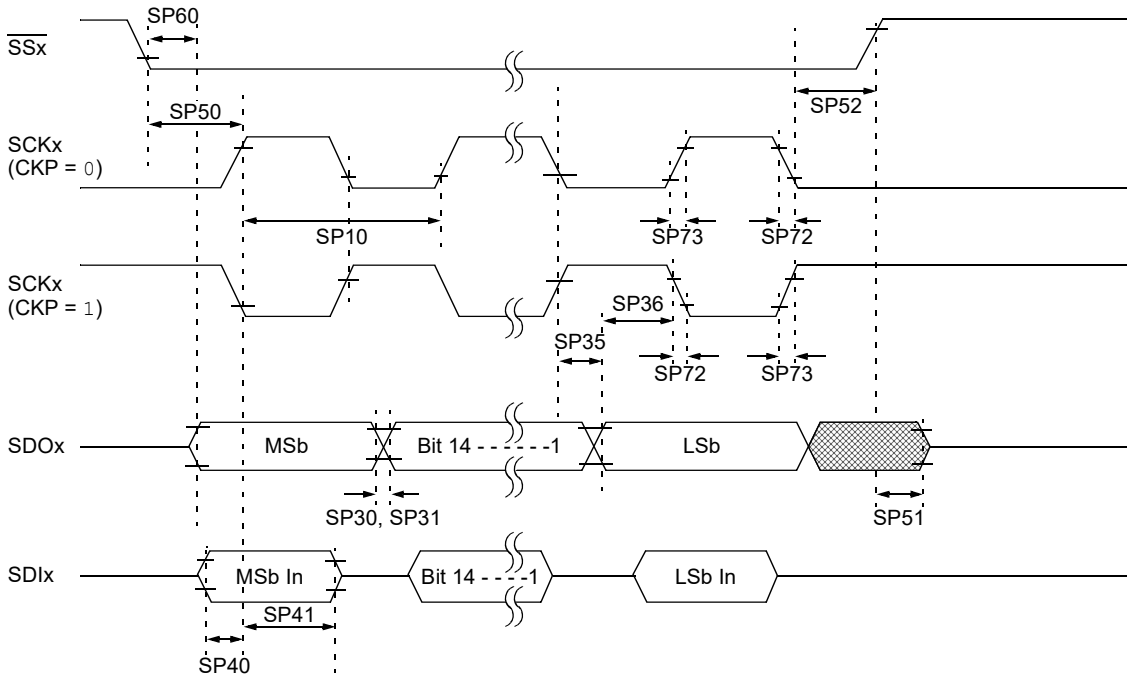


**Note:** Refer to Figure 33-1 for load conditions.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-32: SPIx CLIENT MODE (FULL-DUPLEX, CKE = 1, CKP = x, SMP = 0) TIMING REQUIREMENTS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic(1)** | **Min.** | **Typ.(2)** | **Max.** | **Units** | **Conditions** |
| SP10 | FscP | Maximum SCKx Input Frequency | — | — | 15 | MHz | Using PPS pins |
| | | | — | — | 40 | MHz | SPIx dedicated pins |
| SP72 | TscF | SCKx Input Fall Time | — | — | — | ns | See Parameter DO32 |
| SP73 | TscR | SCKx Input Rise Time | — | — | — | ns | See Parameter DO31 |
| SP30 | TdoF | SDOx Data Output Fall Time | — | — | — | ns | See Parameter DO32 |
| SP31 | TdoR | SDOx Data Output Rise Time | — | — | — | ns | See Parameter DO31 |
| SP35 | TscH2doV, TscL2doV | SDOx Data Output Valid After SCKx Edge | — | 6 | 20 | ns | |
| SP36 | TdoV2scH, TdoV2scL | SDOx Data Output Setup to First SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 20 | — | — | ns | SPIx dedicated pins |
| SP40 | TdiV2scH, TdiV2scL | Setup Time of SDIx Data Input to SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 10 | — | — | ns | SPIx dedicated pins |
| SP41 | TscH2diL, TscL2diL | Hold Time of SDIx Data Input to SCKx Edge | 30 | — | — | ns | Using PPS pins |
| | | | 15 | — | — | ns | SPIx dedicated pins |
| SP50 | TssL2scH, TssL2scL | $\overline{SSx}$ ↓ to SCKx ↑ or SCKx ↓ Input | 120 | — | — | ns | |
| SP51 | TssH2doZ | $\overline{SSx}$ ↑ to SDOx Output High-Impedance | 8 | — | 50 | ns | |
| SP52 | TscH2ssH, TscL2ssH | $\overline{SSx}$ ↑ After SCKx Edge | 1.5 TCY + 40 | — | — | ns | |
| SP60 | TssL2doV | SDOx Data Output Valid After $\overline{SSx}$ Edge | — | — | 50 | ns | |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**2:** Data in the "Typ." column are at 3.3V, +25°C unless otherwise stated.

**FIGURE 33-13: I2Cx BUS START/STOP BITS TIMING CHARACTERISTICS (HOST MODE)**

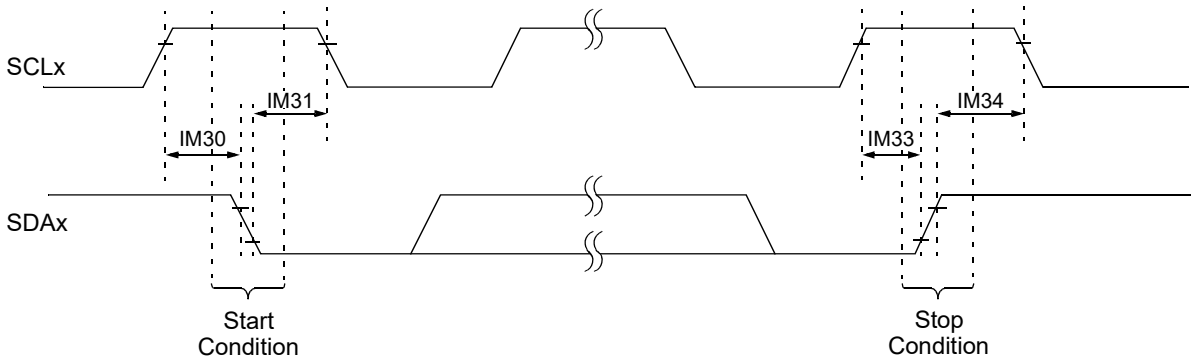


**Note:** Refer to Figure 33-1 for load conditions.

**FIGURE 33-14: I2Cx BUS DATA TIMING CHARACTERISTICS (HOST MODE)**

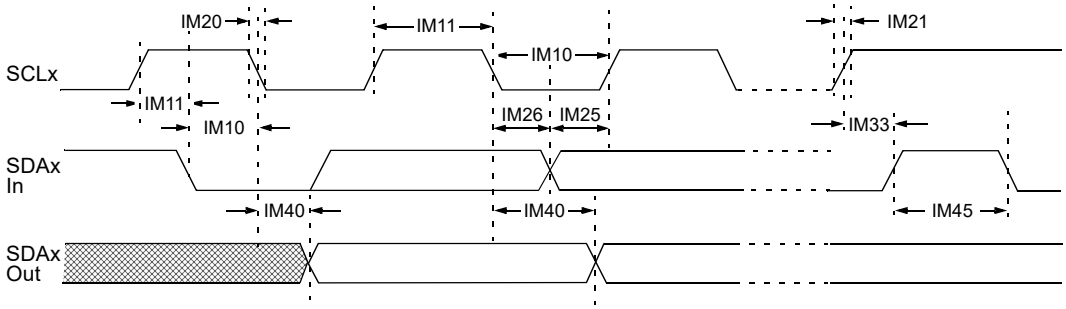


**Note:** Refer to Figure 33-1 for load conditions.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-33: I2Cx BUS DATA TIMING REQUIREMENTS (HOST MODE)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic(4)** | | **Min.(1)** | **Max.** | **Units** | **Conditions** |
| IM10 | TLO:SCL | Clock Low Time | 100 kHz mode | TCY (BRG + 1) | — | µs | |
| | | | 400 kHz mode | TCY (BRG + 1) | — | µs | |
| | | | 1 MHz mode(2) | TCY (BRG + 1) | — | µs | |
| IM11 | THI:SCL | Clock High Time | 100 kHz mode | TCY (BRG + 1) | — | µs | |
| | | | 400 kHz mode | TCY (BRG + 1) | — | µs | |
| | | | 1 MHz mode(2) | TCY (BRG + 1) | — | µs | |
| IM20 | TF:SCL | SDAx and SCLx Fall Time | 100 kHz mode | — | 300 | ns | CB is specified to be from 10 to 400 pF |
| | | | 400 kHz mode | 20 x (VDD/5.5V) | 300 | ns | |
| | | | 1 MHz mode(2) | 20 x (VDD/5.5V) | 120 | ns | |
| IM21 | TR:SCL | SDAx and SCLx Rise Time | 100 kHz mode | — | 1000 | ns | CB is specified to be from 10 to 400 pF |
| | | | 400 kHz mode | 20 + 0.1 CB | 300 | ns | |
| | | | 1 MHz mode(2) | — | 120 | ns | |
| IM25 | TSU:DAT | Data Input Setup Time | 100 kHz mode | 250 | — | ns | |
| | | | 400 kHz mode | 100 | — | ns | |
| | | | 1 MHz mode(2) | 50 | — | ns | |
| IM26 | THD:DAT | Data Input Hold Time | 100 kHz mode | 0 | — | µs | |
| | | | 400 kHz mode | 0 | 0.9 | µs | |
| | | | 1 MHz mode(2) | 0 | 0.3 | µs | |
| IM30 | TSU:STA | Start Condition Setup Time | 100 kHz mode | TCY (BRG + 1) | — | µs | Only relevant for Repeated Start condition |
| | | | 400 kHz mode | TCY (BRG + 1) | — | µs | |
| | | | 1 MHz mode(2) | TCY (BRG + 1) | — | µs | |
| IM31 | THD:STA | Start Condition Hold Time | 100 kHz mode | TCY (BRG + 1) | — | µs | After this period, the first clock pulse is generated |
| | | | 400 kHz mode | TCY (BRG + 1) | — | µs | |
| | | | 1 MHz mode(2) | TCY (BRG + 1) | — | µs | |
| IM33 | TSU:STO | Stop Condition Setup Time | 100 kHz mode | TCY (BRG + 1) | — | µs | |
| | | | 400 kHz mode | TCY (BRG + 1) | — | µs | |
| | | | 1 MHz mode(2) | TCY (BRG + 1) | — | µs | |
| IM34 | THD:STO | Stop Condition Hold Time | 100 kHz mode | TCY (BRG + 1) | — | µs | |
| | | | 400 kHz mode | TCY (BRG + 1) | — | µs | |
| | | | 1 MHz mode(2) | TCY (BRG + 1) | — | µs | |
| IM40 | TAA:SCL | Output Valid from Clock | 100 kHz mode | — | 3450 | ns | |
| | | | 400 kHz mode | — | 900 | ns | |
| | | | 1 MHz mode(2) | — | 450 | ns | |
| IM45 | TBF:SDA | Bus Free Time | 100 kHz mode | 4.7 | — | µs | Time the bus must be free before a new transmission can start |
| | | | 400 kHz mode | 1.3 | — | µs | |
| | | | 1 MHz mode(2) | 0.5 | — | µs | |
| IM50 | CB | Bus Capacitive Loading | | — | 400 | pF | |
| IM51 | TPGD | Pulse Gobbler Delay | | 65 | 390 | ns | Note 3 |

**Note 1:** BRG is the value of the $I^2C$ Baud Rate Generator.

**2:** Maximum Pin Capacitance = 10 pF for all I2Cx pins (for 1 MHz mode only).

**3:** Typical value for this parameter is 130 ns.

**4:** These parameters are characterized but not tested in manufacturing.

© 2017-2021 Microchip Technology Inc.

**FIGURE 33-15: I2Cx BUS START/STOP BITS TIMING CHARACTERISTICS (CLIENT MODE)**

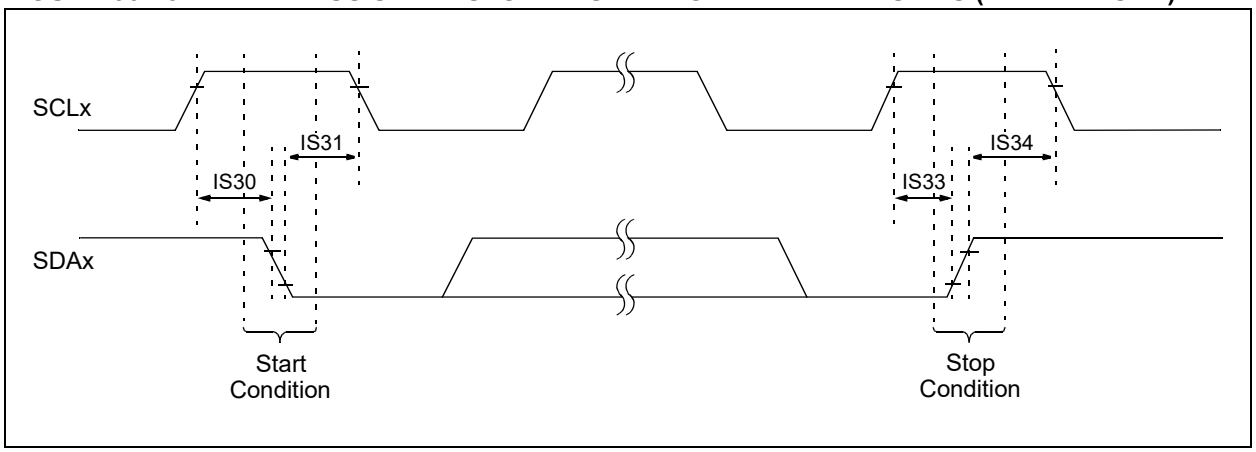


**FIGURE 33-16: I2Cx BUS DATA TIMING CHARACTERISTICS (CLIENT MODE)**

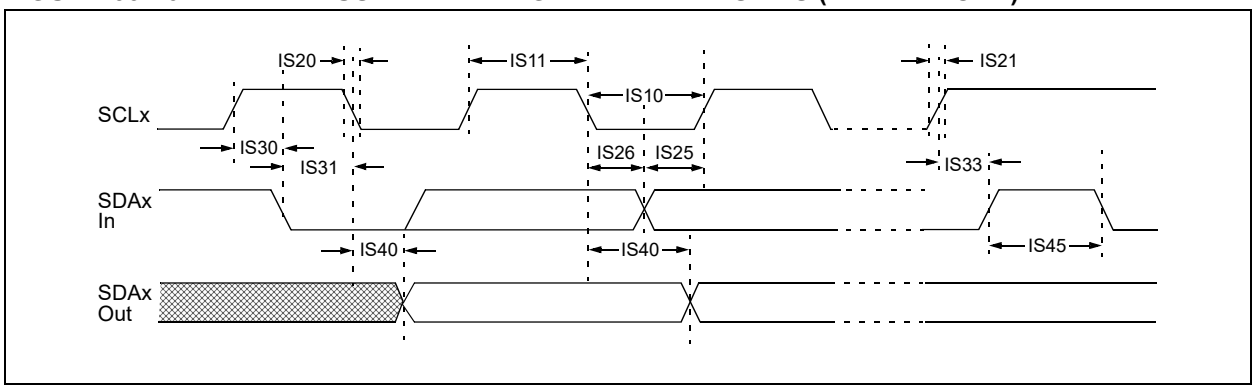



© 2017-2021 Microchip Technology Inc.

**TABLE 33-34: I2Cx BUS DATA TIMING REQUIREMENTS (CLIENT MODE)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic[3]** | | **Min.** | **Max.** | **Units** | **Conditions** |
| IS10 | TLO:SCL | Clock Low Time | 100 kHz mode | 4.7 | — | µs | |
| | | | 400 kHz mode | 1.3 | — | µs | |
| | | | 1 MHz mode[1] | 0.5 | — | µs | |
| IS11 | THI:SCL | Clock High Time | 100 kHz mode | 4.0 | — | µs | Device must operate at a minimum of 1.5 MHz |
| | | | 400 kHz mode | 0.6 | — | µs | Device must operate at a minimum of 10 MHz |
| | | | 1 MHz mode[1] | 0.26 | — | µs | |
| IS20 | TF:SCL | SDAx and SCLx Fall Time | 100 kHz mode | — | 300 | ns | CB is specified to be from 10 to 400 pF |
| | | | 400 kHz mode | 20 x (VDD/5.5V) | 300 | ns | |
| | | | 1 MHz mode[1] | 20 x (VDD/5.5V) | 120 | ns | |
| IS21 | TR:SCL | SDAx and SCLx Rise Time | 100 kHz mode | — | 1000 | ns | CB is specified to be from 10 to 400 pF |
| | | | 400 kHz mode | 20 + 0.1 CB | 300 | ns | |
| | | | 1 MHz mode[1] | — | 120 | ns | |
| IS25 | TSU:DAT | Data Input Setup Time | 100 kHz mode | 250 | — | ns | |
| | | | 400 kHz mode | 100 | — | ns | |
| | | | 1 MHz mode[1] | 50 | — | ns | |
| IS26 | THD:DAT | Data Input Hold Time | 100 kHz mode | 0 | — | µs | |
| | | | 400 kHz mode | 0 | 0.9 | µs | |
| | | | 1 MHz mode[1] | 0 | 0.3 | µs | |
| IS30 | TSU:STA | Start Condition Setup Time | 100 kHz mode | 4.7 | — | µs | Only relevant for Repeated Start condition |
| | | | 400 kHz mode | 0.6 | — | µs | |
| | | | 1 MHz mode[1] | 0.26 | — | µs | |
| IS31 | THD:STA | Start Condition Hold Time | 100 kHz mode | 4.0 | — | µs | After this period, the first clock pulse is generated |
| | | | 400 kHz mode | 0.6 | — | µs | |
| | | | 1 MHz mode[1] | 0.26 | — | µs | |
| IS33 | TSU:STO | Stop Condition Setup Time | 100 kHz mode | 4.0 | — | µs | |
| | | | 400 kHz mode | 0.6 | — | µs | |
| | | | 1 MHz mode[1] | 0.26 | — | µs | |
| IS34 | THD:STO | Stop Condition Hold Time | 100 kHz mode | >0 | — | µs | |
| | | | 400 kHz mode | >0 | — | µs | |
| | | | 1 MHz mode[1] | >0 | | µs | |
| IS40 | TAA:SCL | Output Valid from Clock | 100 kHz mode | 0 | 3450 | ns | |
| | | | 400 kHz mode | 0 | 900 | ns | |
| | | | 1 MHz mode[1] | 0 | 450 | ns | |
| IS45 | TBF:SDA | Bus Free Time | 100 kHz mode | 4.7 | — | µs | Time the bus must be free before a new transmission can start |
| | | | 400 kHz mode | 1.3 | — | µs | |
| | | | 1 MHz mode[1] | 0.5 | — | µs | |
| IS50 | CB | Bus Capacitive Loading | | — | 400 | pF | |
| IS51 | TPGD | Pulse Gobbler Delay | | 65 | 390 | ns | **Note 2** |

**Note 1:** Maximum Pin Capacitance = 10 pF for all I2Cx pins (for 1 MHz mode only).

**2:** Typical value for this parameter is 130 ns.

**3:** These parameters are characterized but not tested in manufacturing.

**FIGURE 33-17: UARTx MODULE I/O TIMING CHARACTERISTICS**

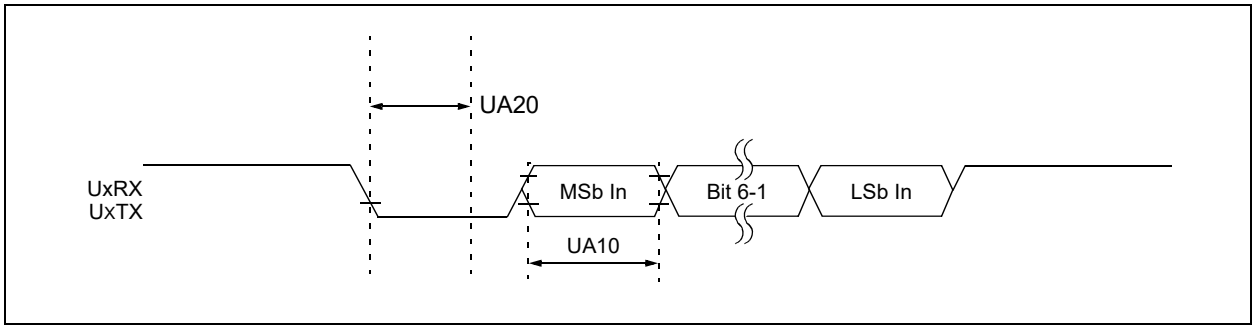


**TABLE 33-35: UARTx MODULE I/O TIMING REQUIREMENTS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +125°C | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic(1)** | **Min.** | **Typ.(2)** | **Max.** | **Units** | **Conditions** |
| UA10 | TUABAUD | UARTx Baud Time | 40 | — | — | ns | |
| UA11 | FBAUD | UARTx Baud Frequency | — | — | 25 | Mbps | |
| UA20 | TCWF | Start Bit Pulse Width to Trigger UARTx Wake-up | 50 | — | — | ns | |

**Note 1:** These parameters are characterized but not tested in manufacturing.

**2:** Data in the “Typ.” column are at 3.3V, +25°C unless otherwise stated. Parameters are for design guidance only and are not tested.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-36: ADC MODULE SPECIFICATIONS**

| **Standard Operating Conditions: (unless otherwise stated)**<br>3.0V to 3.6V[4]<br>-40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristics** | **Min.** | **Typical** | **Max.** | **Units** | **Conditions** |
| **Analog Input** | | | | | | | |
| AD12 | VINH-VINL | Full-Scale Input Span | AVSS | — | AVDD | V | |
| AD14 | VIN | Absolute Input Voltage | AVSS – 0.3 | — | AVDD + 0.3 | V | |
| AD60 | CHOLD | Capacitance | — | 5 | — | pF | Dedicated cores (**Note 1**) |
| AD61 | CHOLD | Capacitance | — | 18 | — | pF | Shared core (**Note 1**) |
| AD62 | RIC | Input resistance | — | 500 | 1000 | Ω | **Note 1** |
| AD66 | VBG | Internal Voltage Reference Source | 1.14 | 1.2 | 1.26 | V | |
| **Clock Requirements** | | | | | | | |
| AD67 | FSRC | ADC Module Input Frequency | — | — | 500 | MHz | Clock frequency selected by the CLKSELx bits |
| | FCORESRC | ADC Control Clock Frequency | — | — | 250 | MHz | Clock frequency after the first divider controlled by the CLKDIVx bits |
| | FADCORE | ADC SAR Core Clock Frequency | — | — | 70 | MHz | SAR core frequency after the second divider controlled by the ADCSx or SHRADCSx bits |
| **ADC Accuracy** | | | | | | | |
| AD20 | Nr | Resolution | 12 data bits | | | bits | |
| AD21a | INL_1D | Dedicated Core Integral Nonlinearity (1 Active Core) | -3.5 | -1.5/+1.5 | +3.5 | LSb | 3.5 Msps[5], TADC = 4 nS (250 MHz), TCORESRC = 8 nS (125 MHz), TADCORE = 16 nS (62.5 MHz), Sampling Time = 4 TADCORE, VDD = 3.3V, AVDD = 3.3V |
| AD22a | DNL_1D | Dedicated Core Differential Nonlinearity (1 Active Core) | -1 | 1.5/+1.5 | +3.5 | LSb | |
| AD23a | GERR_1D | Dedicated Core Gain Error (1 Active Core) | — | +4 | — | LSb | |
| AD24a | OERR_1D | Dedicated Core Offset Error (1 Active Core) | — | -4 | — | LSb | |

**Note 1:** These parameters are not characterized or tested in manufacturing.

**2:** These parameters are characterized but not tested in manufacturing.

**3:** Characterized with a 1 kHz sine wave.

**4:** The ADC module is functional at VBORMIN < VDD < VDDMIN, but with degraded performance. Unless otherwise stated, module functionality is ensured, but not characterized.

**5:** For the dedicated core, the throughput includes 4 TADCORE sampling time and 13 TADCORE conversion time.

**6:** For the shared core, the throughput includes 10 TADCORE sampling time and 13 TADCORE conversion time.

**TABLE 33-36: ADC MODULE SPECIFICATIONS (CONTINUED)**

| **Standard Operating Conditions: (unless otherwise stated)**<br>3.0V to 3.6V[4]<br>-40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristics** | **Min.** | **Typical** | **Max.** | **Units** | **Conditions** |
| AD21b | INL _1S | Shared Core Integral Nonlinearity (1 Active Core) | -3.5 | -1.5/+1.5 | +3.5 | LSb | 2.7 Msps[6], TADC = 4 nS (250 MHz), TCORESRC = 8 nS (125 MHz), TADCORE = 16 nS (62.5 MHz), Sampling Time = 10 TADCORE, VDD = 3.3V, AVDD = 3.3V |
| AD22b | DNL_1S | Shared Core Differential Nonlinearity (1 Active Core) | -1 | 1.5 | +3.5 | LSb | |
| AD23b | GERR_1S | Shared Core Gain Error (1 Active Core) | — | +4 | — | LSb | |
| AD24b | OERR_1S | Shared Core Offset Error (1 Active Core) | — | -4 | — | LSb | |
| AD21c | INL _3D | Dedicated Core Integral Nonlinearity (3 Active Cores) | — | -5/+5 | — | LSb | 3.5 Msps[5], TADC = 4 nS (250 MHz), TCORESRC = 8 nS (125 MHz), TADCORE = 16 nS (62.5 MHz), Sampling Time= 4 TADCORE, VDD = 3.3V, AVDD = 3.3V, all cores conversions are started simultaneously. |
| AD22c | DNL_3D | Dedicated Core Differential Nonlinearity (3 Active Cores) | — | -1/+2 | — | LSb | |
| AD23c | GERR_3D | Dedicated Core Gain Error (3 Active Cores) | — | +5 | — | LSb | |
| AD24c | OERR_3D | Dedicated Core Offset Error (3 Active Cores) | — | -5 | — | LSb | |
| AD21d | INL _3S | Shared Core Integral Nonlinearity (3 Active Cores) | — | -5/+5 | — | LSb | 2.7 Msps[6], TADC = 4 nS (250 MHz), TCORESRC = 8 nS (125 MHz), TADCORE = 16 nS (62.5 MHz), Sampling Time= 10 TADCORE, VDD = 3.3V, AVDD = 3.3V, all core conversions are started simultaneously |
| AD22d | DNL_3S | Shared Core Differential Nonlinearity (3 Active Cores) | — | -1/+2 | — | LSb | |
| AD23d | GERR_3S | Shared Core Gain Error (3 Active Cores) | — | +5 | — | LSb | |
| AD24d | OERR_3S | Shared Core Offset Error (3 Active Cores) | — | -5 | — | LSb | |
| AD25c | — | Monotonicity | — | — | — | — | Guaranteed |

**Note 1:** These parameters are not characterized or tested in manufacturing.

**2:** These parameters are characterized but not tested in manufacturing.

**3:** Characterized with a 1 kHz sine wave.

**4:** The ADC module is functional at VBORMIN < VDD < VDDMIN, but with degraded performance. Unless otherwise stated, module functionality is ensured, but not characterized.

**5:** For the dedicated core, the throughput includes 4 TADCORE sampling time and 13 TADCORE conversion time.

**6:** For the shared core, the throughput includes 10 TADCORE sampling time and 13 TADCORE conversion time.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-36: ADC MODULE SPECIFICATIONS (CONTINUED)**

| **Standard Operating Conditions: (unless otherwise stated)**<br>3.0V to 3.6V[4]<br>-40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristics** | **Min.** | **Typical** | **Max.** | **Units** | **Conditions** |
| **Dynamic Performance** | | | | | | | |
| AD31b | SINAD | Signal-to-Noise and Distortion | 56 | — | 70 | dB | **(Notes 2,3)** |
| AD34b | ENOB | Effective Number of Bits | 9.8 | 10.2 | 11.4 | bits | **(Notes 2,3)** |
| AD50 | TAD | ADC Clock Period | 14.3 | — | — | ns | |
| AD51 | FTP | Throughput Rate | — | — | 3.5 | Msps | Dedicated Cores 0 and 1 **(Note 5)** |
| | | | — | — | 2.7 | Msps | Shared core **(Note 6)** |

**Note 1:** These parameters are not characterized or tested in manufacturing.

**2:** These parameters are characterized but not tested in manufacturing.

**3:** Characterized with a 1 kHz sine wave.

**4:** The ADC module is functional at VBORMIN < VDD < VDDMIN, but with degraded performance. Unless otherwise stated, module functionality is ensured, but not characterized.

**5:** For the dedicated core, the throughput includes 4 TADCORE sampling time and 13 TADCORE conversion time.

**6:** For the shared core, the throughput includes 10 TADCORE sampling time and 13 TADCORE conversion time.

**TABLE 33-37: HIGH-SPEED ANALOG COMPARATOR MODULE SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**[2]<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Typ.**[1] | **Max.** | **Units** | **Comments** |
| CM09 | FIN | Input Frequency | 400 | 500 | 550 | MHz | |
| CM10 | VIOFF | Input Offset Voltage | -20 | — | +20 | mV | |
| CM11 | VICM | Input Common-Mode Voltage Range | AVSS | — | AVDD | V | **Note 1** |
| CM13 | CMRR | Common-Mode Rejection Ratio | 65 | — | — | dB | **Note 1** |
| CM14 | TRESP | Large Signal Response | — | 15 | — | ns | V+ input step of 100 mV while V- input is held at AVDD/2 |
| CM15 | VHYST | Input Hysteresis | 15 | — | 45 | mV | Dependent on HYSSEL[1:0] **(Note 1)** |

**Note 1:** These parameters are for design guidance only and are not tested in manufacturing.

**2:** The comparator module is functional at VBORMIN < VDD < VDDMIN, but with degraded performance. Unless otherwise stated, module functionality is tested, but not characterized.

**TABLE 33-38: DACx MODULE SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Typ.(1)** | **Max.** | **Units** | **Comments** |
| DA02 | CVRES | Resolution | 12 | | | bits | |
| DA03 | INL | Integral Nonlinearity Error | -38 | — | 0 | LSB | |
| DA04 | DNL | Differential Nonlinearity Error | -5 | — | 5 | LSB | |
| DA05 | EOFF | Offset Error | -3.5 | — | 21.5 | LSB | Internal node at comparator input |
| DA06 | EG | Gain Error | 0 | — | 41 | LSB | Internal node at comparator input |
| DA07 | TSET | Settling Time | 600 | 750 | 2000 | ns | Output within 1% of desired output voltage with a 5%-95% or 95%-5% step **(Note 1)** |
| DA08 | VOUT | Voltage Output Range | 0.165 | — | 3.135 | V | VDD = 3.3V |
| DA09 | TTR | Transition Time | 340 | — | — | ns | **Note 1** |
| DA10 | TSS | Steady-State Time | 550 | — | — | ns | **Note 1** |

**Note 1:** Parameters are for design guidance only and are not tested in manufacturing.

**TABLE 33-39: DACx OUTPUT (DACOUT1 PIN) SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)(1,2,3)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Typ.** | **Max.** | **Units** | **Comments** |
| DA11 | RLOAD | Resistive Output Load Impedance | 10K | — | — | Ohm | |
| DA11a | CLOAD | Output Load Capacitance | — | — | 30 | pF | Including output pin capacitance |
| DA12 | IOUT | Output Current Drive Strength | — | 3 | — | mA | Sink and source |

**Note 1:** Parameters are for design guidance only and are not tested in manufacturing.

**2:** The DACx module is functional at VBORMIN < VDD < VDDMIN, but with degraded performance. Unless otherwise stated, module functionality is tested, but not characterized.

**3:** Using other pin functions may degrade DAC performance.


© 2017-2021 Microchip Technology Inc.

**TABLE 33-40: CONSTANT-CURRENT SOURCE SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)[1]**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Typ.** | **Max.** | **Units** | **Conditions** |
| CC03 | I10SRC | 10 µA Source Current | 8.8 | — | 11.2 | µA | ISRCx pin |
| CC04 | I50SRC | 50 µA Source Current | 44 | — | 56 | µA | IBIASx pin |
| CC05 | I50SNK | 50 µA Sink Current | -44 | — | -56 | µA | IBIASx pin |

**Note 1:** The constant-current source module is functional at VBORMIN < VDD < VDDMIN, but with degraded performance. Unless otherwise stated, module functionality is tested, but not characterized.

**TABLE 33-41: OPERATIONAL AMPLIFIER SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +85°C for Industrial<br>-40°C ≤ TA ≤ +125°C for Extended | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Sym** | **Characteristic** | **Min** | **Typ[1]** | **Max** | **Units** | **Comments** |
| OA01 | GBWP | Gain Bandwidth Product | — | 20 | — | MHz | |
| OA02 | SR | Slew Rate | — | 40 | — | V/µs | |
| OA03 | VIOFF | Input Offset Voltage | -3[3] | -1/+1 | +3[3] | mV | Unity gain configuration |
| | | | -8 | -3/+3 | +8 | mV | Open-loop configuration |
| OA04 | VIBC | Input Bias Current | — | — | — | mV | **Note 2** |
| OA05 | VICM | Common-Mode Input Voltage Range | AVSS | — | AVDD | V | NCHDISx = 0 |
| | | | AVSS | — | AVDD – 1.4 | V | NCHDISx = 1 |
| OA07 | CMRR | Common-Mode Rejection Ratio | — | 68 | — | dB | |
| OA08 | PSRR | Power Supply Rejection Ratio | — | 74 | — | dB | |
| OA09 | VOR | Output Voltage Range | AVSS | — | AVDD | mV | 0.5V input overdrive, no output loading **(Note 1)** |
| OA11 | CLOAD | Output Load Capacitance | — | — | 30 | pF | Including output pin capacitance **(Note 1)** |
| OA12 | IOUT | Output Current Drive Strength | — | 3 | — | mA | Sink and source |
| OA13 | PMARGIN | Phase Margin | 44 | — | — | degree | Unity gain **(Note 1)** |
| OA14 | GMARGIN | Gain Margin | 7 | — | — | dB | Unity gain **(Note 1)** |
| OA15 | OLG | Open-Loop Gain | 68 | 75 | — | dB | **Note 1** |

**Note 1:** These parameters are for design guidance only and are not tested in manufacturing.

**2:** The op amps use CMOS input circuitry with negligible input bias current. The maximum “effective bias current” is the I/O pin leakage specified by electrical Parameter DI50.

**3:** This parameter is characterized but not tested in manufacturing.

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 34.0 HIGH-TEMPERATURE ELECTRICAL CHARACTERISTICS

This section provides an overview of the dsPIC33CK256MP508 family devices operating in an ambient temperature range of -40°C to +150°C.

The specifications between -40°C to +150°C are identical to those shown in **Section 33.0 "Electrical Characteristics"** for operation between -40°C to +125°C, with the exception of the parameters listed in this section.

Parameters in this section begin with an H, which denotes High temperature. For example, Parameter DC20 in **Section 33.0 "Electrical Characteristics"** is the Industrial and Extended temperature equivalent of HDC20.

Absolute maximum ratings for the dsPIC33CK256MP508 family high-temperature devices are listed below. Exposure to these maximum rating conditions for extended periods can affect device reliability. Functional operation of the device, at these or any other conditions above the parameters indicated in the operation listings of this specification, is not implied.

### Absolute Maximum Ratings(1)

Ambient temperature under bias ..... -40°C to +150°C
Storage temperature ..... -65°C to +150°C
Voltage on $V_{DD}$ with respect to $V_{SS}$ ..... -0.3V to +4.0V
Voltage on any pin that is not 5V tolerant with respect to $V_{SS}$(3) ..... -0.3V to ($V_{DD}$ + 0.3V)
Voltage on any 5V tolerant pin with respect to $V_{SS}$ when $V_{DD} \geq 3.0V$(3) ..... -0.3V to +5.5V
Voltage on any 5V tolerant pin with respect to Vss when $V_{DD} < 3.0V$(3) ..... -0.3V to +3.6V
Maximum current out of $V_{SS}$ pin ..... 300 mA
Maximum current into $V_{DD}$ pin(2) ..... 300 mA
Maximum current sunk/sourced by any 4x I/O pin ..... 15 mA
Maximum current sunk/sourced by any 8x I/O pin ..... 25 mA
Maximum current sunk by a group of I/Os between two $V_{SS}$ pins(4) ..... 75 mA
Maximum current sourced by a group of I/Os between two $V_{DD}$ pins(4) ..... 75 mA
Maximum current sunk by all I/Os(2,5) ..... 200 mA
Maximum current sourced by all I/Os(2,5) ..... 200 mA

**Note 1:** Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those, or any other conditions above those indicated in the operation listings of this specification, is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**2:** Maximum allowable current is a function of device maximum power dissipation (see Table 34-2).

**3:** See the **"Pin Diagrams"** section for the 5V tolerant pins.

**4:** Not applicable to $AV_{DD}$ and $AV_{SS}$ pins.

**5:** For 28-pin packages, the maximum current sunk/sourced by all I/Os is limited by 150 mA.

## 34.1 DC Characteristics

**TABLE 34-1: OPERATING MIPS vs. VOLTAGE**

| VDD Range | Temperature Range | Maximum CPU Clock Frequency |
|---|---|---|
| 3.0V to 3.6V | -40°C to +150°C | 70 |

**TABLE 34-2: THERMAL OPERATING CONDITIONS**

| Rating | Symbol | Min. | Max. | Unit |
|---|---|---|---|---|
| High-Temperature Devices | | | | |
| Operating Junction Temperature Range | TJ | -40 | +165 | °C |
| Operating Ambient Temperature Range | TA | -40 | +150 | °C |
| Power Dissipation:<br>Internal Chip Power Dissipation:<br>PINT = VDD x (IDD – Σ IOH)<br>I/O Pin Power Dissipation:<br>I/O = Σ ({VDD – VOH} x IOH) + Σ (VOL x IOL) | PD | PINT + PI/O | | W |
| Maximum Allowed Power Dissipation | PDMAX | (TJ – TA)/θJA | | W |

**TABLE 34-3: THERMAL PACKAGING CHARACTERISTICS(1)**

| Characteristic | Symbol | Typ. | Unit |
|---|---|---|---|
| Package Thermal Resistance, 80-Pin TQFP 12x12x1 mm | θJA | 50.67 | °C/W |
| Package Thermal Resistance, 64-Pin TQFP 10x10x1.0 mm | θJA | 45.7 | °C/W |
| Package Thermal Resistance, 64-Pin QFN 9x9 mm | θJA | 18.7 | °C/W |
| Package Thermal Resistance, 48-Pin TQFP 7x7 mm | θJA | 62.76 | °C/W |
| Package Thermal Resistance, 48-Pin UQFN 6x6 mm | θJA | 27.6 | °C/W |
| Package Thermal Resistance, 36-Pin UQFN 5x5 mm | θJA | 29.2 | °C/W |
| Package Thermal Resistance, 28-Pin UQFN 6x6 mm | θJA | 22.41 | °C/W |
| Package Thermal Resistance, 28-Pin SSOP 5.30 mm | θJA | 52.84 | °C/W |

**Note 1:** Junction to ambient thermal resistance, Theta-JA (θJA) numbers are achieved by package simulations.


© 2017-2021 Microchip Technology Inc.

**TABLE 34-4: OPERATING VOLTAGE SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**[1]<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Typ.** | **Max.** | **Units** | **Conditions** |
| **Operating Voltage** | | | | | | | |
| DC10 | VDD | **Supply Voltage** | 3.0 | — | 3.6 | V | |
| DC11 | AVDD | **Supply Voltage** | Greater of: VDD – 0.3 or 3.0 | — | Lesser of: VDD + 0.3 or 3.6 | V | The difference between AVDD supply and VDD supply must not exceed ±300 mV at all times, including during device power-up |
| DC16 | VPOR | **VDD Start Voltage** to Ensure Internal Power-on Reset Signal | — | — | VSS | V | |
| DC17 | SVDD | **VDD Rise Rate** to Ensure Internal Power-on Reset Signal | 0.03 | — | — | V/ms | 0V-3V in 100 ms |
| BO10 | VBOR | **BOR Event on VDD Transition** High-to-Low[2] | 2.68 | 2.84 | 2.99 | V | |

**Note 1:** Device is functional at VBORMIN < VDD < VDDMIN. Analog modules (ADC and comparators) may have degraded performance.

**2:** Parameters are characterized but not tested.

**TABLE 34-5: OPERATING CURRENT (IDD)(2)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.(1)** | **Max.** | **Units** | **Conditions** | | |
| HDC20 | 13.6 | 33.5 | mA | +150°C | 3.3V | 10 MIPS (N1 = 1, N2 = 5, N3 = 2, M = 50, FVCO = 400 MHz, FPLLO = 40 MHz) |
| HDC21 | 16.2 | 36.0 | mA | +150°C | 3.3V | 20 MIPS (N1 = 1, N2 = 5, N3 = 1, M = 50, FVCO = 400 MHz, FPLLO = 80 MHz) |
| HDC22 | 20.4 | 40.0 | mA | +150°C | 3.3V | 40 MIPS (N1 = 1, N2 = 3, N3 = 1, M = 60, FVCO = 480 MHz, FPLLO = 160 MHz) |
| HDC23 | 27.8 | 47.75 | mA | +150°C | 3.3V | 70 MIPS (N1 = 1, N2 = 2, N3 = 1, M = 70, FVCO = 560 MHz, FPLLO = 280 MHz) |

**Note 1:** Data in the “Typ.” column are for design guidance only and are not tested.

**2:** Base Run current (IDD) is measured as follows:

- Oscillator is switched to EC+PLL mode in software
- OSC1 pin is driven with external 8 MHz square wave with levels from 0.3V to VDD – 0.3V
- OSC2 is configured as an I/O in the Configuration Words (OSCIOFNC (FOSC[2]) = `0`)
- FSCM is disabled (FCKSM[1:0] (FOSC[7:6]) = `01`)
- Watchdog Timer is disabled (FWDT[15] = `0` and WDTCONL[15] = `0`)
- All I/O pins (except OSC1) are configured as outputs and driving low
- No peripheral modules are operating or being clocked (defined PMDx bits are all ‘`1`’s)
- JTAG is disabled (JTAGEN (FICD[5]) = `0`)
- `NOP` instructions are executed in `while(1)` loop


© 2017-2021 Microchip Technology Inc.

**TABLE 34-6: IDLE CURRENT ($I_{IDLE}$)(2)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.(1)** | **Max.** | **Units** | **Conditions** | | |
| HDC40 | 11.6 | 33.25 | mA | +150°C | 3.3V | 10 MIPS (N1 = 1, N2 = 5, N3 = 2, M = 50, FVCO = 400 MHz, FPLLO = 40 MHz) |
| HDC41 | 12.7 | 33.75 | mA | +150°C | 3.3V | 20 MIPS (N1 = 1, N2 = 5, N3 = 1, M = 50, FVCO = 400 MHz, FPLLO = 80 MHz) |
| HDC42 | 14.9 | 36.3 | mA | +150°C | 3.3V | 40 MIPS (N1 = 1, N2 = 3, N3 = 1, M = 60, FVCO = 480 MHz, FPLLO = 160 MHz) |
| HDC43 | 18.0 | 39.75 | mA | +150°C | 3.3V | 70 MIPS (N1 = 1, N2 = 2, N3 = 1, M = 70, FVCO = 560 MHz, FPLLO = 280 MHz) |

**Note 1:** Data in the “Typ.” column are for design guidance only and are not tested.

**2:** Base Idle current ($I_{IDLE}$) is measured as follows:

- Oscillator is switched to EC+PLL mode in software
- OSC1 pin is driven with external 8 MHz square wave with levels from 0.3V to $V_{DD}$ – 0.3V
- OSC2 is configured as an I/O in the Configuration Words (OSCIOFNC (FOSC[2]) = 0)
- FSCM is disabled (FCKSM[1:0] (FOSC[7:6]) = 01)
- Watchdog Timer is disabled (FWDT[15] = 0 and WDTCONL[15] = 0)
- All I/O pins (except OSC1) are configured as outputs and driving low
- No peripheral modules are operating or being clocked (defined PMDx bits are all ‘1’s)
- JTAG is disabled (JTAGEN (FICD[5]) = 0)
- Flash in standby with NVMSIDL (NVMCON[12]) = 1

**TABLE 34-7: POWER-DOWN CURRENT ($I_{PD}$)(2)**

| Operating Conditions: 3.0V to 3.6V (unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Characteristic** | **Typ.(1)** | **Max.** | **Units** | **Conditions** | |
| HDC60 | Base Power-Down Current | 8.9 | 29.2 | mA | +150°C | 3.3V |

**Note 1:** Data in the "Typ." column are for design guidance only and are not tested.

**2:** Base Sleep current ($I_{PD}$) is measured as follows:

- OSC1 pin is driven with external 8 MHz square wave with levels from 0.3V to $V_{DD}$ – 0.3V
- OSC2 is configured as an I/O in the Configuration Words (OSCIOFNC (FOSC[2]) = 0)
- FSCM is disabled (FCKSM[1:0] (FOSC[7:6]) = 01)
- Watchdog Timer is disabled (FWDT[15] = 0 and WDTCONL[15] = 0)
- All I/O pins (except OSC1) are configured as outputs and driving low
- No peripheral modules are operating or being clocked (defined PMDx bits are all '1's)
- JTAG is disabled (JTAGEN (FICD[5]) = 0)
- The regulators are in Standby mode (VREGS (RCON[8]) = 0
- The regulators are in Low-Power mode (LPWREN (VREGCON[15]) = 1

**TABLE 34-8: DOZE CURRENT ($I_{DOZE}$)**

| Operating Conditions: 3.0V to 3.6V (unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.(1)** | **Max.** | **Doze Ratio** | **Units** | **Conditions** | | |
| HDC70 | 23.6 | 43 | 1:2 | mA | +150°C | 3.3V | 70 MIPS (N = 1, N2 = 2, N3 = 1, M = 70, $F_{VCO}$ = 560 MHz, $F_{PLLO}$ = 280 MHz) |
| | 18.5 | 38.7 | 1:128 | mA | | | |

**Note 1:** Data in the "Typ." column are for design guidance only and are not tested.

**TABLE 34-9: WATCHDOG TIMER DELTA CURRENT ($\Delta I_{WDT}$)(1)**

| Operating Conditions: 3.0V to 3.6V (unless otherwise stated)<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | |
|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions** | |
| HDC61 | 24 | 120 | µA | +150°C | 3.3V |

**Note 1:** The $\Delta I_{WDT}$ current is the additional current consumed when the module is enabled. This current should be added to the base $I_{PD}$ current. All parameters are characterized but not tested during manufacturing.


© 2017-2021 Microchip Technology Inc.

**TABLE 34-10: PWM DELTA CURRENT(1)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions** | | |
| HDC100 | 5.48 | 7.0 | mA | +150°C | 3.3V | PWM Output Frequency = 500 kHz, PWM Input (AFPLLO = 500 MHz) (AVCO = 1000 MHz, PLLFBD = 125, APLLDIV1 = 2) |
| HDC101 | 4.44 | 5.7 | mA | +150°C | 3.3V | PWM Output Frequency = 500 kHz, PWM Input (AFPLLO = 400 MHz), (AVCO = 400 MHz, PLLFBD = 50, APLLDIV1 = 1) |
| HDC102 | 2.31 | 3.7 | mA | +150°C | 3.3V | PWM Output Frequency = 500 kHz, PWM Input (AFPLLO = 200 MHz), (AVCO = 400 MHz, PLLFBD = 50, APLLDIV1 = 2) |
| HDC103 | 1.22 | 2.3 | mA | +150°C | 3.3V | PWM Output Frequency = 500 kHz, PWM Input (AFPLLO = 100 MHz), (AVCO = 400 MHz, PLLFBD = 50, APLLDIV1 = 4) |

**Note 1:** APLL current is not included. The APLL current will be the same if more than one PWM is running. Listed delta currents are for only one PWM instance when HREN = 0 (PGxCONL[7]). All parameters are characterized but not tested during manufacturing.

**TABLE 34-11: APLL DELTA CURRENT**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions(1)** | | |
| HDC110 | 7.04 | 9.3 | mA | +150°C | 3.3V | AFPLLO = 500 MHz (AVCO = 1000 MHz, PLLFBD = 125, APLLDIV1 = 2) |
| HDC111 | 3.78 | 5.8 | mA | +150°C | 3.3V | AFPLLO = 400 MHz (AVCO = 400 MHz, PLLFBD = 50, APLLDIV1 = 1) |
| HDC112 | 2.49 | 4.5 | mA | +150°C | 3.3V | AFPLLO = 200 MHz (AVCO = 400 MHz, PLLFBD = 50, APLLDIV1 = 2) |
| HDC113 | 1.83 | 3.6 | mA | +150°C | 3.3V | AFPLLO = 100 MHz (AVCO = 400 MHz, PLLFBD = 50, APLLDIV1 = 4) |

**Note 1:** The APLL current will be the same if more than one PWM or DAC is run to the APLL clock. All parameters are characterized but not tested during manufacturing.

**TABLE 34-12: ADC DELTA CURRENT(1)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions** | | |
| HDC120 | 3.76 | 6.8 | mA | +150°C | 3.3V | TAD = 14.3 ns<br>(3.5 Msps conversion rate) |

**Note 1:** Shared core continuous conversion. TAD = 14.3 nS (3.5 Msps conversion rate). Listed delta currents are for only one ADC core. All parameters are characterized but not tested during manufacturing.

**TABLE 34-13: COMPARATOR + DAC DELTA CURRENT**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | |
|---|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions** | | |
| HDC130 | 1.25 | 1.65 | mA | +150°C | 3.3V | AFPLLO @ 500 MHz(1) |

**Note 1:** APLL current is not included. Listed delta currents are for only one comparator + DAC instance. All parameters are characterized but not tested during manufacturing.

**TABLE 34-14: OP AMP DELTA CURRENT(1)**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | |
|---|---|---|---|---|---|
| **Parameter No.** | **Typ.** | **Max.** | **Units** | **Conditions** | |
| HDC140 | 0.58 | 2.3 | mA | +150°C | 3.3V |

**Note 1:** Listed delta currents are for only one op amp instance. All parameters are characterized but not tested during manufacturing.


© 2017-2021 Microchip Technology Inc.

**TABLE 34-15: I/O PIN INPUT SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.(4)** | **Typ.(1)** | **Max.(5)** | **Units** | **Conditions** |
| HDI50 | IIL | **Input Leakage Current(2)** | | | | | |
| | | I/O Pins 5V Tolerant(3) | -1500 | — | 1500 | nA | |
| | | I/O Pins Not 5V Tolerant(3) | -700 | — | 700 | nA | |
| | | $\overline{MCLR}$ | -1500 | — | 1500 | nA | |
| | | OSCI | -750 | — | 750 | nA | XT and HS modes |

**Note 1:** Data in the "Typ." column are at 3.3V, +25°C unless otherwise stated.
**2:** Negative current is defined as current sourced by the pin.
**3:** See the **"Pin Diagrams"** section for the 5V tolerant I/O pins.
**4:** VPIN = VSS.
**5:** VPIN = VDD.

**TABLE 34-16: INTERNAL FRC ACCURACY**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | |
|---|---|---|---|---|---|
| **Param No.** | **Characteristic** | **Min.** | **Max.** | **Units** | **Conditions** |
| **Internal FRC Accuracy @ FRC Frequency = 8 MHz(1)** | | | | | |
| F20a | FRC | -3 | +3 | % | -40°C ≤ TA ≤ +150°C |

**Note 1:** Frequency is calibrated at +25°C and 3.3V.

**TABLE 34-17: INTERNAL LPRC ACCURACY**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | |
|---|---|---|---|---|---|
| **Param No.** | **Characteristic** | **Min.** | **Max.** | **Units** | **Conditions** |
| **LPRC @ 32 kHz** | | | | | |
| F21 | LPRC | -27 | +27 | % | -40°C ≤ TA ≤ +150°C |

**TABLE 34-18: DACx MODULE SPECIFICATIONS**

| **Operating Conditions: 3.0V to 3.6V (unless otherwise stated)**<br>Operating temperature -40°C ≤ TA ≤ +150°C | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Param No.** | **Symbol** | **Characteristic** | **Min.** | **Typ.(1)** | **Max.** | **Units** | **Comments** |
| HDA03 | INL | Integral Nonlinearity Error | -45 | — | 0 | LSB | |

**Note 1:** Parameters are for design guidance only and are not tested in manufacturing.

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## 35.0 PACKAGING INFORMATION

### 35.1 Package Marking Information

28-Lead SSOP (5.30 mm)

Example




28-Lead UQFN (6x6 mm)




Example

36-Lead UQFN (5x5 mm)




Example

48-Lead TQFP (7x7 mm)




Example




| | | |
|---|---|---|
| **Legend:** | XX...X | Customer-specific information |
| | Y | Year code (last digit of calendar year) |
| | YY | Year code (last 2 digits of calendar year) |
| | WW | Week code (week of January 1 is week ‘01’) |
| | NNN | Alphanumeric traceability code |

**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

### 35.1 Package Marking Information (Continued)

48-Lead UQFN (6x6 mm)




Example

64-Lead TQFP (10x10x1 mm)




Example




64-Lead QFN (9x9x0.9 mm)




Example

80-Lead TQFP (12x12x1 mm)




Example





© 2017-2021 Microchip Technology Inc.

## 35.2 Package Details

### 28-Lead Plastic Shrink Small Outline (SS) - 5.30 mm Body [SSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

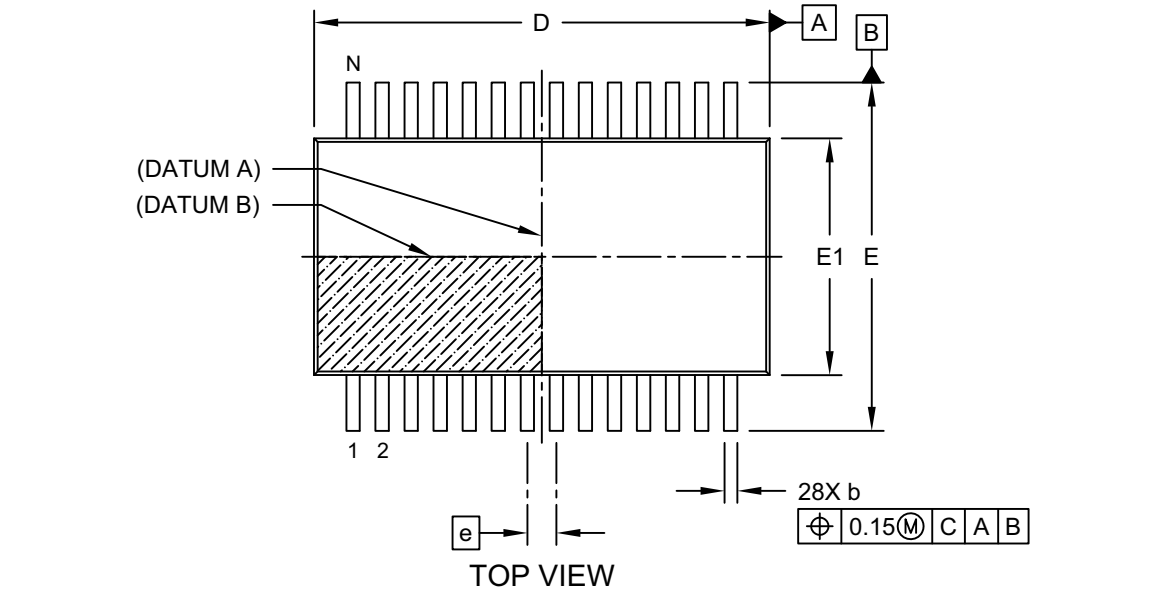


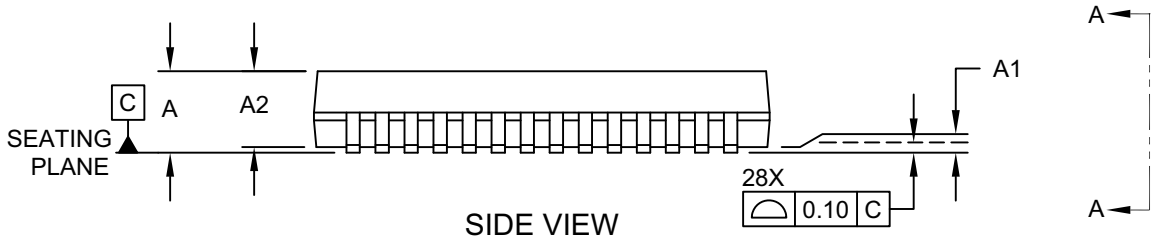


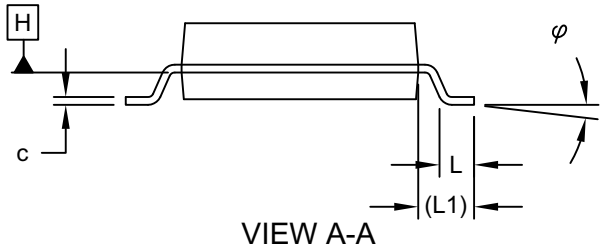


Microchip Technology Drawing C04-073 Rev C Sheet 1 of 2

### 28-Lead Plastic Shrink Small Outline (SS) - 5.30 mm Body [SSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

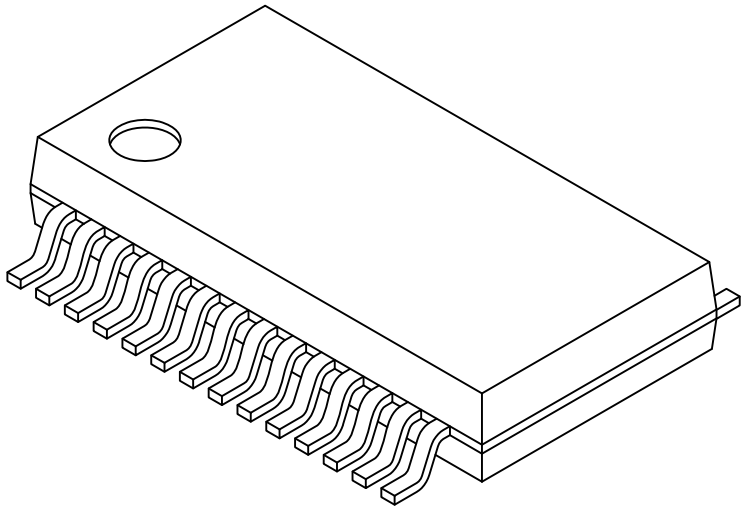

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Pins | N | | 28 | |
| Pitch | e | | 0.65 BSC | |
| Overall Height | A | - | - | 2.00 |
| Molded Package Thickness | A2 | 1.65 | 1.75 | 1.85 |
| Standoff | A1 | 0.05 | - | - |
| Overall Width | E | 7.40 | 7.80 | 8.20 |
| Molded Package Width | E1 | 5.00 | 5.30 | 5.60 |
| Overall Length | D | 9.90 | 10.20 | 10.50 |
| Foot Length | L | 0.55 | 0.75 | 0.95 |
| Footprint | L1 | | 1.25 REF | |
| Lead Thickness | c | 0.09 | - | 0.25 |
| Foot Angle | φ | 0° | 4° | 8° |
| Lead Width | b | 0.22 | - | 0.38 |

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.20mm per side.
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-073 Rev C Sheet 2 of 2


© 2017-2021 Microchip Technology Inc.

## 28-Lead Plastic Shrink Small Outline (SS) - 5.30 mm Body [SSOP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

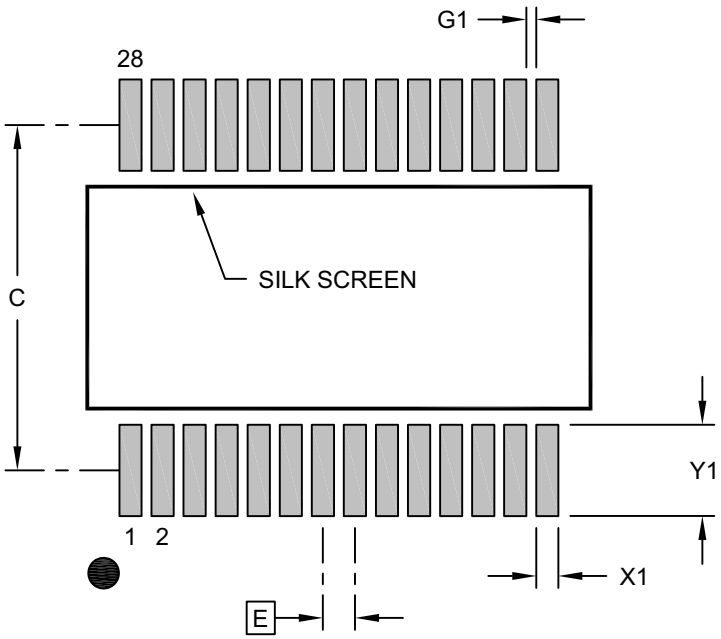


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | 0.65 BSC | | |
| Contact Pad Spacing | C | | 7.00 | |
| Contact Pad Width (X28) | X1 | | | 0.45 |
| Contact Pad Length (X28) | Y1 | | | 1.85 |
| Contact Pad to Center Pad (X26) | G1 | 0.20 | | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2073 Rev B

**28-Lead Ultra Thin Plastic Quad Flat, No Lead Package (2N) - 6x6x0.55 mm Body [UQFN] With 4.65x4.65 mm Exposed Pad and Corner Anchors**

| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |
|---|---|

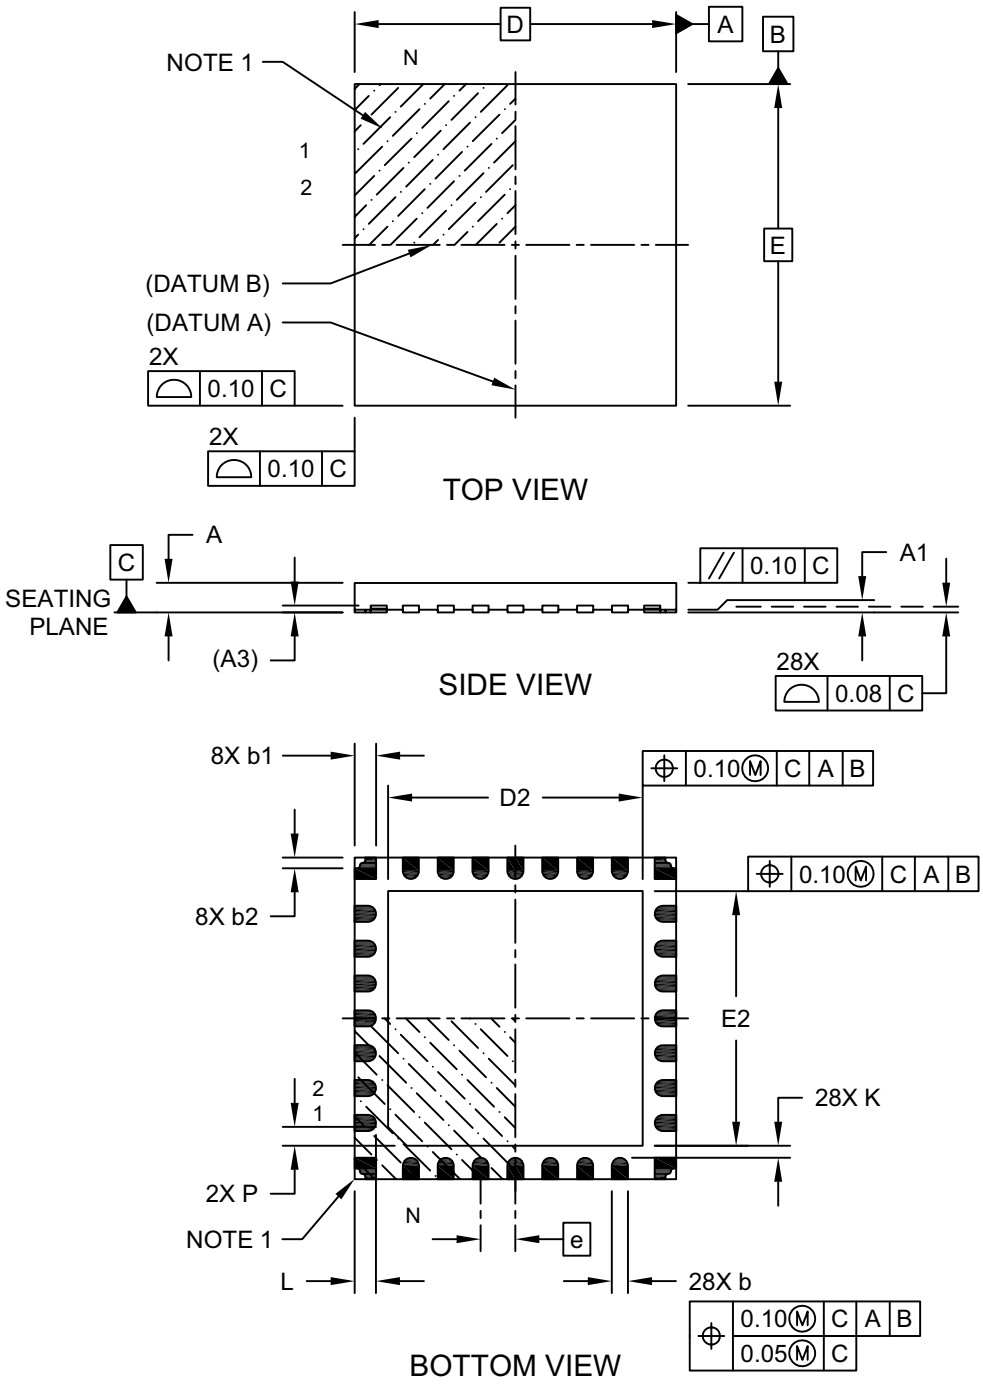


Microchip Technology Drawing C04-385 Rev C Sheet 1 of 2


© 2017-2021 Microchip Technology Inc.

**28-Lead Ultra Thin Plastic Quad Flat, No Lead Package (2N) - 6x6x0.55 mm Body [UQFN] With 4.65x4.65 mm Exposed Pad and Corner Anchors**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

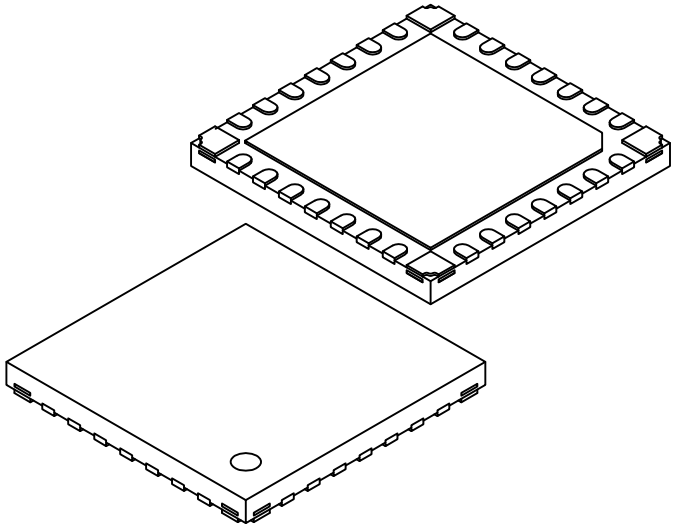

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Terminals | N | | 28 | |
| Pitch | e | | 0.65 BSC | |
| Overall Height | A | 0.45 | 0.50 | 0.55 |
| Standoff | A1 | 0.00 | 0.02 | 0.05 |
| Terminal Thickness | A3 | | 0.127 REF | |
| Overall Width | E | | 6.00 BSC | |
| Exposed Pad Width | E2 | 4.55 | 4.65 | 4.75 |
| Overall Length | D | | 6.00 BSC | |
| Exposed Pad Length | D2 | 4.55 | 4.65 | 4.75 |
| Exposed Pad Corner Chamfer | P | - | 0.35 | - |
| Terminal Width | b | 0.25 | 0.30 | 0.35 |
| Corner Anchor Pad | b1 | 0.35 | 0.40 | 0.43 |
| Corner Pad, Metal Free Zone | b2 | 0.15 | 0.20 | 0.25 |
| Terminal Length | L | 0.30 | 0.40 | 0.50 |
| Terminal-to-Exposed-Pad | K | 0.20 | - | - |

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-385 Rev C Sheet 2 of 2

**28-Lead Ultra Thin Plastic Quad Flat, No Lead Package (2N) - 6x6x0.55 mm Body [UQFN] With 4.65x4.65 mm Exposed Pad and Corner Anchors**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

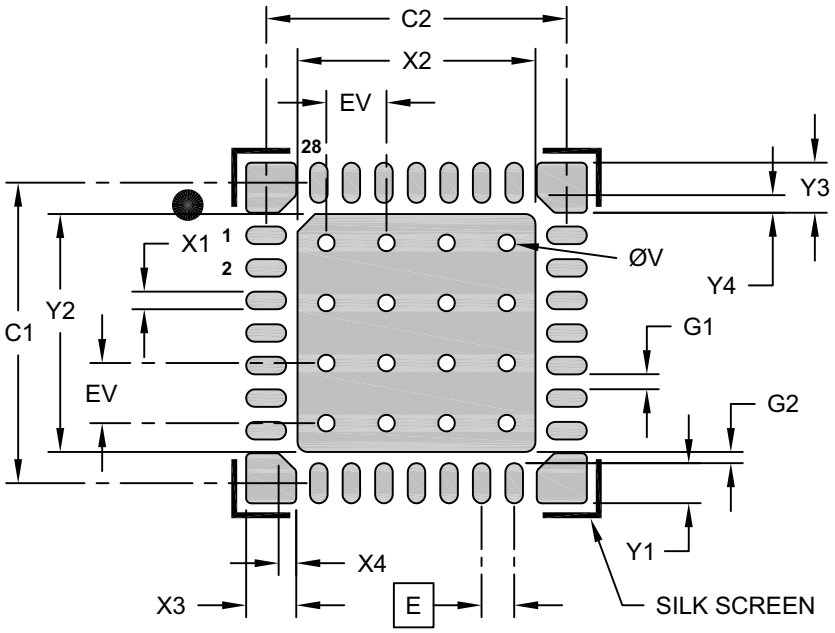


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | | 0.65 BSC | |
| Optional Center Pad Width | X2 | | | 4.75 |
| Optional Center Pad Length | Y2 | | | 4.75 |
| Contact Pad Spacing | C1 | | 6.00 | |
| Contact Pad Spacing | C2 | | 6.00 | |
| Contact Pad Width (X28) | X1 | | | 0.35 |
| Contact Pad Length (X28) | Y1 | | | 0.80 |
| Corner Anchor (X4) | X3 | | | 1.00 |
| Corner Anchor (X4) | Y3 | | | 1.00 |
| Corner Anchor Chamfer (X4) | X4 | | | 0.35 |
| Corner Anchor Chamfer (X4) | Y4 | | | 0.35 |
| Contact Pad to Pad (X28) | G1 | 0.20 | | |
| Contact Pad to Center Pad (X28) | G2 | 0.20 | | |
| Thermal Via Diameter | V | | 0.33 | |
| Thermal Via Pitch | EV | | 1.20 | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2385B


© 2017-2021 Microchip Technology Inc.

**36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M5) - 5x5 mm Body [UQFN] With Corner Anchors**

| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |
|---|---|

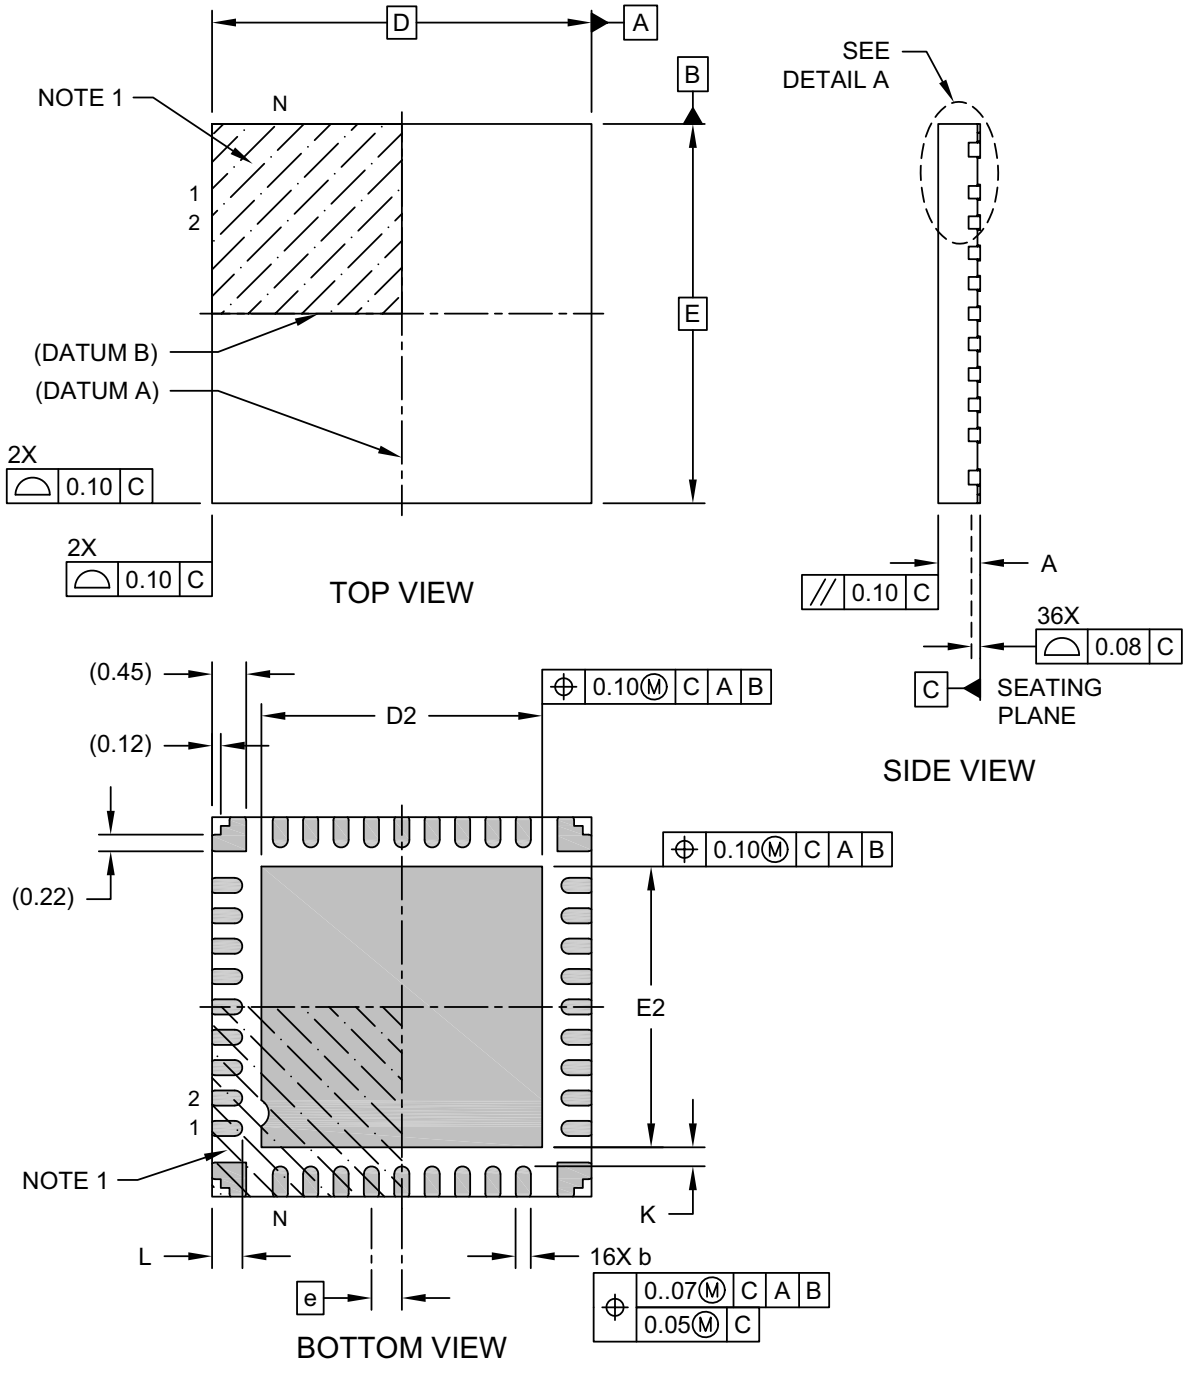


Microchip Technology Drawing C04-436–M5 Rev D Sheet 1 of 2

### 36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M5) - 5x5 mm Body [UQFN] With Corner Anchors

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

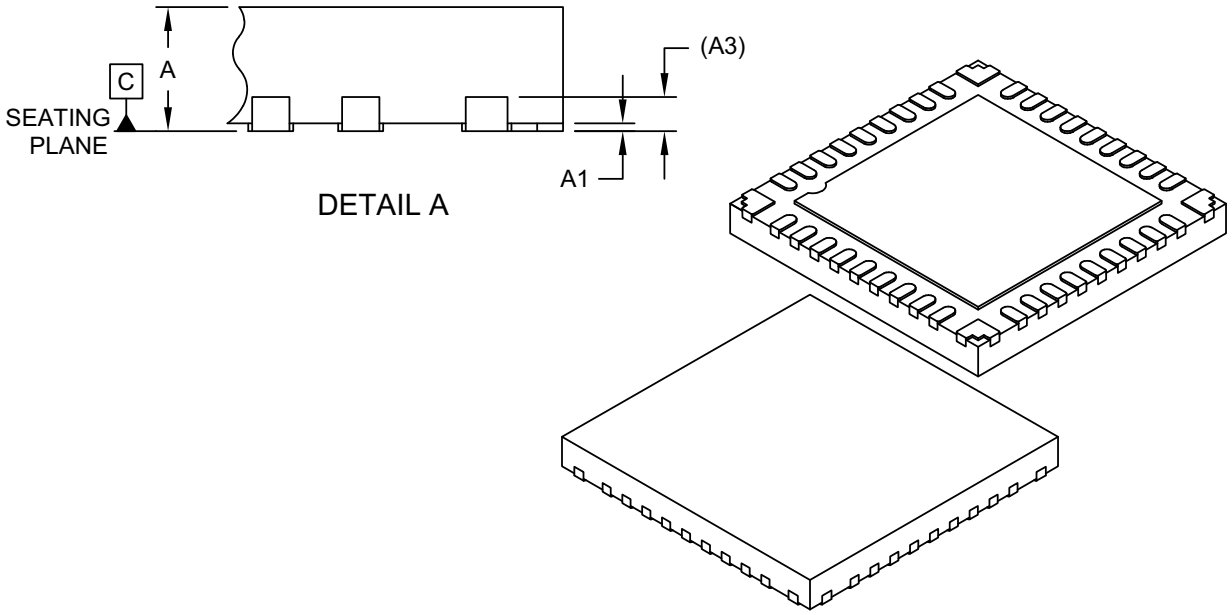


| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Terminals | N | | 36 | |
| Pitch | e | | 0.40 BSC | |
| Overall Height | A | 0.50 | 0.55 | 0.60 |
| Standoff | A1 | 0.00 | 0.02 | 0.05 |
| Terminal Thickness | A3 | | 0.152 REF | |
| Overall Length | D | | 5.00 BSC | |
| Exposed Pad Length | D2 | 3.60 | 3.70 | 3.80 |
| Overall Width | E | | 5.00 BSC | |
| Exposed Pad Width | E2 | 3.60 | 3.70 | 3.80 |
| Terminal Width | b | 0.15 | 0.20 | 0.25 |
| Terminal Length | L | 0.30 | 0.40 | 0.50 |
| Terminal-to-Exposed-Pad | K | | 0.25 REF | |

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-436–M5 Rev D Sheet 2 of 2


© 2017-2021 Microchip Technology Inc.

## 36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M5) - 5x5 mm Body [UQFN] With Corner Anchors

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

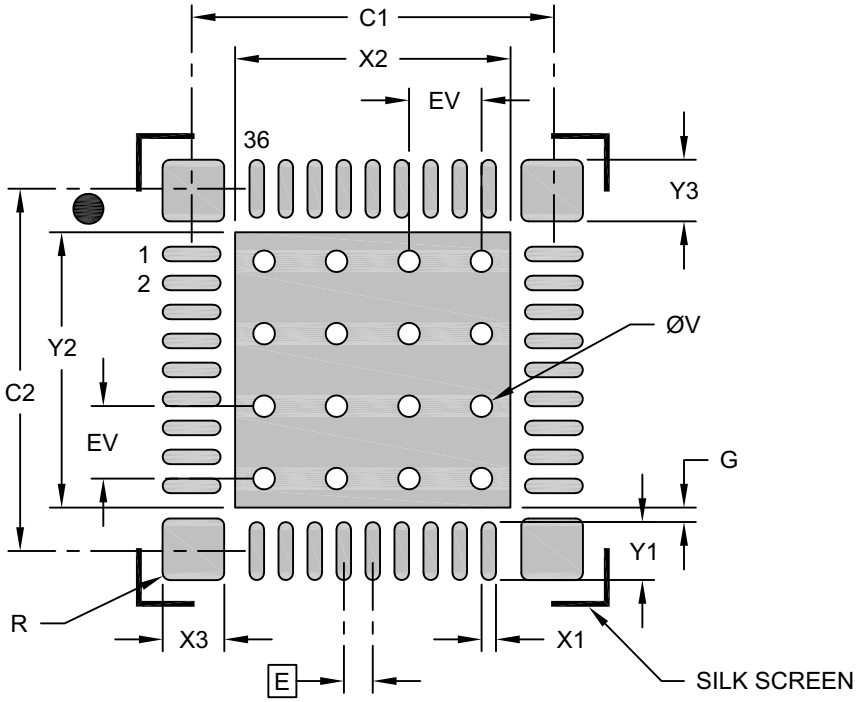


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | 0.40 BSC | | |
| Center Pad Width | X2 | | | 3.80 |
| Center Pad Length | Y2 | | | 3.80 |
| Contact Pad Spacing | C1 | | 5.00 | |
| Contact Pad Spacing | C2 | | 5.00 | |
| Contact Pad Width (X36) | X1 | | | 0.20 |
| Contact Pad Length (X36 | Y1 | | | 0.80 |
| Corner Pad Width (X4) | X3 | | | 0.85 |
| Corner Pad Length (X4) | Y3 | | | 0.85 |
| Corner Pad Radius | R | | 0.10 | |
| Contact Pad to Center Pad (X36) | G | 0.20 | | |
| Thermal Via Diameter | V | | 0.30 | |
| Thermal Via Pitch | EV | | 1.00 | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2436–M5 Rev D

### 48-Lead Plastic Thin Quad Flatpack (PT) - 7x7x1.0 mm Body [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

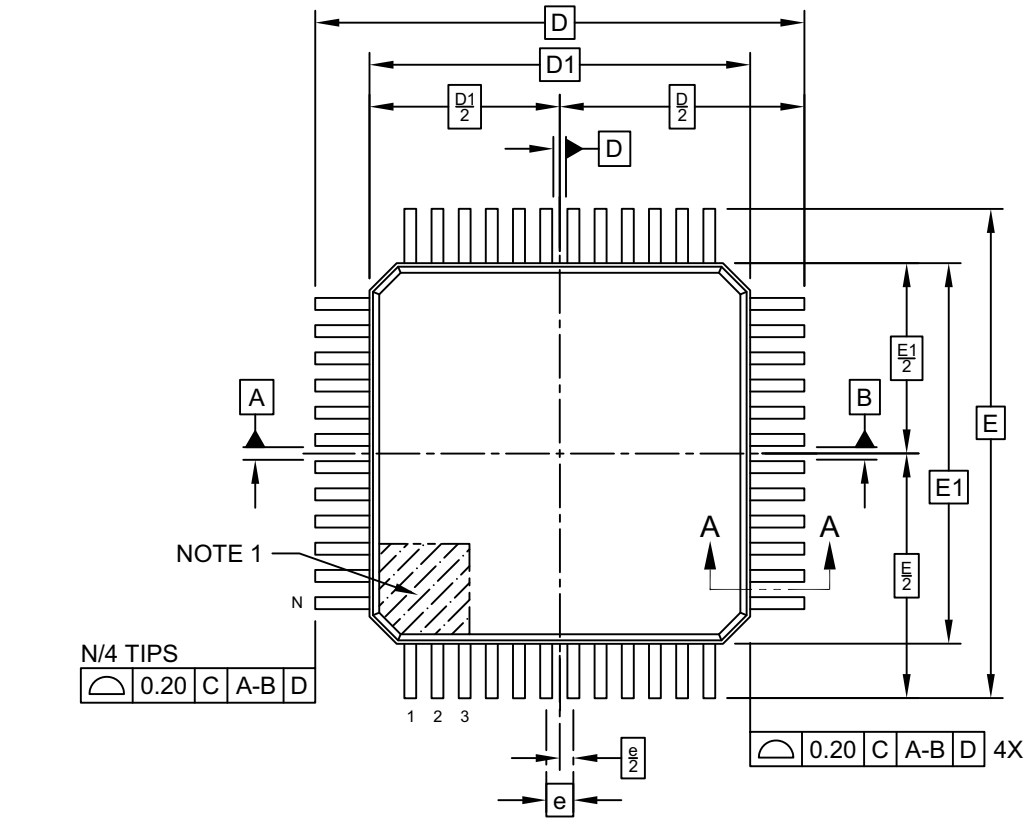


TOP VIEW

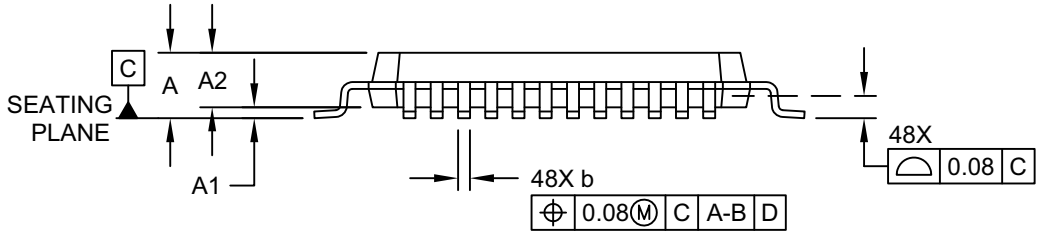


SIDE VIEW

Microchip Technology Drawing C04-300-PT Rev D Sheet 1 of 2


© 2017-2021 Microchip Technology Inc.

## 48-Lead Plastic Thin Quad Flatpack (PT) - 7x7x1.0 mm Body [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

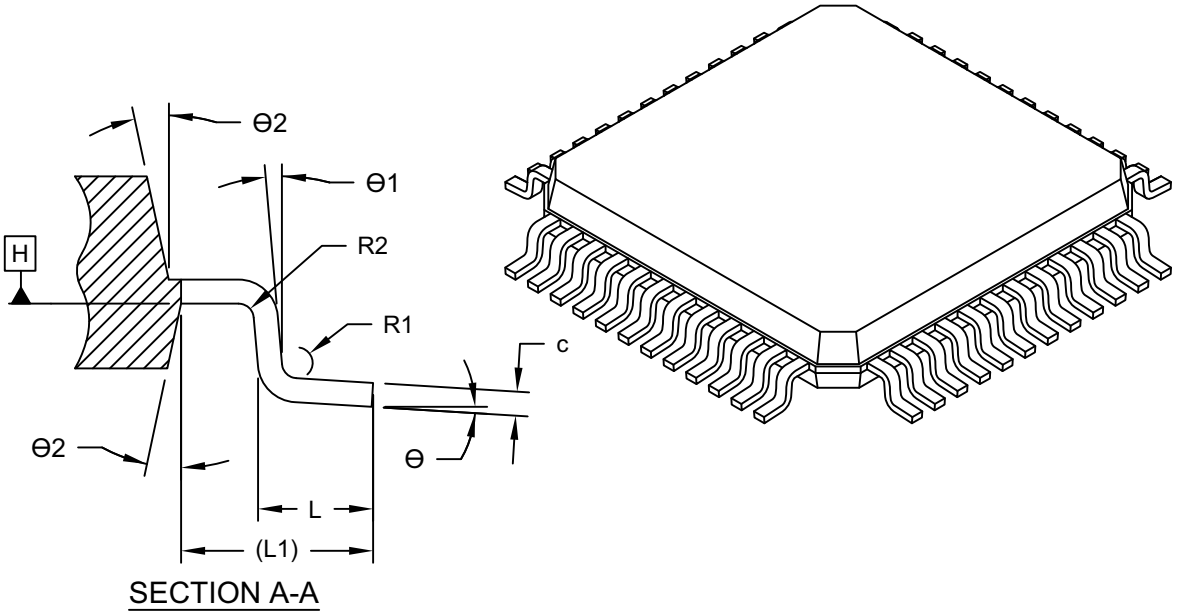


SECTION A-A

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Terminals | N | | 48 | |
| Pitch | e | | 0.50 BSC | |
| Overall Height | A | - | - | 1.20 |
| Standoff | A1 | 0.05 | - | 0.15 |
| Molded Package Thickness | A2 | 0.95 | 1.00 | 1.05 |
| Overall Length | D | | 9.00 BSC | |
| Molded Package Length | D1 | | 7.00 BSC | |
| Overall Width | E | | 9.00 BSC | |
| Molded Package Width | E1 | | 7.00 BSC | |
| Terminal Width | b | 0.17 | 0.22 | 0.27 |
| Terminal Thickness | c | 0.09 | - | 0.16 |
| Terminal Length | L | 0.45 | 0.60 | 0.75 |
| Footprint | L1 | | 1.00 REF | |
| Lead Bend Radius | R1 | 0.08 | - | - |
| Lead Bend Radius | R2 | 0.08 | - | 0.20 |
| Foot Angle | Θ | 0° | 3.5° | 7° |
| Lead Angle | Θ1 | 0° | - | - |
| Mold Draft Angle | Θ2 | 11° | 12° | 13° |

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-300-PT Rev D Sheet 2 of 2

### 48-Lead Plastic Thin Quad Flatpack (PT) - 7x7x1.0 mm Body [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

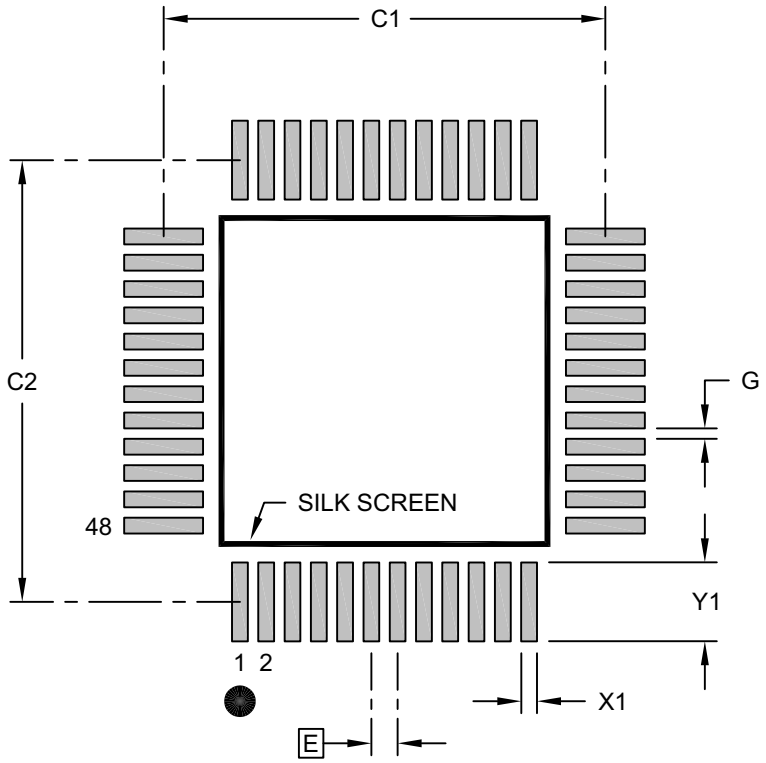


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | | 0.50 BSC | |
| Contact Pad Spacing | C1 | | 8.40 | |
| Contact Pad Spacing | C2 | | 8.40 | |
| Contact Pad Width (X48) | X1 | | | 0.30 |
| Contact Pad Length (X48) | Y1 | | | 1.50 |
| Distance Between Pads | G | 0.20 | | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
   BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2300-PT Rev D


© 2017-2021 Microchip Technology Inc.

**48-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M4) - 6x6 mm Body [UQFN] With Corner Anchors and 4.6x4.6 mm Exposed Pad**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

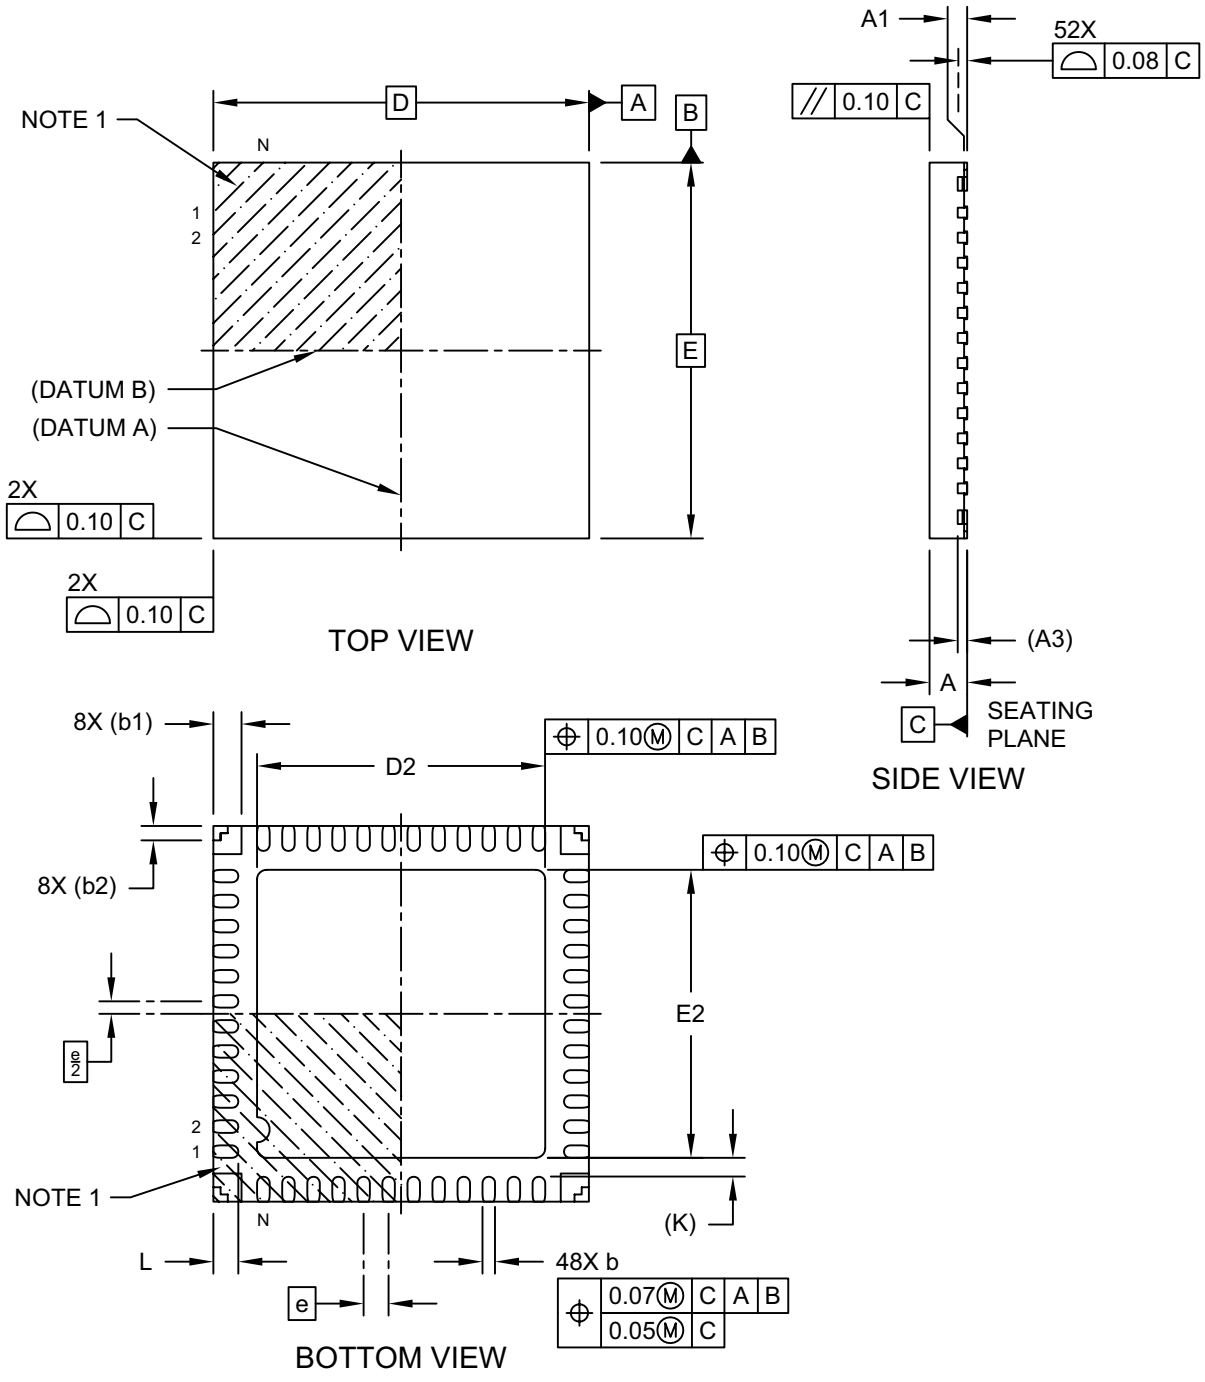


Microchip Technology Drawing C04-442A-M4 Sheet 1 of 2

## 48-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M4) - 6x6 mm Body [UQFN] With Corner Anchors and 4.6x4.6 mm Exposed Pad

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

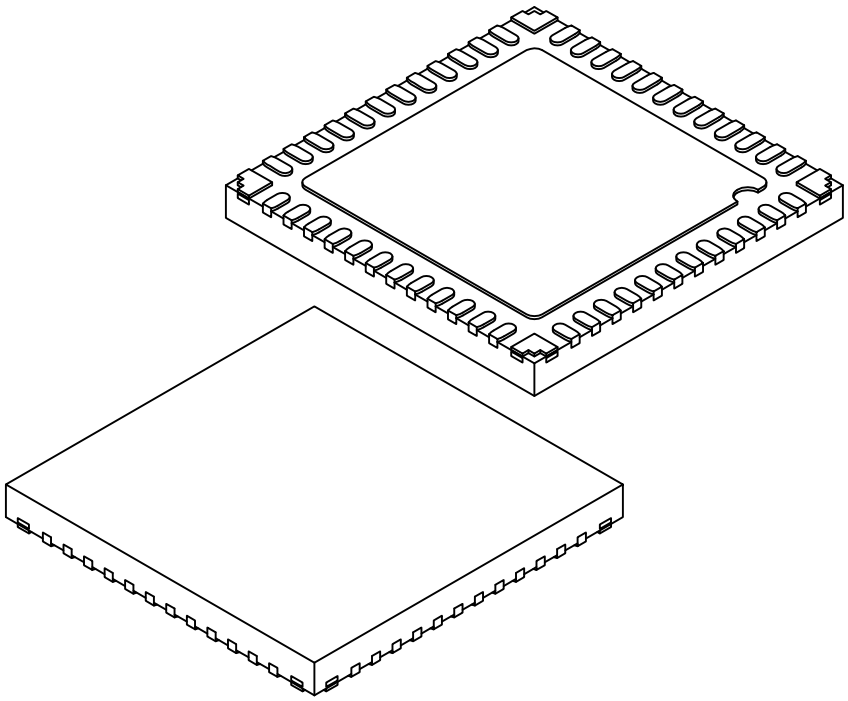

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Terminals | N | | 48 | |
| Pitch | e | | 0.40 BSC | |
| Overall Height | A | 0.50 | 0.55 | 0.60 |
| Standoff | A1 | 0.00 | 0.02 | 0.05 |
| Terminal Thickness | A3 | | 0.15 REF | |
| Overall Length | D | | 6.00 BSC | |
| Exposed Pad Length | D2 | 4.50 | 4.60 | 4.70 |
| Overall Width | E | | 6.00 BSC | |
| Exposed Pad Width | E2 | 4.50 | 4.60 | 4.70 |
| Terminal Width | b | 0.15 | 0.20 | 0.25 |
| Corner Anchor Pad | b1 | | 0.45 REF | |
| Corner Anchor Pad, Metal-free Zone | b2 | | 0.23 REF | |
| Terminal Length | L | 0.35 | 0.40 | 0.45 |
| Terminal-to-Exposed-Pad | K | | 0.30 REF | |

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-442A-M4 Sheet 2 of 2


© 2017-2021 Microchip Technology Inc.

## 48-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M4) - 6x6 mm Body [UQFN] With Corner Anchors and 4.6x4.6 mm Exposed Pad

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

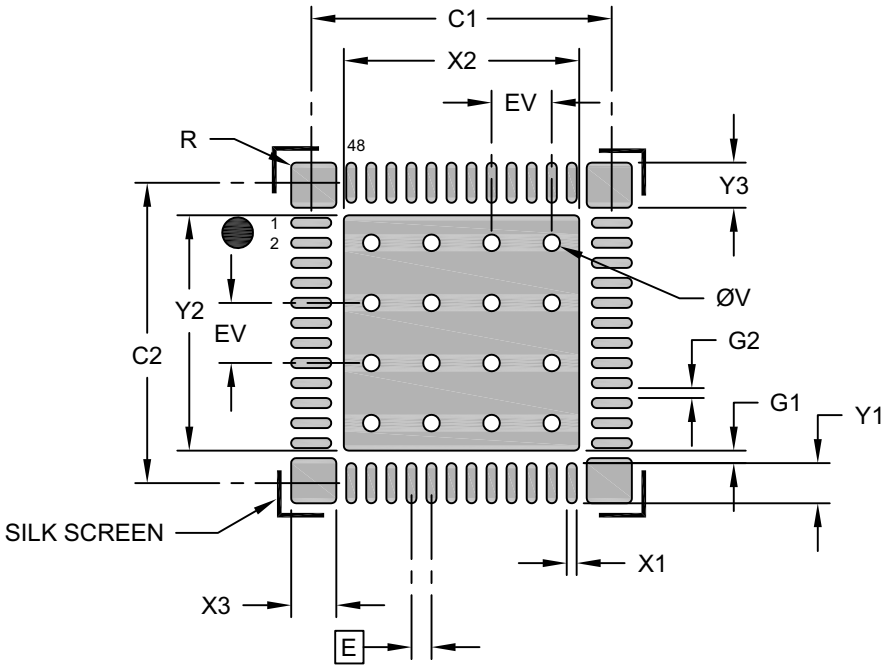


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | 0.40 BSC | | |
| Center Pad Width | X2 | | | 4.70 |
| Center Pad Length | Y2 | | | 4.70 |
| Contact Pad Spacing | C1 | | 6.00 | |
| Contact Pad Spacing | C2 | | 6.00 | |
| Contact Pad Width (X48) | X1 | | | 0.20 |
| Contact Pad Length (X48) | Y1 | | | 0.80 |
| Corner Anchor Pad Width (X4) | X3 | | | 0.90 |
| Corner Anchor Pad Length (X4) | Y3 | | | 0.90 |
| Pad Corner Radius (X 20) | R | | | 0.10 |
| Contact Pad to Center Pad (X48) | G1 | 0.25 | | |
| Contact Pad to Contact Pad | G2 | 0.20 | | |
| Thermal Via Diameter | V | | 0.33 | |
| Thermal Via Pitch | EV | | 1.20 | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2442A-M4

**64-Lead Plastic Thin Quad Flatpack (PT)-10x10x1 mm Body, 2.00 mm Footprint [TQFP]**

| | |
|---|---|
| **Note:** | For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging |

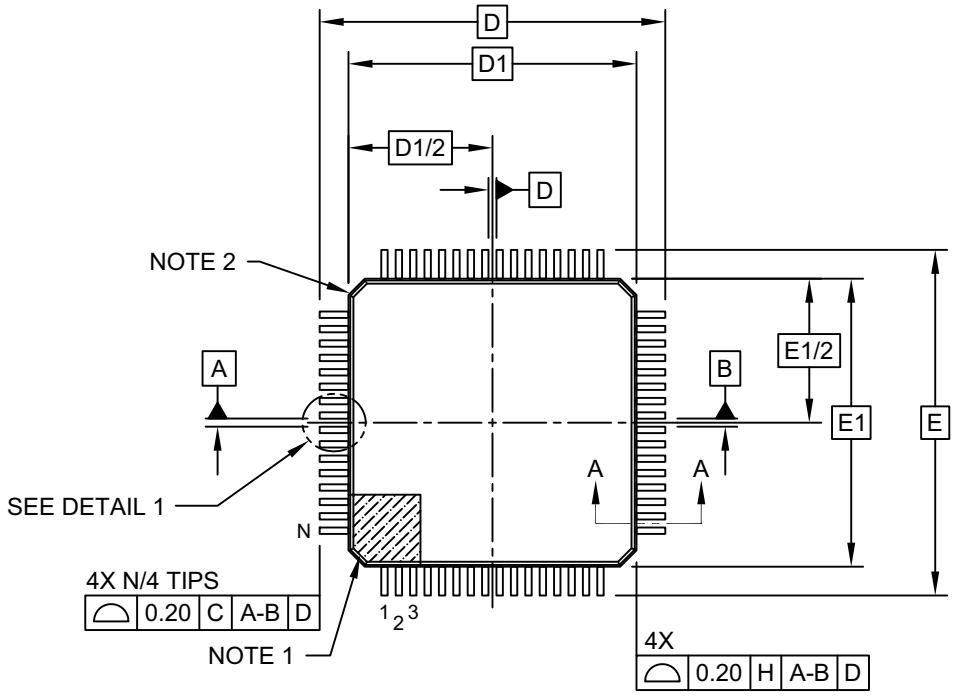


TOP VIEW

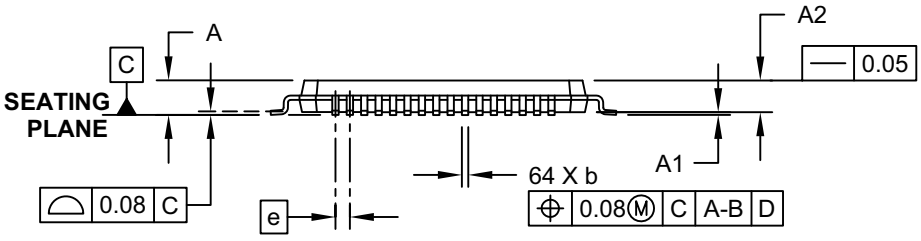


SIDE VIEW

Microchip Technology Drawing C04-085C Sheet 1 of 2


© 2017-2021 Microchip Technology Inc.

### 64-Lead Plastic Thin Quad Flatpack (PT)-10x10x1 mm Body, 2.00 mm Footprint [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

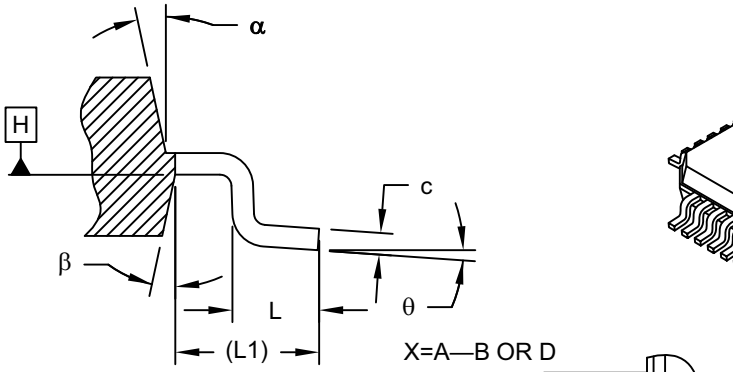


SECTION A-A

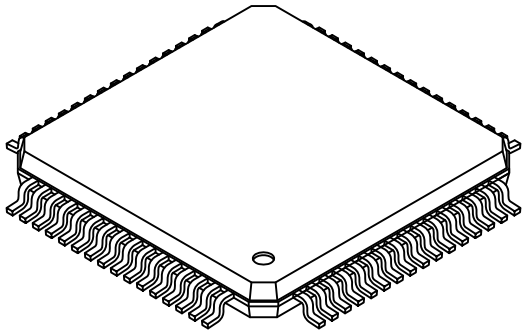




DETAIL 1

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Leads | N | | 64 | |
| Lead Pitch | e | | 0.50 BSC | |
| Overall Height | A | - | - | 1.20 |
| Molded Package Thickness | A2 | 0.95 | 1.00 | 1.05 |
| Standoff | A1 | 0.05 | - | 0.15 |
| Foot Length | L | 0.45 | 0.60 | 0.75 |
| Footprint | L1 | | 1.00 REF | |
| Foot Angle | ϕ | 0° | 3.5° | 7° |
| Overall Width | E | | 12.00 BSC | |
| Overall Length | D | | 12.00 BSC | |
| Molded Package Width | E1 | | 10.00 BSC | |
| Molded Package Length | D1 | | 10.00 BSC | |
| Lead Thickness | c | 0.09 | - | 0.20 |
| Lead Width | b | 0.17 | 0.22 | 0.27 |
| Mold Draft Angle Top | α | 11° | 12° | 13° |
| Mold Draft Angle Bottom | β | 11° | 12° | 13° |

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Chamfers at corners are optional; size may vary.
3. Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25mm per side.
4. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-085C Sheet 2 of 2

### 64-Lead Plastic Thin Quad Flatpack (PT)-10x10x1 mm Body, 2.00 mm Footprint [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

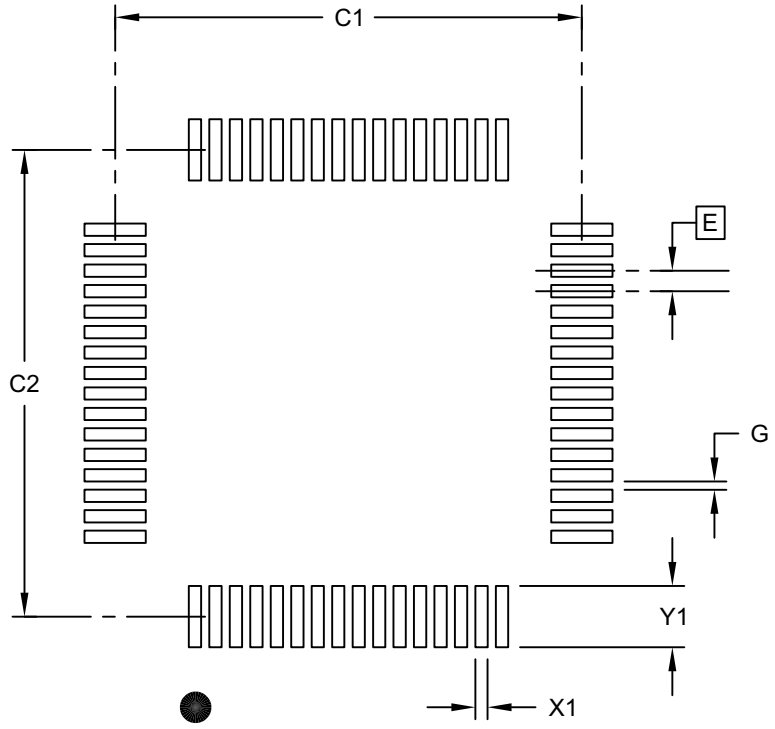


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | | 0.50 BSC | |
| Contact Pad Spacing | C1 | | 11.40 | |
| Contact Pad Spacing | C2 | | 11.40 | |
| Contact Pad Width (X28) | X1 | | | 0.30 |
| Contact Pad Length (X28) | Y1 | | | 1.50 |
| Distance Between Pads | G | 0.20 | | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing C04-2085B Sheet 1 of 1


© 2017-2021 Microchip Technology Inc.

**64-Lead Plastic Quad Flat, No Lead Package (MR) – 9x9x0.9 mm Body with 5.40 x 5.40 Exposed Pad [QFN]**

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

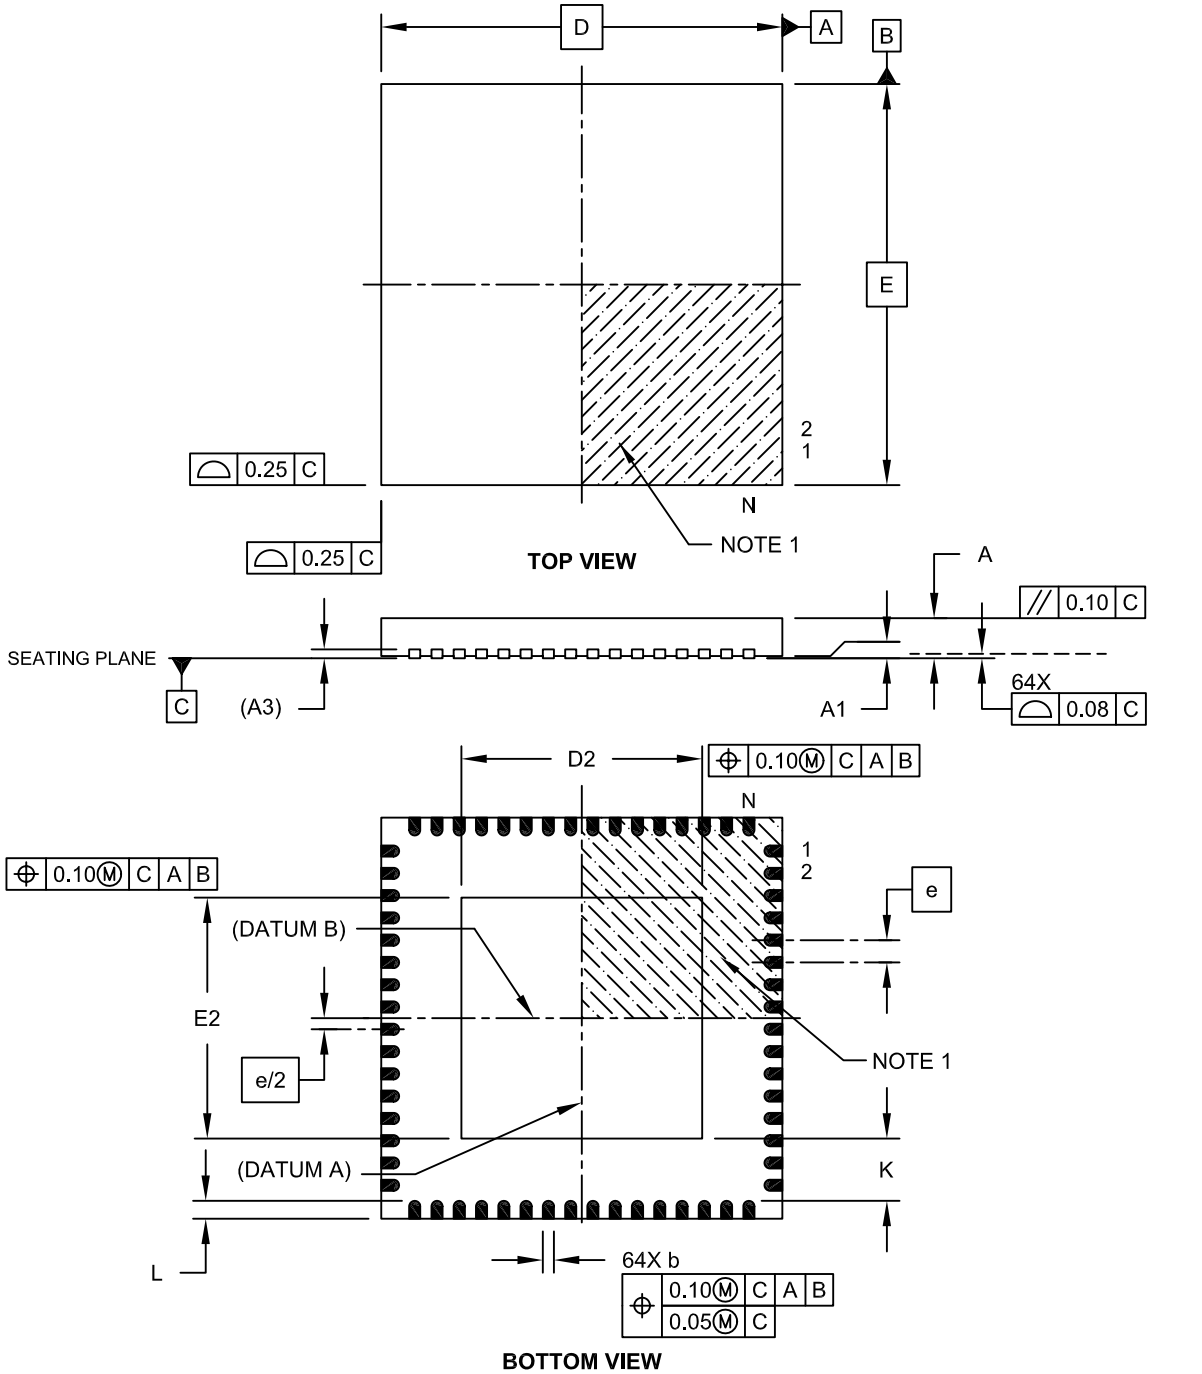


Microchip Technology Drawing C04-154A Sheet 1 of 2

### 64-Lead Plastic Quad Flat, No Lead Package (MR) – 9x9x0.9 mm Body with 5.40 x 5.40 Exposed Pad [QFN]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

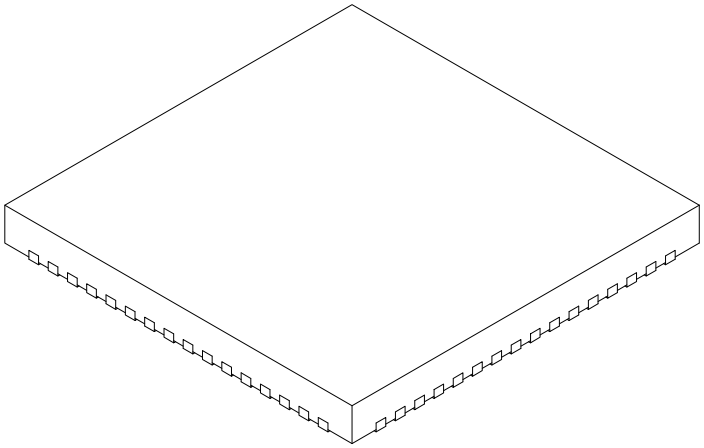

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Pins | N | | 64 | |
| Pitch | e | | 0.50 BSC | |
| Overall Height | A | 0.80 | 0.90 | 1.00 |
| Standoff | A1 | 0.00 | 0.02 | 0.05 |
| Contact Thickness | A3 | | 0.20 REF | |
| Overall Width | E | | 9.00 BSC | |
| Exposed Pad Width | E2 | 5.30 | 5.40 | 5.50 |
| Overall Length | D | | 9.00 BSC | |
| Exposed Pad Length | D2 | 5.30 | 5.40 | 5.50 |
| Contact Width | b | 0.20 | 0.25 | 0.30 |
| Contact Length | L | 0.30 | 0.40 | 0.50 |
| Contact-to-Exposed Pad | K | 0.20 | - | - |

**Notes:**

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated.
3. Dimensioning and tolerancing per ASME Y14.5M.

   BSC: Basic Dimension. Theoretically exact value shown without tolerances.

   REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-154A Sheet 2 of 2


© 2017-2021 Microchip Technology Inc.

64-Lead Plastic Quad Flat, No Lead Package (MR) – 9x9x0.9 mm Body [QFN]
With 0.40 mm Contact Length and 5.40x5.40mm Exposed Pad

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

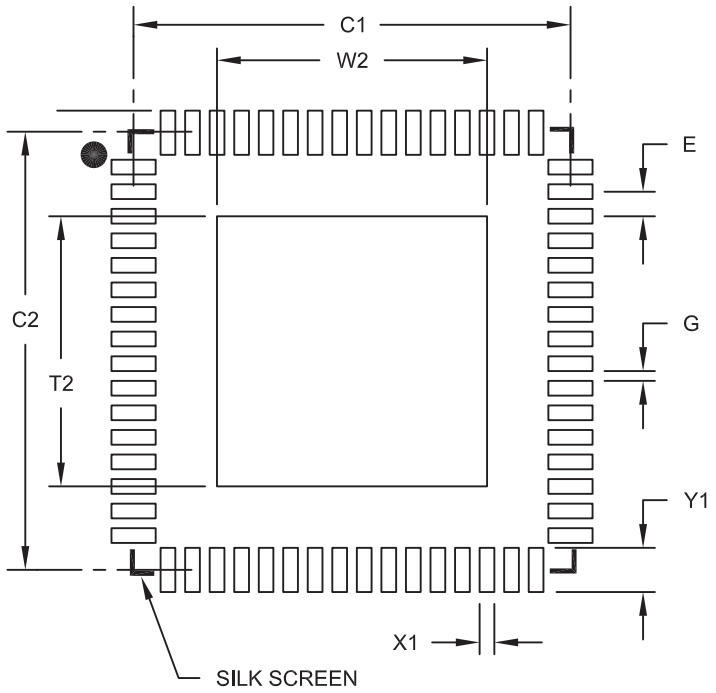


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | 0.50 BSC | | |
| Optional Center Pad Width | W2 | | | 5.50 |
| Optional Center Pad Length | T2 | | | 5.50 |
| Contact Pad Spacing | C1 | | 8.90 | |
| Contact Pad Spacing | C2 | | 8.90 | |
| Contact Pad Width (X64) | X1 | | | 0.30 |
| Contact Pad Length (X64) | Y1 | | | 0.85 |
| Distance Between Pads | G | 0.20 | | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2154A

### 80-Lead Plastic Thin Quad Flatpack (PT) – 12x12x1 mm Body, 2.00 mm [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

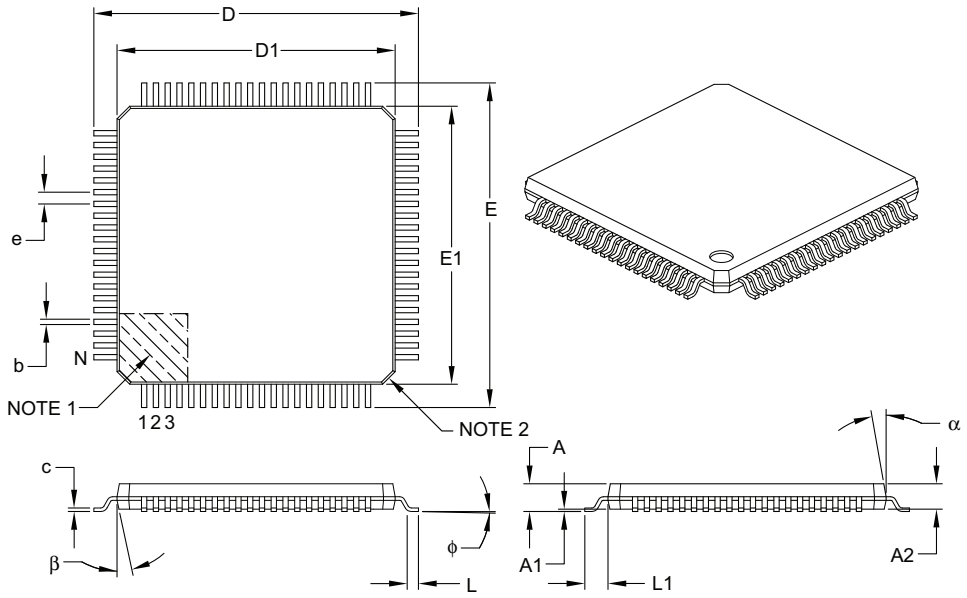


| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Leads | N | | 80 | |
| Lead Pitch | e | | 0.50 BSC | |
| Overall Height | A | – | – | 1.20 |
| Molded Package Thickness | A2 | 0.95 | 1.00 | 1.05 |
| Standoff | A1 | 0.05 | – | 0.15 |
| Foot Length | L | 0.45 | 0.60 | 0.75 |
| Footprint | L1 | | 1.00 REF | |
| Foot Angle | ϕ | 0° | 3.5° | 7° |
| Overall Width | E | | 14.00 BSC | |
| Overall Length | D | | 14.00 BSC | |
| Molded Package Width | E1 | | 12.00 BSC | |
| Molded Package Length | D1 | | 12.00 BSC | |
| Lead Thickness | c | 0.09 | – | 0.20 |
| Lead Width | b | 0.17 | 0.22 | 0.27 |
| Mold Draft Angle Top | α | 11° | 12° | 13° |
| Mold Draft Angle Bottom | β | 11° | 12° | 13° |

**Notes:**

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Chamfers at corners are optional; size may vary.
3. Dimensions D1 and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.25 mm per side.
4. Dimensioning and tolerancing per ASME Y14.5M.

BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-092B


© 2017-2021 Microchip Technology Inc.

80-Lead Plastic Thin Quad Flatpack (PT) - 12x12x1mm Body, 2.00 mm Footprint [TQFP]

**Note:** For the most current package drawings, please see the Microchip Packaging Specification located at http://www.microchip.com/packaging

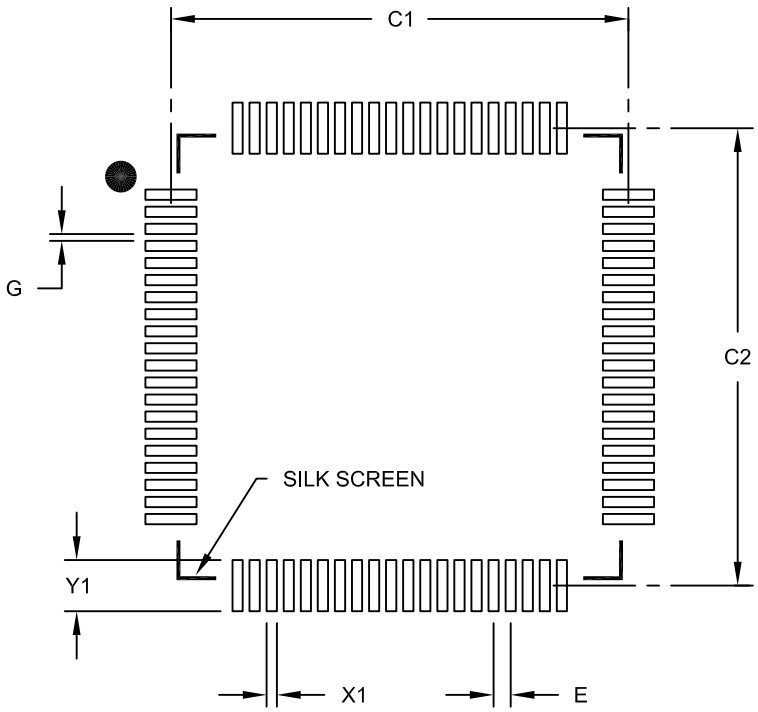


RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---|---|---|---|---|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | | 0.50 BSC | |
| Contact Pad Spacing | C1 | | 13.40 | |
| Contact Pad Spacing | C2 | | 13.40 | |
| Contact Pad Width (X80) | X1 | | | 0.30 |
| Contact Pad Length (X80) | Y1 | | | 1.50 |
| Distance Between Pads | G | 0.20 | | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2092B

**NOTES:**


© 2017-2021 Microchip Technology Inc.

# APPENDIX A: REVISION HISTORY

## Revision A (December 2017)

This is the initial version of the document.

## Revision B (May 2018)

This revision incorporates the following updates:

- Sections:
  - Updated **Section 4.3.1 “BIST at Start-up”**, **Section 4.3.2 “BIST at Run Time”**, **Section 15.0 “Quadrature Encoder Interface (QEI)”**, **Section 30.2 “Device Calibration and Identification”**, **Section 30.10 “Code Protection and CodeGuard™ Security”** and **Section 35.1 “Package Marking Information”**.
  - Added **Section 5.3.2 “Error Correcting Code (ECC)”** and **Section 5.5.4 “ECC Control Registers”**.
- Tables:
  - Updated Table 4-3, Table 4-9, Table 7-3, Table 7-4, Table 7-5, Table 8-7, Table 15-1, Table 24-3, Table 30-3, Table 33-1, Table 33-3, Table 33-5, Table 33-6 (was Table 33-9), Table 33-7 (was Table 33-11), Table 33-22, Table 33-37 and Table 33-40.
  - Deleted Table 33-6, Table 33-7, Table 33-8 and Table 33-10.
  - Added Table 33-10, Table 33-11, Table 33-12 and Table 33-13.
- Figures:
  - Updated Figure 3-1, Figure 4-1, Figure 4-12, Figure 15-2, Figure 30-2 and Figure 30-3.
- Registers:
  - Updated Register 4-1, Register 14-1, Register 14-6, Register 14-7, Register 14-9, Register 15-1, Register 15-2, Register 15-3, Register 15-5, Register 15-6, Register 15-7, Register 15-9, Register 15-11, Register 15-17, Register 27-1, Register 27-2, Register 30-5 and Register 30-7.
  - Added Register 5-7, Register 5-8, Register 5-9, Register 5-10, Register 5-11, Register 5-12, Register 15-18 and Register 15-19.
  - Deleted Register 15-8, Register 15-12 and Register 15-20.
- Examples:
  - Updated Example 29-1.
  - Added Example 29-2.
- Equations:
  - Deleted Equation 4-1.

## Revision C (July 2018)

This revision incorporates the following updates:

- Tables:
  - Updated Table 1-1, Table 33-10, Table 33-20, Table 33-21, Table 33-26 and Table 33-41.
- Registers:
  - Updated Register 4-1, Register 10-1, Register 12-12, Register 12-13, Register 13-30, Register 14-6, Register 14-7, Register 15-2, Register 16-4, Register 20-2, Register 22-7, Register 28-5, Register 28-6, Register 28-7, Register 28-8, Register 28-9, Register 28-10 and Register 28-11.
- Figures:
  - Updated Figure 13-1 and Figure 13-2.

## Revision D (September 2018)

This revision incorporates the following updates:

- Sections:
  - Updated **Section 18.0 “Inter-Integrated Circuit ($I^2C$)”**.
  - Added **Section 18.4 “SMBus Support”**.
  - Updated the packaging diagrams for the 28-Lead SSOP and 28-Lead UQFN in **Section 35.0 “Packaging Information”**.
- Tables:
  - Updated Table 33-5, Table 33-6, Table 33-7, Table 33-8, Table 33-13 and Table 33-23.
  - Added Table 18-3.
- Registers:
  - Updated Register 12-9, Register 13-3, Register 30-6 and Register 30-21.
- Figures:
  - Updated Figure 9-4.

## Revision E (December 2018)

This revision incorporates the following updates:

- Sections:
  - Updated the **"Operating Conditions"**, **"Safety Features"** and **"Pin Diagrams"** sections.
  - Updated **Section 5.0 "Flash Program Memory"**, **Section 5.2 "RTSP Operation"**, **Section 5.3.1 "Programming Algorithm for Flash Program Memory"**, **Section 5.3.3 "ECC Fault Injection"**, **Section 8.5.5 "Input Mapping"**, **Section 12.0 "High-Resolution PWM with Fine Edge Placement"**, **Section 23.1 "CLC Control Registers"** and the **"Product Identification System"** section.
  - Added **Section 8.5.3 "Controlling Configuration Changes"**, **Section 8.5.3.1 "Control Register Lock"**, **Section 8.5.4 "Considerations for Peripheral Pin Selection"**, **Section 9.10 "OSCCON Unlock Sequence"**, **Section 12.3 "Lock and Write Restrictions"**and **Section 34.0 "High-Temperature Electrical Characteristics"**.
- Tables:
  - Added Table 7-1 and Table 12-1.
  - Updated Table 7-2, Table 26-1, Table 33-4, Table 33-39 and Table 33-41.
- Registers:
  - Added Register 3-3 and Register 5-6.
  - Updated Register 5-5, Register 8-13, Register 9-1, Register 9-4, Register 12-1, Register 13-6, Register 16-1, Register 17-1 and Register 30-14.
- Figures:
  - Updated Figure 17-1 and Figure 17-2.
- Examples:
  - Added Example 5-1 and Example 8-1.

## Revision F (March 2019)

This revision incorporates the following updates:

- Sections:
  - Updated the **"Operating Conditions"**, **"Qualification Support"**, **"Absolute Maximum Ratings(1)"** and **"Product Identification System"**sections.
  - Updated **Section 9.0 "Oscillator with High-Frequency PLL"**.
  - Added **Section 9.7 "Backup Internal Fast RC (BFRC) Oscillator"**, **Section 9.8 "Reference Clock Output"**, **Section 12.4 "PWM4H/L Output on Peripheral Pin Select"**, **Section 13.2 "Temperature Sensor"** and **Section 34.0 "High-Temperature Electrical Characteristics"**.
- Tables:
  - Updated Table 3, Table 4, Table 5, Table 6, Table 7, Table 8, Table 1-1, Table 4-10, Table 4-11, Table 4-16, Table 8-7, Table 10-1, Table 12-1, Table 33-4, Table 33-7, Table 33-8 and Table 33-40.
- Registers:
  - Updated Register 12-14, Register 12-16, Register 12-32, Register 15-2 and Register 22-2.
- Equations:
  - Updated Equation 18-1.
- Figures:
  - Updated Figure 22-1.

Updated bit brackets from '<x>' to '[x]' and minor text edits throughout document.


© 2017-2021 Microchip Technology Inc.

## Revision G (October 2019)

This revision incorporates the following updates:

- Sections:
  - Updated CodeGuard™ Intermediate Security FRM reference in **"Referenced Sources"**
  - Updated **Section 1.0 "Device Overview"**, **Section 2.4 "ICSP Pins"**, **Section 4.1.3 "Unique Device Identifier (UDID)"**, **Section 4.5.3.2 "W Address Register Selection"**, **Section 5.3.2 "Error Correcting Code (ECC)"**, **Section 10.4 "Registers"**, **Section 14.1 "Overview"**, **Section 20.0 "Single-Edge Nibble Transmission (SENT)"**, **Section 27.0 "Operational Amplifier"**, **Section 32.0 "Development Support"** and updated the 36-Lead (M5) package diagrams to Rev B.
- Tables:
  - Updated Table 1, Table 2, Table 7-2, Table 8-4, Table 8-6, Table 8-14, Table 10-1, Table 24-3, Table 30-2 and Table 33-36.
- Registers:
  - Updated Register 3-2, Register 7-2, Register 7-3, Register 7-5, Register 7-7, Register 8-9, Register 8-10, Register 8-11, Register 8-12, Register 11-8, Register 11-28, Register 11-44, Register 12-13, Register 12-14, Register 12-17, Register 13-5, Register 13-19, Register 13-31, Register 14-9, Register 20-1, Register 23-3, Register 24-1, Register 25-3, Register 25-4, Register 30-6 and Register 30-21.
- Figures:
  - Updated Figure 4-4, Figure 13-1 and Figure 26-1.

## Revision H (June 2020)

This revision incorporates the following updates:

- Sections:
  - Updated **"Safety Features"**, **"Qualification Support"**, **Section 2.5 "External Oscillator Pins"**, **Section 5.4 "Flash OTP by ICSP™ Write Inhibit"**, **Section 9.6 "Low-Power RC (LPRC) Oscillator"**, **Section 30.5 "Brown-out Reset (BOR)"** and **Section 30.7 "JTAG Interface"**.
  - Added **"Functional Safety"** and **Section 2.6 "External Oscillator Layout Guidance"**.
- Tables:
  - Updated Table 3, Table 4, Table 5, Table 6, Table 7, Table 8, Table 4-9, Table 7-1, Table 8-4, Table 33-22, Table 33-25, Table 33-36, Table 33-37, Table 33-38, Table 33-39 and Table 33-41.
- Registers:
  - Updated Register 13-6, Register 14-1, Register 14-2, Register 14-3 and Register 30-6.
- Figures:
  - Updated Figure 1-1, Figure 4-1, Figure 13-1, Figure 21-1 and Figure 26-1.

## Revision J (July 2021)

This revision incorporates the following updates:

- Sections:
  - Corrected formatting in the 36-Pin Diagram.
  - Updated **Section 4.3 "BIST Overview"**, **Section 4.3.1 "BIST at Start-up"**, **Section 5.3.2 "Error Correcting Code (ECC)"**, **Section 13.0 "High-Speed, 12-Bit Analog-to-Digital Converter (ADC)"**, **Section 13.3 "Analog-to-Digital Converter Resources"**, **Section 30.4 "On-Chip Voltage Regulators"** and the 36-Lead (M5) [UQFN] package drawings.
- Tables:
  - Updated Table 7-2, Table 7-3, Table 7-4, Table 7-5, Table 33-15, Table 33-36, Table 33-38 and Table 33-41.
  - Removed Table 34-18: ADC Module Specifications.
  - Added Table 13-2 after Register 13-27.
- Registers:
  - Updated Register 5-1, Register 9-10, Register 13-27, Register 28-1, Register 30-6 and Register 30-20.
- Figures:
  - Updated Figure 13-1 and Figure 30-1.
- Examples:
  - Updated Example 8-1.

**NOTES:**


© 2017-2021 Microchip Technology Inc.

# INDEX


## A

Absolute Maximum Ratings ..... 553, 591
AC Characteristics ..... 565
    Load Conditions ..... 565
Alternate Interrupt Vector Table (figure) ..... 103
Analog-to-Digital Converter. *See* ADC.
Arithmetic Logic Unit (ALU) ..... 41
Auto-Shutdown and Gating Sources ..... 449

## B

Bit-Reversed Addressing ..... 76
    Example ..... 77
    Implementation ..... 76
    Sequence Table (16-Entry) ..... 77
Block Diagrams
    16-Bit Timer1 Module ..... 437
    ADC Module ..... 302
    ADC Shared Core ..... 303
    Addressing for Table Registers ..... 81
    APLL and VCO Detail ..... 189
    CALL Stack Frame ..... 72
    CAN FD Module ..... 222
    CLCx Input Source Selection ..... 457
    CLCx Logic Function Combinatorial Options ..... 456
    CLCx Module ..... 455
    Conceptual SCCPx Modules ..... 441
    Constant-Current Source ..... 487
    CPU Core ..... 32
    CRC Module ..... 483
    Data Access from Program Space Address Generation ..... 78
    Deadman Timer Module ..... 495
    Dedicated ADC Core ..... 303
    dsPIC33CK256MP508 Core Clock Sources ..... 185
    dsPIC33CK256MP508 Core Oscillator Subsystem ..... 186
    dsPIC33CK256MP508 Family ..... 19
    Functional Direct Memory Access (DMA) ..... 212
    High-Speed Analog Comparator ..... 332
    I2Cx Module ..... 404
    Interleaved PFC ..... 28
    MCLR Pin Connections ..... 26
    Multiplexing Remappable Outputs for RPn ..... 138
    Off-Line UPS ..... 30
    Operational Amplifier ..... 491
    Oscillator Circuit Placement ..... 27
    Phase-Shifted Full-Bridge Converter ..... 29
    PLL and VCO ..... 187
    PMP Pinout and Connections to External Devices ..... 413
    Programmer's Model ..... 34
    PSV Read Address Generation ..... 69
    PTG ..... 468
    PWM High-Level Module ..... 266
    QEI Module ..... 345
    Recommended Minimum Connection ..... 25
    Reference Clock Generator ..... 193
    Remappable Input for U1RX ..... 133
    Reset System ..... 97
    Security Segments ..... 540
    Security Segments (Dual Partition) ..... 540
    SENTx Module ..... 428
    Shared Port Structure ..... 123
    Simplified UARTx ..... 364
    SPIx Client, Frame Client Connection ..... 402
    SPIx Client, Frame Host Connection ..... 402
    SPIx Host, Frame Client Connection ..... 402
    SPIx Host, Frame Host Connection ..... 401
    SPIx Host/Client Connection (Enhanced Buffer Modes) ..... 401
    SPIx Host/Client Connection (Standard Mode) ..... 400
    SPIx Module (Enhanced Mode) ..... 388
    SPIx Module (Standard Mode) ..... 387
    Timer Clock Generator ..... 442
    Watchdog Timer (WDT) ..... 536
Brown-out Reset (BOR) ..... 515, 535
Built-In Self-Test (BIST)
    At Run Time ..... 52
    At Start-up ..... 52
    Flowchart ..... 52
    Overview ..... 52
Built-In Self-Test. *See* BIST.

## C

CAN FD Module
    Control Registers ..... 223
    Features ..... 221
    Message Reception ..... 221
Capture/Compare/PWM/Timer
    Auto-Shutdown and Gating Sources ..... 449
    Auxiliary Output ..... 444
    Control Registers ..... 445
    General Purpose Timer ..... 442
    Input Capture Mode ..... 443
    Output Compare Mode ..... 443
    Synchronization Sources ..... 448
    Time Base Generator ..... 442
Capture/Compare/PWM/Timer (SCCP/MCCP) ..... 441
CLC
    Control Registers ..... 458
Code Examples
    Configuring UART1 Input and Output Functions ..... 133
    Flash Write/Read ..... 83
    PWRSAV Instruction Syntax in Assembly ..... 503
    PWRSAV Instruction Syntax in C Language ..... 503
    Using Auxiliary PLL with Internal FRC Oscillator ..... 190
    Using PLL (50 MIPS) with POSC ..... 192
    Using Primary PLL with 8 MHz Internal FRC ..... 188
Code Protection ..... 515, 539
CodeGuard Security ..... 515, 539
Comparator/DAC
    Control Registers ..... 333
    Features Overview ..... 333
Configurable Logic Cell (CLC) ..... 455
Configurable Logic Cell. *See* CLC.
Configuration Bits ..... 515
    Bit Values for Clock Selection ..... 195
Controller Area Network. *See* CAN.
CPU ..... 31
    Addressing Modes ..... 31
    Control Registers ..... 36
    Data Space Addressing ..... 31
    Instruction Set ..... 31
    Registers ..... 31
    Resources ..... 35
CRC
    Control Registers ..... 484

Current Bias Generator
Control Registers ..... 488
Current Bias Generator (CBG) ..... 487
Current Bias Generator. *See* CBG.
Customer Change Notification Service ..... 639
Customer Notification Service ..... 639
Customer Support ..... 639
Cyclic Redundancy Check. *See* CRC.

**D**

Data Address Space ..... 47
Memory Map for dsPIC33CK128MPX0X Devices ..... 50
Memory Map for dsPIC33CK256MPX0X Devices ..... 49
Memory Map for dsPIC33CK64MPX0X and dsPIC33CK32MPX0X Devices ..... 51
Near Data Space ..... 48
Organization, Alignment ..... 47
SFR Space ..... 48
Width ..... 47
Data Space
Extended X ..... 72
Paged Data Memory Space (figure) ..... 70
Paged Memory Scheme ..... 69
DC Characteristics
Operating MIPS vs. Voltage ..... 554
Deadman Timer (DMT) ..... 495
Control Registers ..... 496
Deadman Timer. *See* DMT.
Development Support ..... 551
Device Calibration ..... 532
and Identification ..... 532
Device Overview ..... 19
Direct Memory Access Controller. *See* DMA.
DMA
Channel Trigger Sources ..... 219
Control Registers ..... 215
Peripheral Module Disable (PMD) ..... 215
Summary of Operations ..... 213
Types of Data Transfers ..... 214
Typical Setup ..... 215
Doze Mode ..... 505
DSP Engine ..... 41
Dual Watchdog Timer (Dual WDT) ..... 536

**E**

ECC
Control Registers ..... 94
Electrical Characteristics ..... 553
AC ..... 565
ADC Delta Current ..... 560
ADC Specifications ..... 585
APLL Delta Current ..... 560
APLL Timing Specifications ..... 567
Comparator + DAC Delta Current ..... 561
Constant-Current Source Specifications ..... 589
DACx Output (DACOUT1 Pin) Specifications ..... 588
DACx Specifications ..... 588
Doze Current ($I_{DOZE}$) ..... 558
External Clock Requirements ..... 566
High-Speed Analog Comparator Specifications ..... 587
High-Speed PWMx Timing Requirements ..... 571
I/O Pin Input Injection Current Specifications ..... 563
I/O Pin Input Specifications ..... 562
I/O Pin Output Specifications ..... 563
I/O Timing Requirements ..... 569
I2Cx Bus Data Timing Requirements (Client Mode) ..... 583
I2Cx Bus Data Timing Requirements (Host Mode) ..... 581
Idle Current ($I_{IDLE}$) ..... 557
Internal FRC Accuracy ..... 568
Internal LPRC Accuracy ..... 568
Op Amp Delta Current ..... 561
Operating Current ($I_{DD}$) ..... 556
Operating Voltage Specifications ..... 555
Operational Amplifier Specifications ..... 589
PLL Timing Specifications ..... 567
Power-Down Current ($I_{PD}$) ..... 558
Program Memory ..... 564
PWM Delta Current ..... 559
SPIx Client Mode (Full-Duplex, CKE = 0, CKP = x, SMP = 0) Timing Requirements ..... 577
SPIx Client Mode (Full-Duplex, CKE = 1, CKP = x, SMP = 0) Timing Requirements ..... 579
SPIx Host Mode (Full-Duplex, CKE = 0, CKP = x, SMP = 1) Timing Requirements ..... 575
SPIx Host Mode (Full-Duplex, CKE = 1, CKP = x, SMP = 1) Timing Requirements ..... 574
SPIx Host Mode (Half-Duplex, Transmit Only) Timing Requirements ..... 573
SPIx Maximum Data/Clock Rate Summary ..... 572
UARTx I/O Timing Requirements ..... 584
Watchdog Timer Delta Current ($\Delta I_{WDT}$) ..... 559
Equations
$AF_{PLLO}$ Calculation ..... 190
$AF_{VCO}$ Calculation ..... 190
Calculating Frequency Output ..... 194
$F_{PLLO}$ Calculation ..... 188
Frame Time Calculations ..... 429
$F_{VCO}$ Calculation ..... 188
$I^2C$ Baud Rate Reload Calculation ..... 405
Relationship Between Device and SPIx Clock Speed ..... 402
SYNCMINx and SYNCMAXx Calculations ..... 430
Tick Period Calculation ..... 429
Errata ..... 15
Error Correcting Code (ECC) ..... 84
Fault Injection ..... 84

**F**

Flash OTP by ICSP Write Inhibit ..... 85
Activation ..... 85
Flash Program Memory
and Table Instructions ..... 81
Control Registers ..... 88
Dual Partition Flash Configuration ..... 86
Operations ..... 83
RTSP Operation ..... 82
Flexible Configuration ..... 515

**G**

Getting Started Guidelines ..... 25
Connection Requirements ..... 25
Decoupling Capacitors ..... 25
External Oscillator Layout Guidance ..... 27
External Oscillator Pins ..... 26
ICSP Pins ..... 26
Master Clear ($\overline{MCLR}$) Pin ..... 26
Oscillator Value Conditions on Start-up ..... 28
Targeted Applications ..... 28
Unused I/Os ..... 28


© 2017-2021 Microchip Technology Inc.

## H


High-Resolution PWM (HSPWM) with
    Fine Edge Placement ... 265
High-Speed Analog Comparator with
    Slope Compensation DAC ... 331
High-Speed, 12-Bit Analog-to-Digital
    Converter (ADC) ... 301
    Channel Trigger Source to Register Association ... 326
    Control Registers ... 305
    Differential-Mode ... 304
    Features Overview ... 301
    Resources ... 304
    Temperature Sensor ... 304
High-Temperature DC Characteristics
    ADC Delta Current ... 598
    APLL Delta Current ... 597
    Comparator + DAC Delta Current ... 598
    DACx Specifications ... 599
    Doze Current (IDOZE) ... 596
    I/O Pin Input Specifications ... 599
    Idle Current (IIDLE) ... 595
    Internal FRC Accuracy ... 599
    Internal LPRC Accuracy ... 599
    Op Amp Delta Current ... 598
    Operating Current (IDD) ... 594
    Operating MIPS vs. Voltage ... 592
    Operating Voltage Specifications ... 593
    Power-Down Current (IPD) ... 596
    PWM Delta Current ... 597
    Thermal Operating Conditions ... 592
    Thermal Packaging Characteristics ... 592
    Watchdog Timer Delta Current (ΔIWDT) ... 596
High-Temperature Electrical Characteristics ... 591
HSPWM
    Architecture ... 266
    Control Registers ... 268
    Lock and Write Restrictions ... 267
    PWM Output Availability (table) ... 265


## I


I/O Ports
    Configuring Analog/Digital Port Pins ... 124
    Control Registers ... 124
    Helpful Tips ... 143
    Parallel I/O (PIO) ... 121
    Resources ... 144
    Write/Read Timing ... 124
I2C
    Client Address Masking ... 405
    Clock Rates ... 405
    Communicating as Host in Single Host Environment ... 403
    Control Registers ... 407
    Reserved Addresses ... 406
    Setting Baud Rate as Bus Host ... 405
    SMBus Support ... 406
In-Circuit Debugger ... 539
In-Circuit Emulation ... 515
In-Circuit Serial Programming (ICSP) ... 515, 539
Input Change Notification (ICN) ... 131
Instruction Addressing Modes ... 73
    File Register Instructions ... 73
    Fundamental Modes Supported ... 73
    MAC Instructions ... 74
    MCU Instructions ... 73
    Move and Accumulator Instructions ... 74
    Other Instructions ... 74
Instruction Set Summary ... 541
    Overview ... 544
    Symbols Used in Opcode Descriptions ... 542
Instruction-Based Power-Saving Modes ... 503
    Idle ... 504
    Sleep ... 504
Inter-Integrated Circuit. *See* I2C.
Internet Address ... 639
Interrupt Controller
    Alternate Interrupt Vector Table (AIVT) ... 101
    Control and Status Registers ... 112
        INTCON1 ... 112
        INTCON2 ... 112
        INTCON3 ... 112
        INTCON4 ... 112
        INTTREG ... 112
    Interrupt Vector Details ... 105
    Interrupt Vector Table (IVT) ... 101
    Reset Sequence ... 101
    Resources ... 112
    Trap Vector Details ... 104
Interrupt Vector Table (figure) ... 102
Interrupts Coincident with Power Save Instructions ... 504


## J


JTAG Boundary Scan Interface ... 515
JTAG Interface ... 539


## L


Low-Power Sleep Modes (table) ... 504


## M


Memory Organization ... 43
    Resources ... 54
Microchip Internet Website ... 639
Modulo Addressing ... 75
    Applicability ... 76
    Operation Example ... 75
    Start and End Address ... 75
    W Address Register Selection ... 75


## O


Operational Amplifier ... 491
    Control Registers ... 492
Oscillator
    Auxiliary PLL ... 189
    Backup Internal Fast RC (BFRC) ... 193
    Configuration ... 195
    Control Registers ... 196
    CPU Clocking ... 191
    Internal Fast RC (FRC) ... 193
    Low-Power RC (LPRC) ... 193
    OSCCON Unlock Sequence ... 195
    Primary (POSC) ... 192
    Primary PLL ... 187
    Reference Clock Output ... 193
Oscillator with High-Frequency PLL ... 185

## P


Packaging ..... 601
  Details ..... 603
  Marking ..... 601
Parallel Master Port (PMP) ..... 413
Peripheral Module Disable (PMD) ..... 505
Peripheral Pin Select (PPS) ..... 131
  Available Peripherals ..... 131
  Available Pins ..... 131
  Control Registers ..... 148
  Controlling Configuration Changes ..... 132
  Input Mapping ..... 132
  Output Mapping ..... 138
  Output Selection for Remappable Pins ..... 141
  Remappable Output Pin Registers ..... 139
  Remappable Pin Inputs ..... 134
  Selectable Input Sources ..... 136
Peripheral Trigger Generator (PTG) ..... 467
Peripheral Trigger Generator. *See* PTG.
Pin and ANSELx Availability ..... 122
Pinout I/O Descriptions (table) ..... 20
PMP
  Control Registers ..... 414
Power-Saving Features ..... 503
  Clock Frequency and Switching ..... 503
  Resources ..... 505
Program Address Space
  Memory Map for dsPIC33CK128MP50X/20X Devices ..... 44
  Memory Map for dsPIC33CK256MP50X/20X Devices ..... 44
  Memory Map for dsPIC33CK32MP50X/20X Devices ..... 45
  Memory Map for dsPIC33CK64MP50X/20X Devices ..... 45
  Memory Map for dsPIC33CKXXXMP50X/20X Devices ..... 43
Program Memory
  Address Space ..... 43
    Construction ..... 78
    Data Access from Program Memory Using Table Instructions ..... 79
    Table Read High Instructions (TBLRDH) ..... 79
    Table Read Low Instructions (TBLRDL) ..... 79
  Interfacing with Data Memory Spaces ..... 78
  Organization ..... 46
  Reset Vector ..... 46
Programmer's Model ..... 33
  Register Descriptions ..... 33
PTG
  Command Options ..... 479
  Control Registers ..... 469
  Features ..... 467
  Input Descriptions ..... 481
  Output Descriptions ..... 481
  Step Command Format/Description ..... 478


## Q


QEI
  Control and Status Registers ..... 346
  Truth Table ..... 344
Quadrature Encoder Interface (QEI) ..... 343
Quadrature Encoder Interface. *See* QEI.


## R


Referenced Sources ..... 16
Register Maps
  Configuration ..... 517
  Interrupt Enable ..... 109
  Interrupt Flag ..... 109
  Interrupt Priority ..... 110
  PMD ..... 513
  PORTA ..... 145
  PORTB ..... 145
  PORTC ..... 146
  PORTD ..... 146
  PORTE ..... 147
  PPS Input Control ..... 183
  PPS Output Control ..... 184
Registers
  ACLKCON1 (Auxiliary Clock Control) ..... 203
  ADCMPxCON (ADC Digital Comparator x Control) ..... 327
  ADCMPxENH (ADC Digital Comparator x Channel Enable High) ..... 328
  ADCMPxENL (ADC Digital Comparator x Channel Enable Low) ..... 328
  ADCON1H (ADC Control 1 High) ..... 306
  ADCON1L (ADC Control 1 Low) ..... 305
  ADCON2H (ADC Control 2 High) ..... 308
  ADCON2L (ADC Control 2 Low) ..... 307
  ADCON3H (ADC Control 3 High) ..... 310
  ADCON3L (ADC Control 3 Low) ..... 309
  ADCON4H (ADC Control 4 High) ..... 312
  ADCON4L (ADC Control 4 Low) ..... 311
  ADCON5H (ADC Control 5 High) ..... 314
  ADCON5L (ADC Control 5 Low) ..... 313
  ADCORExH (Dedicated ADC Core x Control High) ..... 316
  ADCORExL (Dedicated ADC Core x Control Low) ..... 315
  ADEIEH (ADC Early Interrupt Enable High) ..... 318
  ADEIEL (ADC Early Interrupt Enable Low) ..... 318
  ADEISTATH (ADC Early Interrupt Status High) ..... 319
  ADEISTATL (ADC Early Interrupt Status Low) ..... 319
  ADFLxCON (ADC Digital Filter x Control) ..... 329
  ADIEH (ADC Interrupt Enable High) ..... 322
  ADIEL (ADC Interrupt Enable Low) ..... 322
  ADLVLTRGH (ADC Level-Sensitive Trigger Control High) ..... 317
  ADLVLTRGL (ADC Level-Sensitive Trigger Control Low) ..... 317
  ADMOD0H (ADC Input Mode Control 0 High) ..... 320
  ADMOD0L (ADC Input Mode Control 0 Low) ..... 320
  ADMOD1H (ADC Input Mode Control 1 High) ..... 321
  ADMOD1L (ADC Input Mode Control 1 Low) ..... 321
  ADSTATH (ADC Data Ready Status High) ..... 323
  ADSTATL (ADC Data Ready Status Low) ..... 323
  ADTRIGnL/ADTRIGnH (ADC Channel Trigger n(x) Selection Low/High) ..... 324
  AMPCON1H (Op Amp Control High) ..... 493
  AMPCON1L (Op Amp Control Low) ..... 492
  ANSELx (Analog Select for PORTx) ..... 124
  APLLDIV1 (APLL Output Divider) ..... 205
  APLLFBD1 (APLL Feedback Divider) ..... 204
  BIASCON (Current Bias Generator Control) ..... 488
  C1BDIAG0H (CAN Bus Diagnostics 0 High) ..... 257



© 2017-2021 Microchip Technology Inc.

C1BDIAG0L (CAN Bus Diagnostics 0 Low)..... 257
C1BDIAG1H (CAN Bus Diagnostics 1 High) ..... 258
C1BDIAG1L (CAN Bus Diagnostics 1 Low)..... 259
C1CONH (CAN Control High)..... 223
C1CONL (CAN Control Low) ..... 225
C1DBTCFGH (CAN Data Bit Time Configuration High)..... 227
C1DBTCFGL (CAN Data Bit Time Configuration Low)..... 227
C1FIFOBAH (CAN Message Memory Base Address High)..... 241
C1FIFOBAL (CAN Message Memory Base Address Low)..... 241
C1FIFOCONHx (CAN FIFO Control x High)..... 245
C1FIFOCONLx (CAN FIFO Control x Low) ..... 246
C1FIFOSTAx (CAN FIFO Status x) ..... 248
C1FIFOUAHx (CAN FIFO User Address x High)..... 253
C1FIFOUALx (CAN FIFO User Address x Low) ..... 253
C1FLTCONxH (CAN Filter Control x High)..... 260
C1FLTCONxL (CAN Filter Control x Low) ..... 261
C1FLTOBJxH (CAN Filter Object x High)..... 262
C1FLTOBJxL (CAN Filter Object x Low) ..... 262
C1INTH (CAN Interrupt High) ..... 234
C1INTL (CAN Interrupt Low)..... 235
C1MASKxH (CAN Mask x High)..... 263
C1MASKxL (CAN Mask x Low) ..... 263
C1NBTCFGH (CAN Nominal Bit Time Configuration High)..... 226
C1NBTCFGL (CAN Nominal Bit Time Configuration Low)..... 226
C1RXIFH (CAN Receive Interrupt Status High)..... 236
C1RXIFL (CAN Receive Interrupt Status Low)..... 236
C1RXOVIFH (CAN Receive Overflow Interrupt Status High)..... 237
C1RXOVIFL (CAN Receive Overflow Interrupt Status Low)..... 237
C1TBCH (CAN Time Base Counter High) ..... 230
C1TBCL (CAN Time Base Counter Low)..... 230
C1TDCH (CAN Transmitter Delay Compensation High)..... 228
C1TDCL (CAN Transmitter Delay Compensation Low)..... 229
C1TEFCONH (CAN Transmit Event FIFO Control High)..... 250
C1TEFCONL (CAN Transmit Event FIFO Control Low) ..... 251
C1TEFSTA (CAN Transmit Event FIFO Status)..... 252
C1TEFUAH (CAN Transmit Event FIFO User Address High)..... 254
C1TEFUAL (CAN Transmit Event FIFO User Address Low)..... 254
C1TRECH (CAN Transmit/Receive Error Count High)..... 256
C1TRECL (CAN Transmit/Receive Error Count Low) ..... 256
C1TSCONH (CAN Timestamp Control High) ..... 231
C1TSCONL (CAN Timestamp Control Low)..... 231
C1TXATIFH (CAN Transmit Attempt Interrupt Status High)..... 239
C1TXATIFL (CAN Transmit Attempt Interrupt Status Low)..... 239
C1TXIFH (CAN Transmit Interrupt Status High)..... 238
C1TXIFL (CAN Transmit Interrupt Status Low) ..... 238
C1TXQCONH (CAN Transmit Queue Control High) ..... 242
C1TXQCONL (CAN Transmit Queue Control Low)..... 243
C1TXQSTA (CAN Transmit Queue Status)..... 244
C1TXQUAH (CAN Transmit Queue User Address High)..... 255
C1TXQUAL (CAN Transmit Queue User Address Low)..... 255
C1TXREQH (CAN Transmit Request High) ..... 240
C1TXREQL (CAN Transmit Request Low)..... 240
C1VECH (CAN Interrupt Code High)..... 232
C1VECL (CAN Interrupt Code Low) ..... 233
CANCLKCON (CAN Clock Control) ..... 206
CCPxCON1H (CCPx Control 1 High)..... 447
CCPxCON1L (CCPx Control 1 Low) ..... 445
CCPxCON2H (CCPx Control 2 High)..... 450
CCPxCON2L (CCPx Control 2 Low) ..... 449
CCPxCON3H (CCPx Control 3 High)..... 452
CCPxCON3L (CCPx Control 3 Low) ..... 451
CCPxSTATL (CCPx Status)..... 453
CLCxCONH (CLCx Control High)..... 459
CLCxCONL (CLCx Control Low)..... 458
CLCxGLSH (CLCx Gate Logic Input Select High).... 464
CLCxGLSL (CLCx Gate Logic Input Select Low)..... 462
CLCxSEL (CLCx Input MUX Select) ..... 460
CLKDIV (Clock Divider)..... 198
CMBTRIGH (Combinational Trigger High) ..... 273
CMBTRIGL (Combinational Trigger Low)..... 272
CNCONx (Change Notification Control for PORTx) ..... 128
CNEN0x (Interrupt Change Notification Enable for PORTx) ..... 128
CNEN1x (Interrupt Change Notification Edge Select for PORTx) ..... 129
CNFx (Interrupt Change Notification Flag for PORTx) ..... 130
CNPDx (Change Notification Pull-Down Enable for PORTx) ..... 127
CNPUx (Change Notification Pull-up Enable for PORTx) ..... 127
CNSTATx (Interrupt Change Notification Status for PORTx) ..... 129
CORCON (Core Control)..... 38, 114
CRCCONH (CRC Control High)..... 485
CRCCONL (CRC Control Low) ..... 484
CRCXORH (CRC XOR Polynomial, High Byte) ..... 486
CRCXORL (CRC XOR Polynomial, Low Byte)..... 486
CTXTSTAT (CPU W Register Context Status)..... 40
DACCTRL1L (DAC Control 1 Low) ..... 334
DACCTRL2H (DAC Control 2 High) ..... 335
DACCTRL2L (DAC Control 2 Low) ..... 335
DACxCONH (DACx Control High)..... 336
DACxCONL (DACx Control Low) ..... 336
DACxDATH (DACx Data High)..... 338
DACxDATL (DACx Data Low)..... 338
DEVID (Device ID)..... 532
DEVREV (Device Revision)..... 532
DMACHn (DMA Channel n Control) ..... 217
DMACON (DMA Engine Control) ..... 216
DMAINTn (DMA Channel n Interrupt)..... 218
DMTCLR (Deadman Timer Clear)..... 497
DMTCNTH (Deadman Timer Count High)..... 499

DMTCNTL (Deadman Timer Count Low)..... 499
DMTCON (Deadman Timer Control)..... 496
DMTHOLDREG (DMT Hold)..... 502
DMTPRECLR (Deadman Timer Preclear)..... 496
DMTPSCNTH (DMT Post-Configure Count Status High)..... 500
DMTPSCNTL (DMT Post-Configure Count Status Low)..... 500
DMTPSINTVH (DMT Post-Configure Interval Status High)..... 501
DMTPSINTVL (DMT Post-Configure Interval Status Low)..... 501
DMTSTAT (Deadman Timer Status)..... 498
ECCADDRH (ECC Fault Inject Address Compare High)..... 95
ECCADDRL (ECC Fault Inject Address Compare Low)..... 95
ECCCONH (ECC Fault Injection Configuration High)..... 94
ECCCONL (ECC Fault Injection Configuration Low)..... 94
ECCSTATH (ECC System Status Display High)..... 96
ECCSTATL (ECC System Status Display Low)..... 96
FALTREG Configuration..... 529
FBOOT Configuration..... 531
FBSLIM Configuration..... 519
FBTSEQ Configuration..... 530
FDEVOPT Configuration..... 528
FDMT Configuration..... 527
FDMTCNTH Configuration..... 526
FDMTCNTL Configuration..... 526
FDMTIVTH Configuration..... 525
FDMTIVTL Configuration..... 525
FICD Configuration..... 524
FOSC Configuration..... 521
FOSCSEL Configuration..... 520
FPOR Configuration..... 523
FSCL (Frequency Scale)..... 269
FSEC Configuration..... 518
FSIGN Configuration..... 519
FSMINPER (Frequency Scaling Minimum Period)..... 269
FWDT Configuration..... 522
I2CxCONH (I2Cx Control High)..... 409
I2CxCONL (I2Cx Control Low)..... 407
I2CxMSK (I2Cx Client Mode Address Mask)..... 411
I2CxSTAT (I2Cx Status)..... 410
IBIASCONH (Current Bias Generator Current Source Control High)..... 489
IBIASCONL (Current Bias Generator Current Source Control Low)..... 490
INDXxCNTH (Index x Counter High)..... 358
INDXxCNTL (Index x Counter Low)..... 358
INDXxHLD (Index x Counter Hold)..... 359
INTCON1 (Interrupt Control 1)..... 115
INTCON2 (Interrupt Control 2)..... 117
INTCON3 (Interrupt Control 3)..... 118
INTCON4 (Interrupt Control 4)..... 119
INTTREG (Interrupt Control and Status)..... 120
INTxTMRH (Interval x Timer High)..... 356
INTxTMRL (Interval x Timer Low)..... 356
INTXxHLDH (Interval x Timer Hold High)..... 357
INTXxHLDL (Interval x Timer Hold Low)..... 357
LATx (Output Data for PORTx)..... 126
LFSR (Linear Feedback Shift)..... 278
LOGCONy (Combinatorial PWM Logic Control y)..... 274
MBISTCON (MBIST Control)..... 53
MDC (Master Duty Cycle)..... 270
MPER (Master Period)..... 271
MPHASE (Master Phase)..... 270
MSTRPR (EDS Bus Initiator Priority Control)..... 39
NVMADR (Nonvolatile Memory Lower Address)..... 91
NVMADRU (Nonvolatile Memory Upper Address)..... 91
NVMCON (Nonvolatile Memory (NVM) Control)..... 89
NVMKEY (Nonvolatile Memory Key)..... 92
NVMSRCADRH (NVM Source Data Address High)..... 93
NVMSRCADRL (NVM Source Data Address Low)..... 93
ODCx (Open-Drain Enable for PORTx)..... 126
OSCCON (Oscillator Control)..... 196
OSCTUN (FRC Oscillator Tuning)..... 201
PCLKCON (PWM Clock Control)..... 268
PGxCAP (PWM Generator x Capture)..... 299
PGxCONH (PWM Generator x Control High)..... 280
PGxCONL (PWM Generator x Control Low)..... 279
PGxDC (PWM Generator x Duty Cycle)..... 295
PGxDCA (PWM Generator x Duty Cycle Adjustment)..... 296
PGxDTH (PWM Generator x Dead-Time High)..... 298
PGxDTL (PWM Generator x Dead-Time Low)..... 298
PGxEVTH (PWM Generator x Event High)..... 287
PGxEVTL (PWM Generator x Event Low)..... 286
PGxIOCONH (PWM Generator x I/O Control High)..... 285
PGxIOCONL (PWM Generator x I/O Control Low)..... 284
PGxLEBH (PWM Generator x Leading-Edge Blanking High)..... 294
PGxLEBL (PWM Generator x Leading-Edge Blanking Low)..... 293
PGxPER (PWM Generator x Period)..... 296
PGxPHASE (PWM Generator x Phase)..... 295
PGxSTAT (PWM Generator x Status)..... 282
PGxTRIGA (PWM Generator x Trigger A)..... 297
PGxTRIGB (PWM Generator x Trigger B)..... 297
PGxTRIGC (PWM Generator x Trigger C)..... 297
PGxyPCIH (PWM Generator xy PCI High)..... 291
PGxyPCIL (PWM Generator xy PCI Low)..... 289
PLLDIV (PLL Output Divider)..... 202
PLLFBD (PLL Feedback Divider)..... 200
PMADDR (PMP Address)..... 419
PMAEN (PMP Pin Enable)..... 422
PMCON (PMP Control)..... 414
PMCONH (PMP Control High)..... 416
PMD1 (PMD1 Control)..... 506
PMD2 (PMD2 Control)..... 507
PMD3 (PMD3 Control)..... 508
PMD4 (PMD4 Control)..... 509
PMD6 (PMD6 Control)..... 510
PMD7 (PMD7 Control)..... 511
PMD8 (PMD8 Control)..... 512
PMDIN1 (PMP Data Input/Output Low)..... 421
PMDIN2 (PMP Data Input/Output High)..... 421
PMDOUT1 (PMP Data Output Low)..... 420
PMDOUT2 (PMP Data Output High)..... 420
PMMODE (PMP Mode)..... 417
PMRADDR (PMP Read Address)..... 425
PMRDIN (PMP Read Input Data)..... 426
PMSTAT (PMP Status)..... 423
PMWADDR (PMP Write Address)..... 424
PORTx (Input Data for PORTx)..... 125
POSxCNTH (Position x Counter High)..... 352


© 2017-2021 Microchip Technology Inc.

POSxCNTL (Position x Counter Low) ..... 352
POSxHLD (Position x Counter Hold) ..... 353
PTGADJ (PTG Adjust) ..... 476
PTGBTE (PTG Broadcast Trigger Enable Low) ..... 472
PTGBTEH (PTG Broadcast Trigger Enable High) ..... 472
PTGC0LIM (PTG Counter 0 Limit) ..... 475
PTGC1LIM (PTG Counter 1 Limit) ..... 475
PTGCON (PTG Control/Status High) ..... 471
PTGCST (PTG Control/Status Low) ..... 469
PTGHOLD (PTG Hold) ..... 473
PTGL0 (PTG Literal 0) ..... 476
PTGQPTR (PTG Step Queue Pointer) ..... 477
PTGQUEn (PTG Step Queue n Pointer) ..... 477
PTGSDLIM (PTG Step Delay Limit) ..... 474
PTGT0LIM (PTG Timer0 Limit) ..... 473
PTGT1LIM (PTG Timer1 Limit) ..... 474
PWMEVTy (PWM Event Output Control y) ..... 276
QEIxCON (QEIx Control) ..... 346
QEIxGECH (QEIx Greater Than or Equal Compare High) ..... 362
QEIxGECL (QEIx Greater Than or Equal Compare Low) ..... 362
QEIxICH (QEIx Initialization/Capture High) ..... 360
QEIxICL (QEIx Initialization/Capture Low) ..... 360
QEIxIOC (QEIx I/O Control) ..... 348
QEIxIOCH (QEIx I/O Control High) ..... 349
QEIxLECH (QEIx Less Than or Equal Compare High) ..... 361
QEIxLECL (QEIx Less Than or Equal Compare Low) ..... 361
QEIxSTAT (QEIx Status) ..... 350
RCON (Reset Control) ..... 99
REFOCONH (Reference Clock Control High) ..... 208
REFOCONL (Reference Clock Control Low) ..... 207
REFOTRIMH (Reference Oscillator Trim) ..... 209
RPCON (Peripheral Remapping Configuration) ..... 148
RPINR0 (Peripheral Pin Select Input 0) ..... 148
RPINR1 (Peripheral Pin Select Input 1) ..... 149
RPINR10 (Peripheral Pin Select Input 10) ..... 153
RPINR11 (Peripheral Pin Select Input 11) ..... 154
RPINR12 (Peripheral Pin Select Input 12) ..... 154
RPINR13 (Peripheral Pin Select Input 13) ..... 155
RPINR14 (Peripheral Pin Select Input 14) ..... 155
RPINR15 (Peripheral Pin Select Input 15) ..... 156
RPINR16 (Peripheral Pin Select Input 16) ..... 156
RPINR17 (Peripheral Pin Select Input 17) ..... 157
RPINR18 (Peripheral Pin Select Input 18) ..... 157
RPINR19 (Peripheral Pin Select Input 19) ..... 158
RPINR2 (Peripheral Pin Select Input 2) ..... 149
RPINR20 (Peripheral Pin Select Input 20) ..... 158
RPINR21 (Peripheral Pin Select Input 21) ..... 159
RPINR22 (Peripheral Pin Select Input 22) ..... 159
RPINR23 (Peripheral Pin Select Input 23) ..... 160
RPINR26 (Peripheral Pin Select Input 26) ..... 160
RPINR27 (Peripheral Pin Select Input 27) ..... 161
RPINR29 (Peripheral Pin Select Input 29) ..... 161
RPINR3 (Peripheral Pin Select Input 3) ..... 150
RPINR30 (Peripheral Pin Select Input 30) ..... 162
RPINR32 (Peripheral Pin Select Input 32) ..... 162
RPINR33 (Peripheral Pin Select Input 33) ..... 163
RPINR37 (Peripheral Pin Select Input 37) ..... 163
RPINR38 (Peripheral Pin Select Input 38) ..... 164
RPINR4 (Peripheral Pin Select Input 4) ..... 150
RPINR42 (Peripheral Pin Select Input 42) ..... 164
RPINR43 (Peripheral Pin Select Input 43) ..... 165
RPINR44 (Peripheral Pin Select Input 44) ..... 165
RPINR45 (Peripheral Pin Select Input 45) ..... 166
RPINR46 (Peripheral Pin Select Input 46) ..... 166
RPINR47 (Peripheral Pin Select Input 47) ..... 167
RPINR48 (Peripheral Pin Select Input 48) ..... 167
RPINR49 (Peripheral Pin Select Input 49) ..... 168
RPINR5 (Peripheral Pin Select Input 5) ..... 151
RPINR6 (Peripheral Pin Select Input 6) ..... 151
RPINR7 (Peripheral Pin Select Input 7) ..... 152
RPINR8 (Peripheral Pin Select Input 8) ..... 152
RPINR9 (Peripheral Pin Select Input 9) ..... 153
RPOR0 (Peripheral Pin Select Output 0) ..... 169
RPOR1 (Peripheral Pin Select Output 1) ..... 169
RPOR10 (Peripheral Pin Select Output 10) ..... 174
RPOR11 (Peripheral Pin Select Output 11) ..... 174
RPOR12 (Peripheral Pin Select Output 12) ..... 175
RPOR13 (Peripheral Pin Select Output 13) ..... 175
RPOR14 (Peripheral Pin Select Output 14) ..... 176
RPOR15 (Peripheral Pin Select Output 15) ..... 176
RPOR16 (Peripheral Pin Select Output 16) ..... 177
RPOR17 (Peripheral Pin Select Output 17) ..... 177
RPOR18 (Peripheral Pin Select Output 18) ..... 178
RPOR19 (Peripheral Pin Select Output 19) ..... 178
RPOR2 (Peripheral Pin Select Output 2) ..... 170
RPOR20 (Peripheral Pin Select Output 20) ..... 179
RPOR21 (Peripheral Pin Select Output 21) ..... 179
RPOR22 (Peripheral Pin Select Output 22) ..... 180
RPOR23 (Peripheral Pin Select Output 23) ..... 180
RPOR24 (Peripheral Pin Select Output 24) ..... 181
RPOR25 (Peripheral Pin Select Output 25) ..... 181
RPOR26 (Peripheral Pin Select Output 26) ..... 182
RPOR3 (Peripheral Pin Select Output 3) ..... 170
RPOR4 (Peripheral Pin Select Output 4) ..... 171
RPOR5 (Peripheral Pin Select Output 5) ..... 171
RPOR6 (Peripheral Pin Select Output 6) ..... 172
RPOR7 (Peripheral Pin Select Output 7) ..... 172
RPOR8 (Peripheral Pin Select Output 8) ..... 173
RPOR9 (Peripheral Pin Select Output 9) ..... 173
SENTxCON1 (SENTx Control 1) ..... 431
SENTxDATH (SENTx Receive Data High) ..... 435
SENTxDATL (SENTx Receive Data Low) ..... 435
SENTxSTAT (SENTx Status) ..... 433
SLPxCONH (DACx Slope Control High) ..... 339
SLPxCONL (DACx Slope Control Low) ..... 340
SLPxDAT (DACx Slope Data) ..... 342
SPIxCON1H (SPIx Control 1 High) ..... 392
SPIxCON1L (SPIx Control 1 Low) ..... 390
SPIxCON2L (SPIx Control 2 Low) ..... 394
SPIxIMSKH (SPIx Interrupt Mask High) ..... 399
SPIxIMSKL (SPIx Interrupt Mask Low) ..... 398
SPIxSTATH (SPIx Status High) ..... 397
SPIxSTATL (SPIx Status Low) ..... 395
SR (CPU STATUS) ..... 36, 113
T1CON (Timer1 Control) ..... 438
TRISx (Output Enable for PORTx) ..... 125
UxBRG (UARTx Baud Rate) ..... 374
UxBRGH (UARTx Baud Rate High) ..... 374
UxINT (UARTx Interrupt) ..... 383
UxMODE (UARTx Configuration) ..... 366
UxMODEH (UARTx Configuration High) ..... 368
UxP1 (UARTx Timing Parameter 1) ..... 376
UxP2 (UARTx Timing Parameter 2) ..... 377
UxP3 (UARTx Timing Parameter 3) ..... 378
UxP3H (UARTx Timing Parameter 3 High) ..... 378
UxRXCHK (UARTx Receive Checksum) ..... 380
UxRXREG (UARTx Receive Buffer) ..... 375
UxSCCON (UARTx Smart Card Configuration) ..... 381

UxSCINT (UARTx Smart Card Interrupt) ..... 382
UxSTA (UARTx Status) ..... 370
UxSTAH (UARTx Status High) ..... 372
UxTXCHK (UARTx Transmit Checksum) ..... 379
UxTXREG (UARTx Transmit Buffer) ..... 375
VELxCNT (Velocity x Counter) ..... 354
VELxCNTH (Velocity x Counter High) ..... 354
VELxHLD (Velocity x Counter Hold) ..... 355
VREGCON (Voltage Regulator Control) ..... 535
WDTCONH (Watchdog Timer Control High) ..... 538
WDTCONL (Watchdog Timer Control Low) ..... 537
Resets ..... 97
Brown-out Reset (BOR) ..... 97
Configuration Mismatch Reset (CM) ..... 97
Illegal Condition Reset (IOPUWR) ..... 97
Illegal Opcode ..... 97
Security ..... 97
Uninitialized W Register ..... 97
Master Clear (MCLR) Pin Reset ..... 97
Power-on Reset (POR) ..... 97
RESET Instruction (SWR) ..... 97
Resources ..... 98
Trap Conflict Reset (TRAPR) ..... 97
Watchdog Timer Time-out Reset (WDTO) ..... 97
Revision History ..... 627

**S**

SENTx Protocol Data Frames ..... 428
Serial Peripheral Interface (SPI) ..... 385
Serial Peripheral Interface. *See* SPI.
SFR Blocks
000h ..... 54
100h ..... 55
200h ..... 56
300h ..... 57
400h ..... 58
500h ..... 59
600h ..... 60
800h ..... 61
900h ..... 62
A00h ..... 63
B00h ..... 64
C00h ..... 65
D00h ..... 66
E00h ..... 67
F00h ..... 68
Single-Edge Nibble Transmission (SENT) ..... 427
Control Registers ..... 431
Receive Mode ..... 430
Configuration ..... 430
Transmit Mode ..... 429
Configuration ..... 429
Single-Edge Nibble Transmission for Automotive Applications ..... 427
Single-Edge Nibble Transmission. *See* SENT.
Special Features of the CPU ..... 515
SPI
Control Registers ..... 390

**T**

Terminology Cross Reference ..... 17
Thermal Operating Conditions ..... 554
Thermal Packaging Characteristics ..... 554
Timer1 ..... 437
Control Register ..... 438
Timing Diagrams
BOR and Master Clear Reset Characteristics ..... 569
Clock/Instruction Cycle ..... 191
External Clock ..... 566
High-Speed PWMx Fault Characteristics ..... 571
High-Speed PWMx Module Characteristics ..... 571
I/O Characteristics ..... 569
I2Cx Bus Data (Client Mode) ..... 582
I2Cx Bus Data (Host Mode) ..... 580
I2Cx Bus Start/Stop Bits (Client Mode) ..... 582
I2Cx Bus Start/Stop Bits (Host Mode) ..... 580
QEI Interface Signals ..... 343
SPIx Client Mode (Full-Duplex, CKE = 0, CKP = x, SMP = 0) ..... 576
SPIx Client Mode (Full-Duplex, CKE = 1, CKP = x, SMP = 0) ..... 578
SPIx Host Mode (Full-Duplex, CKE = 0, CKP = x, SMP = 1) ..... 575
SPIx Host Mode (Full-Duplex, CKE = 1, CKP = x, SMP = 1) ..... 574
SPIx Host Mode (Half-Duplex, Transmit Only, CKE = 0) ..... 572
SPIx Host Mode (Half-Duplex, Transmit Only, CKE = 1) ..... 573
UARTx I/O Characteristics ..... 584

**U**

UART
Architectural Overview ..... 364
Character Frame ..... 365
Control Registers ..... 366
Data Buffers ..... 365
Protocol Extensions ..... 365
Unique Device Identifier (UDID) ..... 47
Unique Device Identifier. *See* UDID.
Universal Asynchronous Receiver Transmitter (UART) ..... 363
Universal Asynchronous Receiver Transmitter. *See* UART.
User OTP Memory ..... 534

**V**

Voltage Regulator (On-Chip) ..... 534

**W**

Watchdog Timer (WDT) ..... 515
WWW Address ..... 639
WWW, On-Line Support ..... 15



© 2017-2021 Microchip Technology Inc.

## THE MICROCHIP WEBSITE

Microchip provides online support via our WWW site at www.microchip.com. This website is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the website contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip website at www.microchip.com. Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or Field Application Engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

**Technical support is available through the website at: http://microchip.com/support**

**NOTES:**


© 2017-2021 Microchip Technology Inc.

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

**dsPIC 33 CK 256 MP 508 T - I / PT - XXX**

- **Microchip Trademark**
- **Architecture**
- **Flash Memory Family**
- **Program Memory Size (Kbyte)**
- **Product Group**
- **Pin Count**
- **Tape and Reel Flag (if applicable)**
- **Temperature Range**
- **Package**
- **Pattern**

| | | |
|---|---|---|
| **Architecture:** | 33 | = 16-Bit Digital Signal Controller |
| **Product Group:** | MP | = Motor Control/Power Supply |
| **Pin Count:** | 02 | = 28-pin |
| | 03 | = 36-pin |
| | 05 | = 48-pin |
| | 06 | = 64-pin |
| | 08 | = 80-pin |
| **Temperature Range:** | I | = -40°C to +85°C (Industrial) |
| | E | = -40°C to +125°C (Extended) |
| | H | = -40°C to +150°C (High) |
| **Package:** | SS | = Plastic Shrink Small Outline – (28-pin) 5.30 mm body (SSOP) |
| | 2N | = Ultra Thin Plastic Quad Flat, No Lead – (28-pin) 6x6 mm body (UQFN) |
| | M5 | = Ultra Thin Plastic Quad Flat, No Lead – (36-pin) 5x5 mm body (UQFN) |
| | PT | = Thin Quad Flatpack – (48-pin) 7x7 mm body (TQFP) |
| | M4 | = Ultra Thin Plastic Quad Flat, No Lead – (48-pin) 6x6 mm body (UQFN) |
| | PT | = Plastic Thin Quad Flatpack – (64-pin) 10x10 mm body (TQFP) |
| | MR | = Plastic Quad Flat, No Lead – (64-pin) 9x9 mm body (QFN) |
| | PT | = Plastic Thin Quad Flatpack – (80-pin) 12x12 mm body (TQFP) |

**Examples:**

dsPIC33CK256MP508-I/PT:
dsPIC33, Enhanced Performance, 256-Kbyte Program Memory, MC,SMPS, 80-Pin, Industrial Temperature, TQFP Package.

**NOTES:**


© 2017-2021 Microchip Technology Inc.

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods being used in attempts to breach the code protection features of the Microchip devices. We believe that these methods require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Attempts to breach these code protection features, most likely, cannot be accomplished without violating Microchip's intellectual property rights.
- Microchip is willing to work with any customer who is concerned about the integrity of its code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable." Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication is provided for the sole purpose of designing with and using Microchip products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL LOSS, DAMAGE, COST OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

*For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.*

**Trademarks**

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackeTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SMART-I.S., storClad, SQI, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2017-2021, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-8674-9

# Worldwide Sales and Service


## AMERICAS

**Corporate Office**
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
http://www.microchip.com/support
Web Address:
www.microchip.com

**Atlanta**
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

**Austin, TX**
Tel: 512-257-3370

**Boston**
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

**Chicago**
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

**Dallas**
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

**Detroit**
Novi, MI
Tel: 248-848-4000

**Houston, TX**
Tel: 281-894-5983

**Indianapolis**
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453
Tel: 317-536-2380

**Los Angeles**
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608
Tel: 951-273-7800

**Raleigh, NC**
Tel: 919-844-7510

**New York, NY**
Tel: 631-435-6000

**San Jose, CA**
Tel: 408-735-9110
Tel: 408-436-4270

**Canada - Toronto**
Tel: 905-695-1980
Fax: 905-695-2078

## ASIA/PACIFIC

**Australia - Sydney**
Tel: 61-2-9868-6733

**China - Beijing**
Tel: 86-10-8569-7000

**China - Chengdu**
Tel: 86-28-8665-5511

**China - Chongqing**
Tel: 86-23-8980-9588

**China - Dongguan**
Tel: 86-769-8702-9880

**China - Guangzhou**
Tel: 86-20-8755-8029

**China - Hangzhou**
Tel: 86-571-8792-8115

**China - Hong Kong SAR**
Tel: 852-2943-5100

**China - Nanjing**
Tel: 86-25-8473-2460

**China - Qingdao**
Tel: 86-532-8502-7355

**China - Shanghai**
Tel: 86-21-3326-8000

**China - Shenyang**
Tel: 86-24-2334-2829

**China - Shenzhen**
Tel: 86-755-8864-2200

**China - Suzhou**
Tel: 86-186-6233-1526

**China - Wuhan**
Tel: 86-27-5980-5300

**China - Xian**
Tel: 86-29-8833-7252

**China - Xiamen**
Tel: 86-592-2388138

**China - Zhuhai**
Tel: 86-756-3210040

## ASIA/PACIFIC

**India - Bangalore**
Tel: 91-80-3090-4444

**India - New Delhi**
Tel: 91-11-4160-8631

**India - Pune**
Tel: 91-20-4121-0141

**Japan - Osaka**
Tel: 81-6-6152-7160

**Japan - Tokyo**
Tel: 81-3-6880- 3770

**Korea - Daegu**
Tel: 82-53-744-4301

**Korea - Seoul**
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**
Tel: 60-3-7651-7906

**Malaysia - Penang**
Tel: 60-4-227-8870

**Philippines - Manila**
Tel: 63-2-634-9065

**Singapore**
Tel: 65-6334-8870

**Taiwan - Hsin Chu**
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**
Tel: 886-7-213-7830

**Taiwan - Taipei**
Tel: 886-2-2508-8600

**Thailand - Bangkok**
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**
Tel: 84-28-5448-2100

## EUROPE

**Austria - Wels**
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

**Denmark - Copenhagen**
Tel: 45-4485-5910
Fax: 45-4485-2829

**Finland - Espoo**
Tel: 358-9-4520-820

**France - Paris**
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

**Germany - Garching**
Tel: 49-8931-9700

**Germany - Haan**
Tel: 49-2129-3766400

**Germany - Heilbronn**
Tel: 49-7131-72400

**Germany - Karlsruhe**
Tel: 49-721-625370

**Germany - Munich**
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

**Germany - Rosenheim**
Tel: 49-8031-354-560

**Israel - Ra'anana**
Tel: 972-9-744-7705

**Italy - Milan**
Tel: 39-0331-742611
Fax: 39-0331-466781

**Italy - Padova**
Tel: 39-049-7625286

**Netherlands - Drunen**
Tel: 31-416-690399
Fax: 31-416-690340

**Norway - Trondheim**
Tel: 47-7288-4388

**Poland - Warsaw**
Tel: 48-22-3325737

**Romania - Bucharest**
Tel: 40-21-407-87-50

**Spain - Madrid**
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

**Sweden - Gothenberg**
Tel: 46-31-704-60-40

**Sweden - Stockholm**
Tel: 46-8-5090-4654

**UK - Wokingham**
Tel: 44-118-921-5800
Fax: 44-118-921-5820



© 2017-2021 Microchip Technology Inc.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View DSPIC33CK128MP508t-I/PT on WIN SOURCE
- Microchip Technology Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management