



**THE DATASHEET OF**  
**10142348-005LF**



# MicroSpace™ Crimp-To-Wire Connector Platform

## COMPACT, ROBUST AND VERSATILE CONNECTORS SYSTEM

MicroSpace™ Crimp-to-Wire connector platform's unique design enables LV214 Severity-2 and performs at 1.27mm, 1.5mm, and 1.8mm pitch. MicroSpace™ will be available in single and double row versions, with top and side latch configurations.

- LV214 Severity-2 Compatible
- Keying to prevent visual mismatching
- Terminal Positioning Assurance (TPA)
- Primary and secondary contact retention
- Connector Positioning Assurance (CPA)



### FEATURES

- Design based on existing and proven design controls
- Existing crimp section and automated crimp tooling up to 22AWG
- 4N normal force for vibration and >75N connector locking strength
- Poka-yoke polarization
- Terminal Positioning Assurance (TPA)
- Current rating up to 4A per contact
- Connector Positioning Assurance (CPA)
- Low insertion force terminal available

### BENEFITS

- Suitable for harsh environments
- No specific industrial tools required
- High vibration and locking resistance
- Visual mismatching prevention system
- Ensures proper terminal insertion position and retention
- Meets higher power performance requirements
- Assures that connectors are properly mated and locked together
- Makes it easier to mate with receptacle

## TECHNICAL INFORMATION

### MATERIAL

- Contact for Board Header Connector: High Current Alloy with optional Tin and Gold plating
- Housing: High Temperature Thermoplastic, UL94V-0
- Crimping Terminal: High Current Alloy with optional Tin and Gold plating

### MECHANICAL PERFORMANCE

- Terminal Insertion Force/Terminal: <3N
- Terminal Retention into Housing: >50N
- Durability: 20 mating cycles for Sn; 100 mating cycles for Au
- Wire Pullout Force for 0.35qmm<sup>2</sup>: >50N min.

### APPROVALS AND CERTIFICATIONS

- LV214 – Severity 2 Compatible

### PACKAGING

- PCB Header: Tape & Reel
- Receptacle Housing: Bag
- Terminal: Reel

### ELECTRICAL PERFORMANCE

- Low Level Contact Resistance: <30mΩ
- Insulation Resistance: >100MΩ
- Voltage Rating: 48V
- Current Rating:
  - 1.27mm pitch Staggered: 4A
  - 1.27 mm pitch Side To Side: 2A
  - 1.5mm pitch: 3A
  - 1.8mm pitch: 4A
- Dielectric Withstanding Voltage: 500VAC
- Temperature Rise: 30°C max.

### ENVIRONMENTAL

- Operating Temperature Range: -40°C to +130°C

### TARGET MARKETS/APPLICATIONS



Camera/Sensor  
Cluster/Navigation  
HVAC  
Headliner  
Lighting  
Power Steering  
Radio/DVD


## PART NUMBERS

Description			Configuration			
Pitch	Versions	No. of Ways	Header Assembly (Horizontal)	Header Assembly (Vertical)	Receptacle Assembly	Crimp-to-Wire Receptacle
1.27mm	Staggered	2-3	10142396*	10142407*	10142395*	10141272*
		4-16	10142344*	10143535*	10142348*	10141272*
1.5mm	Single Row	2	10159808*	10159449*	10156818*	10141272*
1.8mm	Single Row	4	10142963*		10142961*	10141272*


Find part number details using the search box on [www.amphenol-cs.com](http://www.amphenol-cs.com)

\*denotes base part number. Please contact Amphenol for complete part numbers and for other available configurations


## PART NUMBER SELECTOR – HEADER

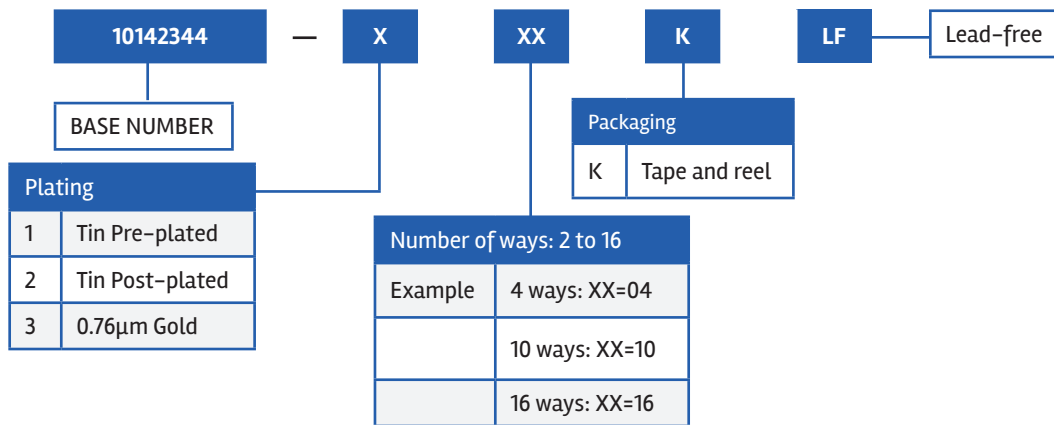

## PART NUMBER SELECTOR – RECEPTACLE

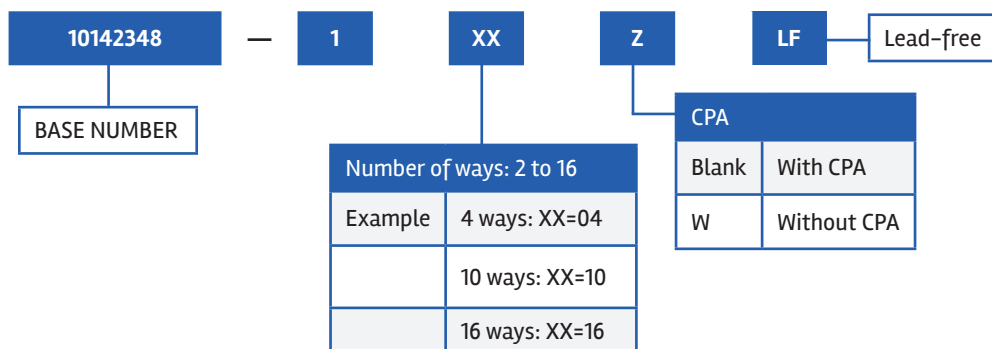

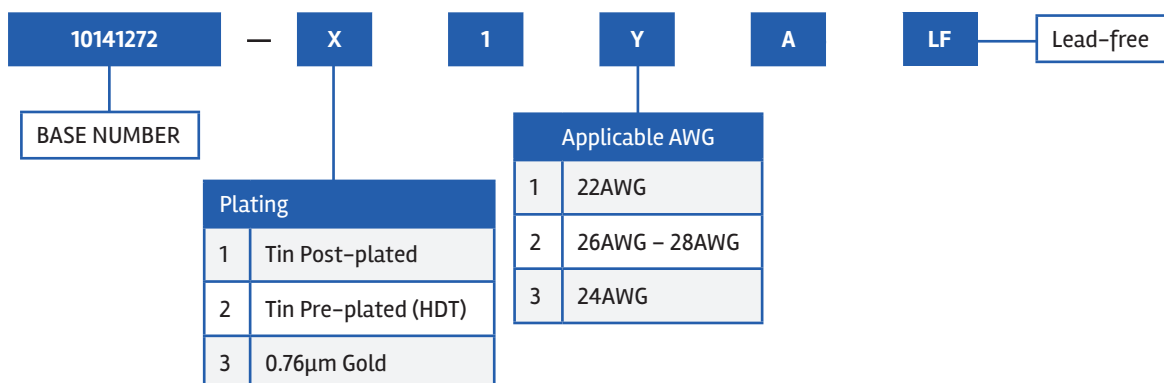

## PART NUMBER SELECTOR – TERMINALS



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 10142348-005LF on WIN SOURCE](#)
-  [Amphenol FCI Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management