


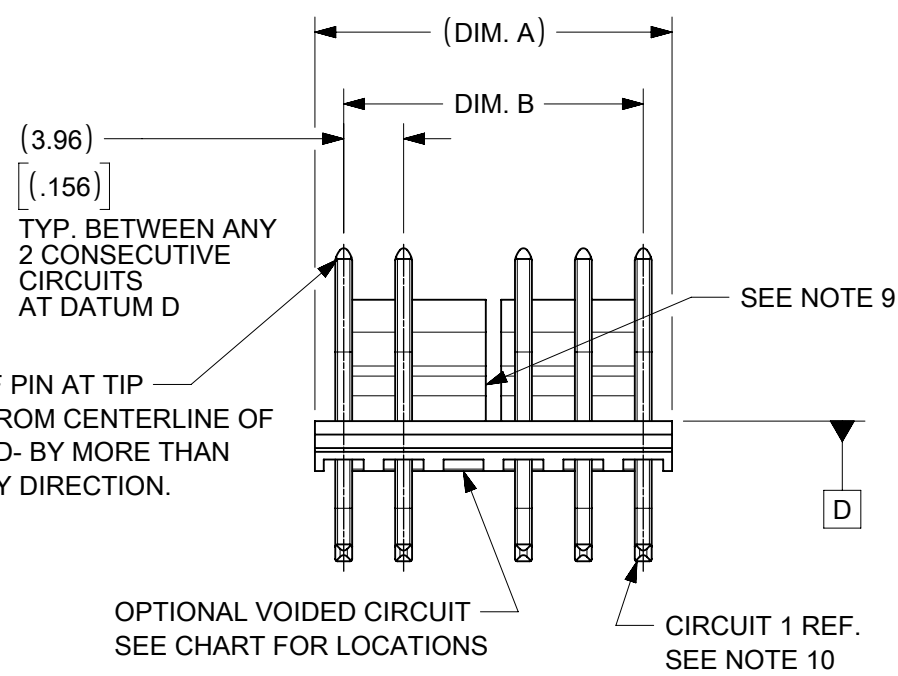


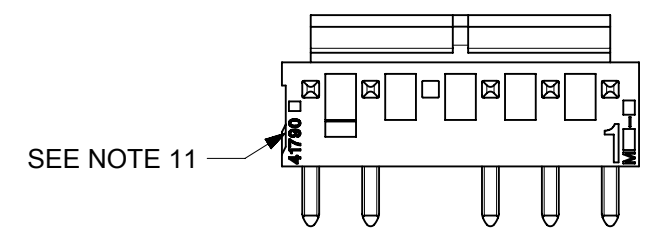


THE DATASHEET OF
0026605080

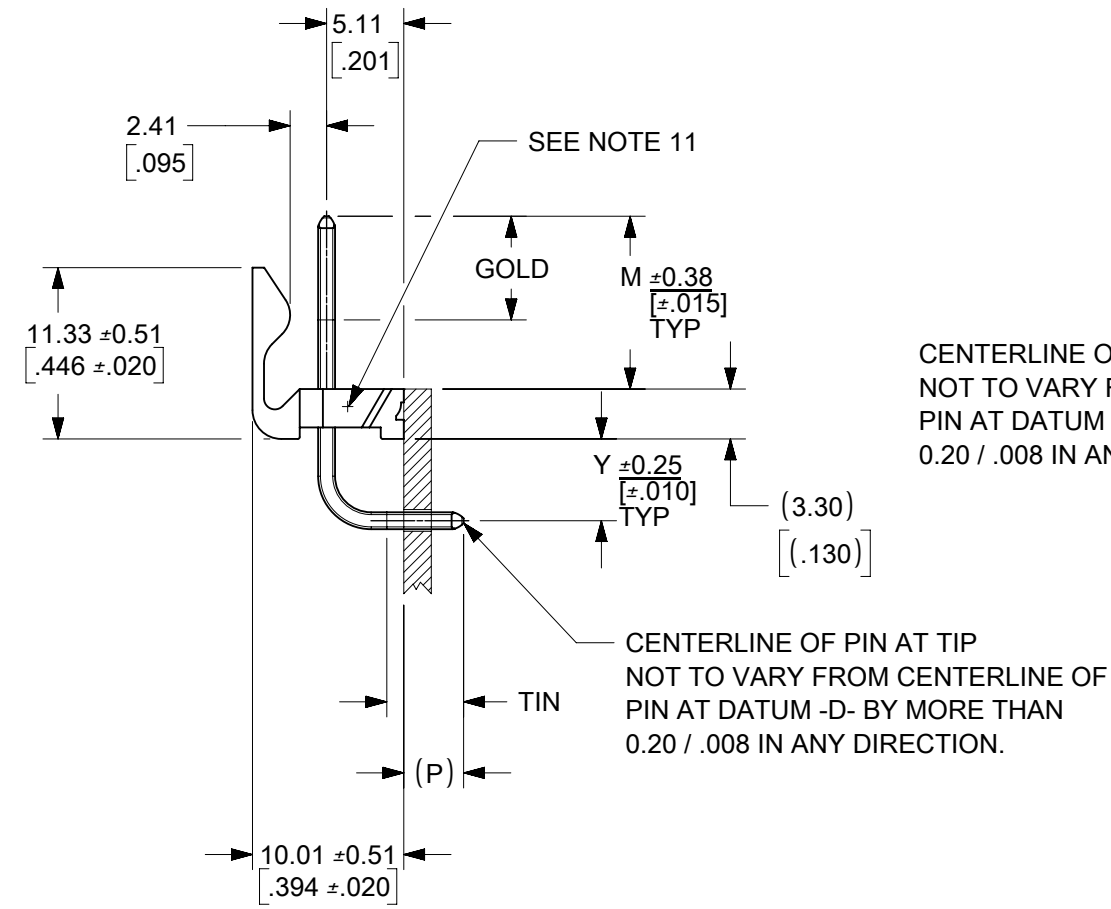

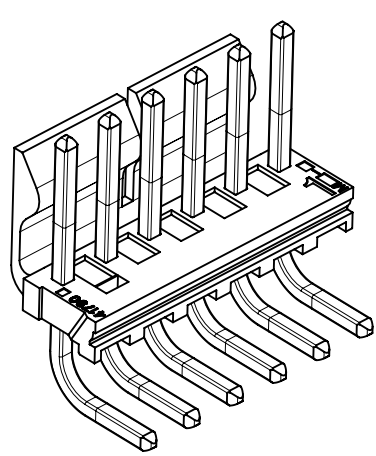

CKT	DIM. A	DIM. B	SLOT LOC BETWEEN CKTS
2	7.77 .306	3.96 ± 0.05 .156 ± 0.02	NONE
3	11.73 .462	7.92 ± 0.08 .312 ± 0.03	NONE
4	15.70 .618	11.89 ± 0.08 .468 ± 0.03	NONE
5	19.66 .774	15.85 ± 0.10 .624 ± 0.04	NONE
6	23.62 .930	19.81 ± 0.10 .780 ± 0.04	3 & 4
7	27.58 1.086	23.77 ± 0.10 .936 ± 0.04	4 & 5
8	31.55 1.242	27.74 ± 0.13 1.092 ± 0.05	4 & 5
9	35.51 1.398	31.70 ± 0.13 1.248 ± 0.05	5 & 6
10	39.47 1.554	35.66 ± 0.13 1.404 ± 0.05	5 & 6
11	43.43 1.710	39.62 ± 0.15 1.560 ± 0.06	6 & 7
12	47.40 1.866	43.59 ± 0.15 1.716 ± 0.06	4 & 5 8 & 9
13	51.36 2.022	47.55 ± 0.15 1.872 ± 0.06	4 & 5 9 & 10
14	55.32 2.178	51.51 ± 0.18 2.028 ± 0.07	5 & 6 9 & 10
15	59.28 2.334	55.47 ± 0.18 2.184 ± 0.07	5 & 6 10 & 11
16	63.25 2.490	59.44 ± 0.18 2.340 ± 0.07	5 & 6 11 & 12
17	67.21 2.646	63.40 ± 0.20 2.496 ± 0.08	6 & 7 11 & 12
18	71.17 2.802	67.36 ± 0.20 2.652 ± 0.08	6 & 7 12 & 13

- NOTES:
- MATERIAL: HEADER-GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).
 - FINISH: (197) OVERALL REFLOWED MATTE TIN: 0.00152/.000060 MIN. OVER 0.00127/.000050 MIN. NICKEL OVERALL.
(154) OVERALL TIN: .00254/.000100 MIN OVER .00127/.000050 MIN NICKEL.
(208) SELECT GOLD: .00038/.000015 MIN, SELECT TIN: .00254/.000100 MIN, OVERALL NICKEL UNDERPLATE: .00127/.000050 MIN.
(228) SELECT GOLD: .00076/.000030 MIN, SELECT TIN: .00254/.000100 MIN, OVERALL NICKEL UNDERPLATE: .00127/.000050 MIN.
(241) SELECT GOLD: 0.00051/.000020 MIN. SELECT TIN: 0.00254/.000100 MIN. OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.
FOR ADDITIONAL PLATING INFO, SEE SD-88.
 - PRODUCT SPECIFICATION AND PROCESS PARAMETERS: SEE PS-08-50.
 - PACKAGING INFORMATION: SEE CHART
 - SOLDERABILITY: PER SMES-152.
 - PIN PUSH-OUT FORCE: PRIOR TO SOLDERING, A 3 LB. MINIMUM FORCE (IN EITHER DIRECTION)
 - PARTS ARE STACKABLE END TO END ON 3.96/.156 CENTERS.
 - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
 - SLOTS ON BACKWALL ARE BETWEEN CIRCUITS. SEE CHART FOR LOCATION.
 - CIRCUIT 1 DESIGNATION IS USED TO DEFINE VOID LOCATION. CIRCUIT 1 MAY OR MAY NOT LINE UP WITH CIRCUIT 1 ON THE MATING HOUSING.
 - FEATURE MAY BE ON EITHER SIDE OF THE PART

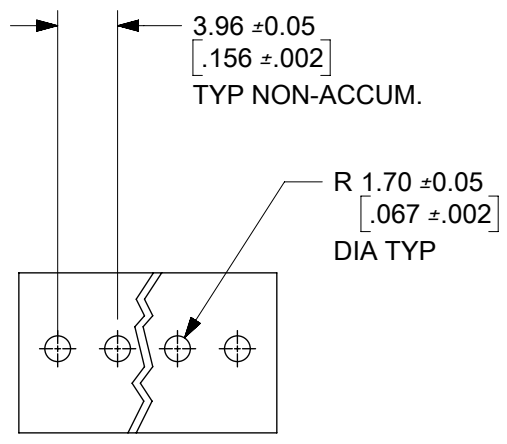

PCB LAYOUT: COMPONENT SIDE


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS MM/IN	SCALE 2:1	CURRENT REV DESC: OBSOLETE PART NUMBER		
GENERAL TOLERANCES (UNLESS SPECIFIED)		molex KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS PRODUCT CUSTOMER DRAWING		
	MM			INCH
4 PLACES	\pm			\pm
3 PLACES	\pm			± 0.01
2 PLACES	± 0.25			± 0.015
1 PLACE	± 0.38	\pm		
0 PLACES	\pm	\pm		
ANGULAR TOL	$\pm 0.5^\circ$			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	
		SERIES	SHEET NUMBER	
		MATERIAL NUMBER	CUSTOMER	
		SEE TABLE	GENERAL MARKET	
		41792	1 OF 8	

EC NO: 650267
DRWN: SKANDB 2020/10/27
CHK'D: GGA 2020/12/10
APPR: GGA 2020/12/10

INITIAL REVISION:
DRWN: JSCHAFFER 11-07-03
APPR: MARGULIS 11-17-03

DOCUMENT NUMBER: SDA-41792
DOC TYPE: PSD
DOC PART: 000
REVISION: L1

10	9	8	7	6	5	4	3	2	1
		41792							
E	OPTIONS	Group	A-41792-0002/0018	Group	A-41792-0511/0527	Group	A-41792-0528/0544	Group	A-41792-0562/0578
		Header No:	41790-0002/0018	Header No:	41790-0002/0018	Header No:	41790-0002/0018	Header No:	41790-0002/0018
		Pin No:	43294-0572	Pin No:	43294-0569	Pin No:	43294-0570	Pin No:	43294-0570
		Plating:	197 - TIN	Plating:	208 - 15 GOLD	Plating:	228 - 30 GOLD	Plating:	228 - 30 GOLD
		Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100
		Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450
		Gold Loc G	N/A	Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270
		Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213
		PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156
		Tin Loc T	OVERALL	Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200
		Voided Ckts	NONE	Voided Ckts	NONE	Voided Ckts	NONE	Voided Ckts	2
		Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	
2	26-60-5020	A-41792-0002	41792-0511	A-41792-0511	41792-0528	A-41792-0528	41792-0562	A-41792-0562	
3	26-60-5030	A-41792-0003	41792-0512	A-41792-0512	41792-0529	A-41792-0529	41792-0563	A-41792-0563	
4	26-60-5040	A-41792-0004	41792-0513	A-41792-0513	41792-0530	A-41792-0530	41792-0564	A-41792-0564	
5	26-60-5050	A-41792-0005	41792-0514	A-41792-0514	41792-0531	A-41792-0531	41792-0565	A-41792-0565	
6	26-60-5060	A-41792-0006	41792-0515	A-41792-0515	41792-0532	A-41792-0532	41792-0566	A-41792-0566	
7	26-60-5070	A-41792-0007	41792-0516	A-41792-0516	41792-0533	A-41792-0533	41792-0567	A-41792-0567	
8	26-60-5080	A-41792-0008	41792-0517	A-41792-0517	41792-0534	A-41792-0534	41792-0568	A-41792-0568	
9	26-60-5090	A-41792-0009	41792-0518	A-41792-0518	41792-0535	A-41792-0535	41792-0569	A-41792-0569	
10	26-60-5100	A-41792-0010	41792-0519	A-41792-0519	41792-0536	A-41792-0536	41792-0570	A-41792-0570	
11	26-60-5110	A-41792-0011	41792-0520	A-41792-0520	41792-0537	A-41792-0537	41792-0571	A-41792-0571	
12	26-60-5120	A-41792-0012	41792-0521	A-41792-0521	41792-0538	A-41792-0538	41792-0572	A-41792-0572	
13	26-60-5130	A-41792-0013	41792-0522	A-41792-0522	41792-0539	A-41792-0539	41792-0573	A-41792-0573	
14	26-60-5140	A-41792-0014	41792-0523	A-41792-0523	41792-0540	A-41792-0540	41792-0574	A-41792-0574	
15	26-60-5150	A-41792-0015	41792-0524	A-41792-0524	41792-0541	A-41792-0541	41792-0575	A-41792-0575	
16	26-60-5160	A-41792-0016	41792-0525	A-41792-0525	41792-0542	A-41792-0542	41792-0576	A-41792-0576	
17	26-60-5170	A-41792-0017	41792-0526	A-41792-0526	41792-0543	A-41792-0543	41792-0577	A-41792-0577	
18	26-60-5180	A-41792-0018	41792-0527	A-41792-0527	41792-0544	A-41792-0544	41792-0578	A-41792-0578	
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS: MM/IN SCALE: 1:1 CURRENT REV DESC: OBSOLETE PART NUMBER GENERAL TOLERANCES (UNLESS SPECIFIED): 4 PLACES ± 0.15 ± 0.015 3 PLACES ± 0.25 ± 0.015 2 PLACES ± 0.38 ± 0.015 1 PLACE ± 0.50 ± 0.015 0 PLACES ± 0.50 ± 0.015 ANGULAR TOL ± 0.5° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS THIRD ANGLE PROJECTION DRAWING SERIES: B-SIZE 41792 MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 2 OF 8			
						 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS PRODUCT CUSTOMER DRAWING EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10 INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03 DOCUMENT NUMBER: SDA-41792 DOC TYPE: PSD DOC PART: 000 REVISION: L1			
DOCUMENT STATUS	P1	RELEASE DATE	2020/12/10	08:28:35					
9	8	7	6	5	4	3	2	1	

10	9	8	7	6	5	4	3	2	1																																																																																																																																																																				
									41792																																																																																																																																																																				
E	OPTIONS	Group	A-41792-0019/0035	Group	A-41792-0036/0050	Group	A-41792-0051/0067	Group																																																																																																																																																																					
		Header No:	41790-0002/0018	Header No:	41790-0004/0018	Header No:	41790-0002/0018	Header No:																																																																																																																																																																					
		Pin No:	43294-0573	Pin No:	43294-0572	Pin No:	43294-0643	Pin No:																																																																																																																																																																					
		Plating:	241 - GOLD	Plating:	197 - TIN	Plating:	197 - TIN	Plating:																																																																																																																																																																					
		Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	29.97 / 1.180	Pin Length L																																																																																																																																																																					
		Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	13.41 / .528	Mating M																																																																																																																																																																					
		Gold Loc G	6.86/ .270	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G																																																																																																																																																																					
		Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y																																																																																																																																																																					
		PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	4.01 / .158	PC Tail P																																																																																																																																																																					
		Tin Loc T	5.08/ .200	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T																																																																																																																																																																					
		Voided Ckts	NONE	Voided Ckts	4	Voided Ckts	NONE	Voided Ckts																																																																																																																																																																					
Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per																																																																																																																																																																							
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number																																																																																																																																																																					
2	26-61-5020	A-41792-0019																																																																																																																																																																											
3	26-61-5030	A-41792-0020																																																																																																																																																																											
4	26-61-5040	A-41792-0021	26-61-5043	A-41792-0036																																																																																																																																																																									
5	26-61-5050	A-41792-0022	26-61-5053	A-41792-0037																																																																																																																																																																									
6	26-61-5060	A-41792-0023	26-61-5063	A-41792-0038																																																																																																																																																																									
7	26-61-5070	A-41792-0024	26-61-5073	A-41792-0039																																																																																																																																																																									
8	26-61-5080	A-41792-0025	26-61-5083	A-41792-0040																																																																																																																																																																									
9	26-61-5090	A-41792-0026	26-61-5093	A-41792-0041																																																																																																																																																																									
10	26-61-5100	A-41792-0027	26-61-5103	A-41792-0042																																																																																																																																																																									
11	26-61-5110	A-41792-0028	26-61-5113	A-41792-0043																																																																																																																																																																									
12	26-61-5120	A-41792-0029	26-61-5123	A-41792-0044																																																																																																																																																																									
13	26-61-5130	A-41792-0030	26-61-5133	A-41792-0045																																																																																																																																																																									
14	26-61-5140	A-41792-0031	26-61-5143	A-41792-0046																																																																																																																																																																									
15	26-61-5150	A-41792-0032	26-61-5153	A-41792-0047																																																																																																																																																																									
16	26-61-5160	A-41792-0033	26-61-5163	A-41792-0048																																																																																																																																																																									
17	26-61-5170	A-41792-0034	26-61-5173	A-41792-0049																																																																																																																																																																									
18	26-61-5180	A-41792-0035	26-61-5183	A-41792-0050																																																																																																																																																																									
<table border="1"> <tr> <td colspan="10">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2">DIMENSION UNITS</td> <td colspan="2">SCALE</td> <td colspan="6">CURRENT REV DESC: OBSOLETE PART NUMBER</td> <td colspan="2" rowspan="2">  </td> </tr> <tr> <td colspan="2">MM/IN</td> <td colspan="2">1:1</td> <td colspan="6"></td> </tr> <tr> <td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> <td colspan="2"></td> <td colspan="2">EC NO: 650267</td> <td colspan="2">2020/10/27</td> <td colspan="2">KK .156 HEADER ASSEMBLY</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">DRWN: SKANDB</td> <td colspan="2">2020/12/10</td> <td colspan="2">FRICITION LOCK RIGHT ANGLE W/O PEGS</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">CHK'D: GGA</td> <td colspan="2">2020/12/10</td> <td colspan="2">PRODUCT CUSTOMER DRAWING</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">APPR: GGA</td> <td colspan="2">2020/12/10</td> <td colspan="2"></td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">INITIAL REVISION:</td> <td colspan="2"></td> <td colspan="2">DOCUMENT NUMBER</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">DRWN: JSCHAFFER</td> <td colspan="2">11-07-03</td> <td colspan="2">SDA-41792</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">APPR: MARGULIS</td> <td colspan="2">11-17-03</td> <td colspan="2">PSD 000 L1</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td> <td colspan="2">THIRD ANGLE PROJECTION</td> <td colspan="2">SHEET NUMBER</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">DRAWING</td> <td colspan="2">SERIES</td> <td colspan="2">MATERIAL NUMBER</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">B-SIZE</td> <td colspan="2">41792</td> <td colspan="2">SEE TABLE</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">CUSTOMER</td> <td colspan="2">GENERAL MARKET</td> <td colspan="2">3 OF 8</td> </tr> </table>										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER								MM/IN		1:1								GENERAL TOLERANCES (UNLESS SPECIFIED)						EC NO: 650267		2020/10/27		KK .156 HEADER ASSEMBLY								DRWN: SKANDB		2020/12/10		FRICITION LOCK RIGHT ANGLE W/O PEGS								CHK'D: GGA		2020/12/10		PRODUCT CUSTOMER DRAWING								APPR: GGA		2020/12/10										INITIAL REVISION:				DOCUMENT NUMBER								DRWN: JSCHAFFER		11-07-03		SDA-41792								APPR: MARGULIS		11-17-03		PSD 000 L1								DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		SHEET NUMBER								DRAWING		SERIES		MATERIAL NUMBER								B-SIZE		41792		SEE TABLE								CUSTOMER		GENERAL MARKET		3 OF 8	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																																																																																													
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																																																																																																									
MM/IN		1:1																																																																																																																																																																											
GENERAL TOLERANCES (UNLESS SPECIFIED)						EC NO: 650267		2020/10/27		KK .156 HEADER ASSEMBLY																																																																																																																																																																			
						DRWN: SKANDB		2020/12/10		FRICITION LOCK RIGHT ANGLE W/O PEGS																																																																																																																																																																			
						CHK'D: GGA		2020/12/10		PRODUCT CUSTOMER DRAWING																																																																																																																																																																			
						APPR: GGA		2020/12/10																																																																																																																																																																					
						INITIAL REVISION:				DOCUMENT NUMBER																																																																																																																																																																			
						DRWN: JSCHAFFER		11-07-03		SDA-41792																																																																																																																																																																			
						APPR: MARGULIS		11-17-03		PSD 000 L1																																																																																																																																																																			
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		SHEET NUMBER																																																																																																																																																																			
						DRAWING		SERIES		MATERIAL NUMBER																																																																																																																																																																			
						B-SIZE		41792		SEE TABLE																																																																																																																																																																			
						CUSTOMER		GENERAL MARKET		3 OF 8																																																																																																																																																																			
DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35																																																																																																																																																																								
9	8	7	6	5	4	3	2	1																																																																																																																																																																					
<small> FORMAT: Eng-16ga-master-ib-prod-B REVISION: E DATE: 2020/11/4 </small>																																																																																																																																																																													



10	9	8	7	6	5	4	3	2	1																																																																																								
41792																																																																																																	
F	E	OPTIONS	Group	A-41792-0460/0471	Group	A-41792-0472/0483	Group	A-41792-0484/0493	Group	A-41792-0579/0595																																																																																							
			Header No:	41790-0007/0018	Header No:	41790-0007/0018	Header No:	41790-0009/0018	Header No:	41790-0002/0018																																																																																							
			Pin No:	43294-0572	Pin No:	43294-0572	Pin No:	43294-0572	Pin No:	43294-0571																																																																																							
			Plating:	197 - TIN	Plating:	197 - TIN	Plating:	197 - TIN	Plating:	154 - TIN																																																																																							
			Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100																																																																																							
			Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450																																																																																							
			Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A																																																																																							
			Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213																																																																																							
			PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156																																																																																							
			Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL																																																																																							
			Voided Ckts	2, 7	Voided Ckts	4, 7	Voided Ckts	2, 5, 9	Voided Ckts	NONE																																																																																							
			Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002																																																																																							
D	C	B	Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number																																																																																						
			2							50-29-1904	A-41792-0579																																																																																						
			3							50-29-1905	A-41792-0580																																																																																						
			4							50-29-1906	A-41792-0581																																																																																						
			5							50-29-1907	A-41792-0582																																																																																						
			6							50-29-1908	A-41792-0583																																																																																						
			7	41792-0460	A-41792-0460		A-41792-0472			50-29-1909	A-41792-0584																																																																																						
			8	41792-0461	A-41792-0461	26-60-5087	A-41792-0473			50-29-1910	A-41792-0585																																																																																						
			9				A-41792-0474		A-41792-0484	50-29-1911	A-41792-0586																																																																																						
			10	41792-0463	A-41792-0463		A-41792-0475		A-41792-0485	50-29-1912	A-41792-0587																																																																																						
			11	41792-0464	A-41792-0464		A-41792-0476		A-41792-0486	50-29-1913	A-41792-0588																																																																																						
			12	41792-0465	A-41792-0465		A-41792-0477	26-60-5128	A-41792-0487	50-29-1914	A-41792-0589																																																																																						
			13	41792-0466	A-41792-0466		A-41792-0478		A-41792-0488	50-29-1915	A-41792-0590																																																																																						
			14	41792-0467	A-41792-0467		A-41792-0479		A-41792-0489	50-29-1916	A-41792-0591																																																																																						
			15	41792-0468	A-41792-0468		A-41792-0480		A-41792-0490	50-29-1917	A-41792-0592																																																																																						
			16	41792-0469	A-41792-0469		A-41792-0481		A-41792-0491	50-29-1918	A-41792-0593																																																																																						
			17	41792-0470	A-41792-0470		A-41792-0482		A-41792-0492	50-29-1919	A-41792-0594																																																																																						
			18	41792-0471	A-41792-0471		A-41792-0483		A-41792-0493	50-29-1920	A-41792-0595																																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="10" style="text-align: center; font-size: small;">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2">DIMENSION UNITS</td> <td colspan="2">SCALE</td> <td colspan="6">CURRENT REV DESC: OBSOLETE PART NUMBER</td> </tr> <tr> <td colspan="2">MM/IN</td> <td colspan="2">1:1</td> <td colspan="6" rowspan="5" style="text-align: center; vertical-align: middle;"> KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS PRODUCT CUSTOMER DRAWING </td> </tr> <tr> <td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> </tr> <tr> <td></td> <td>MM</td> <td>INCH</td> <td></td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td></td> <td>±</td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td>0.01</td> <td>±</td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td>0.25</td> <td>± 0.015</td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td>0.38</td> <td>±</td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td></td> <td>±</td> </tr> <tr> <td colspan="4">ANGULAR TOL ± 0.5°</td> <td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td> <td colspan="2">THIRD ANGLE PROJECTION</td> <td colspan="2">DRAWING SERIES</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2" style="text-align: center;"> </td> <td colspan="2">B-SIZE 41792</td> <td colspan="2">MATERIAL NUMBER CUSTOMER SHEET NUMBER</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">SEE TABLE GENERAL MARKET 5 OF 8</td> <td colspan="2"></td> </tr> </table>										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER						MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS PRODUCT CUSTOMER DRAWING						GENERAL TOLERANCES (UNLESS SPECIFIED)					MM	INCH		4 PLACES	±		±	3 PLACES	±	0.01	±	2 PLACES	±	0.25	± 0.015	1 PLACE	±	0.38	±	0 PLACES	±		±	ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING SERIES								B-SIZE 41792		MATERIAL NUMBER CUSTOMER SHEET NUMBER								SEE TABLE GENERAL MARKET 5 OF 8			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																	
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																													
MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS PRODUCT CUSTOMER DRAWING																																																																																													
GENERAL TOLERANCES (UNLESS SPECIFIED)																																																																																																	
	MM	INCH																																																																																															
4 PLACES	±		±																																																																																														
3 PLACES	±	0.01	±																																																																																														
2 PLACES	±	0.25	± 0.015																																																																																														
1 PLACE	±	0.38	±																																																																																														
0 PLACES	±		±																																																																																														
ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING SERIES																																																																																									
						B-SIZE 41792		MATERIAL NUMBER CUSTOMER SHEET NUMBER																																																																																									
						SEE TABLE GENERAL MARKET 5 OF 8																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>DOCUMENT STATUS</td> <td>P1</td> <td>RELEASE DATE</td> <td>2020/12/10</td> <td>08:28:35</td> <td colspan="5"></td> </tr> </table>										DOCUMENT STATUS	P1	RELEASE DATE	2020/12/10	08:28:35																																																																																			
DOCUMENT STATUS	P1	RELEASE DATE	2020/12/10	08:28:35																																																																																													
9	8	7	6	5	4	3	2	1																																																																																									

	10	9	8	7	6	5	4	3	2	1					
		41792													
F	E	D	C	B	A	OPTIONS	Group	A-41792-0596/0612	Group	A-41792-0613/0629	Group	A-41792-0484/0493	Group	A-41792-0653	
							Header No:	41790-0007/0018	Header No:	41790-0009/0018	Header No:	41790-0009/0018	Header No:	41790-0005/0018	
							Pin No:	43294-0571	Pin No:	43294-0571	Pin No:	43294-0571	Pin No:	43294-0570	
							Plating:	154 - TIN	Plating:	154 - TIN	Plating:	154 - TIN	Plating:	228 - 30 GOLD	
							Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	
							Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	
							Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	6.86/ .270	
							Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	
							PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96/ .156	
							Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	5.08/ .200	
							Voided Ckts	2, 7	Voided Ckts	2, 5, 9	Voided Ckts	2, 5, 9	Voided Ckts	2, 5	
							Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	
							Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number
							2								
							3								
							4								
							5								
							6							41792-0653	A-41792-0653
7	50-29-1926	A-41792-0601													
8	50-29-1927	A-41792-0602													
9	50-29-1928	A-41792-0603	50-29-1945	A-41792-0620		A-41792-0630									
10	50-29-1929	A-41792-0604	50-29-1946	A-41792-0621		A-41792-0631									
11	50-29-1930	A-41792-0605	50-29-1947	A-41792-0622		A-41792-0632									
12	50-29-1931	A-41792-0606	50-29-1948	A-41792-0623	41792-0633	A-41792-0633									
13	50-29-1932	A-41792-0607	50-29-1949	A-41792-0624		A-41792-0634									
14	50-29-1933	A-41792-0608	50-29-1950	A-41792-0625		A-41792-0635									
15	50-29-1934	A-41792-0609	50-29-1951	A-41792-0626		A-41792-0636									
16	50-29-1935	A-41792-0610	50-29-1952	A-41792-0627		A-41792-0637									
17	50-29-1936	A-41792-0611	50-29-1953	A-41792-0628		A-41792-0638									
18	50-29-1937	A-41792-0612	50-29-1954	A-41792-0629		A-41792-0639									
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER											
MM/IN		1:1													
GENERAL TOLERANCES (UNLESS SPECIFIED)				MM		INCH		EC NO: 650267		2020/10/27					
4 PLACES ±								DRWN: SKANDB		2020/12/10					
3 PLACES ±				0.25		0.015		CHK'D: GGA		2020/12/10					
2 PLACES ±				0.38				APPR: GGA		2020/12/10					
1 PLACE ±								INITIAL REVISION:		DOCUMENT NUMBER					
0 PLACES ±								DRWN: JSCHAFFER		11-07-03					
ANGULAR TOL ± 0.5°								APPR: MARGULIS		11-17-03					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER					
						B-SIZE		41792		CUSTOMER					
DOCUMENT STATUS				P1		RELEASE DATE		2020/12/10 08:28:35		SEE TABLE					
								GENERAL MARKET		SHEET NUMBER					
										6 OF 8					

	10	9	8	7	6	5	4	3	2	1	
	41792										
E	F	OPTIONS	Group	A-41792-0667	Group	A-41792-0677	Group	A-41792-0690	Group	A-41792-0698	
			Header No:	41790-0009/0018	Header No:	41790-0011/0018	Header No:	41790-0006/0018	Header No:	41790-0013/0018	
			Pin No:	43294-0570	Pin No:	43294-0570	Pin No:	43294-0570	Pin No:	43294-0572	
			Plating:	228 - 30 GOLD	Plating:	228 - 30 GOLD	Plating:	228 - 30 GOLD	Plating:	197 - TIN	
			Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	
			Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	
			Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270	Gold Loc G	N/A	
			Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	
			PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	
			Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200	Tin Loc T	OVERALL	
			Voided Ckts	2, 3, 5, 6, 8, 9	Voided Ckts	7, 9, 11	Voided Ckts	2, 4, 6	Voided Ckts	2, 6, 11, 13	
			Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number			
2											
3											
4											
5											
6											
7											
8											
9											
10	41792-0667	A-41792-0667									
11											
12			41792-0677	A-41792-0677	41792-0690	A-41792-0690					
13											
14							41792-0698	A-41792-0698			
15											
16											
17											
18											
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER							
MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS PRODUCT CUSTOMER DRAWING							
GENERAL TOLERANCES (UNLESS SPECIFIED)											
	MM	INCH									
4 PLACES	±	±									
3 PLACES	±	±	0.01								
2 PLACES	±	±	0.25 / 0.015								
1 PLACE	±	±	0.38								
0 PLACES	±	±									
ANGULAR TOL ± 0.5°				EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10 INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER	
						B-SIZE		41792		SDA-41792	
										PSD 000 L1	
										SEE TABLE GENERAL MARKET 7 OF 8	
DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35						
	9	8	7	6	5	4	3	2	1		
<small> FORMAT: Eng-lega-master-ib-prod-8 REVISION: E DATE: 2020/1/14 </small>											

41792

OPTIONS	Group	A-41792-0704	Group		Group		Group	
	Header No:	41790-0005/0018	Header No:		Header No:		Header No:	
	Pin No:	43294-0572	Pin No:		Pin No:		Pin No:	
	Plating:	197 - TIN	Plating:		Plating:		Plating:	
	Pin Length L	27.94 / 1.100	Pin Length L		Pin Length L		Pin Length L	
	Mating M	11.43 / .450	Mating M		Mating M		Mating M	
	Gold Loc G	N/A	Gold Loc G		Gold Loc G		Gold Loc G	
	Height Y	5.41 / .213	Height Y		Height Y		Height Y	
	PC Tail P	3.96/ .156	PC Tail P		PC Tail P		PC Tail P	
	Tin Loc T	OVERALL	Tin Loc T		Tin Loc T		Tin Loc T	
	Voided Ckts	2, 3, 5	Voided Ckts		Voided Ckts		Voided Ckts	
	Pack Per	PK-41792-002	Pack Per		Pack Per		Pack Per	
	Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No
2								
3								
4								
5								
6	41792-0704	A-41792-0704						
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER					
MM/IN		1:1		 <p>KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS</p> <p>PRODUCT CUSTOMER DRAWING</p> <p>EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10</p> <p>INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03</p>					
GENERAL TOLERANCES (UNLESS SPECIFIED)									
	MM	INCH							
4 PLACES	±		±						
3 PLACES	±		± 0.01						
2 PLACES	± 0.25		± 0.015						
1 PLACE	± 0.38		±						
0 PLACES	±		±						
ANGULAR TOL ± 0.5°				<p>DOCUMENT NUMBER: SDA-41792</p> <p>DOC TYPE: PSD</p> <p>DOC PART: 000</p> <p>REVISION: L1</p>					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		SHEET NUMBER	
				B-SIZE		41792		8 OF 8	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 0026605080 on WIN SOURCE](#)

 [Molex, LLC Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management