



THE DATASHEET OF
0026644020





Part Number : [26644020](#)


Product Description : KK 396 Header, Vertical, Friction Lock with Press-fit Plastic Peg PCB, 2 Circuits, Tin (Sn) Plating

Series Number : 42491

Status : Active

Product Category : PCB Headers and Receptacles

Engineering Number : 42491-0002

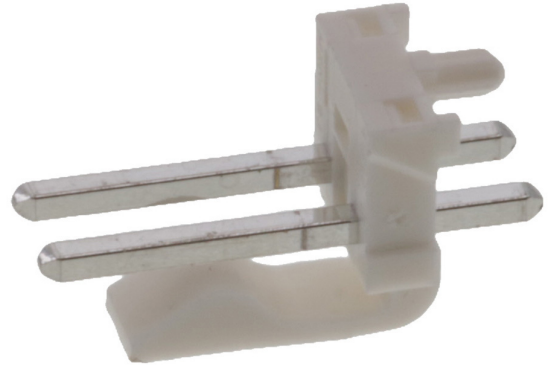

Documents & Resources

Drawings

[026644020_sd.pdf](#)

[PK-42491-001-001.pdf](#)

3D Models and Design Files

[026644020_stp.zip](#)


[SYM-26-64-4020-001.zip](#)

Specifications

[PS-08-50-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS

- REACH SVHC

- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	42491
Description	KK 396 Header, Vertical, Friction Lock with Press-fit Plastic Peg PCB, 2 Circuits, Tin (Sn) Plating
Application	Power, Wire-to-Board
Component Type	PCB Header
Product Name	KK 396
UPC	800754382755

Agency

CSA	LR19980
UL	E29179

Electrical

Current - Maximum per Contact	7.0A
Voltage - Maximum	250V

Physical

Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Durability (mating cycles max)	25
Flammability	94V-0

Glow-Wire Capable	No
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.764/g
Number of Rows	1
Orientation	Vertical
Packaging Type	Bag
PC Tail Length	3.56mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	3.96mm
Plating min - Mating	5.080µm
Plating min - Termination	5.080µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Partial
Stackable	Yes
Temperature Range - Operating	See Product Specification
Termination Interface Style	Through Hole

Solder Process Data

Max-Duration	5
Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	235

Mates With / Use With

Mates with Part(s)

Description	Part Number
KK 3.96mm Single Row Crimp Housings	<u>2139</u>

KK 3.96mm Single Row Crimp Housings	<u>3069</u>
KK 3.96mm Crimp Housings	<u>41695</u>
KK 396 PC Board Connector	<u>41815</u>
KK 3.96mm Pitch Single Row Crimp Housings	<u>6442</u>

This document was generated on Dec 13, 2024

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 0026644020 on WIN SOURCE](#)

 [Molex, LLC Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management