



**THE DATASHEET OF**  
**0257040.PXAPC**



## ATO® BLADE FUSE RATED 32V



### Description

Developed by Littelfuse for the automotive industry, the ATO® fuse has become the original equipment circuit protection standard for foreign and domestic automobiles and trucks. Readily identifiable and easily replaced, this fuse can be specified for a variety of low voltage electronic applications.

### Specifications

Voltage Rating:	32 VDC
Interrupting Rating:	1000A @ 32 VDC
Operating Temperature Range:	-40°C to +105°C
Terminals:	Sn plated zinc alloy
Housing Terminals:	Polyethersulfone, Polysulfone, and Polycarbonate
Complies with:	ISO 8820-3 UL 248 Special Purpose Fuses

### Ordering Information

Part Number	Package Size
0257xxx.PXPV	2000
0257xxx.U	500
0257xxx.L	50

### Time-Current Characteristics

% of Rating	Current Rating	Opening Time Min / Max (s)
100	35-40	360,000 s / -
110	1-30	360,000 s / -
135	1-2 3-40	500 ms / 600 s 0.750 s / 600 s
200	1-2 3-40	100 ms / 5.0 s 0.150 s / 5.0 s
350	1-2 3-40	20 ms / 500 ms 80 ms / 500 ms
600	1-30 35-40	- / 100 ms - / 150 ms

### Ratings

Part Number	Current Rating	Housing Color	Typ. Voltage Drop	Cold Resistance	I <sup>2</sup> t
0257001._	1 A	Black	176 mV	123 mΩ	0.4 A <sup>2</sup> s
0257002._	2 A	Grey	141 mV	53.5 mΩ	1.4 A <sup>2</sup> s
0257003._	3 A	Purple	137 mV	31.1 mΩ	7.4 A <sup>2</sup> s
0257004._	4 A	Pink	136 mV	22.8 mΩ	14 A <sup>2</sup> s
0257005._	5 A	Brown	128 mV	17.85 mΩ	26 A <sup>2</sup> s
025707.5_	7.5 A	Dark Brown	116 mV	10.91 mΩ	60 A <sup>2</sup> s
0257010._	10 A	Red	109 mV	7.70 mΩ	115 A <sup>2</sup> s
0257015._	15 A	Blue	102 mV	4.80 mΩ	340 A <sup>2</sup> s
0257020._	20 A	Yellow	98 mV	3.38 mΩ	520 A <sup>2</sup> s
0257025._	25 A	White	92 mV	2.52 mΩ	1080 A <sup>2</sup> s
0257030._	30 A	Light Green	84 mV	1.97 mΩ	1510 A <sup>2</sup> s
0257035._	35 A	Dark Green	87 mV	1.61 mΩ	2280 A <sup>2</sup> s
0257040._	40 A	Orange	96 mV	1.44 mΩ	3310 A <sup>2</sup> s


Corresponding holder see Section "Fuse Holders."

**ATO® BLADE FUSE RATED 32V**




**Dimensions**


Dimensions in mm

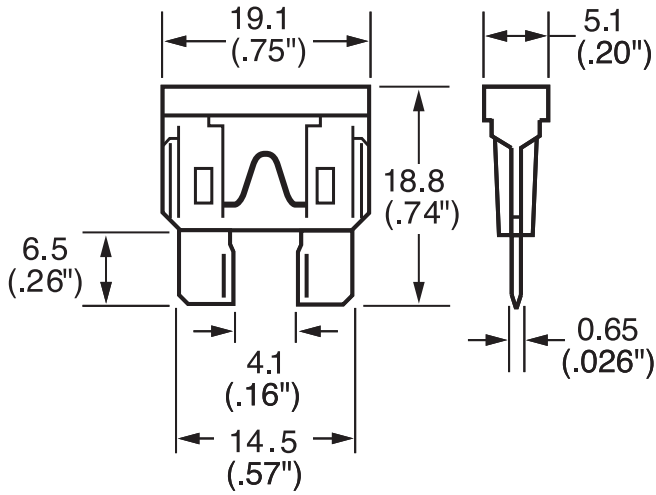

**Temperature Derating Curve**

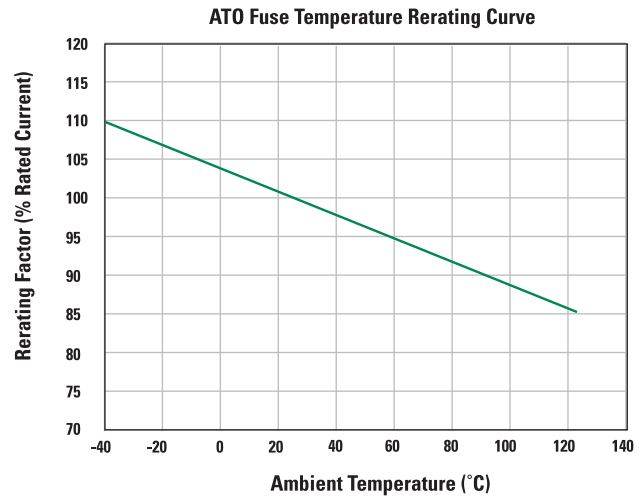

**Time-Current Characteristic Curves**

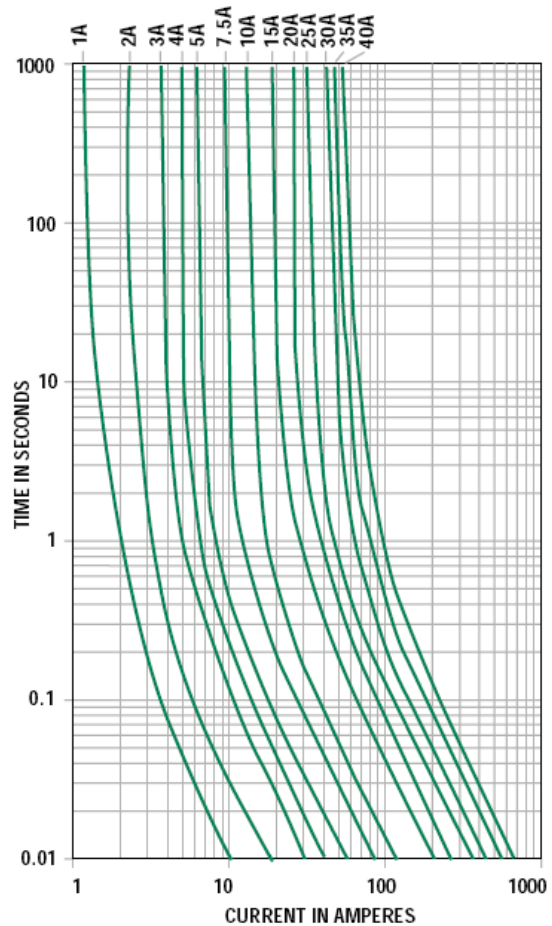

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 0257040.PXAPC](#) on WIN SOURCE

 [Littelfuse Inc.](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management