



THE DATASHEET OF
0465572545






Part Number : [465572545](#)

Product Description : SEARAY Slim Receptacle, 80 Circuits, 8.00mm Unmated Height, 4 Rows, with Pegs, Solder Charge Lead-Free

Series Number : 46557

Status : Active

Product Category : Board-to-Board Connectors

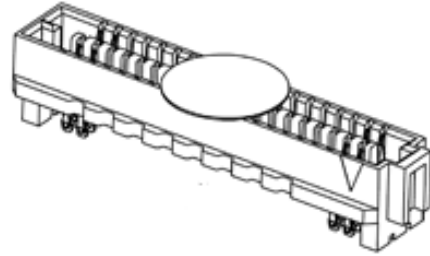

Documents & Resources

Drawings

[465572545_sd.pdf](#)

[PK-45971-002-001.pdf](#)

3D Models and Design Files

[465572545_stp.zip](#)

[EE-45970-010-010.pdf](#)

[SP-45970-010-010.zip](#)

[SYM-46557-2545-001.zip](#)

Specifications

[AS-45970-001-001.pdf](#)

[AS-45970-002-001.pdf](#)

[AS-45970-990-001.pdf](#)

[PS-45970-001-001.pdf](#)

[TS-45970-001-001.pdf](#)

[PS-46436-100-001.pdf](#)

[TS-45970-002-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Board-to-Board Connectors
Series	46557
Description	SEARAY Slim Receptacle, 80 Circuits, 8.00mm Unmated Height, 4 Rows, with Pegs, Solder Charge Lead-Free
Application	Board-to-Board, Signal
Component Type	PCB Receptacle
Product Name	SEARAY
UPC	800756911847

Agency

CSA	LR19980
UL	E29179

Electrical

Current - Maximum per Contact	2.7A
Grounding to PCB	No
Voltage - Maximum	240V AC

Physical

Circuits (Loaded)	80
-------------------	----

Circuits (maximum)	80
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	No
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.757/g
Number of Rows	4
Orientation	Vertical
Packaging Type	Embossed Tape on Reel
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.18mm
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Pick and Place Cap
Stackable	No
Temperature Range - Operating	-55° to +125°C
Termination Interface Style	Surface Mount
Unmated Height	8.00mm

Solder Process Data

Max-Duration	20
Lead-Free Process Capability	REFLOW
Max-Cycle	3

Max-Temp	260
----------	-----

Mates With / Use With

Mates with Part(s)

Description	Part Number
Searay Slim Plugs	<u>46556</u>

This document was generated on Jan 10, 2025

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View 0465572545 on WIN SOURCE](#)
- ⊖ [Molex, LLC Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management