




Part Number : [513532400](#)

Product Description : 2.00mm Pitch
MicroClasp Wire-to-Board Receptacle
Housing, Positive Lock, Dual Row, 24 Circuits,
White

Series Number : 51353

Status : Active

Product Category : Connector Housings

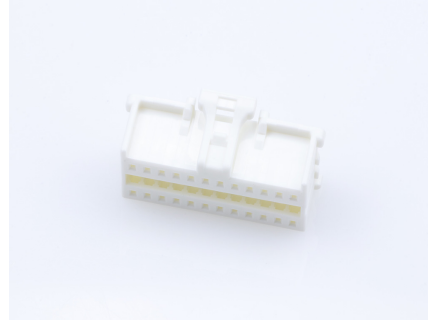

Documents & Resources

Drawings

[513532400_sd.pdf](#)

3D Models and Design Files

[513532400_stp.zip](#)

Specifications

[561340000-AS-000.pdf](#)

[SPK-51353-001-001.pdf](#)

[PS-51353-003-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Connector Housings
Series	51353
Description	2.00mm Pitch MicroClasp Wire-to-Board Receptacle Housing, Positive Lock, Dual Row, 24 Circuits, White
Application	Signal, Wire-to-Board
Product Name	MicroClasp
UPC	756054235836

Agency

UL	E29179
----	--------

Physical

Circuits (maximum)	24
Color - Resin	White
Flammability	94V-0
Gender	Receptacle
Glow-Wire Capable	No
Lock to Mating Part	Yes
Material - Resin	Nylon
Net Weight	1123.600/mg
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	2.00mm
Stackable	No
Temperature Range - Operating	-40° to +105°C

Mates With / Use With

Mates with Part(s)



Description	Part Number
MicroClasp Vertical Dual Row Headers	<u>501844</u>
MicroClasp Vertical Dual Row Headers	<u>55917</u>
MicroClasp Right-Angle Dual Row Headers	<u>55959</u>

Use with Part(s)

Description	Part Number
Pre-Crimped Lead MicroClasp Female-to-MicroClasp Female, Tin (Sn) Plating, 150.00mm Length, 24 AWG, Black	<u>797581001</u>
Pre-Crimped Lead MicroClasp Female-to-MicroClasp Female, Tin (Sn) Plating, 300.00mm Length, 24 AWG, Black	<u>797581002</u>
2.00mm Pitch Crimp Terminal, Female, 28-22 AWG, Copper Alloy, Reel	<u>561349000</u>
2.00mm Pitch Crimp Terminal, Female, 28-22 AWG, Copper Alloy, Bag	<u>561349100</u>
MicroClasp Terminal Position Assurance (TPA) Retainers	<u>500638</u>

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 0513532400 on WIN SOURCE](#)
-  [Molex, LLC Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management