



**THE DATASHEET OF  
ESS-JC210YGKT**





Jiangsu Everstar Electronics Co., Ltd.  
Address: No.111 Tianmu Rd, Tianmuhu Town, Liyang City, Jiangsu Province, China  
TEL: +86-519-87557772 FAX: +86-519-87557773  
Http: [www.everstarelect.com](http://www.everstarelect.com)

# DATA SHEET

ESL NO.. :ESS-JC210YGKT

CUSNO.. :

REV : A / 0

Producer: 陈秀 Auditor: \_\_\_\_\_ Approver: 黄书艺

CUSTOMER'S APPROVAL : \_\_\_\_\_ DCC : \_\_\_\_\_



1.0×0.5×0.42mm SMD LED

ESS-JC210YGKT

REV:A0

※ **Features:**

- 1.Package: 1.0×0.5×0.42mm
- 2.Emitted Color: Yellow Green
- 3.Mono-color type
- 4.Soldering methods: All SMT assembly methods
- 5.Compliant ROHS standard.

※ **Applications:**

- 1.Interior automotive lighting(dashboard backlight etc···)
- 2.Optical indicators
- 3.Communication Products
- 4.Backlighting
- 5.Flash
- 6.Toys




# 1.0×0.5×0.42mm SMD LED

## ESS-JC210YGKT

REV:A0

### ※ Package Outline Dimension:

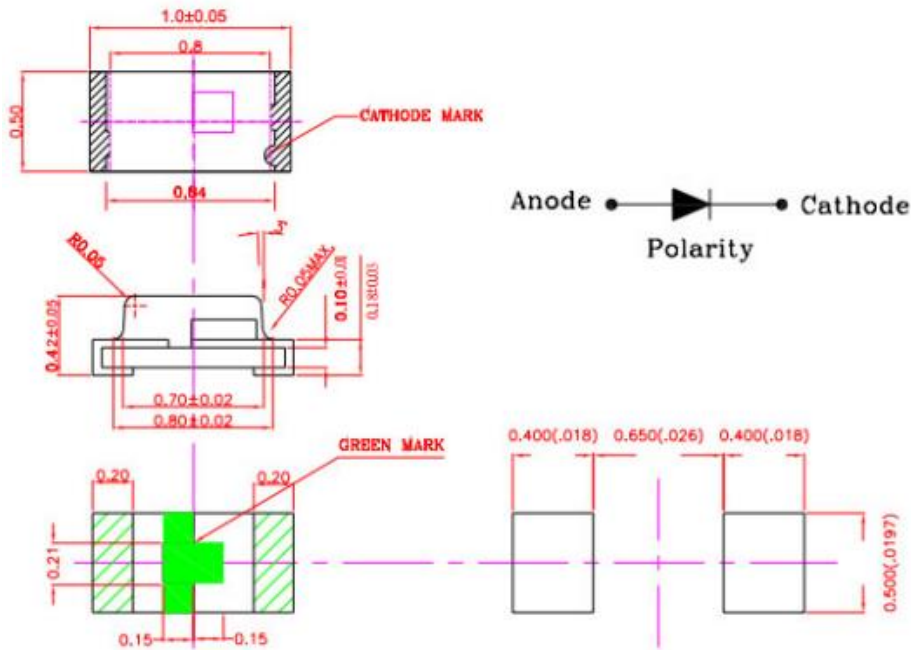

### NOTES:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.10$ mm unless otherwise specified.
3. Specifications are subject to change without notice.



# 1.0×0.5×0.42mm SMD LED

## ESS-JC210YGKT

REV:A0

### ※ Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Value	Unit
Power Dissipation	Pd	50	mW
Forward current	If	20	mA
Reverse voltage	Vr	5	V
Operating temperature range	Top	-20~+80	°C
Storage temperature range	Tstg	-40~+100	°C
Peak pulsing current	Ifp	100	mA

Pulse width $\leq$ 0.1msec duty $\leq$ 1/10

### ※ Electrical-optical characteristics(Ta=25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage	V <sub>F</sub>	If=20mA	1.8	---	2.2	V
Viewing angle	2θ <sub>1/2</sub>	If=20mA		120		Deg
Reverse current	I <sub>r</sub>	V <sub>r</sub> =5V	---	---	5	A
Luminous intensity	I <sub>v</sub>	If=20mA	80	---	160	mcd
wave length	λ <sub>d</sub>	If=20mA	570		575	nm

#### Note:

- 1.Tolerance of measurement of luminous intensity : ±8%
- 2.Tolerance of measurement of chromatic coordinates : ±0.01
- 3.Tolerance of measurement of forward voltage : ±0.1V









# 1.0×0.5×0.42mm SMD LED

## ESS-JC210YGKT

REV:A0

### ※ Typical Electro-Optical Characteristics Curves

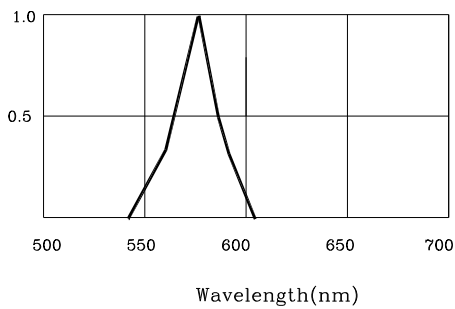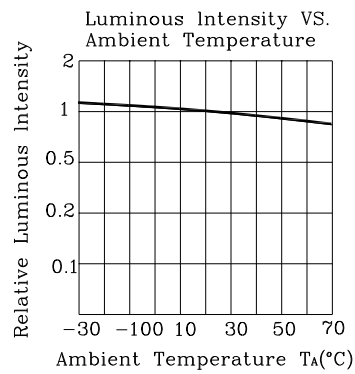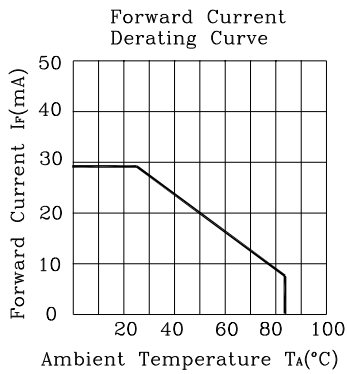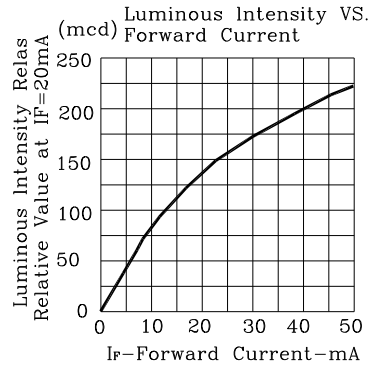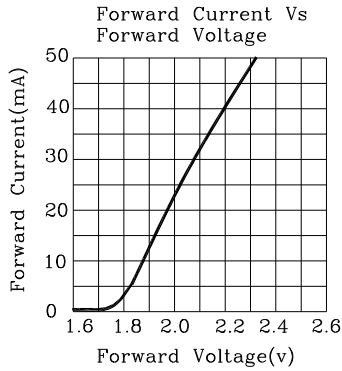





# 1.0×0.5×0.42mm SMD LED

## ESS-JC210YGKT

REV:A0

### ※ Package Tape Specifications:

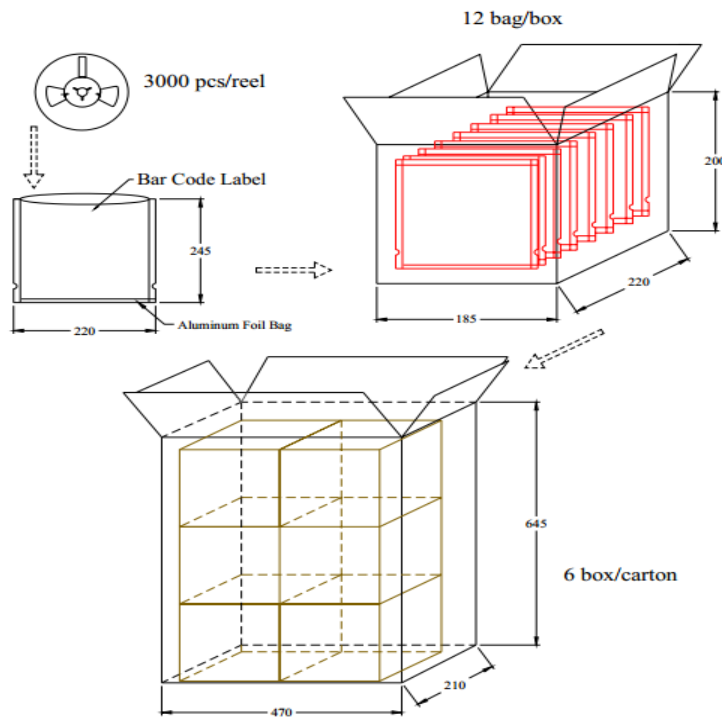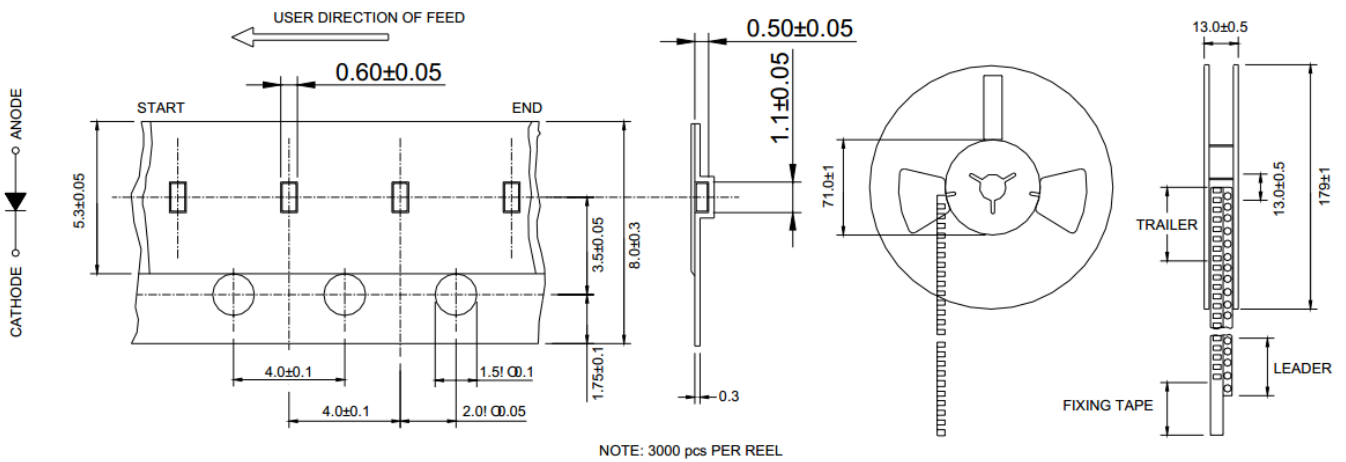



1.0×0.5×0.42mm SMD LED

ESS-JC210YGKT

REV:A0

※ **Precautions for use :**

1. Customer must apply the current limiting resistor in the circuit so as to drive the LEDs within the rated current. Otherwise slight voltage shift maybe will cause big current change and burn out will happen.
2. Also, caution should be taken not to overload the LEDs with instantaneous high voltage at the turning ON and OFF of the circuit.
3. Storage:

3.1 Don' t open the moisture proof bag before ready to use the LEDs.

3.2 The LEDs should be kept at 30°C or less and 60%RH or less before opening the package. The max. storage period before opening the package is 1 year.

3.3 After opening the package, the LEDs should be kept at 30°C/35%RH or less, and it should be used within 7 days.

3.4 If the LEDs be kept over the conditions of 3.4, baking is required before mounting.

Baking condition as below: 60±5°C for 12 hrs.

4. Soldering condition:

**4.1 Lead Solder:**



1.0×0.5×0.42mm SMD LED

ESS-JC210YGKT

REV:A0

**4.2 Lead Free Solder:**

**Note:**

- 1.Reflow soldering should not be done more than two times.
2. Don' t put stress on the LEDs when soldering.
- 3.Don' t warp the circuit board before it have been returned to normal ambient conditions after soldering

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View ESS-JC210YGKT on WIN SOURCE](#)
- [Shanghai Everstar Electronics Co., Ltd. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management