




**THE DATASHEET OF
5500R-223K**





High Current Power Chokes

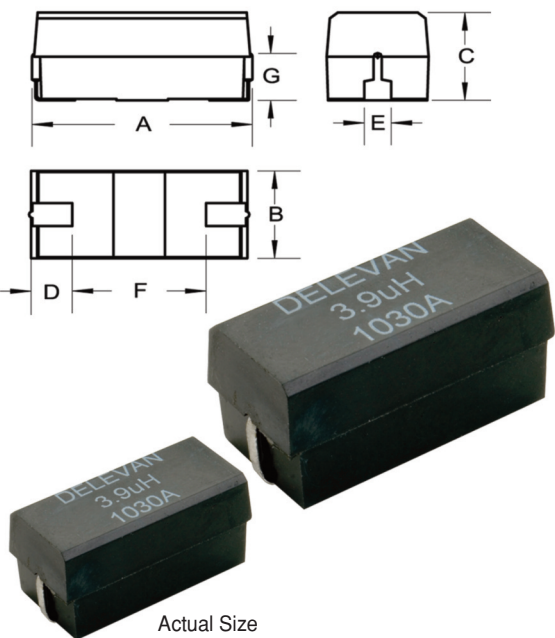

Physical Parameters

	Inches	Millimeters
A	1.020 to 1.080	25.91 to 27.44
B	0.480 to 0.510	12.20 to 12.96
C	0.520 Maximum	13.21 Maximum
D	0.240 Minimum	6.10 Minimum
E	0.120 to 0.160	3.05 to 4.07
F	0.500 (Ref. Only)	12.70 (Ref. Only)
G	0.250 (Ref. Only)	6.35 (Ref. Only)

Dimensions "A" and "C" and "G" are over the terminals.
Operating Temperature Range -55°C to +130°C
Current Rating at 85°C Ambient 45°C Temperature Rise
Maximum Power Dissipation at +85°C: 1.166 Watts Maximum
Inductance Measured @ 1 kHz with 0 ADC on Wayne Kerr 3245A, or equivalent.
Incremental Current The amount of DC that decreases the Inductance by 5% maximum relative to the 0 ADC.
Dielectric Withstanding Voltage Meets MIL-STD-202, Method 301, 1000 Vrms Minimum
Marking Delevan; dash number; date code/lot symbol (YYWWL).
 Note: An R before the date code/lot symbol indicates a RoHS Compliant choke.
 Example: 5500R-392K

DELEVAN
392
R 1822A

Thermal Shock Meets MIL-STD-202, Method 107, Test Condition A-1 (-55°C to +130°C).
Mechanical Shock Meets MIL-STD-202, Method 213, Test Condition I.
Vibration Meets MIL-STD-202, Method 204, Test Condition D
Solderability Meets MIL-STD-202, Method 208
Terminal Material and Final Finish
 Series 5500R: (Tin - Silver - Copper) Sn96.5Ag3.0Cu0.5 over Copper (Cu)
 Series 5500: (Tin - Lead) Sn63Pb37 over Copper (Cu)
Weight 13 Grams Maximum

Packaging Tape and Reel (44mm): 13" reel, 200 pieces max: 7" reel not available
Made In The U.S.A.

DASH NUMBER* ±10% (µH @ 1.00 kHz) INDUCTANCE MAXIMUM (OHMS) DC RESISTANCE MAXIMUM (A DC) CURRENT RATING MAXIMUM (A DC) INCREMENTAL CURRENT (A DC)

SERIES 5500R AND 5500				
-392K	3.9	0.007	11.91	9.13
-472K	4.7	0.008	11.14	8.30
-562K	5.6	0.011	9.50	7.61
-682K	6.8	0.012	9.10	7.02
-822K	8.2	0.013	8.74	6.52
-103K	10	0.016	7.88	5.71
-123K	12	0.018	7.43	5.07
-153K	15	0.020	7.05	4.57
-183K	18	0.022	6.72	4.15
-223K	22	0.024	6.43	3.65
-273K	27	0.025	6.30	3.38
-333K	33	0.028	5.96	3.04
-393K	39	0.031	5.66	2.85
-473K	47	0.034	5.41	2.61
-563K	56	0.043	4.81	2.34
-683K	68	0.060	4.08	2.12
-823K	82	0.066	3.88	1.94
-104K	100	0.084	3.44	1.76
-124K	120	0.113	2.96	1.60
-154K	150	0.129	2.78	1.43
-184K	180	0.150	2.57	1.30
-224K	220	0.162	2.48	1.19
-274K	270	0.226	2.10	1.07
-334K	330	0.257	1.97	0.96
-394K	390	0.288	1.86	0.88
-474K	470	0.393	1.59	0.81
-564K	560	0.504	1.40	0.74
-684K	680	0.570	1.32	0.68
-824K	820	0.643	1.24	0.63
-105K	1,000	0.844	1.08	0.56
-125K	1,200	0.977	1.01	0.51
-155K	1,500	1.18	0.92	0.45
-185K	1,800	1.50	0.81	0.41
-225K	2,200	1.76	0.75	0.37
-275K	2,700	2.13	0.68	0.32
-335K	3,300	2.53	0.63	0.30
-395K	3,900	2.84	0.59	0.28
-475K	4,700	3.79	0.51	0.25
-565K	5,600	4.24	0.48	0.23
-685K	6,800	5.75	0.42	0.21
-825K	8,200	6.44	0.39	0.19
-106K	10,000	7.30	0.37	0.17
-126K	12,000	9.34	0.33	0.16
-156K	15,000	10.7	0.30	0.14
-186K	18,000	14.8	0.26	0.13
-226K	22,000	18.0	0.23	0.12
-276K	27,000	22.7	0.21	0.10
-336K	33,000	25.7	0.20	0.09
-396K	39,000	29.7	0.18	0.09
-476K	47,000	33.7	0.17	0.08
-566K	56,000	38.0	0.16	0.07
-686K	68,000	52.8	0.14	0.07
-826K	82,000	67.3	0.12	0.06
-107K	100,000	76.0	0.11	0.05

OPTIONAL TOLERANCES: J = +/- 5% L = +/- 15%
 The Suffix (Optional Tolerance "J" or "L") should replace the "K", in the dash number.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 5500R-223K on WIN SOURCE](#)

 [API Delevan Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management